

NORTHERN REGION

CENTRAL REGION

SOUTHERN REGION

ERC/PUBLIC NOTICE CHECK LIST

PROJECT #s: N-1062909 *N-2368*

REQST. COMPL.

— ERC TRANSFER OF PREVIOUSLY BANKED CREDITS
 — ERC PRELIMINARY PUBLIC NOTICE
 — ERC FINAL PUBLIC NOTICE

Date Completed [DATE COMPLETED]/By [SELECT SUPERVISOR]

Newspaper Notice Emailed to Clerical (Check box and tab to generate Notice)

— Send email to "OA-PublicNotices" containing the following:
SUBJECT: facility name, facility id#, project #, type of notice (prelim/final)
BODY: project description and why it is being noticed (based on Major Source, Major Modification, Title V Minor Mod, Title V Significant Mod, Initial Title V, Title V renewal, or ATC with COC)

ENCLOSED DOCUMENTS REQUIRE:

Enter Correct Date, Print All Documents from File and Obtain Directors Signature

Mail **PRELIMINARY** Notice Letter to Applicant with the following attachments:
 Application Evaluation
 Other Public Notice

Email **PRELIMINARY** Public Notice for Publication to the Stockton Record

Email **PRELIMINARY** Public Notice package to EPA and CARB

Email **PRELIMINARY** Public Notice package to "webmaster"

Send **PRELIMINARY** Public Notice package to: Rick Dyer

— Other Special Instructions (please specify): _____

APR 04 2011
MB

Song Thao

From: Song Thao
Sent: Monday, April 04, 2011 10:42 AM
To: 'legals@recordnet.com'
Cc: Tony Reyes; Nai Saelee; Ryan Kincaid
Subject: Public Notice Project N-1062909
Importance: High
Attachments: ERC ltr - (Prelim Notice), newspaper, N1062909, Andersen Rack.doc; STOCKTON RECORD COVER PG.doc

04/04/2011

Song Thao

From: Postmaster
Sent: Monday, April 04, 2011 10:41 AM
To: Song Thao
Subject: Delivery Status Notification (Relay)

Attachments: ATT1245377.txt; Public Notice Project N-1062909



ATT1245377.txt Public Notice
(275 B) Project N-106290..

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

legals@recordnet.com

Song Thao

From: Song Thao
Sent: Monday, April 04, 2011 10:48 AM
To: Gerardo Rios (SJV_T5_Permits@epamail.epa.gov); Mike Tollstrup (mtollstr@arb.ca.gov)
Subject: Preliminary ERC Public Notice for Hannibal Industries Facility N-2368 Project N-1062909
Importance: High
Attachments: Public Notice Package.pdf; Newspaper Notice.pdf

TICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Emission Reduction Credits to Hannibal Industries, R Jensen Rack Systems, Inc. for the shutdown of the steel storage systems manufacturing operation at 821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

Song Thao

From: Postmaster
Sent: Monday, April 04, 2011 10:48 AM
To: Song Thao
Subject: Delivery Status Notification (Relay)

Attachments: ATT1245770.txt; Preliminary ERC Public Notice for Hannibal Industries Facility N-2368 Project N-1062909



ATT1245770.txt Preliminary ERC
(274 B) Public Notice ...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

mtollstr@arb.ca.gov

Song Thao

From: Mail Delivery System [MAILER-DAEMON@mseive02.rtp.epa.gov]
Sent: Monday, April 04, 2011 10:48 AM
To: Song Thao
Subject: Successful Mail Delivery Report

Attachments: Delivery report; Message Headers



Delivery

report.txt (492 B)



Message

Headers.txt (1 KB)

This is the mail system at host mseive02.rtp.epa.gov.

Your message was successfully delivered to the destination(s) listed below. If the message was delivered to mailbox you will receive no further notifications. Otherwise you may still receive notifications of mail delivery errors from other systems.

The mail system

<SJV_T5_Permits@epamail.epa.gov>: delivery via 127.0.0.1[127.0.0.1]:10025: 250
OK, sent 4D9A0463_24855_1361_1 630DF2D4005

Song Thao

From: Song Thao

Sent: Monday, April 04, 2011 10:50 AM

To: WebMaster

Subject: valleyair.org update: Preliminary ERC Public Notice for Hannibal Industries Facility N-2368 Project N-1062909

April 4, 2011 (Facility N-2368 Project N-1062909) NOTICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Emission Reduction Credits to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for the shutdown of the steel storage systems manufacturing operation at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10). The comment period ends 30 days after newspaper notice.

[Newspaper Notice](#)

[Public Notice Package](#)

Song Thao

From: TSR_legals [legals@recordnet.com]
Sent: Tuesday, April 05, 2011 2:23 PM
To: Song Thao
Subject: RE: Public Notice Project N-1062909
Importance: High

Here is your ad copy for 4/7 pub. thx!

**NOTICE OF
PRELIMINARY
DECISION FOR THE
PROPOSED ISSUANCE
OF EMISSION
REDUCTION CREDITS**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Emission Reduction Credits to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for the shut-down of the steel storage systems manufacturing operation at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

The analysis of the regulatory basis for this proposed action, Project # N-1062909, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the District office at the address below. Written comments on this project must be submitted within 30 days of the publication date of this notice to DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 4800 ENTERPRISE WAY, MODESTO, CA 95356-8718.

#863690 4/7/2011

Carlette Schnell

04/05/2011



APR 04 2011

Bernardo Moreno
Hannibal Industries
Ref: Andersen Rack Systems, Inc.
3851 S. Santa Fe Ave
Los Angeles, CA 90058

Re: Notice of Preliminary Decision - Emission Reduction Credits
Project Number: N-1062909

Dear Mr. Moreno:

Enclosed for your review and comment is the District's analysis of Hannibal Industries Ref: Andersen Rack Systems, Inc.'s application for Emission Reduction Credits (ERCs) resulting from the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. Please submit your written comments on this project within the 30-day public comment period which begins on the date of publication of the public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Rick Dyer of Permit Services at (209) 557-6458.

Sincerely,

David Warner
Director of Permit Services

DW:rd/st

Enclosures

Seyed Sadredin

Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585

APR 04 2011

Mike Tollstrup, Chief
Project Assessment Branch
Stationary Source Division
California Air Resources Board
PO Box 2815
Sacramento, CA 95812-2815

Re: Notice of Preliminary Decision - Emission Reduction Credits
Project Number: N-1062909

Dear Mr. Tollstrup:

Enclosed for your review and comment is the District's analysis of Hannibal Industries Ref: Andersen Rack Systems, Inc.'s application for Emission Reduction Credits (ERCs) resulting from the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. Please submit your written comments on this project within the 30-day public comment period which begins on the date of publication of the public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Rick Dyer of Permit Services at (209) 557-6458.

Sincerely,



David Warner
Director of Permit Services

DW:rd/st

Enclosure

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-8000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



APR 04 2011

Gerardo C. Rios (AIR 3)
Chief, Permits Office
Air Division
U.S. E.P.A. - Region IX
75 Hawthorne Street
San Francisco, CA 94105

Re: Notice of Preliminary Decision - Emission Reduction Credits
Project Number: N-1062909

Dear Mr. Rios:

Enclosed for your review and comment is the District's analysis of Hannibal Industries Ref: Andersen Rack Systems, Inc.'s application for Emission Reduction Credits (ERCs) resulting from the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. Please submit your written comments on this project within the 30-day public comment period which begins on the date of publication of the public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Rick Dyer of Permit Services at (209) 557-6458.

Sincerely,



David Warner
Director of Permit Services

DW:rd/st

Enclosure

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585

**NOTICE OF PRELIMINARY DECISION
FOR THE PROPOSED ISSUANCE OF
EMISSION REDUCTION CREDITS**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Emission Reduction Credits to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

The analysis of the regulatory basis for this proposed action, Project #N-1062909, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the District office at the address below. Written comments on this project must be submitted within 30 days of the publication date of this notice to **DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 4800 ENTERPRISE WAY, MODESTO, CA 95356-8718.**

ERC Application Evaluation

Company Name: Andersen Rack Systems, Inc

Date: March 31, 2011

Mailing Address: Hannibal Industries, Inc.
RE: Andersen Rack Systems, Inc.
3851 S. Santa Fe Ave.
Los Angeles, CA 90058

Contact Name: Bernardo Moreno
Phone: (323) 552-3146

Engineer: Rick Dyer
Project #: N1062909
Application #'s: N-2368-1

Date Application Received: October 16, 2006

Date Application Deemed Complete: March 19, 2008

I. Summary:

The Hannibal Industries, Inc. (owner of Andersen Rack Systems, Inc.) is proposing to receive the following quantities of Emission Reduction Credits (ERCs) for the shut down of the steel storage systems manufacturing facility. This application was submitted for the PM₁₀ and VOC emissions resulting from the coating operations only. Although there was natural gas combustion and solvent usage at the facility, available records were insufficient for ERC calculations for those operations.

	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
VOC	7,335	7,335	7,335	7,335
PM ₁₀	300	303	306	306

II. Applicable Rules:

District Rule 2201: New and Modified Stationary Source Review (12/18/08)

District Rule 2301: Emission Reduction Credit Banking (12/17/92)

District Rule 4603: Surface Coating of Metal Parts and Products (9/17/09)

III. Location of Reductions:

The facility was located at 1821 E Charter Way, Stockton, CA.

IV. Method of Generating Reductions:

The ERCs were generated by the shutdown of the stationary source on July 28, 2006. The stationary source consisted of a conveyORIZED metal parts and products coating operation with two spray booths and natural gas-fired curing ovens.

V. ERC Calculations:

A. Assumptions:

- The results of all Historical Actual Emission (HAE) and Actual Emission Reduction (AER) calculations are rounded to the nearest whole number.
- The first quarter of the calendar year has 90 days, the second quarter of the calendar year had 91 days, the third quarter of the year had 92 days and the fourth quarter of the calendar year has 92 days.

B. Emissions Factors:

VOC and PM₁₀:

The facility manufactured metal storage racks and then coated the racks with liquid coatings to protect the exposed metal surfaces. The liquid coatings were applied inside a spray booth with exhaust filters using HVLP spray equipment (75% transfer efficiency and 66% removal efficiency per project N1000156).

Historical Actual Emissions (HAE) from the coating operations during the baseline period will be calculated utilizing the as-applied coating VOC contents, the coating solids contents, and the quantities of coatings used. Coating information provided by Material Safety Data Sheets and Technical Sheets are summarized in the table below.

Material	Product Code	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)
Andersen Off White	QE-113	9.75	37.98	0.99	2.53
Lozier Almond	QE-117	9.57	36.34	1.00	2.62
Andersen White	QE-119	9.74	37.94	0.99	2.53
Andersen White	QE-126	9.72	37.96	0.98	2.49
Andersen White	QE-132	9.95	39.59	0.50	1.66
A Andersen White	QE-135	9.87	38.79	0.50	1.78
Andersen White	QE-138	9.87	38.79	0.50	1.78
Designer White	QE-147	9.67	36.02	0.90	2.47
Vista Green	QE-415	9.03	31.37	1.00	2.71
Johns Import Green	QE-424	8.95	30.68	1.00	2.68

Material	Product Code	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)
Interlake Green	QE-432	9.20	31.88	0.98	2.71
McCoy Green	QE-441	8.56	25.11	0.96	2.71
Andersen Green	QE-442	8.92	29.85	0.50	1.88
Andersen Green	QE-443	8.92	29.85	0.50	1.88
AGN Std Green	QE-464	8.95	30.55	1.00	2.71
AGN Standard Green	QE-466	8.95	30.55	1.00	2.71
Andersen Off Green	QE-468	9.64	36.05	0.89	2.43
Vitmar Green	QE-474	9.28	32.95	0.89	2.49
Lodi Metal Tech Green	QE-478	8.93	29.78	0.90	2.54
Caterpillar Yellow	QE-510	9.05	32.60	1.33	2.83
Yardbird Yellow	QE-515	9.15	32.32	0.96	2.58
Andersen Orange	QE-522	9.17	33.31	0.99	2.57
Interlake Orange	QE-535	8.96	31.45	1.00	2.63
And. Orange & Yellows	QE-542	9.18	32.55	0.53	1.78
And. Orange & Yellows	QE-544	9.18	32.55	0.53	1.78
And. Orange & Yellows	QE-545	9.18	32.55	0.53	1.78
And. Orange & Yellows	QE-552	9.18	32.55	0.53	1.78
AOR Standard Orange	QE-566	9.27	39.19	1.00	2.71
Andersen Yellow	QE-569	9.34	37.20	1.00	2.61
Lodi Metal Tech Orange	QE-570	8.71	28.98	1.00	2.71
Pantone Yellow	QE-572	9.37	37.85	1.00	2.55
Inca Yellow	QE-574	9.26	36.76	1.00	2.60
Monarch Orange	QE-576	8.81	29.20	1.00	2.70
Dorfman Orange	QE-579	9.22	36.99	1.00	2.71
Safety Yellow	QE-580	9.27	36.82	0.99	2.38
And. Summit Yellow	QE-581	9.25	35.83	1.00	2.68
Frazier Yellow	QE-582	9.04	31.25	0.98	2.63
Ferguson Orange	QE-585	8.65	32.61	1.00	2.71
Cool Gray	QE-617	10.08	43.80	1.35	2.81
Yardbird Gray	QE-620	9.19	32.58	1.00	2.71
Andersen Pebble Gray	QE-626	9.33	31.80	0.51	2.57
Andersen Gray	QE-647	9.27	33.41	1.00	2.66
Kwal Gray	QE-649	8.73	28.21	1.00	2.71
Andersen Gray	QE-653	9.48	34.48	1.00	2.71
Allied HSF Gray	QE-654	9.48	34.48	1.00	2.71
Sketcher's Gray	QE-655	9.17	32.46	1.00	2.71
Toyota Gray	QE-664	9.91	39.32	1.00	2.55
Fire Red	QE-713	8.61	28.20	1.00	2.66
Andersen Reds	QE-733	8.67	29.45	0.98	2.57

Material	Product Code	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)
Kwal Red	QE-734	8.63	27.99	0.94	2.59
Andersen Reds	QE-735	8.67	29.45	0.98	2.57
Bear Foot Pink	QE-736	9.67	36.07	0.90	2.47
Crimson Red	QE-737	8.59	27.47	0.94	2.58
BNR Red	QE-739	8.58	28.66	0.98	2.54
Bagel Tan	QE-848	9.60	36.68	1.00	2.64
Home Depot Beige	QE-850	9.55	36.35	1.00	2.58
Inca Putty	QE-851	9.32	33.34	0.92	2.52
Andersen Tans	QE-852	9.65	18.78	0.98	2.58
Andersen Tans	QE-854	9.65	18.78	0.98	2.58
Food Max Beige	QE-855	9.61	34.62	0.93	2.62
CSB Brown	QE-858	9.10	32.04	1.00	2.71
Andersen Tans	QE-862	9.07	30.09	0.51	1.73
Andersen Tans	QE-863	9.07	30.09	0.51	1.73
Andersen Blues	QE-915	8.87	30.13	1.00	2.71
Royal Blue	QE-929	8.87	30.13	1.00	2.71
Sturdi-Built Blue	QE-930	8.77	27.53	0.95	2.71
NC Blue	QE-951	8.77	30.93	1.17	2.83
Sturdi-Built Blue	QE-954	8.78	27.68	0.51	1.73
Unarco Blue	QE-963	8.78	28.68	0.99	2.71
Reno Blue	QE-964	8.73	28.29	1.00	2.71
Blue Aquatech	QE-981	8.70	27.48	0.50	1.88
Kwal Blue	QE-987	8.72	28.22	0.99	2.70
Frazier Blue	QE-988	8.72	28.16	1.00	2.71
Inca Blue	QE-989	8.68	26.72	0.97	2.71
SBL Blue	QE-991	9.07	31.19	1.00	2.69
Hannibal Blue	QE-992	8.65	29.96	1.00	2.71
Blue Aquatech Enamel	QE-995	8.47	25.74	1.00	2.71
Toyota Blue	QE-9003	8.84	27.74	0.81	2.63
Gloss Black	QE-J204	8.48	24.13	0.97	2.71
V-AGN	VS-001	8.96	35.24	2.36	2.36
V-OR	VS-002	8.96	35.24	2.36	2.36

C. Baseline Period Determination and Data:

Baseline Period Determination:

Section 3.5 of District Rule 2301 defines the baseline period as “two consecutive years immediately prior to the submission of a complete application” or “another time period of at least two years within five years immediately prior to the

submission of the complete application determined by the APCO as more representative of normal source operation”.

The applicant stated that the facility was in normal operation up to the shutdown of the facility. The eight consecutive calendar quarter periods preceding the shutdown will be used for the baseline period. The baseline period is Q3 2004 through Q2 2006.

Baseline Period Data:

Please refer to Appendix I for the coating usages during the period of time from Q3 2004 through Q2 2006.

D. Historical Actual Emissions (HAE):

HAE from the coating operations are determined as follows (See Appendix II for tabulated calculation results):

$$HAE_{VOC} = \text{coating usage (gal)} \times \text{as-applied VOC content (lb/gal)}$$

$$HAE_{PM10} = \text{coating usage (gal)} \times \text{coating solids content (\% by wt.)} \\ \times \text{coating density (lb/gal)} \times (1 - \text{transfer efficiency}) \\ \times (1 - \text{removal efficiency})$$

VOC				
	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
2004	---	---	8,935	8,521
2005	6,802	15,427	14,889	18,883
2006	11,990	11,548	---	---
Average	9,396	13,488	11,912	13,702
Surplus HAE ¹	8,150	8,150	8,150	8,150

PM ₁₀				
	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
2004	---	---	2,563	2,498
2005	1,451	2,905	3,285	3,745
2006	3,306	3,107	---	---
Average	2,379	3,006	2,924	3,436
Surplus HAE ¹	333	337	340	340

¹ See the discussion for Surplus Reductions under section VI.E in this document.

E. Actual Emission Reductions (AER):

In the case of shutdowns AER = HAE, unless the HAE must be reduced such that they are surplus. As shown in section VI.E of this document, the HAE for both VOC and PM₁₀ were reduced to meet the surplus emissions requirements.

F. Air Quality Improvement Deduction:

Per section 6.5 of District Rule 2201, a 10% air quality improvement deduction must be applied to the AER prior to banking. The air quality improvement deductions are as follows:

Air Quality Improvement Deduction for VOC		
Quarter	AERs (lb/qtr)	10% Deduction (lb/qtr)
1	8,150	815
2	8,150	815
3	8,150	815
4	8,150	815

Air Quality Improvement Deduction for PM₁₀		
Quarter	AERs (lb/qtr)	10% Deduction (lb/qtr)
1	333	33
2	337	34
3	340	34
4	340	34

G. Bankable Emissions Reductions:

The bankable reductions are the AER minus the Air Quality Improvement Deduction.

	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
VOC	7,335	7,335	7,335	7,335
PM ₁₀	300	303	306	306

VI. Compliance:

A. Real Reductions:

The emission reductions were generated by the permanent shutdown of all emission units at the stationary source. Therefore, the emission reductions are real.

B. Enforceable Reductions:

All of the facility's Permits to Operate have been surrendered to the District. Operation of the equipment without permits would result in enforcement action being taken. Therefore, the reductions are enforceable.

C. Quantifiable Reductions:

The baseline emissions were calculated utilizing District-approved emission factors and actual baseline period coating usages. Therefore, the reductions are quantifiable.

D. Permanent Reductions:

All of the facility's Permits to Operate have been surrendered to the District. Operation of the equipment without permits would result in enforcement action being taken. Therefore, the reductions are permanent.

E. Surplus Reductions:

This section will contain an explanation of the actions taken to ensure that all emission reductions during the baseline period were surplus.

Coating Operations:

The coating operation was subject to District Rule 4603: Surface Coating of Metal Parts and Products.

In order to determine if the proposed VOC emission reductions from the coating operations are surplus, the following Rules were reviewed:

SJVAPCD Rule 4603:

Surface Coating of Metal Parts and Products (September 17, 2009)

San Diego APCD Rule 67.3:

Metal Parts and Products Coating Operations (April 9, 2003)

Sac Metro APCD Rule 451:

Surface Coating of Miscellaneous Metal Parts and Products
(October 28, 2010)

SCAQMD Rule 1107:

Coating of Metal Parts and Products (January 6, 2006)

BAAQMD Rule 19:

Surface Preparation and Coating of Miscellaneous Metal Parts and
Products (October 16, 2002)

San Luis Obispo County APCD Rule 411:

Surface Coating of Metal Part and Products (January 28, 1998)

Monterey Bay Unified APCD Rule 434:

Coating of Metal and Products (January 17, 2001)

Yolo Solano AQMD Rule R2-25:

Metal Parts and Products Coating Operations (May 14, 2008)

A review of the rules listed above found that, except for the Monterey Bay Unified APCD, all the districts have a VOC limit for heat-cured operations of 2.3 lb/gal (275 g/l), less water and exempt compounds. The limit for the Monterey Bay unified APCD is 3.0 lb/gal for heat-cured coatings. Therefore, the VOC limit applicable for this project is 2.3 lb/gal.

As shown in Section V. B. of this document, the VOC content for most of the liquid coatings used exceeded the limit of 2.3 lb/gal, less water and exempt compounds. Consequently, the VOC limit, as applied (in lb/gal), used in the VOC emissions calculations will also be adjusted. The adjustment will be based on adjusting the actual VOC limit of the coatings used, less water and exempt compounds, to the rule limit of 2.3 lb-VOC/gal, less water and exempt compounds. The resulting percentage adjustment will then be applied to the VOC calculations. For example, if the coating used exceeds the rule limit by 18%, the VOC coating limit, as applied, will also be reduced by 18% for the VOC emission calculations. See Appendix II for emissions calculations.

Permitted Emissions Limitations:

VOC Emissions:

The permit for this operation contained VOC limits of 174 lb/day and 32,600 lb/yr.² The maximum permitted quarterly emissions breakdowns are as follows:

² Although the daily and annual VOC permit conditions limited coating and solvents, no data was available for solvent usage. For this project, the VOC calculations will be based only upon coating usage.

PE_{VOC} Calculations based upon the daily VOC limit:

$$\begin{aligned} PE_{VOC} &= 174 \frac{\text{lb}}{\text{day}} \times 90 \frac{\text{days}}{\text{qtr 1}} = 15,660 \frac{\text{lb}}{\text{qtr 1}} \\ &= 174 \frac{\text{lb}}{\text{day}} \times 91 \frac{\text{days}}{\text{qtr 2}} = 15,834 \frac{\text{lb}}{\text{qtr 2}} \\ &= 174 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 3}} = 16,008 \frac{\text{lb}}{\text{qtr 3}} \\ &= 174 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 4}} = 16,008 \frac{\text{lb}}{\text{qtr 4}} \end{aligned}$$

PE_{VOC} Calculations based on the annual VOC limit:

Since this is non-seasonal operation, the annual VOC emissions limit will be divided by four to get the permitted quarterly emissions.

$$\begin{aligned} PE_{VOC} &= 32,600 \text{ lb-VOC/yr} \div 4 \text{ qtr/yr} \\ &= \mathbf{8,150 \text{ lb-VOC/qtr}} \end{aligned}$$

Since the averaged HAE for VOC listed in section V.C of this document exceed the maximum permitted quarterly emissions limitation, the HAE for VOC during the baseline period are not surplus. Therefore, the HAE for VOC will be set to the equivalent permitted quarterly emissions limits, 8,150 lb-VOC/qtr.

PM₁₀ Emissions:

The permit for this operation contained a limit for PM₁₀ of 3.7 lb/day. The maximum permitted quarterly emissions breakdowns are as follows:

$$\begin{aligned} PE_{PM10} &= 3.7 \frac{\text{lb}}{\text{day}} \times 90 \frac{\text{days}}{\text{qtr 1}} = 333 \frac{\text{lb}}{\text{qtr 1}} \\ &= 3.7 \frac{\text{lb}}{\text{day}} \times 91 \frac{\text{days}}{\text{qtr 2}} = 337 \frac{\text{lb}}{\text{qtr 2}} \\ &= 3.7 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 3}} = 340 \frac{\text{lb}}{\text{qtr 3}} \\ &= 3.7 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 4}} = 340 \frac{\text{lb}}{\text{qtr 4}} \end{aligned}$$

Since the averaged HAE for PM₁₀ listed in section V.C of this document exceed the maximum permitted quarterly emission limitation, the HAE for PM₁₀ during the baseline period are not surplus. Therefore, the HAE for PM₁₀ will be set to the equivalent permitted quarterly emission limits.

Summary:

The facility's actual VOC emissions from the coating operation exceeded the permitted annual limitation of 32,600 lb/yr and were discounted to the permitted level. The actual PM₁₀ emissions from the coating operations exceeded the permitted limitation of 3.7 lb/day and were discounted to the permitted level. Additionally, the emission reductions were made voluntarily and were not required by any present or pending regulation. Therefore, the emission reductions (as adjusted) are surplus.

F. Timeliness:

The facility was shut down on July 28, 2006 and the ERC application was submitted on October 16, 2006. The application was submitted before the 180-day deadline imposed by section 4.2.3 of District Rule 2301. Therefore, the ERC application was filed in a timely manner.

VII. Recommendation:

Issue Emission Reduction Credit Certificates to Andersen Rack Systems, Inc for NO_x, VOC, CO, PM₁₀, and SO_x in the following amounts:

	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
VOC	7,335	7,335	7,335	7,335
PM ₁₀	300	303	306	306

Appendix I: Coating Usage

Appendix II: Historical Actual Emissions Calculations

Appendix III: Permit to Operate for N-2368-1-3

Appendix IV: Draft ERC Certificates

Appendix I Coating Usages

Coating Usage - Quarter 4; April 2005 - June 2005

Project N1062909

																			Total
Apr-05	QE-415	3	4	2															9
	QE-432	40	7	24															71
	QE-441	3																	3
	QE-468	55	67	67	24	106	26	76											421
	QE-510	8	3																11
	QE-535	24	21	7	27														79
	QE-566	12	4																16
	QE-569	5																	5
	QE-570	5																	5
	QE-572	120	210	106	40	88													564
	QE-579	43	48																91
	QE-647	14	19	6															39
	QE-649	5																	5
	QE-654	55	33																88
	QE-929	24	38	31	1														94
	QE-930	70	102	187	110	55	55	8	2										589
	QE-J204	12	3																15
	VS-001	33	12	27	72	93	41	7	34	55	41	60	30	146					651
	VS-002	72	63	21	28	48	9	27	100	10	65	55	78	5	34	131			746
																			Total
May-05	QE-117	14																	14
	QE-415	52	51	14	45														162
	QE-424	30																	30
	QE-432	4	14	10	10														38
	QE-441	15	18	12	4														49
	QE-486	98	72	59	35	31	74	30											399
	QE-522	81	31	65	21	100	53	93	80	93	43								660
	QE-535	14	5	5	10														34
	QE-566	12	55	45	44	55	17	15	36										279
	QE-589	12	5	3															20
	QE-570	12																	12
	QE-572	5	17	5	4														31
	QE-579	22	33																55
	QE-582	20																	20
	QE-647	17	3	10	8	8	20	17											83
	QE-655	29	57																86
	QE-713	9	19																28
	QE-929	5	37	55	48	45													190
	QE-930	3	10	5															18
	QE-983	55	55	45															155
	QE-981	40																	40
	QE-992	63	75																138
	QE-J204	10	8																18
	VS-001	26	170	45	55	50	18	35	39	50	40	38	34	37	30	30			695
	VS-002	100	60	72	47	225	30	75	27	60	83	24							803
																			Total
Jun-05	QE-113	36	46	130	55	42													309
	QE-117	15	15																30
	QE-415	5	12																17
	QE-424	10																	10
	QE-432	30	3	14	12	2	19	4	56	14									154
	QE-486	38	17	21	33	55	12	98	27	9	4	27	30	55	18	9	40	40	610
	QE-510	5	4																9
	QE-522	75	36	62	85	52	20												330
	QE-535	36	31	15	25	10	12	12	43										184
	QE-566	3	9	5	2	28	20												87
	QE-589	20	7	5	7	4													43
	QE-572	5	19	24	108	26													182
	QE-617	65	113	15															193
	QE-647	10	1	9	7	2	7	12											48
	QE-713	9																	9
	QE-929	25	24	5	31	46	57	45	60	14	20	14	5	4	5				355
	QE-930	38	5	8	19	27	29	35	19	19	1	7	7	3					217
	QE-983	47																	47
	QE-987	5																	5
	QE-992	3																	3
	QE-J204	36	33	19	74	5	9	6											182
	VS-001	40	40	91	20	10													201
	VS-002	80	63	8	65	36	55	60	60	82	64	71	37	29	38	74	92	57	951

Appendix II
Historical Actual Emission Calculations

Emissions Calculations
Project N1062909

The MACCLAC coating data information used in the following calculations was provided by the applicant/supplier

The Valspar coating data was applied to both coatings, VS-001 and VS-002
(The data sheet was only available for VS-002, but the densities, % weight of pigments, specific gravity were very similar)

From the Material Safety Data Sheets and Technical Information Sheets provided by the applicant/supplier it was noted that most of the coatings exceeded the VOC emissions limit (less water and exempt compounds) specified by District Rule 4603. Consequently, the VOC emissions calculated for each coating was reduced on a percentage basis to adjust for District 4603 compliance.

Shown below are sample calculations for VOC reductions and PM10 calculations.

Sample Calculations

Reduction for Rule 4603 Compliance (%):

$(\text{VOC, less water \& exempts,} - \text{VOC, rule limit}) / \text{VOC, rule limit} \times 100$

example QE-415 (July 04): $(2.71 - 2.30) / 2.30 \times 100 = 17.83\%$

Surplus VOC:

$(\text{VOC, as applied}) \times (1 - \text{VOC reduction, \%})$

example QE-415 (July 04): $(1.00 \text{ lb/gal}) \times (1 - 17.83\%) = 0.82 \text{ lb/gal}$

VOC Emissions:

$\text{Usage} \times \text{Surplus VOC}$

example QE-415 (July 04): $40 \text{ gal} \times 0.82 \text{ lb/gal} = 32.87 \text{ lb}$

PM10 Calculation:

$\text{Usage} \times \text{Density} \times \text{Solids Content} / 100 \times (1 - \text{TE}) \times (1 - \text{RE})$

example QE-415 (July 04): $40 \text{ gal} \times 9.03 \text{ lb/gal} \times (31.37 / 100) \times (1 - 0.75) \times (1 - 0.66) = 9.63 \text{ lb}$

	Product	Liquid		Solids	VOC	VOC	Rule	Reduction	Surplus	VOC	PM10
Material	Code	Usage	Density	Content	as applied	less water	Limit	for rule	VOC	Emissions	Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
July-04											
Andersen White	QE-132	14	9.95	39.59	0.50	1.66	2.30	0.00	0.50	7.00	4.69
Vista Green **	QE-415	40	9.03	31.37	1.00	2.71	2.30	17.83	0.82	32.87	9.63
Interlake Green	QE-432	60	9.20	31.88	0.98	2.70	2.30	17.39	0.81	48.57	14.96
McCoy Green	QE-441	31	8.56	25.11	0.96	2.71	2.30	17.83	0.79	24.45	5.66
AGN Standard Green	QE-466	845	8.95	30.55	1.00	2.71	2.30	17.83	0.82	694.37	196.39
Yardbird Yellow	QE-515	15	9.15	32.32	0.96	2.58	2.30	12.17	0.84	12.65	3.77
Andersen Orange	QE-522	845	9.17	33.31	0.99	2.57	2.30	11.74	0.87	736.35	219.39
Interlake Oranga	QE-535	204	8.96	31.45	1.00	2.63	2.30	14.35	0.86	174.73	48.86
AOR Standard Orange	QE-566	137	9.27	39.19	1.00	2.71	2.30	17.83	0.82	112.58	42.31
Andersen Yellow	QE-589	28	9.34	37.20	1.00	2.61	2.30	13.48	0.87	24.23	8.27
Andersen Gray	QE-647	88	9.27	33.41	1.00	2.71	2.30	17.83	0.82	72.31	23.17
Kwal Gray	QE-649	2	8.73	28.21	1.00	2.71	2.30	17.83	0.82	1.64	0.42
Fire Red	QE-713	30	8.61	28.20	1.00	2.66	2.30	15.65	0.84	25.30	6.19
Home Depot Beige	QE-850	587	9.55	36.35	1.00	2.58	2.30	12.17	0.88	515.54	173.21
Sturdi-Built Blue	QE-930	146	8.77	27.53	0.95	2.71	2.30	17.83	0.76	113.98	29.96
NC Blue	QE-951	8	8.77	30.93	1.17	2.83	2.30	23.04	0.90	7.20	1.84
Gloss Black	QE-J204	15	8.48	24.13	0.97	2.71	2.30	17.83	0.80	11.96	2.61
									TOTALS:	2,618	791
August-04											
Vista Green	QE-415	5	9.03	31.37	1.00	2.71	2.30	17.83	0.82	4.11	1.20
Johns Import Green	QE-424	30	8.95	30.68	1.00	2.68	2.30	16.52	0.63	25.04	7.00
McCoy Green	QE-441	21	8.56	25.11	0.96	2.71	2.30	17.83	0.79	16.57	3.84
AGN Standard Green	QE-466	915	8.95	30.55	1.00	2.71	2.30	17.83	0.82	751.89	212.65
Andersen Orange	QE-522	837	9.17	33.31	0.99	2.57	2.30	11.74	0.87	731.36	217.31
AOR Standard Orange	QE-566	421	9.27	39.19	1.00	2.71	2.30	17.83	0.82	345.95	130.00
Andersen Yellow	QE-589	2	9.34	37.20	1.00	2.61	2.30	13.48	0.87	1.73	0.59
Pantone Yellow	QE-572	12	9.37	37.85	1.00	2.55	2.30	10.87	0.89	10.70	3.62
Andersen Gray	QE-647	25	9.27	33.41	1.00	2.71	2.30	17.83	0.82	20.64	6.58
Kwal Gray	QE-649	3	8.73	28.21	1.00	2.71	2.30	17.83	0.82	2.47	0.63
Andersen Gray	QE-653	68	9.48	34.48	1.00	2.71	2.30	17.83	0.82	55.88	18.89
Andersen Reds	QE-735	82	8.67	29.45	0.98	2.57	2.30	11.74	0.86	70.93	17.80
Home Depot Beige	QE-850	5	9.55	36.35	1.00	2.58	2.30	12.17	0.88	4.39	1.48
Inca Putty	QE-851	65	9.32	33.34	0.92	2.52	2.30	9.57	0.83	54.08	17.17
Andersen Tans	QE-852	4	9.65	18.76	0.98	2.56	2.30	12.17	0.86	3.44	0.62
Royal Blue	QE-929	614	8.67	30.13	1.00	2.71	2.30	17.83	0.82	668.90	184.91
Sturdi-Built Blue	QE-930	121	8.77	27.53	0.95	2.71	2.30	17.83	0.78	94.46	24.83
Reno Blue	QE-964	1	8.73	28.29	1.00	2.71	2.30	17.83	0.82	0.82	0.21
Inca Blue	QE-989	98	8.68	26.72	0.97	2.71	2.30	17.83	0.80	78.11	19.32
Gloss Black	QE-J204	1	8.48	24.13	0.97	2.71	2.30	17.83	0.80	0.80	0.17
V-AGN	VS-001	65	8.96	35.24	2.36	2.36	2.30	2.61	2.30	149.40	17.45
V-OR	VS-002	20	8.96	35.24	2.36	2.36	2.30	2.61	2.30	45.97	5.37
									TOTALS:	3,138	892

Material	Product Code	Liquid	Density	Solids	VOC	VOC	Rule	Reduction	Surplus	VOC	PM10
		Usage		Content	as applied	less water	Limit	for rule	VOC	Emissions	Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	compliance (%)	as applied (lb/gal)	(lb)	(lb)
September-04											
Designer White	QE-147	5	9.67	38.02	0.90	2.47	2.30	7.39	0.83	4.17	1.48
Vista Green	QE-415	7	9.03	31.37	1.00	2.71	2.30	17.83	0.82	5.75	1.69
Interlake Green	QE-432	33	9.20	31.88	0.98	2.70	2.30	17.39	0.81	26.72	8.23
McCoy Green	QE-441	13	8.56	25.11	0.96	2.71	2.30	17.83	0.79	10.26	2.38
AGN Standard Green	QE-466	1265	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1039.50	294.00
Andersen Orange	QE-522	1020	9.17	33.31	0.99	2.57	2.30	11.74	0.87	891.26	264.83
Interlake Orange	QE-535	49	8.96	31.45	1.00	2.63	2.30	14.35	0.86	41.97	11.74
AOR Standard Orange	QE-566	482	9.27	39.19	1.00	2.71	2.30	17.83	0.82	396.08	148.84
Andersen Yellow	QE-569	34	9.34	37.20	1.00	2.61	2.30	13.48	0.87	29.42	10.04
Pantone Yellow	QE-572	30	9.37	37.65	1.00	2.55	2.30	10.87	0.89	26.74	9.04
Dorfman Orange	QE-579	62	9.22	36.99	1.00	2.71	2.30	17.83	0.82	50.95	17.97
Andersen Gray	QE-647	87	9.27	33.41	1.00	2.71	2.30	17.83	0.82	79.71	25.54
Fire Red	QE-713	1	8.61	28.20	1.00	2.66	2.30	15.65	0.84	0.84	0.21
Royal Blue	QE-929	41	8.67	30.13	1.00	2.71	2.30	17.83	0.82	33.69	9.31
Sturdi-Built Blue	QE-930	33	8.77	27.53	0.95	2.71	2.30	17.83	0.78	25.76	6.77
Gloss Black	QE-J204	95	8.48	24.13	0.97	2.71	2.30	17.83	0.80	75.72	16.52
V-AGN	VS-001	157	8.96	35.24	2.36	2.36	2.30	2.61	2.30	360.85	42.14
V-OR	VS-002	35	8.96	35.24	2.36	2.36	2.30	2.61	2.30	80.45	9.39
									TOTALS:	3,180	880
									QTR-1	8,935	2,563
October-04											
Vista Green	QE-415	44	9.03	31.37	1.00	2.71	2.30	17.83	0.82	36.16	10.59
Johns Import Green	QE-424	15	8.95	30.68	1.00	2.68	2.30	16.52	0.83	12.52	3.50
Interlake Green	QE-432	91	9.20	31.68	0.98	2.70	2.30	17.39	0.81	73.67	22.69
AGN Standard Green	QE-466	321	8.95	30.55	1.00	2.71	2.30	17.83	0.82	263.78	74.60
Andersen Orange	QE-522	269	9.17	33.31	0.99	2.57	2.30	11.74	0.87	235.05	69.84
Interlake Orange	QE-535	178	8.96	31.45	1.00	2.63	2.30	14.35	0.86	152.46	42.64
AOR Standard Orange	QE-566	11	9.27	39.19	1.00	2.71	2.30	17.83	0.82	9.04	3.40
Andersen Yellow	QE-569	61	9.34	37.20	1.00	2.61	2.30	13.48	0.87	52.78	18.02
Dorfman Orange	QE-579	2	9.22	36.99	1.00	2.71	2.30	17.83	0.82	1.64	0.58
Andersen Gray	QE-647	109	9.27	33.41	1.00	2.66	2.30	15.65	0.84	91.94	26.69
Fire Red	QE-713	13	8.61	28.20	1.00	2.66	2.30	15.65	0.84	10.97	2.68
Bear Foot Pink	QE-736	30	9.67	36.07	0.90	2.47	2.30	7.39	0.83	25.00	8.89
Home Depot Beige	QE-850	313	9.55	38.35	1.00	2.58	2.30	12.17	0.88	274.90	92.36
Andersen Tans	QE-854	20	9.65	18.78	0.98	2.58	2.30	12.17	0.86	17.21	3.08
Royal Blue	QE-929	348	8.67	30.13	1.00	2.71	2.30	17.83	0.82	285.97	79.05
Sturdi-Built Blue	QE-930	108	8.77	27.53	0.95	2.71	2.30	17.83	0.78	84.31	22.16
Gloss Black	QE-J204	54	8.48	24.13	0.97	2.71	2.30	17.83	0.80	43.04	9.39
V-OR	VS-002	50	8.96	35.24	2.36	2.36	2.30	2.61	2.30	114.92	13.42
									TOTALS:	1,785	506

Material	Product Code	Liquid	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
		Usage									
November-04											
Vista Green	QE-415	74	9.03	31.37	1.00	2.71	2.30	17.83	0.82	60.81	17.82
Interlake Green	QE-432	186	9.20	31.88	0.98	2.70	2.30	17.39	0.81	150.58	46.37
McCoy Green	QE-441	16	8.56	25.11	0.96	2.71	2.30	17.83	0.79	12.62	2.92
AGN Standard Green	QE-466	991	8.95	30.55	1.00	2.71	2.30	17.83	0.82	814.34	230.32
Andersen Orange	QE-522	782	9.17	33.31	0.99	2.57	2.30	11.74	0.87	683.30	203.03
Interlake Orange	QE-535	109	8.98	31.45	1.00	2.63	2.30	14.35	0.86	93.36	26.11
AOR Standard Orange	QE-566	52	9.27	39.19	1.00	2.71	2.30	17.83	0.82	42.73	16.06
Andersen Yellow	QE-569	128	9.34	37.20	1.00	2.61	2.30	13.48	0.87	109.02	37.21
Pantone Yellow	QE-572	30	9.37	37.85	1.00	2.55	2.30	10.87	0.89	26.74	9.04
Safety Yellow	QE-580	60	9.27	36.82	0.99	2.38	2.30	3.48	0.96	57.33	17.41
Andersen Gray	QE-647	21	9.27	33.41	1.00	2.66	2.30	15.65	0.84	17.71	5.53
Home Depot Beige	QE-850	937	9.55	36.35	1.00	2.58	2.30	12.17	0.88	822.93	276.48
Andersen Tans	QE-854	10	9.65	18.78	0.98	2.58	2.30	12.17	0.86	8.61	1.54
Royal Blue	QE-929	813	8.87	30.13	1.00	2.71	2.30	17.83	0.82	668.07	184.69
Sturdi-Built Blue	QE-930	140	8.77	27.53	0.95	2.71	2.30	17.83	0.78	109.29	28.73
V-OR	VS-002	38	8.96	35.24	2.36	2.36	2.30	2.61	2.30	87.34	10.20
TOTALS:										3,765	1,113
December-04											
Andersen Whites	QE-126	25	9.72	37.96	0.98	2.49	2.30	8.26	0.90	22.48	7.84
Designer White	QE-147	5	9.67	36.02	0.90	2.47	2.30	7.39	0.83	4.17	1.48
Vista Green	QE-415	5	9.03	31.37	1.00	2.71	2.30	17.83	0.82	4.11	1.20
Johns Import Green	QE-424	5	8.95	30.68	1.00	2.68	2.30	16.52	0.83	4.17	1.17
Interlake Green	QE-432	58	9.20	31.88	0.98	2.70	2.30	17.39	0.81	46.95	14.46
AGN Standard Green	QE-466	1327	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1090.45	308.41
Andersen Orange	QE-522	1304	9.17	33.31	0.99	2.57	2.30	11.74	0.87	1139.41	338.56
Interlake Orange	QE-535	60	8.96	31.45	1.00	2.63	2.30	14.35	0.86	51.39	14.37
AOR Standard Orange	QE-566	57	9.27	39.19	1.00	2.71	2.30	17.83	0.82	46.84	17.60
Andersen Yellow	QE-569	213	9.34	37.20	1.00	2.61	2.30	13.48	0.87	184.29	62.91
Pantone Yellow	QE-572	46	9.37	37.85	1.00	2.55	2.30	10.87	0.89	41.00	13.87
Andersen Summit Yellow	QE-581	1	9.25	35.83	1.00	2.68	2.30	16.52	0.83	0.83	0.28
Andersen Gray	QE-647	170	9.27	33.41	1.00	2.66	2.30	15.65	0.84	143.39	44.75
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Fire Red	QE-713	10	8.61	28.20	1.00	2.66	2.30	15.65	0.84	8.43	2.08
Home Depot Beige	QE-850	18	9.55	36.35	1.00	2.58	2.30	12.17	0.88	15.81	5.31
Royal Blue	QE-929	191	8.87	30.13	1.00	2.71	2.30	17.83	0.82	156.95	43.39
Sturdi-Built Blue	QE-930	21	8.77	27.53	0.95	2.71	2.30	17.83	0.78	16.39	4.31
SBL Blue	QE-991	15	9.07	31.19	1.00	2.69	2.30	16.96	0.83	12.46	3.61
TOTALS:										2,971	879
QTR-2										8,521	2,498

Material	Product Code	Liquid	Density	Solids Content	VOC as applied	VOC	Rule Limit	Reduction	Surplus	VOC	PM10
		Usage				less water & exempts		for rule compliance	as applied	Emissions	
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
January-05											
Vista Green	QE-415	18	9.03	31.37	1.00	2.71	2.30	17.83	0.82	14.79	4.33
Interlake Green	QE-432	133	9.20	31.88	0.98	2.70	2.30	17.39	0.81	107.67	33.16
McCoy Green	QE-441	23	8.56	25.11	0.96	2.71	2.30	17.83	0.79	18.14	4.20
AGN Standard Green	QE-466	827	8.95	30.55	1.00	2.71	2.30	17.83	0.82	679.58	192.20
Vitmar Green	QE-474	35	9.28	32.95	0.89	2.49	2.30	8.26	0.82	28.58	9.10
Andersen Orange	QE-522	643	9.17	33.31	0.99	2.57	2.30	11.74	0.87	561.84	166.95
Interlake Orange	QE-535	170	8.96	31.45	1.00	2.63	2.30	14.35	0.86	145.61	40.72
AOR Standard Orange	QE-566	19	9.27	39.19	1.00	2.71	2.30	17.83	0.82	15.61	5.87
Andersen Yellow	QE-569	39	9.34	37.20	1.00	2.61	2.30	13.48	0.87	33.74	11.52
Pantone Yellow	QE-572	21	9.37	37.85	1.00	2.55	2.30	10.87	0.89	18.72	6.33
Monarch Orange	QE-576	15	8.81	29.20	1.00	2.70	2.30	17.39	0.83	12.39	3.28
Dorfman Orange	QE-579	50	9.22	36.99	1.00	2.71	2.30	17.83	0.82	41.09	14.49
Andersen Summit Yellow	QE-581	110	9.25	35.83	1.00	2.68	2.30	16.52	0.83	91.83	30.99
Andersen Gray	QE-647	106	9.27	33.41	1.00	2.66	2.30	15.65	0.84	89.41	27.90
Fire Red	QE-713	62	8.61	28.20	1.00	2.66	2.30	15.65	0.84	52.30	12.80
Crimson Red	QE-737	24	8.59	27.47	0.94	2.58	2.30	12.17	0.83	19.81	4.81
Bagel Tan	QE-848	40	9.60	38.68	1.00	2.64	2.30	14.78	0.85	34.09	11.97
Food Max Beige	QE-855	15	9.61	34.62	0.93	2.62	2.30	13.91	0.80	12.01	4.24
Royal Blue	QE-929	10	8.87	30.13	1.00	2.71	2.30	17.83	0.82	8.22	2.27
Sturdi-Built Blue	QE-930	107	8.77	27.53	0.95	2.71	2.30	17.83	0.78	83.53	21.96
SBL Blue	QE-991	45	9.07	31.19	1.00	2.69	2.30	16.96	0.83	37.37	10.82
Hannibal Blue	QE-992	38	8.65	29.96	1.00	2.71	2.30	17.83	0.82	31.23	8.37
Gloss Black	QE-J204	61	8.48	24.13	0.97	2.71	2.30	17.83	0.80	48.62	10.61
V-OR	VS-002	311	8.96	35.24	2.36	2.36	2.30	2.61	2.30	714.81	83.47
TOTALS:										2,901	722
February-05											
Vista Green	QE-415	12	9.03	31.37	1.00	2.71	2.30	17.83	0.82	9.86	2.89
Interlake Green	QE-432	26	9.20	31.88	0.98	2.70	2.30	17.39	0.81	21.05	6.48
McCoy Green	QE-441	35	8.58	25.11	0.96	2.71	2.30	17.83	0.79	27.61	6.39
AGN Standard Green	QE-466	656	8.95	30.55	1.00	2.71	2.30	17.83	0.82	539.06	152.46
Andersen Orange	QE-522	489	9.17	33.31	0.99	2.57	2.30	11.74	0.87	427.28	128.96
AOR Standard Orange	QE-566	26	9.27	39.19	1.00	2.71	2.30	17.83	0.82	21.37	8.03
Andersen Yellow	QE-569	98	9.34	37.20	1.00	2.61	2.30	13.48	0.87	84.79	28.94
Andersen Summit Yellow	QE-581	27	9.25	35.83	1.00	2.68	2.30	16.52	0.83	22.54	7.61
Andersen Gray	QE-647	238	9.27	33.41	1.00	2.66	2.30	15.65	0.84	200.75	82.65
Fire Red	QE-713	65	8.61	28.20	1.00	2.66	2.30	15.65	0.84	54.83	13.41
Bagel Tan	QE-848	5	9.60	36.88	1.00	2.64	2.30	14.78	0.85	4.26	1.50
Royal Blue	QE-929	20	8.87	30.13	1.00	2.71	2.30	17.83	0.82	16.43	4.54
Sturdi-Built Blue	QE-930	89	8.77	27.53	0.95	2.71	2.30	17.83	0.78	69.48	18.26
Reno Blue	QE-964	12	8.73	28.29	1.00	2.71	2.30	17.83	0.82	9.86	2.52
SBL Blue	QE-991	7	9.07	31.19	1.00	2.69	2.30	16.96	0.83	5.81	1.68
Gloss Black	QE-J204	30	8.48	24.13	0.97	2.71	2.30	17.83	0.80	23.91	5.22
V-AGN	VS-001	628	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1443.42	168.55
V-OR	VS-002	386	8.96	35.24	2.36	2.36	2.30	2.61	2.30	887.20	103.60
TOTALS:										3,870	722

Material	Product Code	Liquid Usage (gal)	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
March-05											
Andersen Off White	QE-113	320	9.75	37.98	0.99	2.53	2.30	10.00	0.89	285.12	100.72
Designer White	QE-147	25	9.67	38.02	0.90	2.47	2.30	7.39	0.83	20.84	7.40
Vista Green	QE-415	9	9.03	31.37	1.00	2.71	2.30	17.83	0.82	7.40	2.17
Interlake Green	QE-432	83	9.20	31.88	0.98	2.70	2.30	17.39	0.81	67.19	20.69
McCoy Green	QE-441	32	8.56	25.11	0.96	2.71	2.30	17.83	0.79	25.24	5.85
AGN Standard Green	QE-466	806	8.95	30.55	1.00	2.71	2.30	17.83	0.82	662.32	187.32
Caterpillar Yellow	QE-510	5	9.05	32.60	1.33	2.83	2.30	23.04	1.02	5.12	1.25
Andersen Orange	QE-522	276	9.17	33.31	0.99	2.57	2.30	11.74	0.87	242.91	72.18
Interlake Orange	QE-535	241	8.96	31.45	1.00	2.63	2.30	14.35	0.86	206.42	57.73
AOR Standard Orange	QE-566	103	9.27	39.19	1.00	2.71	2.30	17.83	0.82	84.64	31.81
Andersen Yellow	QE-569	165	9.34	37.20	1.00	2.61	2.30	13.48	0.87	142.76	48.73
Cool Gray	QE-617	10	10.06	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Gray	QE-647	89	9.27	33.41	1.00	2.66	2.30	15.65	0.84	58.20	18.16
Fire Red	QE-713	43	8.61	28.20	1.00	2.66	2.30	15.65	0.84	36.27	6.87
Royal Blue	QE-929	344	8.87	30.13	1.00	2.71	2.30	17.83	0.82	282.68	76.14
Sturdi-Built Blue	QE-930	59	8.77	27.53	0.95	2.71	2.30	17.83	0.78	46.06	12.11
Gloss Black	QE-J204	39	8.48	24.13	0.97	2.71	2.30	17.83	0.80	31.09	6.78
V-AGN	VS-001	323	8.96	35.24	2.36	2.36	2.30	2.61	2.30	742.39	86.69
V-OR	VS-002	401	8.96	35.24	2.36	2.36	2.30	2.61	2.30	921.67	107.62
									TOTALS:	3,594	757
									QTR-3	6,802	1,451
April-05											
Vista Green	QE-415	9	9.03	31.37	1.00	2.71	2.30	17.83	0.82	7.40	2.17
Interlake Green	QE-432	71	9.20	31.88	0.98	2.70	2.30	17.39	0.81	57.48	17.70
McCoy Green	QE-441	3	8.56	25.11	0.96	2.71	2.30	17.83	0.79	2.37	0.55
AGN Standard Green	QE-466	421	8.95	30.55	1.00	2.71	2.30	17.83	0.82	345.95	97.84
Caterpillar Yellow	QE-510	11	9.05	32.60	1.33	2.83	2.30	23.04	1.02	11.26	2.76
Interlake Orange	QE-535	79	8.96	31.45	1.00	2.63	2.30	14.35	0.86	67.67	18.92
AOR Standard Orange	QE-566	16	9.27	39.19	1.00	2.71	2.30	17.83	0.82	13.15	4.94
Andersen Yellow	QE-569	5	9.34	37.20	1.00	2.61	2.30	13.48	0.87	4.33	1.48
Lodi Metal Tech Orange	QE-570	5	8.71	28.98	1.00	2.71	2.30	17.83	0.82	4.11	1.07
Pantone Yellow	QE-572	584	9.37	37.85	1.00	2.55	2.30	10.87	0.89	502.70	170.02
Dorfman Orange	QE-579	91	9.22	36.99	1.00	2.71	2.30	17.83	0.82	74.78	26.38
Andersen Gray	QE-647	39	9.27	33.41	1.00	2.66	2.30	15.65	0.84	32.90	10.27
Kwai Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Allied HSF Gray	QE-654	88	9.48	34.48	1.00	2.71	2.30	17.83	0.82	72.31	24.46
Royal Blue	QE-929	94	8.87	30.13	1.00	2.71	2.30	17.83	0.82	77.24	21.35
Sturdi-Built Blue	QE-930	589	8.77	27.53	0.95	2.71	2.30	17.83	0.78	459.80	120.88
Gloss Black	QE-J204	15	8.48	24.13	0.97	2.71	2.30	17.83	0.80	11.96	2.61
V-AGN	VS-001	651	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1496.28	174.72
V-OR	VS-002	746	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1714.63	200.22
									TOTALS:	4,960	899

Material	Product Code	Liquid Usage	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
May-05											
Lozier Almond	QE-117	14	9.57	36.34	1.00	2.62	2.30	13.91	0.86	12.05	4.14
Vista Green	QE-415	162	9.03	31.37	1.00	2.71	2.30	17.83	0.62	133.12	39.01
Johns Import Green	QE-424	30	8.95	30.68	1.00	2.68	2.30	16.52	0.83	25.04	7.00
Interlake Green	QE-432	38	9.20	31.88	0.98	2.70	2.30	17.39	0.81	30.76	9.47
McCoy Green	QE-441	49	8.56	25.11	0.96	2.71	2.30	17.83	0.79	38.65	8.95
AGN Standard Green	QE-466	399	8.95	30.55	1.00	2.71	2.30	17.83	0.82	327.87	92.73
Andersen Orange	QE-522	660	9.17	33.31	0.99	2.57	2.30	11.74	0.87	576.70	171.36
Interlake Orange	QE-535	34	8.96	31.45	1.00	2.63	2.30	14.35	0.86	29.12	8.14
AOR Standard Orange	QE-566	279	9.27	39.19	1.00	2.71	2.30	17.83	0.82	229.27	66.15
Andersen Yellow	QE-569	20	9.34	37.20	1.00	2.61	2.30	13.48	0.87	17.30	5.91
Lodi Metal Tech Orange	QE-570	12	8.71	28.96	1.00	2.71	2.30	17.83	0.82	9.66	2.57
Pantone Yellow	QE-572	31	9.37	37.85	1.00	2.55	2.30	10.87	0.89	27.63	9.35
Dorfman Orange	QE-579	55	9.22	36.99	1.00	2.71	2.30	17.83	0.82	45.20	15.94
Frazier Yellow	QE-582	20	9.04	31.25	0.98	2.63	2.30	14.35	0.84	16.79	4.80
Andersen Gray	QE-647	83	9.27	33.41	1.00	2.66	2.30	15.65	0.84	70.01	21.85
Skecher's Gray	QE-655	86	9.17	32.46	1.00	2.71	2.30	17.83	0.82	70.67	21.76
Fire Red	QE-713	28	8.61	28.20	1.00	2.66	2.30	15.65	0.84	23.62	5.78
Royal Blue	QE-929	190	8.87	30.13	1.00	2.71	2.30	17.83	0.82	156.13	43.16
Sturdi-Built Blue	QE-930	18	8.77	27.53	0.95	2.71	2.30	17.83	0.78	14.05	3.69
Unarco Blue	QE-963	155	8.76	28.66	0.99	2.71	2.30	17.83	0.81	126.10	33.18
Blue Aquatech	QE-981	40	8.70	27.46	0.50	1.86	2.30	0.00	0.50	20.00	8.13
Hannibal Blue	QE-992	138	8.65	29.96	1.00	2.71	2.30	17.83	0.82	113.40	30.40
Gloss Black	QE-J204	18	8.48	24.13	0.97	2.71	2.30	17.83	0.80	14.35	3.13
V-AGN	VS-001	695	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1597.41	186.53
V-OR	VS-002	803	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1845.64	215.52
									TOTALS:	5,559	1,035
June-05											
Andersen Off White	QE-113	309	9.75	37.98	0.99	2.53	2.30	10.00	0.89	275.32	97.26
Lozier Almond	QE-117	30	9.57	36.34	1.00	2.62	2.30	13.91	0.86	25.83	8.87
Vista Green	QE-415	17	9.03	31.37	1.00	2.71	2.30	17.83	0.82	13.97	4.09
Johns Import Green	QE-424	10	8.95	30.66	1.00	2.68	2.30	16.52	0.83	8.35	2.33
Interlake Green	QE-432	154	9.20	31.88	0.98	2.70	2.30	17.39	0.81	124.67	38.39
AGN Standard Green	QE-466	610	8.95	30.55	1.00	2.71	2.30	17.83	0.82	501.26	141.77
Caterpillar Yellow	QE-510	9	9.05	32.60	1.33	2.83	2.30	23.04	1.02	9.21	2.26
Andersen Orange	QE-522	330	9.17	33.31	0.99	2.57	2.30	11.74	0.87	288.35	85.68
Interlake Orange	QE-535	184	8.96	31.45	1.00	2.63	2.30	14.35	0.86	157.60	44.07
AOR Standard Orange	QE-566	67	9.27	39.19	1.00	2.71	2.30	17.83	0.82	55.06	20.69
Andersen Yellow	QE-569	43	9.34	37.20	1.00	2.61	2.30	13.48	0.87	37.20	12.70
Pantone Yellow	QE-572	182	9.37	37.85	1.00	2.55	2.30	10.87	0.89	162.22	54.87
Cool Gray	QE-617	193	10.08	43.80	1.35	2.81	2.30	22.17	1.05	202.78	72.43
Andersen Gray	QE-647	48	9.27	33.41	1.00	2.66	2.30	15.65	0.84	40.49	12.64
Fire Red	QE-713	9	8.61	28.20	1.00	2.66	2.30	15.65	0.84	7.59	1.86
Royal Blue	QE-929	355	8.87	30.13	1.00	2.71	2.30	17.83	0.82	291.72	80.64
Sturdi-Built Blue	QE-930	217	8.77	27.53	0.95	2.71	2.30	17.83	0.78	169.40	44.53
Unarco Blue	QE-963	47	8.76	28.66	0.99	2.71	2.30	17.83	0.81	38.24	10.06
Kwal Blue	QE-987	5	8.72	28.22	0.99	2.70	2.30	17.39	0.82	4.09	1.05
Hannibal Blue	QE-992	3	8.65	29.96	1.00	2.71	2.30	17.83	0.82	2.47	0.66
Gloss Black	QE-J204	182	8.48	24.13	0.97	2.71	2.30	17.83	0.80	145.07	31.66
V-AGN	VS-001	201	8.96	35.24	2.36	2.36	2.30	2.61	2.30	461.99	53.95
V-OR	VS-002	951	8.96	35.24	2.36	2.36	2.30	2.61	2.30	2185.81	255.24
									TOTALS:	4,908	972
									QTR-4	15,427	2,905

Material	Product Code	Liquid	Solids		VOC	VOC	Rule Limit	Reduction	Surplus	VOC	PM10
		Usage	Density	Content	as applied	less water & exempts		for rule compliance	as applied	Emissions	Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)		(%)	(lb/gal)	(lb)	(lb)
July-05											
Andersen Off White	QE-113	44	9.75	37.98	0.99	2.53	2.30	10.00	0.89	39.20	13.85
Lozier Almond	QE-117	15	9.57	36.34	1.00	2.62	2.30	13.91	0.86	12.91	4.43
Designer White	QE-147	20	9.67	36.02	0.90	2.47	2.30	7.39	0.83	16.67	5.92
Vista Green	QE-415	11	9.03	31.37	1.00	2.71	2.30	17.83	0.82	9.04	2.65
Johns Import Green	QE-424	3	8.95	30.68	1.00	2.68	2.30	18.52	0.83	2.50	0.70
Interlake Green	QE-432	30	9.20	31.88	0.98	2.70	2.30	17.39	0.81	24.29	7.48
McCoy Green	QE-441	35	8.56	25.11	0.96	2.71	2.30	17.83	0.79	27.61	6.39
AGN Standard Green	QE-466	380	8.95	30.55	1.00	2.71	2.30	17.83	0.82	312.26	88.32
Caterpillar Yellow	QE-510	2	9.05	32.60	1.33	2.83	2.30	23.04	1.02	2.05	0.50
Andersen Orange	QE-522	660	9.17	33.31	0.99	2.57	2.30	11.74	0.87	576.70	171.36
Interlake Orange	QE-535	108	8.96	31.45	1.00	2.63	2.30	14.35	0.86	92.50	25.87
AOR Standard Orange	QE-566	248	9.27	39.19	1.00	2.71	2.30	17.83	0.82	203.79	76.58
Andersen Yellow	QE-569	374	9.34	37.20	1.00	2.61	2.30	13.48	0.87	323.59	110.45
Pantone Yellow	QE-572	364	9.37	37.85	1.00	2.55	2.30	10.87	0.89	324.43	109.73
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Yardbird Gray	QE-620	15	9.19	32.58	1.00	2.71	2.30	17.83	0.82	12.33	3.82
Andersen Gray	QE-647	60	9.27	33.41	1.00	2.68	2.30	15.65	0.84	50.61	15.80
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
BNR Red	QE-739	75	8.58	28.66	0.98	2.54	2.30	10.43	0.88	65.83	15.68
Royal Blue	QE-929	126	8.87	30.13	1.00	2.71	2.30	17.83	0.82	105.18	29.08
Sturdi-Built Blue	QE-930	235	8.77	27.53	0.95	2.71	2.30	17.83	0.78	183.45	48.23
Reno Blue	QE-964	9	8.73	28.29	1.00	2.71	2.30	17.83	0.82	7.40	1.89
Gloss Black	QE-J204	63	8.48	24.13	0.97	2.71	2.30	17.83	0.80	42.25	9.22
V-AGN	VS-001	618	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1420.43	165.86
V-OR	VS-002	141	8.96	35.24	2.36	2.36	2.30	2.61	2.30	324.08	37.84
TOTALS:										4,142	938
August-05											
Vista Green	QE-415	7	9.03	31.37	1.00	2.71	2.30	17.83	0.82	5.75	1.69
Interlake Green	QE-432	108	9.20	31.88	0.98	2.70	2.30	17.39	0.81	87.43	26.92
McCoy Green	QE-441	7	8.56	25.11	0.96	2.71	2.30	17.83	0.79	5.52	1.28
AGN Standard Green	QE-466	715	8.95	30.55	1.00	2.71	2.30	17.83	0.82	587.54	166.17
Caterpillar Yellow	QE-510	5	9.05	32.60	1.33	2.83	2.30	23.04	1.02	5.12	1.25
Andersen Orange	QE-522	716	9.17	33.31	0.99	2.57	2.30	11.74	0.87	625.63	185.90
Interlake Orange	QE-535	109	8.96	31.45	1.00	2.63	2.30	14.35	0.86	93.36	26.11
AOR Standard Orange	QE-566	285	9.27	39.19	1.00	2.71	2.30	17.83	0.82	234.20	88.01
Andersen Yellow	QE-569	133	9.34	37.20	1.00	2.61	2.30	13.48	0.87	115.07	39.26
Pantone Yellow	QE-572	143	9.37	37.85	1.00	2.55	2.30	10.87	0.89	127.46	43.11
Yardbird Gray	QE-620	3	9.19	32.58	1.00	2.71	2.30	17.83	0.82	2.47	0.78
Andersen Gray	QE-647	359	9.27	33.41	1.00	2.66	2.30	15.65	0.84	302.81	94.51
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Fire Red	QE-713	23	8.61	28.20	1.00	2.86	2.30	15.85	0.84	19.40	4.75
Royal Blue	QE-929	158	8.87	30.13	1.00	2.71	2.30	17.83	0.82	129.83	35.89
Sturdi-Built Blue	QE-930	109	8.77	27.53	0.95	2.71	2.30	17.83	0.76	85.09	22.37
Blue Aquatech Enamel	QE-995	10	6.47	25.74	1.00	2.71	2.30	17.83	0.82	8.22	1.85
Gloss Black	QE-J204	41	8.48	24.13	0.97	2.71	2.30	17.83	0.80	32.68	7.13
V-AGN	VS-001	702	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1613.50	188.41
V-OR	VS-002	748	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1719.23	200.75
TOTALS:										5,804	1,137

Material	Product Code	Liquid Usage	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
September-05											
Lozier Almond	QE-117	30	9.57	36.34	1.00	2.62	2.30	13.91	0.86	25.83	8.87
Vista Green	QE-415	75	9.03	31.37	1.00	2.71	2.30	17.83	0.82	61.83	18.06
Interlake Green	QE-432	208	9.20	31.88	0.98	2.70	2.30	17.39	0.81	168.39	51.85
McCoy Green	QE-441	5	8.56	25.11	0.96	2.71	2.30	17.83	0.79	3.94	0.91
AGN Standard Green	QE-466	1399	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1149.61	325.14
Andersen Orange	QE-522	1539	9.17	33.31	0.99	2.57	2.30	11.74	0.87	1344.75	399.58
Interlake Orange	QE-535	300	8.96	31.45	1.00	2.63	2.30	14.35	0.86	256.96	71.86
AOR Standard Orange	QE-566	15	9.27	39.19	1.00	2.71	2.30	17.83	0.82	12.33	4.83
Andersen Yellow	QE-569	15	9.34	37.20	1.00	2.61	2.30	13.48	0.87	12.98	4.43
Pantone Yellow	QE-572	98	9.37	37.85	1.00	2.55	2.30	10.87	0.89	85.57	28.94
Inca Yellow	QE-574	32	9.26	36.76	1.00	2.60	2.30	13.04	0.87	27.83	9.26
Andersen Summit Yellow	QE-581	29	9.25	35.83	1.00	2.66	2.30	16.52	0.83	24.21	8.17
Andersen Gray	QE-647	290	9.27	33.41	1.00	2.66	2.30	15.65	0.84	244.61	76.34
Fire Red	QE-713	120	8.61	28.20	1.00	2.66	2.30	15.65	0.84	101.22	24.77
Royal Blue	QE-929	58	8.87	30.13	1.00	2.71	2.30	17.83	0.82	47.66	13.18
Sturdi-Built Blue	QE-930	40	8.77	27.53	0.95	2.71	2.30	17.83	0.78	31.23	8.21
Inca Blue	QE-989	15	8.88	26.72	0.97	2.71	2.30	17.83	0.80	11.98	2.96
SBL Blue	QE-991	9	9.07	31.19	1.00	2.69	2.30	16.96	0.83	7.47	2.16
Gloss Black	QE-J204	19	8.48	24.13	0.97	2.71	2.30	17.83	0.80	15.14	3.30
V-AGN	VS-001	430	8.98	35.24	2.36	2.36	2.30	2.61	2.30	988.33	115.41
V-OR	VS-002	151	8.96	35.24	2.36	2.36	2.30	2.61	2.30	347.06	40.53
TOTALS:										4,943	1,210
QTR-5										14,889	3,285
October-05											
Andersen White	QE-132	18	9.95	39.59	0.50	1.66	2.30	0.00	0.50	9.00	6.03
Vista Green	QE-415	20	9.03	31.37	1.00	2.71	2.30	17.83	0.82	16.43	4.82
Interlake Green	QE-432	51	9.20	31.88	0.98	2.70	2.30	17.39	0.81	41.29	12.71
AGN Standard Green	QE-466	1131	8.95	30.55	1.00	2.71	2.30	17.83	0.82	929.39	262.85
Caterpillar Yellow	QE-510	3	9.05	32.60	1.33	2.83	2.30	23.04	1.02	3.07	0.75
Andersen Orange	QE-522	1045	9.17	33.31	0.99	2.57	2.30	11.74	0.87	913.10	271.32
Interlake Orange	QE-535	55	8.96	31.45	1.00	2.63	2.30	14.35	0.86	47.11	13.17
AOR Standard Orange	QE-566	337	9.27	39.19	1.00	2.71	2.30	17.83	0.62	276.93	104.06
Andersen Yellow	QE-569	185	9.34	37.20	1.00	2.61	2.30	13.48	0.87	160.07	54.64
Pantone Yellow	QE-572	89	9.37	37.85	1.00	2.55	2.30	10.87	0.89	79.33	28.83
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Gray	QE-647	400	9.27	33.41	1.00	2.66	2.30	15.65	0.84	337.39	105.30
Crimson Red	QE-737	47	8.59	27.47	0.94	2.58	2.30	12.17	0.83	38.80	9.43
Inca Putty	QE-851	214	9.32	33.34	0.92	2.52	2.30	9.57	0.83	178.05	58.52
CSB Brown	QE-858	181	9.10	32.04	1.00	2.71	2.30	17.83	0.82	148.73	44.86
Royal Blue	QE-929	17	8.87	30.13	1.00	2.71	2.30	17.83	0.82	13.97	3.86
Sturdi-Built Blue	QE-930	223	8.77	27.53	0.95	2.71	2.30	17.83	0.78	174.09	45.76
Frazier Blue	QE-988	6	8.72	28.16	1.00	2.71	2.30	17.83	0.62	4.93	1.25
Gloss Black	QE-J204	27	8.48	24.13	0.97	2.71	2.30	17.83	0.80	21.52	4.70
V-AGN	VS-001	599	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1376.76	160.76
V-OR	VS-002	689	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1583.62	184.92
TOTALS:										6,364	1,376

Material	Product Code	Liquid Usage (gal)	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
November-05											
Andersen Off White	QE-113	25	9.75	37.98	0.99	2.53	2.30	10.00	0.89	22.28	7.87
Vista Green	QE-415	26	9.03	31.37	1.00	2.71	2.30	17.83	0.82	21.37	6.26
Johns Import Green	QE-424	151	8.95	30.68	1.00	2.68	2.30	16.52	0.83	126.05	35.24
Interlake Green	QE-432	101	9.20	31.88	0.98	2.70	2.30	17.39	0.81	81.77	25.18
AGN Standard Green	QE-466	55	8.95	30.55	1.00	2.71	2.30	17.83	0.82	45.20	12.78
Interlake Orange	QE-535	109	8.96	31.45	1.00	2.63	2.30	14.35	0.86	93.36	28.11
AOR Standard Orange	QE-566	178	9.27	39.19	1.00	2.71	2.30	17.83	0.82	146.27	54.97
Andersen Yellow	QE-569	134	9.34	37.20	1.00	2.61	2.30	13.48	0.87	115.94	39.57
Pantone Yellow	QE-572	46	9.37	37.85	1.00	2.55	2.30	10.87	0.89	41.00	13.87
Inca Yellow	QE-574	728	9.26	36.76	1.00	2.60	2.30	13.04	0.87	633.04	210.64
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.76
Andersen Gray	QE-647	88	9.27	33.41	1.00	2.66	2.30	15.65	0.84	72.54	22.84
Fire Red	QE-713	40	8.61	28.20	1.00	2.66	2.30	15.65	0.84	33.74	8.26
Inca Putty	QE-851	5	9.32	33.34	0.92	2.52	2.30	9.57	0.83	4.16	1.32
Royal Blue	QE-929	29	8.87	30.13	1.00	2.71	2.30	17.83	0.82	23.83	6.59
Sturdi-Built Blue	QE-930	174	8.77	27.53	0.95	2.71	2.30	17.83	0.78	135.83	35.71
Inca Blue	QE-989	625	8.68	28.72	0.97	2.71	2.30	17.83	0.80	498.18	123.21
V-AGN	VS-001	949	8.96	35.24	2.36	2.36	2.30	2.61	2.30	2181.21	254.70
V-OR	VS-002	1098	8.96	35.24	2.36	2.36	2.30	2.61	2.30	2523.68	294.69
									TOTALS:	6,788	1,175
December-05											
Lozier Almond	QE-117	2	9.57	36.34	1.00	2.62	2.30	13.91	0.86	1.72	0.59
Vista Green	QE-415	15	9.03	31.37	1.00	2.71	2.30	17.83	0.82	12.33	3.61
Interlake Green	QE-432	122	9.20	31.88	0.98	2.71	2.30	17.83	0.81	98.25	30.41
McCoy Green	QE-441	3	8.56	25.11	0.96	2.71	2.30	17.83	0.79	2.37	0.55
AGN Standard Green	QE-466	792	8.95	30.55	1.00	2.71	2.30	17.83	0.82	650.82	184.07
Andersen Orange	QE-522	355	9.17	33.31	0.99	2.57	2.30	11.74	0.87	310.19	92.17
Interlake Orange	QE-535	213	8.96	31.45	1.00	2.63	2.30	14.35	0.86	182.44	51.02
AOR Standard Orange	QE-566	178	9.27	39.19	1.00	2.71	2.30	17.83	0.82	146.27	54.97
Andersen Yellow	QE-569	20	9.34	37.20	1.00	2.61	2.30	13.48	0.87	17.30	5.91
Pantone Yellow	QE-572	38	9.37	37.85	1.00	2.55	2.30	10.87	0.89	33.87	11.46
Inca Yellow	QE-574	774	9.26	36.76	1.00	2.60	2.30	13.04	0.87	673.04	223.95
Dorfman Orange	QE-579	15	9.22	36.99	1.00	2.71	2.30	17.83	0.82	12.33	4.36
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.76
Andersen Gray	QE-647	112	9.27	33.41	1.00	2.66	2.30	15.65	0.84	94.47	29.48
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Fire Red	QE-713	28	8.61	28.20	1.00	2.66	2.30	15.65	0.84	23.62	5.78
Andersen Reds	QE-733	55	8.67	29.45	0.98	2.57	2.30	11.74	0.86	47.57	11.94
Royal Blue	QE-929	20	8.87	30.13	1.00	2.71	2.30	17.83	0.82	16.43	4.54
Sturdi-Built Blue	QE-930	74	8.77	27.53	0.95	2.71	2.30	17.83	0.78	57.77	15.19
Inca Blue	QE-989	649	8.68	26.72	0.97	2.71	2.30	17.83	0.80	517.31	127.94
Gloss Black	QE-J204	3	8.48	24.13	0.97	2.71	2.30	17.83	0.60	2.39	0.52
V-AGN	VS-001	624	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1434.22	167.47
V-OR	VS-002	602	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1383.66	181.57
									TOTALS:	5,731	1,192
									QTR-6	18,883	3,745

Material	Product Code	Liquid		Solids	VOC	VOC	Rule	Reduction	Surplus	VOC	PM10
		Usage	Density	Content	as applied	less water	Limit	for rule	VOC	Emissions	Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	compliance	as applied	(lb)	(lb)
January-06											
Andersen White	QE-119	5	9.74	37.94	0.99	2.53	2.30	10.00	0.89	4.46	1.57
Vista Green	QE-415	29	9.03	31.37	1.00	2.71	2.30	17.83	0.82	23.83	6.98
Johns Import Green	QE-424	17	8.95	30.68	1.00	2.68	2.30	16.52	0.83	14.19	3.97
Interlake Green	QE-432	208	9.20	31.88	0.98	2.71	2.30	17.83	0.81	167.50	51.86
McCoy Green	QE-441	41	8.56	25.11	0.96	2.71	2.30	17.83	0.79	32.34	7.49
AGN Standard Green	QE-488	1339	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1100.31	311.20
Andersen Orange	QE-522	1271	9.17	33.31	0.99	2.57	2.30	11.74	0.87	1110.58	330.00
Interlake Orange	QE-535	173	8.96	31.45	1.00	2.63	2.30	14.35	0.86	148.18	41.44
AOR Standard Orange	QE-568	750	9.27	39.19	1.00	2.71	2.30	17.83	0.82	618.30	231.80
Andersen Yellow	QE-569	49	9.34	37.20	1.00	2.81	2.30	13.48	0.87	42.40	14.47
Pantone Yellow	QE-572	82	9.37	37.85	1.00	2.55	2.30	10.87	0.89	73.09	24.72
Inca Yellow	QE-574	9	9.28	38.78	1.00	2.80	2.30	13.04	0.87	7.83	2.60
Andersen Gray	QE-847	135	9.27	33.41	1.00	2.68	2.30	15.65	0.84	113.87	35.54
Fire Red	QE-713	41	8.81	28.20	1.00	2.66	2.30	15.65	0.84	34.58	8.46
Kwal Red	QE-734	15	8.83	27.99	0.94	2.59	2.30	12.81	0.82	12.32	3.08
BNR Red	QE-739	74	8.58	28.66	0.98	2.54	2.30	10.43	0.88	64.95	15.47
Royal Blue	QE-929	310	8.87	30.13	1.00	2.71	2.30	17.83	0.82	254.74	70.42
Sturdi-Built Blue	QE-930	200	8.77	27.53	0.95	2.71	2.30	17.83	0.78	156.13	41.04
Gloss Black	QE-J204	13	8.48	24.13	0.97	2.71	2.30	17.83	0.80	10.36	2.26
									TOTALS:	3,984	1,203
February-06											
Andersen Off White	QE-113	114	9.75	37.98	0.99	2.53	2.30	10.00	0.89	101.57	35.88
Designer White	QE-147	23	9.67	38.02	0.90	2.47	2.30	7.39	0.83	19.17	8.81
Vista Green	QE-415	21	9.03	31.37	1.00	2.71	2.30	17.83	0.82	17.26	5.06
Interlake Green	QE-432	118	9.20	31.88	0.98	2.71	2.30	17.83	0.81	95.03	29.42
McCoy Green	QE-441	32	8.58	25.11	0.96	2.71	2.30	17.83	0.79	25.24	5.86
AGN Standard Green	QE-488	1481	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1200.66	339.55
Andersen Orange	QE-522	899	9.17	33.31	0.99	2.57	2.30	11.74	0.87	785.53	233.41
Interlake Orange	QE-535	237	8.96	31.45	1.00	2.63	2.30	14.35	0.88	203.00	58.77
AOR Standard Orange	QE-586	50	9.27	39.19	1.00	2.71	2.30	17.83	0.82	41.09	15.44
Andersen Yellow	QE-569	197	9.34	37.20	1.00	2.81	2.30	13.48	0.87	170.45	58.18
Pantone Yellow	QE-572	90	9.37	37.85	1.00	2.55	2.30	10.87	0.89	80.22	27.13
Andersen Gray	QE-647	135	9.27	33.41	1.00	2.66	2.30	15.65	0.84	113.87	35.54
Fire Red	QE-713	41	8.81	28.20	1.00	2.66	2.30	15.65	0.84	34.58	8.46
Kwal Red	QE-734	15	8.83	27.99	0.94	2.59	2.30	12.81	0.82	12.32	3.08
BNR Red	QE-739	74	8.58	28.66	0.98	2.54	2.30	10.43	0.88	64.95	15.47
Royal Blue	QE-929	310	8.87	30.13	1.00	2.71	2.30	17.83	0.82	254.74	70.42
Sturdi-Built Blue	QE-930	168	8.77	27.53	0.95	2.71	2.30	17.83	0.78	131.15	34.48
Gloss Black	QE-J204	13	8.48	24.13	0.97	2.71	2.30	17.83	0.80	10.38	2.26
									TOTALS:	3,260	947

Material	Product Code	Liquid	Density	Solids	VOC	VOC	Rule Limit	Reduction	Surplus	VOC	PM10	
		Usage		Content	as applied	less water		for rule	VOC	Emissions		Emissions
		(gal)		(lb/gal)	(% by wt)	(lb/gal)		& exempts	compliance	as applied		(lb)
March-06												
Lozier Almond	QE-117	51	9.57	36.34	1.00	2.62	2.30	13.91	0.86	43.90	15.08	
Vista Green	QE-415	11	9.03	31.37	1.00	2.71	2.30	17.83	0.82	9.04	2.65	
Interlake Green	QE-432	129	9.20	31.88	0.98	2.71	2.30	17.83	0.81	103.88	32.16	
AGN Standard Green	QE-466	929	8.95	30.55	1.00	2.71	2.30	17.83	0.82	763.40	216.91	
Lodi metal Tech Green	QE-478	10	8.93	29.78	0.90	2.54	2.30	10.43	0.81	8.08	2.26	
Andersen Orange	QE-522	894	9.17	33.31	0.99	2.57	2.30	11.74	0.87	781.16	232.11	
Interlake Orange	QE-535	124	8.98	31.45	1.00	2.63	2.30	14.35	0.86	108.21	29.70	
AOR Standard Orange	QE-566	205	9.27	39.19	1.00	2.71	2.30	17.83	0.82	168.46	63.30	
Andersen Yellow	QE-569	112	9.34	37.20	1.00	2.61	2.30	13.48	0.87	98.90	33.08	
Lodi Metal Tech Orange	QE-570	10	8.71	28.98	1.00	2.71	2.30	17.83	0.82	8.22	2.15	
Pantone Yellow	QE-572	497	9.37	37.85	1.00	2.55	2.30	10.87	0.89	442.98	149.82	
Andersen Gray	QE-647	113	9.27	33.41	1.00	2.66	2.30	15.65	0.84	95.31	29.75	
Toyota Gray	QE-664	110	9.91	39.32	1.00	2.55	2.30	10.87	0.89	98.04	36.43	
Fire Red	QE-713	39	8.61	28.20	1.00	2.66	2.30	15.65	0.84	32.90	8.05	
Kwal Red	QE-734	39	8.63	27.99	0.94	2.59	2.30	12.61	0.82	32.04	8.01	
Bear Foot Pink	QE-736	15	9.67	36.07	0.90	2.47	2.30	7.39	0.83	12.50	4.45	
Royal Blue	QE-929	303	8.87	30.13	1.00	2.71	2.30	17.83	0.82	248.99	68.83	
Sturdi-Built Blue	QE-930	147	8.77	27.53	0.95	2.71	2.30	17.83	0.78	114.76	30.17	
NC Blue	QE-951	15	8.77	30.93	1.17	2.83	2.30	23.04	0.90	13.51	3.46	
Toyota Blue	QE-9003	104	8.84	27.74	0.81	2.63	2.30	14.35	0.69	72.15	21.68	
Gloss Black	QE-J204	27	8.48	24.13	0.97	2.71	2.30	17.83	0.80	21.52	4.70	
V-AGN	VS-001	330	8.96	35.24	2.36	2.38	2.30	2.61	2.30	758.48	88.57	
V-OR	VS-002	330	8.96	35.24	2.36	2.36	2.30	2.61	2.30	758.48	88.57	
									TOTALS:	4,747	1,156	
									QTR-7	11,990	3,306	
April-06												
Lozier Almond	QE-117	58	9.57	36.34	1.00	2.62	2.30	13.91	0.86	49.93	17.15	
Andersen White	QE-119	444	9.74	37.94	0.99	2.53	2.30	10.00	0.89	395.60	139.46	
Designer White	QE-147	20	9.67	36.02	0.90	2.47	2.30	7.39	0.83	16.67	5.92	
Vista Green	QE-415	30	9.03	31.37	1.00	2.71	2.30	17.83	0.82	24.65	7.22	
Interlake Green	QE-432	192	9.20	31.88	0.98	2.71	2.30	17.83	0.81	154.82	47.87	
AGN Standard Green	QE-466	1012	8.95	30.55	1.00	2.71	2.30	17.83	0.82	831.60	235.20	
Andersen Orange	QE-522	960	9.17	33.31	0.99	2.57	2.30	11.74	0.87	838.83	249.25	
Interlake Orange	QE-535	234	8.96	31.45	1.00	2.63	2.30	14.35	0.86	200.43	56.05	
AOR Standard Orange	QE-566	7	9.27	39.19	1.00	2.71	2.30	17.83	0.82	5.75	2.16	
Andersen Yellow	QE-569	85	9.34	37.20	1.00	2.61	2.30	13.48	0.87	73.54	25.10	
Pantone Yellow	QE-572	134	9.37	37.85	1.00	2.55	2.30	10.87	0.89	119.43	40.40	
Ferguson Orange	QE-585	86	8.65	32.61	1.00	2.71	2.30	17.83	0.82	70.67	20.62	
Andersen Gray	QE-647	90	9.27	33.41	1.00	2.66	2.30	15.65	0.84	75.91	23.69	
Fire Red	QE-713	1115	8.61	28.20	1.00	2.66	2.30	15.65	0.84	940.48	230.12	
Kwal Red	QE-734	9	8.63	27.99	0.94	2.59	2.30	12.61	0.82	7.39	1.85	
Royal Blue	QE-929	166	8.87	30.13	1.00	2.71	2.30	17.83	0.82	136.41	37.71	
Sturdi-Built Blue	QE-930	199	8.77	27.53	0.95	2.71	2.30	17.83	0.78	155.35	40.84	
Reno Blue	QE-964	17	8.73	28.29	1.00	2.71	2.30	17.83	0.82	13.97	3.57	
Gloss Black	QE-J204	45	8.48	24.13	0.97	2.71	2.30	17.83	0.80	35.87	7.83	
									TOTALS:	3,702	1,035	

Material	Product Code	Liquid Usage	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
May-06											
Andersen White	QE-119	32	9.74	37.94	0.99	2.53	2.30	10.00	0.89	28.51	10.05
Designer White	QE-147	26	9.67	38.02	0.90	2.47	2.30	7.39	0.83	21.67	7.70
Vista Green	QE-415	21	9.03	31.37	1.00	2.71	2.30	17.83	0.82	17.26	5.06
Interlake Green	QE-432	19	9.20	31.88	0.98	2.71	2.30	17.83	0.81	15.30	4.74
McCoy Green	QE-441	473	8.58	25.11	0.96	2.71	2.30	17.83	0.79	373.14	86.42
Andersen Greens	QE-464	464	8.95	30.55	1.00	2.71	2.30	17.83	0.82	381.29	107.84
AGN Standard Green	QE-466	592	8.95	30.55	1.00	2.71	2.30	17.83	0.82	486.47	137.59
Andersen Orange	QE-522	490	9.17	33.31	0.99	2.57	2.30	11.74	0.87	428.15	127.22
Interlake Orange	QE-535	18	8.96	31.45	1.00	2.63	2.30	14.35	0.86	13.70	3.83
Andersen Oranges	QE-542	307	9.18	32.55	0.53	1.78	2.30	0.00	0.53	182.71	77.97
AOR Standard Orange	QE-566	29	9.27	39.19	1.00	2.71	2.30	17.83	0.82	23.83	8.96
Andersen Yellow	QE-569	75	9.34	37.20	1.00	2.61	2.30	13.48	0.87	64.89	22.15
Pantone Yellow	QE-572	233	9.37	37.85	1.00	2.55	2.30	10.87	0.89	207.67	70.24
Andersen Summit Yellow	QE-581	62	9.25	35.83	1.00	2.68	2.30	16.52	0.83	51.76	17.47
Andersen Gray	QE-647	125	9.27	33.41	1.00	2.66	2.30	15.65	0.84	105.43	32.91
Fire Red	QE-713	19	8.61	28.20	1.00	2.66	2.30	15.65	0.84	16.03	3.92
Royal Blue	QE-929	26	8.87	30.13	1.00	2.71	2.30	17.83	0.82	21.37	5.91
Sturdi-Built Blue	QE-930	83	8.77	27.53	0.95	2.71	2.30	17.83	0.78	64.79	17.03
Reno Blue	QE-964	19	8.73	28.29	1.00	2.71	2.30	17.83	0.82	15.61	3.99
Toyota Blue	QE-9003	3	8.84	27.74	0.81	2.63	2.30	14.35	0.69	2.08	0.63
Gloss Black	QE-J204	27	8.48	24.13	0.97	2.71	2.30	17.83	0.80	21.52	4.70
V-AGN	VS-001	349	8.96	35.24	2.36	2.36	2.30	2.61	2.30	802.15	93.67
V-OR	VS-002	342	8.98	35.24	2.36	2.36	2.30	2.81	2.30	786.06	91.79
									TOTALS:	4,083	932
June-06											
Andersen Off White	QE-113	13	9.75	37.98	0.99	2.53	2.30	10.00	0.89	11.58	4.09
Lozier Almond	QE-117	37	9.57	36.34	1.00	2.82	2.30	13.91	0.86	31.85	10.94
Andersen White	QE-119	36	9.74	37.94	0.99	2.53	2.30	10.00	0.89	32.08	11.31
Andersen White	QE-135	29	9.87	38.79	0.50	1.78	2.30	0.00	0.50	14.50	9.44
Andersen White	QE-138	20	9.87	38.79	0.50	1.78	2.30	0.00	0.50	10.00	6.51
Interlake Green	QE-432	82	9.20	31.88	0.98	2.71	2.30	17.83	0.81	66.03	20.44
Andersen Green	QE-442	16	8.92	29.85	0.50	1.88	2.30	0.00	0.50	8.00	3.62
Andersen Green	QE-443	3	8.92	29.85	0.50	1.88	2.30	0.00	0.50	1.50	0.68
AGN Std Green	QE-464	1169	8.95	30.55	1.00	2.71	2.30	17.83	0.82	960.61	271.69
Andersen Off Green	QE-468	7	9.64	36.05	0.89	2.43	2.30	5.85	0.84	5.88	2.07
Andersen Orange	QE-522	367	9.17	33.31	0.99	2.57	2.30	11.74	0.87	320.68	95.29
Interlake Orange	QE-535	101	8.96	31.45	1.00	2.63	2.30	14.35	0.86	86.51	24.19
And. Orange & Yellows	QE-542	692	9.18	32.55	0.53	1.78	2.30	0.00	0.53	366.76	175.76
And. Orange & Yellows	QE-544	115	9.18	32.55	0.53	1.78	2.30	0.00	0.53	60.95	29.21
And. Orange & Yellows	QE-545	79	9.18	32.55	0.53	1.78	2.30	0.00	0.53	41.87	20.07
And. Orange & Yellows	QE-552	438	9.18	32.55	0.53	1.78	2.30	0.00	0.53	232.14	111.25
AOR Standard Orange	QE-566	25	9.27	39.19	1.00	2.71	2.30	17.83	0.82	20.54	7.72
Andersen Yellow	QE-589	66	9.34	37.20	1.00	2.61	2.30	13.48	0.87	57.10	19.49
Pantone Yellow	QE-572	40	9.37	37.85	1.00	2.55	2.30	10.87	0.89	35.65	12.06
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Pebble Gray	QE-626	402	9.33	31.80	0.61	2.57	2.30	11.74	0.45	180.95	101.38
Andersen Gray	QE-647	13	9.27	33.41	1.00	2.66	2.30	15.65	0.84	10.97	3.42
Fire Red	QE-713	7	8.61	28.20	1.00	2.66	2.30	15.65	0.84	5.90	1.44
Andersen Reds	QE-733	2	8.67	29.45	0.88	2.57	2.30	11.74	0.86	1.73	0.43
Kwal Red	QE-734	55	8.63	27.99	0.94	2.59	2.30	12.81	0.82	45.18	11.29
Andersen Tans	QE-862	55	9.07	30.09	0.51	1.73	2.30	0.00	0.51	28.05	12.76
Andersen Tans	QE-863	60	9.07	30.09	0.51	1.73	2.30	0.00	0.51	30.60	13.92
Andersen Blues	QE-915	15	8.87	30.13	1.00	2.71	2.30	17.83	0.82	12.33	3.41
Royal Blue	QE-929	20	8.87	30.13	1.00	2.71	2.30	17.83	0.82	16.43	4.54
Sturdi-Built Blue	QE-930	46	8.77	27.53	0.95	2.71	2.30	17.83	0.78	35.91	9.44
Sturdi-Built Blue	QE-954	159	8.78	27.68	0.51	1.73	2.30	0.00	0.51	81.09	32.85
Reno Blue	QE-964	110	8.73	28.29	1.00	2.71	2.30	17.83	0.82	90.39	23.09
Gloss Black	QE-J204	12	8.48	24.13	0.97	2.71	2.30	17.83	0.80	9.57	2.09
V-AGN	VS-001	246	8.96	35.24	2.36	2.36	2.30	2.61	2.30	565.41	66.02
V-OR	VS-002	152	8.96	35.24	2.36	2.36	2.30	2.61	2.30	349.36	40.79
									TOTALS:	3,763	1,140
									QTR-8	11,548	3,107

Appendix III
Permit to Operate for N-2368-1-3

San Joaquin Valley
Air Pollution Control District

COPY

PERMIT UNIT: N-2368-1-3

EXPIRATION DATE: 07/31/2007

EQUIPMENT DESCRIPTION:

CONVEYORIZED METAL PARTS & PRODUCTS COATING OPERATION CONSISTING OF ONE (1) 1.56 MMBTU/HR NATURAL GAS FIRED PRE-HEAT OVEN, ONE (1) EXEMPT 0.78 MMBTU/HR NATURAL GAS FIRED PRE-WASH OVEN, ONE (1) EXEMPT 0.78 MMBTU/HR NATURAL GAS FIRED CURING OVEN, AND TWO (2) JBI MODEL CIDB-2010-S SPRAY BOOTHS

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]
3. All painting shall be conducted in booth with filters in place, fan(s) operating, and doors closed. [District 2201 Rule]
4. The coating operation shall comply with Rule 4603 (Surface Coating of Metal Parts and Products). [District Rule 4603]
5. All fresh or spent coatings, adhesives, catalysts, thinners and solvents shall be stored in closed containers. Solvent laden cloth or paper shall be stored and disposed in closed non-absorbent containers. [District Rule 4603]
6. Until 11/14/02, VOC content of solvents used for clean-up and surface preparation, excluding cleaning of coating application equipment, shall not exceed 200 g/l (1.67 lb/gallon). [District Rule 4603]
7. Until 11/14/02, no materials containing VOC shall be used for spray equipment clean-up unless an enclosed system or equipment proven to be equally effective is used for cleaning. [District Rule 4603]
8. Only HVLP, electrostatic, electrodeposition, flow, roll, dip, brush or continuous coating application equipment shall be used, and the application equipment shall be operated in accordance with the manufacturer's recommendations. [District Rule 4603]
9. Permittee shall demonstrate that HVLP guns manufactured prior to 1/1/96 operate between 0.1 and 10 psig air atomizing pressure, by manufacturer's published technical material or by use of a certified air pressure tip gauge. [District Rule 4603]
10. VOC content of any coatings as applied, excluding water and exempt compounds, used for any metal parts or product shall not exceed any of the following limits: baked coating 275 g/l (2.3 lb/gal), air-dried coating: 340 g/l (2.8 lb/gal), air-dried dip coating of steel joists with coating viscosity, as applied, of more than 45.6 centistokes at 78 °F or an average dry-film thickness of greater than 2.0 millimeters: 340 g/l (2.8 lb/gal), air-dried dip coating of steel joists with coating viscosity, as applied, of less than or equal to 45.6 centistokes at 78 °F or an average dry-film thickness of less than or equal to 2.0 millimeters: 400 g/l (3.32 lb/gal). [District Rule 4603]
11. VOC content of baked specialty coatings as applied, excluding water and exempt compounds, used for metal parts or product shall not exceed any of the following limits: camouflage 360 g/l (3.0 lb/gal), extreme performance: 420 g/l (3.5 lb/gal), heat resistant: 360 g/l (3.0 lb/gal), high gloss: 360 g/l (3.0 lb/gal), high performance architectural: 420 g/l (3.5 lb/gal), high temperature: 420 g/l (3.5 lb/gal), metallic topcoat: 360 g/l (3.0 lb/gal), pretreatment wash primer: 420 g/l (3.5 lb/gal), silicone release: 420 g/l (3.5 lb/gal), solar absorbant: 360 g/l (3.0 lb/gal), and solid film lubricant: 880 g/l (7.3 lb/gal). [District Rule 4603]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

12. VOC content of air-dried specialty coatings as applied, excluding water and exempt compounds, used for metal parts or product shall not exceed any of the following limits: camouflage 420 g/l (3.5 lb/gal), extreme performance: 420 g/l (3.5 lb/gal), heat resistant: 420 g/l (3.5 lb/gal), high gloss: 420 g/l (3.5 lb/gal), high performance architectural: 420 g/l (3.5 lb/gal), high temperature: 420 g/l (3.5 lb/gal), metallic topcoat: 420 g/l (3.5 lb/gal), pretreatment wash primer: 420 g/l (3.5 lb/gal), silicone release: 420 g/l (3.5 lb/gal), solar absorbant: 420 g/l (3.5 lb/gal), and solid film lubricant: 880 g/l (7.3 lb/gal). [District Rule 4603]
13. Effective 11/15/02, cleaning activities that use solvents with a VOC content greater than 50 g/l (0.42 lb/gallon) shall be performed by one or more of the following methods: wipe cleaning; application of solvent from hand-held spray bottles from which solvents are dispensed without a propellant-induced force; non-atomized solvent flow method in which the cleaning solvent is collected in a container or a collection system which is closed except for solvent collection openings and, if necessary, openings to avoid excessive pressure build-up inside the container; or solvent flushing method in which the cleaning solvent is discharged into a container that is closed except for solvent collection openings and, if necessary, openings to avoid excessive pressure build-up inside the container. The discharged solvent from the equipment must be collected into containers without atomizing into the open air. The solvent may be flushed through the system by air or hydraulic pressure, or by pumping. [District Rule 4603]
14. Effective 11/15/02, the permittee shall not use materials with a VOC content greater than 50 g/l (0.42 lb/gallon) for spray equipment clean-up unless an enclosed system or equipment proven to be equally effective is used for cleaning. [District Rule 4603]
15. Effective 11/15/02 through 11/14/03, VOC content of solvents used shall not exceed any of the following limits: product cleaning during manufacturing process or surface preparation for coating application: 70 g/l (0.58 lb/gal), repair and maintenance cleaning (except, until June 30, 2005, cleaning of ultraviolet lamps used for the curing of ultraviolet coatings): 50 g/l (0.42 lb/gal), and cleaning of coating application equipment: 950 g/l (7.9 lb/gal) and solvent vapor pressure of 35 mm Hg at standard conditions. [District Rule 4603]
16. Effective 11/15/03, VOC content of solvents used shall not exceed any of the following limits: product cleaning during manufacturing process or surface preparation for coating application: 50 g/l (0.42 lb/gal), repair and maintenance cleaning (except, until June 30, 2005, cleaning of ultraviolet lamps used for the curing of ultraviolet coatings): 50 g/l (0.42 lb/gal), and cleaning of coating application equipment: 550 g/l (4.6 lb/gal). [District Rule 4603]
17. The VOC emissions due to the usage of coatings and solvents shall not exceed 174 pounds during any one day. [District Rule 2201]
18. The PM10 emissions due to the usage of coatings and solvents shall not exceed 3.7 pounds during any one day. [District Rule 2201]
19. The VOC emissions due to the usage of coatings and solvents shall not exceed 32,600 pounds during any one calendar year. [District Rule 2201]
20. The NOx emissions concentration due to the combustion of natural gas shall not exceed 0.1 lbs./MMBtu. [District Rule 2201]
21. The CO emissions concentration due to the combustion of natural gas shall not exceed 0.084 lbs./MMBtu. [District Rule 2201]
22. The VOC emissions concentration due to the combustion of natural gas shall not exceed 0.0055 lbs./MMBtu. [District Rule 2201]
23. The SOx emissions concentration due to the combustion of natural gas shall not exceed 0.00214 lbs./MMBtu. [District Rule 2201]
24. The PM10 emissions concentration due to combustion of natural gas shall not exceed 0.0076 lbs./MMBtu. [District Rule 2201]
25. Records shall be kept in accordance with Rule 4603 (Surface Coating of Metal Parts and Products). [District Rule 4603]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

26. Permittee shall maintain daily records of the following: quantity and type of coatings used, mix ratios of volume of components added to each coating, volume of coatings applied, VOC content of each coating as applied, and VOC content of each solvent. [District Rule 4603]
27. Effective 11/15/02 permittee shall keep the following records for solvent cleaning activities: manufacturers product data sheet or MSDS of solvents used, VOC content of solvents in g/l or lb/gal, and the type of cleaning activity for which each solvent is used. [District Rule 4603]
28. Maintain a daily record of the total quantity of VOC emitted in pounds from the use of coatings and solvents. [District Rule 2201 & 4603]
29. Maintain a record of the cumulative annual VOC emissions from the use of coatings and solvents in pounds. [District Rule 2201 & 1070]
30. Records shall be retained on-site for a minimum of five years and made available for District inspection upon request. [District Rule 4603]

These terms and conditions are part of the Facility-wide Permit to Operate.

Appendix IV
Draft ERC Certificates

San Joaquin Valley
Air Pollution Control District

Northern Regional Office • 4800 Enterprise Way • Modesto, CA 95356-8718

Emission Reduction Credit Certificate
N1062909-68-1

ISSUED TO: ANDERSEN RACK SYSTEMS, INC
ISSUED DATE: <DRAFT>
LOCATION OF REDUCTION: 1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

For VOC Reduction In The Amount Of:

Quarter 1	Quarter 2	Quarter 3	Quarter 4
7,335 lbs	7,335 lbs	7,335 lbs	7,335 lbs

Conditions Attached

Method Of Reduction

- Shutdown of Entire Stationary Source
 Shutdown of Emissions Units
 Other

Emissions reduction credits for the shutdown of the entire Anderson Rack Systems facility

Use of these credits outside the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) is not allowed without express written authorization by the SJVUAPCD.

Seyed Saadoun, Executive Director / APCD

DRAFT

David Warner, Director of Permit Services

San Joaquin Valley
Air Pollution Control District

Northern Regional Office • 4800 Enterprise Way • Modesto, CA 95356-8718

Emission Reduction Credit Certificate
N1062909-68-4

DRAFT

ISSUED TO: ANDERSEN RACK SYSTEMS, INC
ISSUED DATE: <DRAFT>
LOCATION OF REDUCTION: 1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

For PM10 Reduction In The Amount Of:

Quarter 1	Quarter 2	Quarter 3	Quarter 4
300 lbs	303 lbs	306 lbs	306 lbs

Conditions Attached

Method Of Reduction

- Shutdown of Entire Stationary Source
 Shutdown of Emissions Units
 Other

Emissions reduction credits for the shutdown of the entire Anderson Rack Systems facility

Use of these credits outside the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) is not allowed without express written authorization by the SJVUAPCD.

Seyed Saadeghi, Executive Director / APCD

DRAFT

David Warner, Director of Permit Services


**THE RECORD
PROOF OF PUBLICATION**

STATE OF CALIFORNIA
COUNTY OF SAN JOAQUIN

THE UNDERSIGNED SAYS:

I am a citizen of the United States and a resident of San Joaquin County; I am over the age of 18 years and not a part to or interested in the above-entitled matter. I am the principal clerk of the printer of THE RECORD, a newspaper of general publication, printed and published daily in the City of Stockton, County of San Joaquin by the Superior Court of the County of San Joaquin, State of California, under the date of February 26, 1952, File No. 52857, San Joaquin County Records; that the notice of which the annexed is a printed copy (set in type not smaller than nonpareil), has been published each regular and entire issue of said newspaper and not in any supplement thereof on the following dates,
To wit, April 7 2011

I declare under penalty of perjury that the foregoing is true and correct. Executed on April 7, 2011 In Stockton California


Carlette Schnell,
The Record

0000863690

**NOTICE OF
PRELIMINARY
DECISION FOR THE PROPOSED ISSUANCE OF EMISSION
REDUCTION CREDITS**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Emission Reduction Credits to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for the shutdown of the steel storage systems manufacturing operation at 1821 E Charter Way, Stockton, CA. The quantity of ERCs proposed for banking is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

The analysis of the regulatory basis for this proposed action, Project # N-1062909, is available for public inspection at [http:// www.valleyair.org/notices/public_notices_idx.htm](http://www.valleyair.org/notices/public_notices_idx.htm) and the District office at the address below. Written comments on this project must be submitted within 30 days of the publication date of this notice to DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 4800 ENTERPRISE WAY, MODESTO, CA 95356-8718.

#863690 4/7/2011

RECEIVED

\$127.40

APR 18 2011

FINANCE
SJVAPCD

NORTHERN REGION

CENTRAL REGION

SOUTHERN REGION

ERC/PUBLIC NOTICE CHECK LIST

PROJECT #s: N-1062909 *N-2368*

√ √
REQST. COMPL.

— — ERC TRANSFER OF PREVIOUSLY BANKED CREDITS
— — ERC PRELIMINARY PUBLIC NOTICE
√ — ERC FINAL PUBLIC NOTICE

Date Completed [DATE COMPLETED]/By [SELECT SUPERVISOR]

√
√ Newspaper Notice Emailed to Clerical (Check box and tab to generate Notice)
Send email to "OA-Public Notices" containing the following:
SUBJECT: Andersen Rack Systems, Inc., N-2368, N-1062909#, Final
Notice for ERC banking application
BODY: ERC banking resulting from the shutdown of the entire facility

ENCLOSED DOCUMENTS REQUIRE:

√ Director's Signature and District Seal Embossed on ERC Certificates

√ — Mail **FINAL** notice letter to applicant by **Certified Mail** including the
following:
√ Public Notice
√ Original ERC Certificates

√ Email **FINAL** Public Notice for Publication to Stockton Record

√ Email **FINAL** Public Notice package to EPA and CARB

√ Email **FINAL** Public Notice package to "webmaster"

√ Send **FINAL** Public Notice package to Rick Dyer

√ Assign Mailing Date

— — Other Special Instructions (please specify): _____

MAY 27 2011
mb

U.S. Postal Service TM

CERTIFIED MAIL TM RECEIPT

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

OFFICIAL USE

Postage

\$

Certified Fee

Return Receipt Fee
(Endorsement Required)

Restricted Delivery Fee
(Endorsement Required)

Postmark
Here

Bernardo Moreno

Hannibal Industries

Ref: Andersen Rack Systems, Inc.

3851 S. Santa Fe Ave.

Los Angeles, CA 90058

St

St

or

Ci

7070 3090 0002 0936 9731

Certified Mail Provides:

- A mailing receipt
- A unique identifier for your mailpiece
- A record of delivery kept by the Postal Service for two years

Important Reminders:

- Certified Mail may **ONLY** be combined with First-Class Mail® or Priority Mail®.
- Certified Mail is *not* available for any class of international mail.
- **NO INSURANCE COVERAGE IS PROVIDED** with Certified Mail. For valuables, please consider Insured or Registered Mail.
- For an additional fee, a *Return Receipt* may be requested to provide proof of delivery. To obtain Return Receipt service, please complete and attach a Return Receipt (PS Form 3811) to the article and add applicable postage to cover the fee. Endorse mailpiece "Return Receipt Requested". To receive a fee waiver for a duplicate return receipt, a USPS® postmark on your Certified Mail receipt is required.
- For an additional fee, delivery may be restricted to the addressee or addressee's authorized agent. Advise the clerk or mark the mailpiece with the endorsement "*Restricted Delivery*".
- If a postmark on the Certified Mail receipt is desired, please present the article at the post office for postmarking. If a postmark on the Certified Mail receipt is not needed, detach and affix label with postage and mail.

IMPORTANT: Save this receipt and present it when making an inquiry.

PS Form 3800, August 2003 (*Reverse*) PSN 7530-02-000-9047

Song Thao

From: Postmaster
Sent: Friday, May 27, 2011 8:14 AM
To: Song Thao
Subject: Delivery Status Notification (Relay)

Attachments: ATT22497.txt; ERC Final Public Notice Project N-1062909



ATT22497.txt
(276 B)



ERC Final Public
Notice Projec...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

legals@recordnet.com

Song Thao

From: Song Thao
Sent: Friday, May 27, 2011 8:46 AM
To: Gerardo Rios (SJV_T5_Permits@epamail.epa.gov); Mike Tollstrup (mtollstr@arb.ca.gov)
Subject: ERC Final Public Notice for Hannibal Industries Facility N-2368 Project N-1062909
Importance: High
Attachments: Public Notice Package.pdf; Newspaper Notice.pdf

NOTICE IS HEREBY GIVEN that the Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

Song Thao

From: Postmaster
Sent: Friday, May 27, 2011 8:46 AM
To: Song Thao
Subject: Delivery Status Notification (Relay)

Attachments: ATT25928.txt; ERC Final Public Notice for Hannibal Industries Facility N-2368 Project N-1062909



ATT25928.txt
(275 B)



ERC Final Public
Notice for Ha...

This is an automatically generated Delivery Status Notification.

Your message has been successfully relayed to the following recipients, but the requested delivery status notifications may not be generated by the destination.

mtollstr@arb.ca.gov

Song Thao

From: Mail Delivery System [MAILER-DAEMON@mseive02.rtp.epa.gov]
Sent: Friday, May 27, 2011 8:46 AM
To: Song Thao
Subject: Successful Mail Delivery Report

Attachments: Delivery report; Message Headers



Delivery

report.txt (493 B)



Message

Headers.txt (1 KB)

This is the mail system at host mseive02.rtp.epa.gov.

Your message was successfully delivered to the destination(s) listed below. If the message was delivered to mailbox you will receive no further notifications. Otherwise you may still receive notifications of mail delivery errors from other systems.

The mail system

<SJV_T5_Permits@epamail.epa.gov>: delivery via 127.0.0.1 [127.0.0.1]:10025: 250
OK, sent 4DDFC738_10157_21971_3 C4B875D4017

Song Thao

From: Song Thao

Sent: Friday, May 27, 2011 9:00 AM

To: WebMaster

Subject: valleyair.org update: ERC Final Public Notice for Hannibal Industries Facility N-2368 Project N-1062909

May 27, 2011 (Facility N-2368 Project N-1062909) NOTICE IS HEREBY GIVEN that the Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

[Newspaper Notice](#)

[Public Notice Package](#)



MAY 27 2011

Bernardo Moreno
Hannibal Industries
Ref: Andersen Rack Systems, Inc.
3851 S. Santa Fe Ave
Los Angeles, CA 90058

RE: Notice of Final Action - Emission Reduction Credits
Project Number: N-1062909

Dear Mr. Moreno:

The Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

Enclosed are the ERC Certificates and a copy of the notice of final action to be published approximately three days from the date of this letter.

Notice of the District's preliminary decision to issue the ERC Certificates was published on April 4, 2011. The District's analysis of the proposal was also sent to CARB and US EPA Region IX on April 4, 2011. No comments were received following the District's preliminary decision on this project.

Also enclosed is an invoice for the engineering evaluation fees pursuant to District Rule 3010. Please remit the amount owed, along with a copy of the attached invoice, within 60 days.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Ruphi Gill at (209) 557-6400.

Sincerely,

David Warner
Director of Permit Services

DW:rd/st

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



MAY 27 2011

Mike Tollstrup, Chief
Project Assessment Branch
Stationary Source Division
California Air Resources Board
PO Box 2815
Sacramento, CA 95812-2815

**RE: Notice of Final Action - Emission Reduction Credits
Project Number: N-1062909**

Dear Mr. Tollstrup:

The Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

Enclosed are copies of the ERC Certificates and a copy of the notice of final action to be published approximately three days from the date of this letter.

Notice of the District's preliminary decision to issue the ERC Certificates was published on April 4, 2011. The District's analysis of the proposal was also sent to CARB and US EPA Region IX on April 4, 2011. No comments were received following the District's preliminary decision on this project.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Rupi Gill at (209) 557-6400.

Sincerely,

David Warner
Director of Permit Services

DW:rd/st

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



MAY 27 2011

Gerardo C. Rios (AIR 3)
Chief, Permits Office
Air Division
U.S. E.P.A. - Region IX
75 Hawthorne Street
San Francisco, CA 94105

RE: Notice of Final Action - Emission Reduction Credits
Project Number: N-1062909

Dear Mr. Rios:

The Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

Enclosed are copies of the ERC Certificates and a copy of the notice of final action to be published approximately three days from the date of this letter.

Notice of the District's preliminary decision to issue the ERC Certificates was published on April 4, 2011. The District's analysis of the proposal was also sent to CARB and US EPA Region IX on April 4, 2011. No comments were received following the District's preliminary decision on this project.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Rupi Gill at (209) 557-6400.

Sincerely,

David Warner
Director of Permit Services

DW:rd/st

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585

Stockton Record

**NOTICE OF FINAL ACTION
FOR THE ISSUANCE OF
EMISSION REDUCTION CREDITS**

NOTICE IS HEREBY GIVEN that the Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries, Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10).

No comments were received following the District's preliminary decision on this project.

The application review for Project #N-1062909 is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the **SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 4800 ENTERPRISE WAY, MODESTO, CA 95356-8718.**



Northern Regional Office • 4800 Enterprise Way • Modesto, CA 95356-8718

Emission Reduction Credit Certificate N-950-1

ISSUED TO: ANDERSEN RACK SYSTEMS, INC
ISSUED DATE: May 26, 2011
LOCATION OF REDUCTION: 1821 E CHARTER WAY
 A SUBSIDIARY OF HANNIBAL INDUSTRIES
 STOCKTON, CA 95205

For VOC Reduction In The Amount Of:

Quarter 1	Quarter 2	Quarter 3	Quarter 4
7,335 lbs	7,335 lbs	7,335 lbs	7,335 lbs

Conditions Attached

Method Of Reduction

- Shutdown of Entire Stationary Source
- Shutdown of Emissions Units
- Other

Emissions reduction credits for the shutdown of the entire Anderson Rack Systems facility



Use of these credits outside the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) is not allowed without express written authorization by the SJVUAPCD.

Seyed Sadredin, Executive Director / APCO

David Warner, Director of Permit Services



Northern Regional Office • 4800 Enterprise Way • Modesto, CA 95356-8718

Emission Reduction Credit Certificate

N-950-4

ISSUED TO: ANDERSEN RACK SYSTEMS, INC
ISSUED DATE: May 26, 2011
LOCATION OF REDUCTION: 1821 E CHARTER WAY
 A SUBSIDIARY OF HANNIBAL INDUSTRIES
 STOCKTON, CA 95205

For PM10 Reduction In The Amount Of:

Quarter 1	Quarter 2	Quarter 3	Quarter 4
300 lbs	303 lbs	306 lbs	306 lbs


Conditions Attached

Method Of Reduction

- Shutdown of Entire Stationary Source
- Shutdown of Emissions Units
- Other

Emissions reduction credits for the shutdown of the entire Anderson Rack Systems facility

Use of these credits outside the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) is not allowed without express written authorization by the SJVUAPCD.

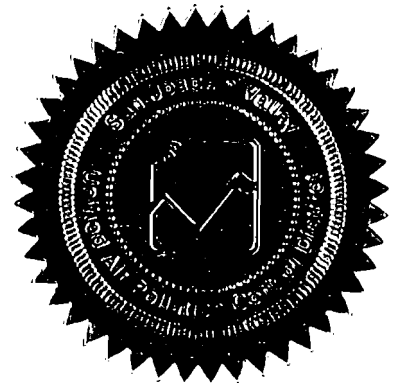

Sayed Sadredin, Executive Director / APCO

David Warner, Director of Permit Services



San Joaquin Valley

AIR POLLUTION CONTROL DISTRICT

Due Date
6/27/2011

Amount Due
\$ 4,740.00

Amount Enclosed

ERCFEE N1062909
2368 N86193 5/26/2011

HANNIBAL INDUSTRIES, INC.
3851 S. SANTA FE AVE.
LOS ANGELES, CA 90058

SJVAPCD
4800 Enterprise Way
Modesto, CA 95356-8718

Facility ID	Invoice Date	Invoice Number
N2368	5/26/2011	N86193

Invoice Type
Project: N1062909

ANDERSEN RACK SYSTEMS, INC
1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

PROJECT NUMBER: 1062909

APPLICATION FILING FEES	\$ 650.00
ENGINEERING TIME FEES	\$ 4,740.00
TOTAL FEES	\$ 5,390.00
LESS PREVIOUSLY PAID PROJECT FEES APPLIED TO THIS INVOICE	(\$ 650.00)
PROJECT FEES DUE (Enclosed is a detailed statement outlining the fees for each item.)	\$ 4,740.00

Invoice Detail

Facility ID: N2368

ANDERSEN RACK SYSTEMS, INC
 1821 E CHARTER WAY
 A SUBSIDIARY OF HANNIBAL INDUSTRIES
 STOCKTON, CA 95205

Invoice Nbr: N86193
 Invoice Date: 5/26/2011
 Page: 1

Application Filing Fees

Project Nbr	Permit Number	Description	Application Fee
N1062909	N-2368-1062909-0	Emission Reduction Credit Banking Evaluation Fee	\$ 650.00
Total Application Filing Fees:			\$ 650.00

Engineering Time Fees

Project Nbr	Quantity	Rate	Description	Fee
N1062909	53.9 hours	\$ 100.00 /h	Standard Engineering Time	\$ 5,390.00
			Less Credit For Application Filing Fees	(\$ 650.00)
			Standard Engineering Time SubTotal	\$ 4,740.00
Total Engineering Time Fees:				\$ 4,740.00

**THE RECORD
PROOF OF PUBLICATION**

STATE OF CALIFORNIA
COUNTY OF SAN JOAQUIN

THE UNDERSIGNED SAYS:

I am a citizen of the United States and a resident of San Joaquin County; I am over the age of 18 years and not a part to or interested in the above-entitled matter. I am the principal clerk of the printer of THE RECORD, a newspaper of general publication, printed and published daily in the City of Stockton, County of San Joaquin by the Superior Court of the County of San Joaquin, State of California, under the date of February 26, 1952, File No. 52857, San Joaquin County Records; that the notice of which the annexed is a printed copy (set in type not smaller than nonpareil), has been published each regular and entire issue of said newspaper and not in any supplement thereof on the following dates,
To wit, June 8 2011

I declare under penalty of perjury that the foregoing is true and correct. Executed on June 8, 2011 In Stockton California

Carlette Schnell

Carlette Schnell,
The Record

0000871916

**NOTICE OF
PRELIMINARY
DECISION FOR THE PROPOSED ISSUANCE OF AN AUTHORITY TO CONSTRUCT**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Authority to Construct permits to City of Stockton for two 757 hp Volvo Model TAD1641GE (Tier 2 Certified) diesel-fired emergency standby IC engines each powering electric generators, at 22 E. Weber Avenue in Stockton, CA. The analysis of the regulatory basis for this proposed action, Project #N-1110422, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the District office at the address below. Written comments on this project must be submitted within 30 days of the publication date of this notice to DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 4800 ENTERPRISE WAY, MODESTO, CA 95356-8718.

#871916 6/8/2011

\$111.34

RECEIVED

JUN 09 2011

**FINANCE
SJVUAPCD**

N-4899

RD

**THE RECORD
PROOF OF PUBLICATION**

STATE OF CALIFORNIA
COUNTY OF SAN JOAQUIN

THE UNDERSIGNED SAYS:

I am a citizen of the United States and a resident of San Joaquin County; I am over the age of 18 years and not a part to or interested in the above-entitled matter. I am the principal clerk of the printer of THE RECORD, a newspaper of general publication, printed and published daily in the City of Stockton, County of San Joaquin by the Superior Court of the County of San Joaquin, State of California, under the date of February 26, 1952, File No. 52857, San Joaquin County Records; that the notice of which the annexed is a printed copy (set in type not smaller than nonpareil), has been published each regular and entire issue of said newspaper and not in any supplement thereof on the following dates,
To wit, June 2 2011

I declare under penalty of perjury that the foregoing is true and correct. Executed on June 2, 2011 In Stockton California

Carlette Schnell

Carlette Schnell,
The Record

0000871104.

**NOTICE OF FINAL
ACTION
FOR THE ISSUANCE OF
EMISSION REDUCTION CREDITS**

NOTICE IS HEREBY GIVEN that the Air Pollution Control Officer has issued Emission Reduction Credits (ERCs) to Hannibal Industries Ref: Andersen Rack Systems, Inc. for emission reductions generated by the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. The quantity of ERCs to be issued is 29,340 pounds per year of Volatile Organic Compounds (VOC) and 1,215 pounds per year of Particulate Matter, 10 microns or less (PM10). No comments were received following the District's preliminary decision on this project. The application review for Project #N-1062909 is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 4800 ENTERPRISE WAY, MODESTO, CA 95356-8718.

#871104 6/2/11

109.04

N-2368

RECEIVED

JUN 06 2011

FINANCE
SJVUAPCD

SENDER: COMPLETE THIS SECTION


- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Bernardo Moreno
 Hannibal Industries
 Ref: Andersen Rack Systems, Inc.
 3851 S. Santa Fe Ave.
 Los Angeles, CA 90058

COMPLETE THIS SECTION ON DELIVERY

A. Signature

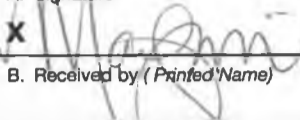X 

 Agent Addressee

B. Received by (Printed Name)

C. Date of Delivery

5-31-11

D. Is delivery address different from item 1? Yes
 If YES, enter delivery address below: No

3. Service Type

 Certified Mail Express Mail Registered Return Receipt for Merchandise Insured Mail C.O.D.

4. Restricted Delivery? (Extra Fee)

 Yes

2. A 7010 3090 0002 0936 9731

UNITED STATES POSTAL SERVICE
LOS ANGELES CA 900

31 MAY 2011 PM 6 T



First-Class Mail
Postage & Fees Paid
USPS
Permit No. G-10

- Sender: Please print your name, address, and ZIP+4 in this box •

San Joaquin Valley Air
Pollution Control District
1990 E. Gettysburg Avenue
Fresno, CA 93726

Song

PN-N2368

N-1062909



PROJECT ROUTING FORM

FACILITY NAME: Andersen Rack Systems, Inc

FACILITY ID: N2368 PROJECT NUMBER: N1062909

PERMIT #'s: 1-3 - ERCs

DATE RECEIVED: October 16, 2006

PRELIMINARY REVIEW	ENGR	DATE	SUPR	DATE
A. Application Deemed Incomplete	<i>RD</i>	<i>11/1/06</i>	<i>RH</i>	<i>11/8/06</i>
Second Information Letter	<i>RD</i>	<i>2/21/07</i>	<i>RH</i>	<i>2/26/07</i>
B. Application Deemed Complete	<i>RD</i>	<i>3/17/08</i>	<i>JS</i>	<i>3/19/08</i>
C. Application Pending Denial				
D. Application Denied				

ENGINEERING EVALUATION	INITIAL	DATE
E. Engineering Evaluation Complete	<i>RH</i>	<i>6/22/09</i>
F. Supervising Engineer Approval		
G. Compliance Division Approval <input type="checkbox"/> Not Required		
H. Applicant's Review of Draft Authority to Construct Completed <input type="checkbox"/> 3-day Review <input type="checkbox"/> 10-day Review <input type="checkbox"/> No Review Requested		
I. Permit Services Regional Manager Approval	<i>RH</i>	<i>2/31/11</i>

DIRECTOR REVIEW: Not Required Required

DIRECTOR REVIEW	INITIAL	DATE
J. Preliminary Approval to Director		
K. Final Approval to Director		

NSPS/NESHAP TRIGGERED: Yes No

If "Yes" then do the following:

1. Complete form (on AIRnet at [Per](#) » [General](#) » [Internal Forms](#) : Miscellaneous: NSPS/NESHAP Report) and attach copy to engineering evaluation.
2. Send or email form to Compliance (Tanya Good) after management approval of project.

ERC Application Evaluation

Company Name: Andersen Rack Systems, Inc

Date: March 31, 2011

Mailing Address: Hannibal Industries, Inc.
RE: Andersen Rack Systems, Inc.
3851 S. Santa Fe Ave.
Los Angeles, CA 90058

Contact Name: Bernardo Moreno
Phone: (323) 552-3146

Engineer: Rick Dyer
Project #: N1062909
Application #'s: N-2368-1

Date Application Received: October 16, 2006
Date Application Deemed Complete: March 19, 2008

I. Summary:

The Hannibal Industries, Inc. (owner of Andersen Rack Systems, Inc.) is proposing to receive the following quantities of Emission Reduction Credits (ERCs) for the shut down of the steel storage systems manufacturing facility. This application was submitted for the PM₁₀ and VOC emissions resulting from the coating operations only. Although there was natural gas combustion and solvent usage at the facility, available records were insufficient for ERC calculations for those operations.

	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
VOC	7,335	7,335	7,335	7,335
PM ₁₀	300	303	306	306

II. Applicable Rules:

District Rule 2201: New and Modified Stationary Source Review (12/18/08)
District Rule 2301: Emission Reduction Credit Banking (12/17/92)
District Rule 4603: Surface Coating of Metal Parts and Products (9/17/09)

III. Location of Reductions:

The facility was located at 1821 E Charter Way, Stockton, CA.

IV. Method of Generating Reductions:

The ERCs were generated by the shutdown of the stationary source on July 28, 2006. The stationary source consisted of a conveyorized metal parts and products coating operation with two spray booths and natural gas-fired curing ovens.

V. ERC Calculations:

A. **Assumptions:**

- The results of all Historical Actual Emission (HAE) and Actual Emission Reduction (AER) calculations are rounded to the nearest whole number.
- The first quarter of the calendar year has 90 days, the second quarter of the calendar year had 91 days, the third quarter of the year had 92 days and the fourth quarter of the calendar year has 92 days.

B. **Emissions Factors:**

VOC and PM₁₀:

The facility manufactured metal storage racks and then coated the racks with liquid coatings to protect the exposed metal surfaces. The liquid coatings were applied inside a spray booth with exhaust filters using HVLP spray equipment (75% transfer efficiency and 66% removal efficiency per project N1000156).

Historical Actual Emissions (HAE) from the coating operations during the baseline period will be calculated utilizing the as-applied coating VOC contents, the coating solids contents, and the quantities of coatings used. Coating information provided by Material Safety Data Sheets and Technical Sheets are summarized in the table below.

Material	Product Code	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)
Andersen Off White	QE-113	9.75	37.98	0.99	2.53
Lozier Almond	QE-117	9.57	36.34	1.00	2.62
Andersen White	QE-119	9.74	37.94	0.99	2.53
Andersen White	QE-126	9.72	37.96	0.98	2.49
Andersen White	QE-132	9.95	39.59	0.50	1.66
A Andersen White	QE-135	9.87	38.79	0.50	1.78
Andersen White	QE-138	9.87	38.79	0.50	1.78
Designer White	QE-147	9.67	36.02	0.90	2.47
Vista Green	QE-415	9.03	31.37	1.00	2.71
Johns Import Green	QE-424	8.95	30.68	1.00	2.68

Material	Product Code	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)
Interlake Green	QE-432	9.20	31.88	0.98	2.71
McCoy Green	QE-441	8.56	25.11	0.96	2.71
Andersen Green	QE-442	8.92	29.85	0.50	1.88
Andersen Green	QE-443	8.92	29.85	0.50	1.88
AGN Std Green	QE-464	8.95	30.55	1.00	2.71
AGN Standard Green	QE-466	8.95	30.55	1.00	2.71
Andersen Off Green	QE-468	9.64	36.05	0.89	2.43
Vitmar Green	QE-474	9.28	32.95	0.89	2.49
Lodi Metal Tech Green	QE-478	8.93	29.78	0.90	2.54
Caterpillar Yellow	QE-510	9.05	32.60	1.33	2.83
Yardbird Yellow	QE-515	9.15	32.32	0.96	2.58
Andersen Orange	QE-522	9.17	33.31	0.99	2.57
Interlake Orange	QE-535	8.96	31.45	1.00	2.63
And. Orange & Yellows	QE-542	9.18	32.55	0.53	1.78
And. Orange & Yellows	QE-544	9.18	32.55	0.53	1.78
And. Orange & Yellows	QE-545	9.18	32.55	0.53	1.78
And. Orange & Yellows	QE-552	9.18	32.55	0.53	1.78
AOR Standard Orange	QE-566	9.27	39.19	1.00	2.71
Andersen Yellow	QE-569	9.34	37.20	1.00	2.61
Lodi Metal Tech Orange	QE-570	8.71	28.98	1.00	2.71
Pantone Yellow	QE-572	9.37	37.85	1.00	2.55
Inca Yellow	QE-574	9.26	36.76	1.00	2.60
Monarch Orange	QE-576	8.81	29.20	1.00	2.70
Dorfman Orange	QE-579	9.22	36.99	1.00	2.71
Safety Yellow	QE-580	9.27	36.82	0.99	2.38
And. Summit Yellow	QE-581	9.25	35.83	1.00	2.68
Frazier Yellow	QE-582	9.04	31.25	0.98	2.63
Ferguson Orange	QE-585	8.65	32.61	1.00	2.71
Cool Gray	QE-617	10.08	43.80	1.35	2.81
Yardbird Gray	QE-620	9.19	32.58	1.00	2.71
Andersen Pebble Gray	QE-626	9.33	31.80	0.51	2.57
Andersen Gray	QE-647	9.27	33.41	1.00	2.66
Kwal Gray	QE-649	8.73	28.21	1.00	2.71
Andersen Gray	QE-653	9.48	34.48	1.00	2.71
Allied HSF Gray	QE-654	9.48	34.48	1.00	2.71
Sketcher's Gray	QE-655	9.17	32.46	1.00	2.71
Toyota Gray	QE-664	9.91	39.32	1.00	2.55
Fire Red	QE-713	8.61	28.20	1.00	2.66
Andersen Reds	QE-733	8.67	29.45	0.98	2.57

Material	Product Code	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)
Kwal Red	QE-734	8.63	27.99	0.94	2.59
Andersen Reds	QE-735	8.67	29.45	0.98	2.57
Bear Foot Pink	QE-736	9.67	36.07	0.90	2.47
Crimson Red	QE-737	8.59	27.47	0.94	2.58
BNR Red	QE-739	8.58	28.66	0.98	2.54
Bagel Tan	QE-848	9.60	36.68	1.00	2.64
Home Depot Beige	QE-850	9.55	36.35	1.00	2.58
Inca Putty	QE-851	9.32	33.34	0.92	2.52
Andersen Tans	QE-852	9.65	18.78	0.98	2.58
Andersen Tans	QE-854	9.65	18.78	0.98	2.58
Food Max Beige	QE-855	9.61	34.62	0.93	2.62
CSB Brown	QE-858	9.10	32.04	1.00	2.71
Andersen Tans	QE-862	9.07	30.09	0.51	1.73
Andersen Tans	QE-863	9.07	30.09	0.51	1.73
Andersen Blues	QE-915	8.87	30.13	1.00	2.71
Royal Blue	QE-929	8.87	30.13	1.00	2.71
Sturdi-Built Blue	QE-930	8.77	27.53	0.95	2.71
NC Blue	QE-951	8.77	30.93	1.17	2.83
Sturdi-Built Blue	QE-954	8.78	27.68	0.51	1.73
Unarco Blue	QE-963	8.78	28.68	0.99	2.71
Reno Blue	QE-964	8.73	28.29	1.00	2.71
Blue Aquatech	QE-981	8.70	27.48	0.50	1.88
Kwal Blue	QE-987	8.72	28.22	0.99	2.70
Frazier Blue	QE-988	8.72	28.16	1.00	2.71
Inca Blue	QE-989	8.68	26.72	0.97	2.71
SBL Blue	QE-991	9.07	31.19	1.00	2.69
Hannibal Blue	QE-992	8.65	29.96	1.00	2.71
Blue Aquatech Enamel	QE-995	8.47	25.74	1.00	2.71
Toyota Blue	QE-9003	8.84	27.74	0.81	2.63
Gloss Black	QE-J204	8.48	24.13	0.97	2.71
V-AGN	VS-001	8.96	35.24	2.36	2.36
V-OR	VS-002	8.96	35.24	2.36	2.36

C. Baseline Period Determination and Data:

Baseline Period Determination:

Section 3.5 of District Rule 2301 defines the baseline period as “two consecutive years immediately prior to the submission of a complete application” or “another time period of at least two years within five years immediately prior to the

submission of the complete application determined by the APCO as more representative of normal source operation”.

The applicant stated that the facility was in normal operation up to the shutdown of the facility. The eight consecutive calendar quarter periods preceding the shutdown will be used for the baseline period. The baseline period is Q3 2004 through Q2 2006.

Baseline Period Data:

Please refer to Appendix I for the coating usages during the period of time from Q3 2004 through Q2 2006.

D. Historical Actual Emissions (HAE):

HAE from the coating operations are determined as follows (See Appendix II for tabulated calculation results):

$$HAE_{VOC} = \text{coating usage (gal)} \times \text{as-applied VOC content (lb/gal)}$$

$$HAE_{PM10} = \text{coating usage (gal)} \times \text{coating solids content (\% by wt.)} \\ \times \text{coating density (lb/gal)} \times (1 - \text{transfer efficiency}) \\ \times (1 - \text{removal efficiency})$$

VOC				
	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
2004	---	---	8,935	8,521
2005	6,802	15,427	14,889	18,883
2006	11,990	11,548	---	---
Average	9,396	13,488	11,912	13,702
Surplus HAE ¹	8,150	8,150	8,150	8,150

PM ₁₀				
	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
2004	---	---	2,563	2,498
2005	1,451	2,905	3,285	3,745
2006	3,306	3,107	---	---
Average	2,379	3,006	2,924	3,436
Surplus HAE ¹	333	337	340	340

¹ See the discussion for Surplus Reductions under section VI.E in this document.

E. Actual Emission Reductions (AER):

In the case of shutdowns AER = HAE, unless the HAE must be reduced such that they are surplus. As shown in section VI.E of this document, the HAE for both VOC and PM₁₀ were reduced to meet the surplus emissions requirements.

F. Air Quality Improvement Deduction:

Per section 6.5 of District Rule 2201, a 10% air quality improvement deduction must be applied to the AER prior to banking. The air quality improvement deductions are as follows:

Air Quality Improvement Deduction for VOC		
Quarter	AERs (lb/qtr)	10% Deduction (lb/qtr)
1	8,150	815
2	8,150	815
3	8,150	815
4	8,150	815

Air Quality Improvement Deduction for PM₁₀		
Quarter	AERs (lb/qtr)	10% Deduction (lb/qtr)
1	333	33
2	337	34
3	340	34
4	340	34

G. Bankable Emissions Reductions:

The bankable reductions are the AER minus the Air Quality Improvement Deduction.

	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
VOC	7,335	7,335	7,335	7,335
PM ₁₀	300	303	306	306

VI. Compliance:

A. Real Reductions:

The emission reductions were generated by the permanent shutdown of all emission units at the stationary source. Therefore, the emission reductions are real.

B. Enforceable Reductions:

All of the facility's Permits to Operate have been surrendered to the District. Operation of the equipment without permits would result in enforcement action being taken. Therefore, the reductions are enforceable.

C. Quantifiable Reductions:

The baseline emissions were calculated utilizing District-approved emission factors and actual baseline period coating usages. Therefore, the reductions are quantifiable.

D. Permanent Reductions:

All of the facility's Permits to Operate have been surrendered to the District. Operation of the equipment without permits would result in enforcement action being taken. Therefore, the reductions are permanent.

E. Surplus Reductions:

This section will contain an explanation of the actions taken to ensure that all emission reductions during the baseline period were surplus.

Coating Operations:

The coating operation was subject to District Rule 4603: Surface Coating of Metal Parts and Products.

In order to determine if the proposed VOC emission reductions from the coating operations are surplus, the following Rules were reviewed:

SJVAPCD Rule 4603:

Surface Coating of Metal Parts and Products (September 17, 2009)

San Diego APCD Rule 67.3:

Metal Parts and Products Coating Operations (April 9, 2003)

Sac Metro APCD Rule 451:
Surface Coating of Miscellaneous Metal Parts and Products
(October 28, 2010)

SCAQMD Rule 1107:
Coating of Metal Parts and Products (January 6, 2006)

BAAQMD Rule 19:
Surface Preparation and Coating of Miscellaneous Metal Parts and
Products (October 16, 2002)

San Luis Obispo County APCD Rule 411:
Surface Coating of Metal Part and Products (January 28, 1998)

Monterey Bay Unified APCD Rule 434:
Coating of Metal and Products (January 17, 2001)

Yolo Solano AQMD Rule R2-25:
Metal Parts and Products Coating Operations (May 14, 2008)

A review of the rules listed above found that, except for the Monterey Bay Unified APCD, all the districts have a VOC limit for heat-cured operations of 2.3 lb/gal (275 g/l), less water and exempt compounds. The limit for the Monterey Bay unified APCD is 3.0 lb/gal for heat-cured coatings. Therefore, the VOC limit applicable for this project is 2.3 lb/gal.

As shown in Section V. B. of this document, the VOC content for most of the liquid coatings used exceeded the limit of 2.3 lb/gal, less water and exempt compounds. Consequently, the VOC limit, as applied (in lb/gal), used in the VOC emissions calculations will also be adjusted. The adjustment will be based on adjusting the actual VOC limit of the coatings used, less water and exempt compounds, to the rule limit of 2.3 lb-VOC/gal, less water and exempt compounds. The resulting percentage adjustment will then be applied to the VOC calculations. For example, if the coating used exceeds the rule limit by 18%, the VOC coating limit, as applied, will also be reduced by 18% for the VOC emission calculations. See Appendix II for emissions calculations.

Permitted Emissions Limitations:

VOC Emissions:

The permit for this operation contained VOC limits of 174 lb/day and 32,600 lb/yr.² The maximum permitted quarterly emissions breakdowns are as follows:

² Although the daily and annual VOC permit conditions limited coating and solvents, no data was available for solvent usage. For this project, the VOC calculations will be based only upon coating usage.

PE_{VOC} Calculations based upon the daily VOC limit:

$$\begin{aligned} PE_{VOC} &= 174 \frac{\text{lb}}{\text{day}} \times 90 \frac{\text{days}}{\text{qtr 1}} = 15,660 \frac{\text{lb}}{\text{qtr 1}} \\ &= 174 \frac{\text{lb}}{\text{day}} \times 91 \frac{\text{days}}{\text{qtr 2}} = 15,834 \frac{\text{lb}}{\text{qtr 2}} \\ &= 174 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 3}} = 16,008 \frac{\text{lb}}{\text{qtr 3}} \\ &= 174 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 4}} = 16,008 \frac{\text{lb}}{\text{qtr 4}} \end{aligned}$$

PE_{VOC} Calculations based on the annual VOC limit:

Since this is non-seasonal operation, the annual VOC emissions limit will be divided by four to get the permitted quarterly emissions.

$$\begin{aligned} PE_{VOC} &= 32,600 \text{ lb-VOC/yr} \div 4 \text{ qtr/yr} \\ &= \mathbf{8,150 \text{ lb-VOC/qtr}} \end{aligned}$$

Since the averaged HAE for VOC listed in section V.C of this document exceed the maximum permitted quarterly emissions limitation, the HAE for VOC during the baseline period are not surplus. Therefore, the HAE for VOC will be set to the equivalent permitted quarterly emissions limits, 8,150 lb-VOC/qtr.

PM₁₀ Emissions:

The permit for this operation contained a limit for PM₁₀ of 3.7 lb/day. The maximum permitted quarterly emissions breakdowns are as follows:

$$\begin{aligned} PE_{PM10} &= 3.7 \frac{\text{lb}}{\text{day}} \times 90 \frac{\text{days}}{\text{qtr 1}} = 333 \frac{\text{lb}}{\text{qtr 1}} \\ &= 3.7 \frac{\text{lb}}{\text{day}} \times 91 \frac{\text{days}}{\text{qtr 2}} = 337 \frac{\text{lb}}{\text{qtr 2}} \\ &= 3.7 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 3}} = 340 \frac{\text{lb}}{\text{qtr 3}} \\ &= 3.7 \frac{\text{lb}}{\text{day}} \times 92 \frac{\text{days}}{\text{qtr 4}} = 340 \frac{\text{lb}}{\text{qtr 4}} \end{aligned}$$

Since the averaged HAE for PM₁₀ listed in section V.C of this document exceed the maximum permitted quarterly emission limitation, the HAE for PM₁₀ during the baseline period are not surplus. Therefore, the HAE for PM₁₀ will be set to the equivalent permitted quarterly emission limits.

Summary:

The facility's actual VOC emissions from the coating operation exceeded the permitted annual limitation of 32,600 lb/yr and were discounted to the permitted level. The actual PM₁₀ emissions from the coating operations exceeded the permitted limitation of 3.7 lb/day and were discounted to the permitted level. Additionally, the emission reductions were made voluntarily and were not required by any present or pending regulation. Therefore, the emission reductions (as adjusted) are surplus.

F. Timeliness:

The facility was shut down on July 28, 2006 and the ERC application was submitted on October 16, 2006. The application was submitted before the 180-day deadline imposed by section 4.2.3 of District Rule 2301. Therefore, the ERC application was filed in a timely manner.

VII. Recommendation:

Issue Emission Reduction Credit Certificates to Andersen Rack Systems, Inc for NO_x, VOC, CO, PM₁₀, and SO_x in the following amounts:

	Quarter 1 (lb)	Quarter 2 (lb)	Quarter 3 (lb)	Quarter 4 (lb)
VOC	7,335	7,335	7,335	7,335
PM ₁₀	300	303	306	306

Appendix I: Coating Usage

Appendix II: Historical Actual Emissions Calculations

Appendix III: Permit to Operate for N-2368-1-3

Appendix IV: Draft ERC Certificates

Appendix I

Coating Usages

Coating Usage - Quarter 1; July 2004 - September 2004

Project N1062909

																						Total	
Jul-04	QE-132	14																			14		
	QE-415	8	5	27																		40	
	QE-432	17	4	15	20	4																60	
	QE-441	11	12	8																		31	
	QE-466	31	120	35	5	50	30	60	60	40	30	60	17	62	63	86	35	61			845		
	QE-515	15																				15	
	QE-522	25	58	70	26	16	54	50	40	51	60	75	20	32	41	35	90	75	60			878	
	QE-535	3	22	30	20	23	30	10	54	12												204	
	QE-566	51	46	40																		137	
	QE-569	8	17	3																		28	
	QE-647	8	4	20	38	10	8															88	
	QE-649	2																				2	
	QE-713	8	22																		30		
	QE-850	81	74	74	149	87	62	60														587	
QE-930	47	33	28	12	26																146		
QE-951	8																				8		
QE-J204	15																				15		
																						Total	
Aug-04	QE-415	1	2	2																		5	
	QE-424	22	8																		30		
	QE-441	21																				21	
	QE-466	40	30	40	41	70	59	33	3	4	15	80	61	27	83	46	52	85	30	75	41	915	
	QE-522	66	3	6	68	20	20	59	17	17	22	9	47	90	62	48	20	52	61	80	70	837	
	QE-566	8	8	43	34	110	20	65	85	21	27											421	
	QE-569	1	1																			2	
	QE-572	12																				12	
	QE-647	2	6	1	2	7	7															25	
	QE-649	3																				3	
	QE-653	68																				68	
	QE-735	40	42																		82		
	QE-850	5																				5	
	QE-851	27	26	12																		65	
	QE-852	4																				4	
	QE-929	45	15	45	60	58	122	13	65	50	125	52	140	19	5							814	
	QE-930	43	30	26	4	7	11															121	
	QE-964	1																				1	
QE-989	41	34	13	10																98			
QE-J204	1																				1		
VS-001	15	50																		65			
VS-002	20																				20		
																						Total	
Sep-04	QE-147	5																			5		
	QE-415	1	2	4																		7	
	QE-432	14	18	1																	33		
	QE-441	13																				13	
	QE-466	35	33	58	101	95	121	18	70	20	60	4	38	140	42	65	130	33	22	70	110	1,265	
	QE-522	78	70	72	80	25	75	32	28	36	80	55	30	37	2	35	35	80	125	45			1,020
	QE-535	4	17	28																		49	
	QE-566	10	17	12	75	40	43	45	90	16	85	9	40									482	
	QE-569	10	2	2	20																34		
	QE-572	3	2	25																		30	
	QE-579	20	42																		62		
	QE-647	7	7	13	30	12	8	20														97	
	QE-713	1																				1	
	QE-929	3	38																		41		
QE-930	2	5	5	2	11	2	6															33	
QE-J204	3	10	34	48																	95		
VS-001	65	32	30	30																157			
VS-002	35																				35		

Appendix II
Historical Actual Emission Calculations

Emissions Calculations

Project N1062909

The MACLAC coating data information used in the following calculations was provided by the applicant/supplier

The Valspar coating data was applied to both coatings, VS-001 and VS-002

(The data sheet was only available for VS-002, but the densities, % weight of pigments, specific gravity were very similar)

From the Material Safety Data Sheets and Technical Information Sheets provided by the applicant/supplier it was noted that most of the coatings exceeded the VOC emissions limit (less water and exempt compounds) specified by District Rule 4603. Consequently, the VOC emissions calculated for each coating was reduced on a percentage basis to adjust for District 4603 compliance.

Shown below are sample calculations for VOC reductions and PM10 calculations.

Sample Calculations

Reduction for Rule 4603 Compliance (%):

$(\text{VOC, less water \& exempts,} - \text{VOC, rule limit}) / \text{VOC, rule limit} \times 100$

example QE-415 (July 04): $(2.71-2.30)/2.30 \times 100 = 17.83\%$

Surplus VOC:

$(\text{VOC, as applied}) \times (1 - \text{VOC reduction, \%})$

example QE-415 (July 04): $(1.00 \text{ lb/gal}) \times (1 - 17.83\%) = 0.82 \text{ lb/gal}$

VOC Emissions:

$\text{Usage} \times \text{Surplus VOC}$

example QE-415 (July 04): $40 \text{ gal} \times 0.82 \text{ lb/gal} = 32.87 \text{ lb}$

PM10 Calculation:

$\text{Usage} \times \text{Density} \times \text{Solids Content}/100 \times (1 - \text{TE}) \times (1 - \text{RE})$

example QE-415 (July 04): $40 \text{ gal} \times 9.03 \text{ lb/gal} \times (31.37/100) \times (1 - 0.75) \times (1 - 0.66) = 9.63 \text{ lb}$

Material	Product Code	Liquid Usage (gal)	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
July-04											
Andersen White	QE-132	14	9.95	39.59	0.50	1.66	2.30	0.00	0.50	7.00	4.69
Vista Green **	QE-415	40	9.03	31.37	1.00	2.71	2.30	17.83	0.82	32.87	9.63
Interlake Green	QE-432	60	9.20	31.88	0.98	2.70	2.30	17.39	0.81	48.57	14.96
McCoy Green	QE-441	31	8.56	25.11	0.96	2.71	2.30	17.83	0.79	24.45	5.66
AGN Standard Green	QE-466	845	8.95	30.55	1.00	2.71	2.30	17.83	0.82	694.37	196.39
Yardbird Yellow	QE-515	15	9.15	32.32	0.96	2.58	2.30	12.17	0.84	12.65	3.77
Andersen Orange	QE-522	845	9.17	33.31	0.99	2.57	2.30	11.74	0.87	738.35	219.39
Interlake Orange	QE-535	204	8.96	31.45	1.00	2.63	2.30	14.35	0.86	174.73	48.86
AOR Standard Orange	QE-566	137	9.27	39.19	1.00	2.71	2.30	17.83	0.82	112.58	42.31
Andersen Yellow	QE-569	28	9.34	37.20	1.00	2.61	2.30	13.48	0.87	24.23	8.27
Andersen Gray	QE-647	88	9.27	33.41	1.00	2.71	2.30	17.83	0.82	72.31	23.17
Kwal Gray	QE-649	2	8.73	28.21	1.00	2.71	2.30	17.83	0.82	1.64	0.42
Fire Red	QE-713	30	8.61	28.20	1.00	2.66	2.30	15.65	0.84	25.30	6.19
Home Depot Beige	QE-850	587	9.55	36.35	1.00	2.58	2.30	12.17	0.88	515.54	173.21
Sturdi-Built Blue	QE-930	146	8.77	27.53	0.95	2.71	2.30	17.83	0.78	113.98	29.96
NC Blue	QE-951	8	8.77	30.93	1.17	2.83	2.30	23.04	0.90	7.20	1.84
Gloss Black	QE-J204	15	8.48	24.13	0.97	2.71	2.30	17.83	0.80	11.96	2.61
									TOTALS:	2,618	791
August-04											
Vista Green	QE-415	5	9.03	31.37	1.00	2.71	2.30	17.83	0.82	4.11	1.20
Johns Import Green	QE-424	30	8.95	30.68	1.00	2.68	2.30	16.52	0.83	25.04	7.00
McCoy Green	QE-441	21	8.56	25.11	0.96	2.71	2.30	17.83	0.79	16.57	3.84
AGN Standard Green	QE-466	915	8.95	30.55	1.00	2.71	2.30	17.83	0.82	751.89	212.65
Andersen Orange	QE-522	837	9.17	33.31	0.99	2.57	2.30	11.74	0.87	731.36	217.31
AOR Standard Orange	QE-566	421	9.27	39.19	1.00	2.71	2.30	17.83	0.82	345.95	130.00
Andersen Yellow	QE-569	2	9.34	37.20	1.00	2.61	2.30	13.48	0.87	1.73	0.59
Pantone Yellow	QE-572	12	9.37	37.85	1.00	2.55	2.30	10.87	0.89	10.70	3.62
Andersen Gray	QE-647	25	9.27	33.41	1.00	2.71	2.30	17.83	0.82	20.54	6.58
Kwal Gray	QE-649	3	8.73	28.21	1.00	2.71	2.30	17.83	0.82	2.47	0.63
Andersen Gray	QE-653	68	9.48	34.48	1.00	2.71	2.30	17.83	0.82	55.88	18.89
Andersen Reds	QE-735	82	8.67	29.45	0.98	2.57	2.30	11.74	0.86	70.93	17.80
Home Depot Beige	QE-850	5	9.55	36.35	1.00	2.58	2.30	12.17	0.88	4.39	1.48
Inca Putty	QE-851	65	9.32	33.34	0.92	2.52	2.30	9.57	0.83	54.08	17.17
Andersen Tans	QE-852	4	9.65	18.78	0.98	2.58	2.30	12.17	0.86	3.44	0.62
Royal Blue	QE-929	814	8.87	30.13	1.00	2.71	2.30	17.83	0.82	668.90	184.91
Sturdi-Built Blue	QE-930	121	8.77	27.53	0.95	2.71	2.30	17.83	0.78	94.46	24.83
Reno Blue	QE-964	1	8.73	28.29	1.00	2.71	2.30	17.83	0.82	0.82	0.21
Inca Blue	QE-989	98	8.68	26.72	0.97	2.71	2.30	17.83	0.80	78.11	19.32
Gloss Black	QE-J204	1	8.48	24.13	0.97	2.71	2.30	17.83	0.80	0.80	0.17
V-AGN	VS-001	65	8.96	35.24	2.36	2.36	2.30	2.61	2.30	149.40	17.45
V-OR	VS-002	20	8.96	35.24	2.36	2.36	2.30	2.61	2.30	45.97	5.37
									TOTALS:	3,138	892

Material	Product Code	Liquid	Solids	VOC	VOC	Rule	Reduction	Surplus	VOC	PM10	
		Usage									Density
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
September-04											
Designer White	QE-147	5	9.67	36.02	0.90	2.47	2.30	7.39	0.83	4.17	1.48
Vista Green	QE-415	7	9.03	31.37	1.00	2.71	2.30	17.83	0.82	5.75	1.69
Interlake Green	QE-432	33	9.20	31.88	0.98	2.70	2.30	17.39	0.81	26.72	8.23
McCoy Green	QE-441	13	8.56	25.11	0.96	2.71	2.30	17.83	0.79	10.26	2.38
AGN Standard Green	QE-466	1265	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1039.50	294.00
Andersen Orange	QE-522	1020	9.17	33.31	0.99	2.57	2.30	11.74	0.87	891.26	264.83
Interlake Orange	QE-535	49	8.96	31.45	1.00	2.63	2.30	14.35	0.86	41.97	11.74
AOR Standard Orange	QE-566	482	9.27	39.19	1.00	2.71	2.30	17.83	0.82	396.08	148.84
Andersen Yellow	QE-569	34	9.34	37.20	1.00	2.61	2.30	13.48	0.87	29.42	10.04
Pantone Yellow	QE-572	30	9.37	37.85	1.00	2.55	2.30	10.87	0.89	26.74	9.04
Dorfman Orange	QE-579	62	9.22	36.99	1.00	2.71	2.30	17.83	0.82	50.95	17.97
Andersen Gray	QE-647	97	9.27	33.41	1.00	2.71	2.30	17.83	0.82	79.71	25.54
Fire Red	QE-713	1	8.61	28.20	1.00	2.66	2.30	15.65	0.84	0.84	0.21
Royal Blue	QE-929	41	8.87	30.13	1.00	2.71	2.30	17.83	0.82	33.69	9.31
Sturdi-Built Blue	QE-930	33	8.77	27.53	0.95	2.71	2.30	17.83	0.78	25.76	6.77
Gloss Black	QE-J204	95	8.48	24.13	0.97	2.71	2.30	17.83	0.80	75.72	16.52
V-AGN	VS-001	157	8.96	35.24	2.36	2.36	2.30	2.61	2.30	360.85	42.14
V-OR	VS-002	35	8.96	35.24	2.36	2.36	2.30	2.61	2.30	80.45	9.39
									TOTALS:	3,180	880
									QTR-1	8,935	2,563
October-04											
Vista Green	QE-415	44	9.03	31.37	1.00	2.71	2.30	17.83	0.82	36.16	10.59
Johns Import Green	QE-424	15	8.95	30.68	1.00	2.68	2.30	16.52	0.83	12.52	3.50
Interlake Green	QE-432	91	9.20	31.88	0.98	2.70	2.30	17.39	0.81	73.67	22.69
AGN Standard Green	QE-466	321	8.95	30.55	1.00	2.71	2.30	17.83	0.82	263.78	74.60
Andersen Orange	QE-522	269	9.17	33.31	0.99	2.57	2.30	11.74	0.87	235.05	69.84
Interlake Orange	QE-535	178	8.96	31.45	1.00	2.63	2.30	14.35	0.86	152.46	42.64
AOR Standard Orange	QE-566	11	9.27	39.19	1.00	2.71	2.30	17.83	0.82	9.04	3.40
Andersen Yellow	QE-569	61	9.34	37.20	1.00	2.61	2.30	13.48	0.87	52.78	18.02
Dorfman Orange	QE-579	2	9.22	36.99	1.00	2.71	2.30	17.83	0.82	1.64	0.58
Andersen Gray	QE-647	109	9.27	33.41	1.00	2.66	2.30	15.65	0.84	91.94	28.69
Fire Red	QE-713	13	8.61	28.20	1.00	2.66	2.30	15.65	0.84	10.97	2.68
Bear Foot Pink	QE-736	30	9.67	36.07	0.90	2.47	2.30	7.39	0.83	25.00	8.89
Home Depot Beige	QE-850	313	9.55	36.35	1.00	2.58	2.30	12.17	0.88	274.90	92.36
Andersen Tans	QE-854	20	9.65	18.78	0.98	2.58	2.30	12.17	0.86	17.21	3.08
Royal Blue	QE-929	348	8.87	30.13	1.00	2.71	2.30	17.83	0.82	285.97	79.05
Sturdi-Built Blue	QE-930	108	8.77	27.53	0.95	2.71	2.30	17.83	0.78	84.31	22.16
Gloss Black	QE-J204	54	8.48	24.13	0.97	2.71	2.30	17.83	0.80	43.04	9.39
V-OR	VS-002	50	8.96	35.24	2.36	2.36	2.30	2.61	2.30	114.92	13.42
									TOTALS:	1,785	506

Material	Product Code	Liquid Usage (gal)	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
November-04											
Vista Green	QE-415	74	9.03	31.37	1.00	2.71	2.30	17.83	0.82	60.81	17.82
Interlake Green	QE-432	186	9.20	31.88	0.98	2.70	2.30	17.39	0.81	150.58	46.37
McCoy Green	QE-441	16	8.56	25.11	0.96	2.71	2.30	17.83	0.79	12.62	2.92
AGN Standard Green	QE-466	991	8.95	30.55	1.00	2.71	2.30	17.83	0.82	814.34	230.32
Andersen Orange	QE-522	782	9.17	33.31	0.99	2.57	2.30	11.74	0.87	683.30	203.03
Interlake Orange	QE-535	109	8.96	31.45	1.00	2.63	2.30	14.35	0.86	93.36	26.11
AOR Standard Orange	QE-566	52	9.27	39.19	1.00	2.71	2.30	17.83	0.82	42.73	16.06
Andersen Yellow	QE-569	126	9.34	37.20	1.00	2.61	2.30	13.48	0.87	109.02	37.21
Pantone Yellow	QE-572	30	9.37	37.85	1.00	2.55	2.30	10.87	0.89	26.74	9.04
Safety Yellow	QE-580	60	9.27	36.82	0.99	2.38	2.30	3.48	0.96	57.33	17.41
Andersen Gray	QE-647	21	9.27	33.41	1.00	2.66	2.30	15.65	0.84	17.71	5.53
Home Depot Beige	QE-850	937	9.55	36.35	1.00	2.58	2.30	12.17	0.88	822.93	276.48
Andersen Tans	QE-854	10	9.65	18.78	0.98	2.58	2.30	12.17	0.86	8.61	1.54
Royal Blue	QE-929	813	8.87	30.13	1.00	2.71	2.30	17.83	0.82	668.07	184.69
Sturdi-Built Blue	QE-930	140	8.77	27.53	0.95	2.71	2.30	17.83	0.78	109.29	28.73
V-OR	VS-002	38	8.96	35.24	2.36	2.36	2.30	2.61	2.30	87.34	10.20
TOTALS:										3,765	1,113
December-04											
Andersen Whites	QE-126	25	9.72	37.96	0.98	2.49	2.30	8.26	0.90	22.48	7.84
Designer White	QE-147	5	9.67	36.02	0.90	2.47	2.30	7.39	0.83	4.17	1.48
Vista Green	QE-415	5	9.03	31.37	1.00	2.71	2.30	17.83	0.82	4.11	1.20
Johns Import Green	QE-424	5	8.95	30.68	1.00	2.68	2.30	16.52	0.83	4.17	1.17
Interlake Green	QE-432	58	9.20	31.88	0.98	2.70	2.30	17.39	0.81	46.95	14.46
AGN Standard Green	QE-466	1327	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1090.45	308.41
Andersen Orange	QE-522	1304	9.17	33.31	0.99	2.57	2.30	11.74	0.87	1139.41	338.56
Interlake Orange	QE-535	60	8.96	31.45	1.00	2.63	2.30	14.35	0.86	51.39	14.37
AOR Standard Orange	QE-566	57	9.27	39.19	1.00	2.71	2.30	17.83	0.82	46.84	17.60
Andersen Yellow	QE-569	213	9.34	37.20	1.00	2.61	2.30	13.48	0.87	184.29	62.91
Pantone Yellow	QE-572	46	9.37	37.85	1.00	2.55	2.30	10.87	0.89	41.00	13.87
Andersen Summit Yellow	QE-581	1	9.25	35.83	1.00	2.68	2.30	16.52	0.83	0.83	0.28
Andersen Gray	QE-647	170	9.27	33.41	1.00	2.66	2.30	15.65	0.84	143.39	44.75
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Fire Red	QE-713	10	8.61	28.20	1.00	2.66	2.30	15.65	0.84	8.43	2.06
Home Depot Beige	QE-850	18	9.55	36.35	1.00	2.58	2.30	12.17	0.88	15.81	5.31
Royal Blue	QE-929	191	8.87	30.13	1.00	2.71	2.30	17.83	0.82	156.95	43.39
Sturdi-Built Blue	QE-930	21	8.77	27.53	0.95	2.71	2.30	17.83	0.78	16.39	4.31
SBL Blue	QE-991	15	9.07	31.19	1.00	2.69	2.30	16.96	0.83	12.46	3.61
TOTALS:										2,971	879
QTR-2										8,521	2,498

Material	Product Code	Liquid Usage	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
January-05											
Vista Green	QE-415	18	9.03	31.37	1.00	2.71	2.30	17.83	0.82	14.79	4.33
Interlake Green	QE-432	133	9.20	31.88	0.98	2.70	2.30	17.39	0.81	107.67	33.16
McCoy Green	QE-441	23	8.56	25.11	0.96	2.71	2.30	17.83	0.79	18.14	4.20
AGN Standard Green	QE-466	827	8.95	30.55	1.00	2.71	2.30	17.83	0.82	679.58	192.20
Vitmar Green	QE-474	35	9.28	32.95	0.89	2.49	2.30	8.26	0.82	28.58	9.10
Andersen Orange	QE-522	643	9.17	33.31	0.99	2.57	2.30	11.74	0.87	561.84	166.95
Interlake Orange	QE-535	170	8.96	31.45	1.00	2.63	2.30	14.35	0.86	145.61	40.72
AOR Standard Orange	QE-566	19	9.27	39.19	1.00	2.71	2.30	17.83	0.82	15.61	5.87
Andersen Yellow	QE-569	39	9.34	37.20	1.00	2.61	2.30	13.48	0.87	33.74	11.52
Pantone Yellow	QE-572	21	9.37	37.85	1.00	2.55	2.30	10.87	0.89	18.72	6.33
Monarch Orange	QE-576	15	8.81	29.20	1.00	2.70	2.30	17.39	0.83	12.39	3.28
Dorfman Orange	QE-579	50	9.22	36.99	1.00	2.71	2.30	17.83	0.82	41.09	14.49
Andersen Summit Yellow	QE-581	110	9.25	35.83	1.00	2.68	2.30	16.52	0.83	91.83	30.99
Andersen Gray	QE-647	106	9.27	33.41	1.00	2.66	2.30	15.65	0.84	89.41	27.90
Fire Red	QE-713	62	8.61	28.20	1.00	2.66	2.30	15.65	0.84	52.30	12.80
Crimson Red	QE-737	24	8.59	27.47	0.94	2.58	2.30	12.17	0.83	19.81	4.81
Bagel Tan	QE-848	40	9.60	36.68	1.00	2.64	2.30	14.78	0.85	34.09	11.97
Food Max Beige	QE-855	15	9.61	34.62	0.93	2.62	2.30	13.91	0.80	12.01	4.24
Royal Blue	QE-929	10	8.87	30.13	1.00	2.71	2.30	17.83	0.82	8.22	2.27
Sturdi-Built Blue	QE-930	107	8.77	27.53	0.95	2.71	2.30	17.83	0.78	83.53	21.96
SBL Blue	QE-991	45	9.07	31.19	1.00	2.69	2.30	16.96	0.83	37.37	10.82
Hannibal Blue	QE-992	38	8.65	29.96	1.00	2.71	2.30	17.83	0.82	31.23	8.37
Gloss Black	QE-J204	61	8.48	24.13	0.97	2.71	2.30	17.83	0.80	48.62	10.61
V-OR	VS-002	311	8.96	35.24	2.36	2.36	2.30	2.61	2.30	714.81	83.47
TOTALS:									2,901	722	
February-05											
Vista Green	QE-415	12	9.03	31.37	1.00	2.71	2.30	17.83	0.82	9.86	2.89
Interlake Green	QE-432	26	9.20	31.88	0.98	2.70	2.30	17.39	0.81	21.05	6.48
McCoy Green	QE-441	35	8.56	25.11	0.96	2.71	2.30	17.83	0.79	27.61	6.39
AGN Standard Green	QE-466	656	8.95	30.55	1.00	2.71	2.30	17.83	0.82	539.06	152.46
Andersen Orange	QE-522	489	9.17	33.31	0.99	2.57	2.30	11.74	0.87	427.28	126.96
AOR Standard Orange	QE-566	26	9.27	39.19	1.00	2.71	2.30	17.83	0.82	21.37	8.03
Andersen Yellow	QE-569	98	9.34	37.20	1.00	2.61	2.30	13.48	0.87	84.79	28.94
Andersen Summit Yellow	QE-581	27	9.25	35.83	1.00	2.68	2.30	16.52	0.83	22.54	7.61
Andersen Gray	QE-647	238	9.27	33.41	1.00	2.66	2.30	15.65	0.84	200.75	62.65
Fire Red	QE-713	65	8.61	28.20	1.00	2.66	2.30	15.65	0.84	54.83	13.41
Bagel Tan	QE-848	5	9.60	36.68	1.00	2.64	2.30	14.78	0.85	4.26	1.50
Royal Blue	QE-929	20	8.87	30.13	1.00	2.71	2.30	17.83	0.82	16.43	4.54
Sturdi-Built Blue	QE-930	89	8.77	27.53	0.95	2.71	2.30	17.83	0.78	69.48	18.26
Reno Blue	QE-964	12	8.73	28.29	1.00	2.71	2.30	17.83	0.82	9.86	2.52
SBL Blue	QE-991	7	9.07	31.19	1.00	2.69	2.30	16.96	0.83	5.81	1.68
Gloss Black	QE-J204	30	8.48	24.13	0.97	2.71	2.30	17.83	0.80	23.91	5.22
V-AGN	VS-001	628	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1443.42	168.55
V-OR	VS-002	386	8.96	35.24	2.36	2.36	2.30	2.61	2.30	887.20	103.60
TOTALS:									3,870	722	

Material	Product Code	Liquid	Density	Solids Content	VOC	VOC	Rule Limit	Reduction	Surplus	VOC	PM10	
		Usage			as applied	less water & exempts		for rule compliance	VOC as applied	Emissions		Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)	
March-05												
Andersen Off White	QE-113	320	9.75	37.98	0.99	2.53	2.30	10.00	0.89	285.12	100.72	
Designer White	QE-147	25	9.67	36.02	0.90	2.47	2.30	7.39	0.83	20.84	7.40	
Vista Green	QE-415	9	9.03	31.37	1.00	2.71	2.30	17.83	0.82	7.40	2.17	
Interlake Green	QE-432	83	9.20	31.88	0.98	2.70	2.30	17.39	0.81	67.19	20.69	
McCoy Green	QE-441	32	8.56	25.11	0.96	2.71	2.30	17.83	0.79	25.24	5.85	
AGN Standard Green	QE-466	806	8.95	30.55	1.00	2.71	2.30	17.83	0.82	662.32	187.32	
Caterpillar Yellow	QE-510	5	9.05	32.60	1.33	2.83	2.30	23.04	1.02	5.12	1.25	
Andersen Orange	QE-522	278	9.17	33.31	0.99	2.57	2.30	11.74	0.87	242.91	72.18	
Interlake Orange	QE-535	241	8.96	31.45	1.00	2.63	2.30	14.35	0.86	206.42	57.73	
AOR Standard Orange	QE-566	103	9.27	39.19	1.00	2.71	2.30	17.83	0.82	84.64	31.81	
Andersen Yellow	QE-569	165	9.34	37.20	1.00	2.61	2.30	13.48	0.87	142.76	48.73	
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75	
Andersen Gray	QE-647	69	9.27	33.41	1.00	2.66	2.30	15.65	0.84	58.20	18.16	
Fire Red	QE-713	43	8.61	28.20	1.00	2.66	2.30	15.65	0.84	36.27	8.87	
Royal Blue	QE-929	344	8.87	30.13	1.00	2.71	2.30	17.83	0.82	282.68	78.14	
Sturdi-Built Blue	QE-930	59	8.77	27.53	0.95	2.71	2.30	17.83	0.78	46.06	12.11	
Gloss Black	QE-J204	39	8.48	24.13	0.97	2.71	2.30	17.83	0.80	31.09	6.78	
V-AGN	VS-001	323	8.96	35.24	2.36	2.36	2.30	2.61	2.30	742.39	86.69	
V-OR	VS-002	401	8.96	35.24	2.36	2.36	2.30	2.61	2.30	921.67	107.62	
										TOTALS:	3,594	757
										QTR-3	6,802	1,451
April-05												
Vista Green	QE-415	9	9.03	31.37	1.00	2.71	2.30	17.83	0.82	7.40	2.17	
Interlake Green	QE-432	71	9.20	31.88	0.98	2.70	2.30	17.39	0.81	57.48	17.70	
McCoy Green	QE-441	3	8.56	25.11	0.96	2.71	2.30	17.83	0.79	2.37	0.55	
AGN Standard Green	QE-466	421	8.95	30.55	1.00	2.71	2.30	17.83	0.82	345.95	97.84	
Caterpillar Yellow	QE-510	11	9.05	32.60	1.33	2.83	2.30	23.04	1.02	11.26	2.76	
Interlake Orange	QE-535	79	8.96	31.45	1.00	2.63	2.30	14.35	0.86	67.67	18.92	
AOR Standard Orange	QE-566	16	9.27	39.19	1.00	2.71	2.30	17.83	0.82	13.15	4.94	
Andersen Yellow	QE-569	5	9.34	37.20	1.00	2.61	2.30	13.48	0.87	4.33	1.48	
Lodi Metal Tech Orange	QE-570	5	8.71	28.98	1.00	2.71	2.30	17.83	0.82	4.11	1.07	
Pantone Yellow	QE-572	564	9.37	37.85	1.00	2.55	2.30	10.87	0.89	502.70	170.02	
Dorfman Orange	QE-579	91	9.22	36.99	1.00	2.71	2.30	17.83	0.82	74.78	26.38	
Andersen Gray	QE-647	39	9.27	33.41	1.00	2.66	2.30	15.65	0.84	32.90	10.27	
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05	
Allied HSF Gray	QE-654	88	9.48	34.48	1.00	2.71	2.30	17.83	0.82	72.31	24.45	
Royal Blue	QE-929	94	8.87	30.13	1.00	2.71	2.30	17.83	0.82	77.24	21.35	
Sturdi-Built Blue	QE-930	589	8.77	27.53	0.95	2.71	2.30	17.83	0.78	459.80	120.88	
Gloss Black	QE-J204	15	8.48	24.13	0.97	2.71	2.30	17.83	0.80	11.96	2.61	
V-AGN	VS-001	651	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1496.28	174.72	
V-OR	VS-002	746	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1714.63	200.22	
										TOTALS:	4,960	899

Material	Product Code	Liquid	Solids	VOC	VOC	Rule	Reduction	Surplus	VOC	VOC	PM10									
		Usage										Density	Content	as applied	less water	Limit	for rule	as applied	Emissions	Emissions
		(gal)										(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
May-05																				
Lozier Almond	QE-117	14	9.57	36.34	1.00	2.62	2.30	13.91	0.86	12.05	4.14									
Vista Green	QE-415	162	9.03	31.37	1.00	2.71	2.30	17.83	0.82	133.12	39.01									
Johns Import Green	QE-424	30	8.95	30.68	1.00	2.68	2.30	16.52	0.83	25.04	7.00									
Interlake Green	QE-432	38	9.20	31.88	0.98	2.70	2.30	17.39	0.81	30.76	9.47									
McCoy Green	QE-441	49	8.56	25.11	0.96	2.71	2.30	17.83	0.79	38.65	8.95									
AGN Standard Green	QE-466	399	8.95	30.55	1.00	2.71	2.30	17.83	0.82	327.87	92.73									
Andersen Orange	QE-522	660	9.17	33.31	0.99	2.57	2.30	11.74	0.87	576.70	171.36									
Interlake Orange	QE-535	34	8.96	31.45	1.00	2.63	2.30	14.35	0.86	29.12	8.14									
AOR Standard Orange	QE-566	279	9.27	39.19	1.00	2.71	2.30	17.83	0.82	229.27	86.15									
Andersen Yellow	QE-569	20	9.34	37.20	1.00	2.61	2.30	13.48	0.87	17.30	5.91									
Lodi Metal Tech Orange	QE-570	12	8.71	28.98	1.00	2.71	2.30	17.83	0.82	9.86	2.57									
Pantone Yellow	QE-572	31	9.37	37.85	1.00	2.55	2.30	10.87	0.89	27.63	9.35									
Dorfman Orange	QE-579	55	9.22	36.99	1.00	2.71	2.30	17.83	0.82	45.20	15.94									
Frazier Yellow	QE-582	20	9.04	31.25	0.98	2.63	2.30	14.35	0.84	16.79	4.80									
Andersen Gray	QE-647	83	9.27	33.41	1.00	2.66	2.30	15.65	0.84	70.01	21.85									
Skecher's Gray	QE-655	86	9.17	32.46	1.00	2.71	2.30	17.83	0.82	70.67	21.76									
Fire Red	QE-713	28	8.61	28.20	1.00	2.66	2.30	15.65	0.84	23.62	5.78									
Royal Blue	QE-929	190	8.87	30.13	1.00	2.71	2.30	17.83	0.82	156.13	43.16									
Sturdi-Built Blue	QE-930	18	8.77	27.53	0.95	2.71	2.30	17.83	0.78	14.05	3.69									
Unarco Blue	QE-963	155	8.78	28.68	0.99	2.71	2.30	17.83	0.81	126.10	33.18									
Blue Aquatech	QE-981	40	8.70	27.48	0.50	1.88	2.30	0.00	0.50	20.00	8.13									
Hannibal Blue	QE-992	138	8.65	29.96	1.00	2.71	2.30	17.83	0.82	113.40	30.40									
Gloss Black	QE-J204	18	8.48	24.13	0.97	2.71	2.30	17.83	0.80	14.35	3.13									
V-AGN	VS-001	695	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1597.41	186.53									
V-OR	VS-002	803	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1845.64	215.52									
									TOTALS:	5,559	1,035									
June-05																				
Andersen Off White	QE-113	309	9.75	37.98	0.99	2.53	2.30	10.00	0.89	275.32	97.26									
Lozier Almond	QE-117	30	9.57	36.34	1.00	2.62	2.30	13.91	0.86	25.83	8.87									
Vista Green	QE-415	17	9.03	31.37	1.00	2.71	2.30	17.83	0.82	13.97	4.09									
Johns Import Green	QE-424	10	8.95	30.68	1.00	2.68	2.30	16.52	0.83	8.35	2.33									
Interlake Green	QE-432	154	9.20	31.88	0.98	2.70	2.30	17.39	0.81	124.67	38.39									
AGN Standard Green	QE-466	610	8.95	30.55	1.00	2.71	2.30	17.83	0.82	501.26	141.77									
Caterpillar Yellow	QE-510	9	9.05	32.60	1.33	2.83	2.30	23.04	1.02	9.21	2.26									
Andersen Orange	QE-522	330	9.17	33.31	0.99	2.57	2.30	11.74	0.87	288.35	85.68									
Interlake Orange	QE-535	184	8.96	31.45	1.00	2.63	2.30	14.35	0.86	157.60	44.07									
AOR Standard Orange	QE-566	67	9.27	39.19	1.00	2.71	2.30	17.83	0.82	55.06	20.69									
Andersen Yellow	QE-569	43	9.34	37.20	1.00	2.61	2.30	13.48	0.87	37.20	12.70									
Pantone Yellow	QE-572	182	9.37	37.85	1.00	2.55	2.30	10.87	0.89	162.22	54.87									
Cool Gray	QE-617	193	10.08	43.80	1.35	2.81	2.30	22.17	1.05	202.78	72.43									
Andersen Gray	QE-647	48	9.27	33.41	1.00	2.66	2.30	15.65	0.84	40.49	12.64									
Fire Red	QE-713	9	8.61	28.20	1.00	2.66	2.30	15.65	0.84	7.59	1.86									
Royal Blue	QE-929	355	8.87	30.13	1.00	2.71	2.30	17.83	0.82	291.72	80.64									
Sturdi-Built Blue	QE-930	217	8.77	27.53	0.95	2.71	2.30	17.83	0.78	169.40	44.53									
Unarco Blue	QE-963	47	8.78	28.68	0.99	2.71	2.30	17.83	0.81	38.24	10.06									
Kwal Blue	QE-987	5	8.72	28.22	0.99	2.70	2.30	17.39	0.82	4.09	1.05									
Hannibal Blue	QE-992	3	8.65	29.96	1.00	2.71	2.30	17.83	0.82	2.47	0.66									
Gloss Black	QE-J204	182	8.48	24.13	0.97	2.71	2.30	17.83	0.80	145.07	31.66									
V-AGN	VS-001	201	8.96	35.24	2.36	2.36	2.30	2.61	2.30	461.99	53.95									
V-OR	VS-002	951	8.96	35.24	2.36	2.36	2.30	2.61	2.30	2185.81	255.24									
									TOTALS:	4,908	972									
									QTR-4	15,427	2,905									

Material	Product Code	Liquid Usage (gal)	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
July-05											
Andersen Off White	QE-113	44	9.75	37.98	0.99	2.53	2.30	10.00	0.89	39.20	13.85
Lozier Almond	QE-117	15	9.57	36.34	1.00	2.62	2.30	13.91	0.86	12.91	4.43
Designer White	QE-147	20	9.67	36.02	0.90	2.47	2.30	7.39	0.83	16.67	5.92
Vista Green	QE-415	11	9.03	31.37	1.00	2.71	2.30	17.83	0.82	9.04	2.65
Johns Import Green	QE-424	3	8.95	30.68	1.00	2.68	2.30	16.52	0.83	2.50	0.70
Interlake Green	QE-432	30	9.20	31.88	0.98	2.70	2.30	17.39	0.81	24.29	7.48
McCoy Green	QE-441	35	8.56	25.11	0.96	2.71	2.30	17.83	0.79	27.61	6.39
AGN Standard Green	QE-466	380	8.95	30.55	1.00	2.71	2.30	17.83	0.82	312.26	88.32
Caterpillar Yellow	QE-510	2	9.05	32.60	1.33	2.83	2.30	23.04	1.02	2.05	0.50
Andersen Orange	QE-522	660	9.17	33.31	0.99	2.57	2.30	11.74	0.87	576.70	171.36
Interlake Orange	QE-535	108	8.96	31.45	1.00	2.63	2.30	14.35	0.86	92.50	25.87
AOR Standard Orange	QE-566	248	9.27	39.19	1.00	2.71	2.30	17.83	0.82	203.79	76.58
Andersen Yellow	QE-569	374	9.34	37.20	1.00	2.61	2.30	13.48	0.87	323.59	110.45
Pantone Yellow	QE-572	364	9.37	37.85	1.00	2.55	2.30	10.87	0.89	324.43	109.73
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Yardbird Gray	QE-620	15	9.19	32.58	1.00	2.71	2.30	17.83	0.82	12.33	3.82
Andersen Gray	QE-647	60	9.27	33.41	1.00	2.66	2.30	15.65	0.84	50.61	15.80
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
BNR Red	QE-739	75	8.58	28.66	0.98	2.54	2.30	10.43	0.88	65.83	15.68
Royal Blue	QE-929	128	8.87	30.13	1.00	2.71	2.30	17.83	0.82	105.18	29.08
Sturdi-Built Blue	QE-930	235	8.77	27.53	0.95	2.71	2.30	17.83	0.78	183.45	48.23
Reno Blue	QE-964	9	8.73	28.29	1.00	2.71	2.30	17.83	0.82	7.40	1.89
Gloss Black	QE-J204	53	8.48	24.13	0.97	2.71	2.30	17.83	0.80	42.25	9.22
V-AGN	VS-001	618	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1420.43	165.86
V-OR	VS-002	141	8.96	35.24	2.36	2.36	2.30	2.61	2.30	324.08	37.84
TOTALS:										4,142	938
August-05											
Vista Green	QE-415	7	9.03	31.37	1.00	2.71	2.30	17.83	0.82	5.75	1.69
Interlake Green	QE-432	108	9.20	31.88	0.98	2.70	2.30	17.39	0.81	87.43	26.92
McCoy Green	QE-441	7	8.56	25.11	0.96	2.71	2.30	17.83	0.79	5.52	1.28
AGN Standard Green	QE-466	715	8.95	30.55	1.00	2.71	2.30	17.83	0.82	587.54	166.17
Caterpillar Yellow	QE-510	5	9.05	32.60	1.33	2.83	2.30	23.04	1.02	5.12	1.25
Andersen Orange	QE-522	716	9.17	33.31	0.99	2.57	2.30	11.74	0.87	625.63	185.90
Interlake Orange	QE-535	109	8.96	31.45	1.00	2.63	2.30	14.35	0.86	93.36	26.11
AOR Standard Orange	QE-566	285	9.27	39.19	1.00	2.71	2.30	17.83	0.82	234.20	88.01
Andersen Yellow	QE-569	133	9.34	37.20	1.00	2.61	2.30	13.48	0.87	115.07	39.28
Pantone Yellow	QE-572	143	9.37	37.85	1.00	2.55	2.30	10.87	0.89	127.46	43.11
Yardbird Gray	QE-620	3	9.19	32.58	1.00	2.71	2.30	17.83	0.82	2.47	0.76
Andersen Gray	QE-647	359	9.27	33.41	1.00	2.66	2.30	15.65	0.84	302.81	94.51
Kwal Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Fire Red	QE-713	23	8.61	28.20	1.00	2.66	2.30	15.65	0.84	19.40	4.75
Royal Blue	QE-929	158	8.87	30.13	1.00	2.71	2.30	17.83	0.82	129.83	35.89
Sturdi-Built Blue	QE-930	109	8.77	27.53	0.95	2.71	2.30	17.83	0.78	85.09	22.37
Blue Aquatech Enamel	QE-995	10	8.47	25.74	1.00	2.71	2.30	17.83	0.82	8.22	1.85
Gloss Black	QE-J204	41	8.48	24.13	0.97	2.71	2.30	17.83	0.80	32.68	7.13
V-AGN	VS-001	702	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1613.50	188.41
V-OR	VS-002	748	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1719.23	200.75
TOTALS:										5,804	1,137

Material	Product Code	Liquid Usage	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
September-05											
Lozier Almond	QE-117	30	9.57	36.34	1.00	2.62	2.30	13.91	0.86	25.83	8.87
Vista Green	QE-415	75	9.03	31.37	1.00	2.71	2.30	17.83	0.82	61.63	18.06
Interlake Green	QE-432	208	9.20	31.88	0.98	2.70	2.30	17.39	0.81	168.39	51.85
McCoy Green	QE-441	5	8.56	25.11	0.96	2.71	2.30	17.83	0.79	3.94	0.91
AGN Standard Green	QE-466	1399	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1149.61	325.14
Andersen Orange	QE-522	1539	9.17	33.31	0.99	2.57	2.30	11.74	0.87	1344.75	399.58
Interlake Orange	QE-535	300	8.96	31.45	1.00	2.63	2.30	14.35	0.86	256.96	71.86
AOR Standard Orange	QE-566	15	9.27	39.19	1.00	2.71	2.30	17.83	0.82	12.33	4.63
Andersen Yellow	QE-569	15	9.34	37.20	1.00	2.61	2.30	13.48	0.87	12.98	4.43
Pantone Yellow	QE-572	96	9.37	37.85	1.00	2.55	2.30	10.87	0.89	85.57	28.94
Inca Yellow	QE-574	32	9.26	36.76	1.00	2.60	2.30	13.04	0.87	27.83	9.26
Andersen Summit Yellow	QE-581	29	9.25	35.83	1.00	2.68	2.30	16.52	0.83	24.21	8.17
Andersen Gray	QE-647	290	9.27	33.41	1.00	2.66	2.30	15.65	0.84	244.61	76.34
Fire Red	QE-713	120	8.61	28.20	1.00	2.66	2.30	15.65	0.84	101.22	24.77
Royal Blue	QE-929	58	8.87	30.13	1.00	2.71	2.30	17.83	0.82	47.66	13.18
Sturdi-Built Blue	QE-930	40	8.77	27.53	0.95	2.71	2.30	17.83	0.78	31.23	8.21
Inca Blue	QE-989	15	8.68	26.72	0.97	2.71	2.30	17.83	0.80	11.96	2.96
SBL Blue	QE-991	9	9.07	31.19	1.00	2.69	2.30	16.96	0.83	7.47	2.16
Gloss Black	QE-J204	19	8.48	24.13	0.97	2.71	2.30	17.83	0.80	15.14	3.30
V-AGN	VS-001	430	8.96	35.24	2.36	2.36	2.30	2.61	2.30	988.33	115.41
V-OR	VS-002	151	8.96	35.24	2.36	2.36	2.30	2.61	2.30	347.06	40.53
									TOTALS:	4,943	1,210
									QTR-5	14,889	3,285
October-05											
Andersen White	QE-132	18	9.95	39.59	0.50	1.66	2.30	0.00	0.50	9.00	6.03
Vista Green	QE-415	20	9.03	31.37	1.00	2.71	2.30	17.83	0.82	16.43	4.82
Interlake Green	QE-432	51	9.20	31.88	0.98	2.70	2.30	17.39	0.81	41.29	12.71
AGN Standard Green	QE-466	1131	8.95	30.55	1.00	2.71	2.30	17.83	0.82	929.39	262.85
Caterpillar Yellow	QE-510	3	9.05	32.60	1.33	2.83	2.30	23.04	1.02	3.07	0.75
Andersen Orange	QE-522	1045	9.17	33.31	0.99	2.57	2.30	11.74	0.87	913.10	271.32
Interlake Orange	QE-535	55	8.96	31.45	1.00	2.63	2.30	14.35	0.86	47.11	13.17
AOR Standard Orange	QE-566	337	9.27	39.19	1.00	2.71	2.30	17.83	0.82	276.93	104.06
Andersen Yellow	QE-569	185	9.34	37.20	1.00	2.61	2.30	13.48	0.87	160.07	54.64
Pantone Yellow	QE-572	89	9.37	37.85	1.00	2.55	2.30	10.87	0.89	79.33	26.83
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Gray	QE-647	400	9.27	33.41	1.00	2.66	2.30	15.65	0.84	337.39	105.30
Crimson Red	QE-737	47	8.59	27.47	0.94	2.58	2.30	12.17	0.83	38.80	9.43
Inca Putty	QE-851	214	9.32	33.34	0.92	2.52	2.30	9.57	0.83	178.05	56.52
CSB Brown	QE-858	181	9.10	32.04	1.00	2.71	2.30	17.83	0.82	148.73	44.86
Royal Blue	QE-929	17	8.87	30.13	1.00	2.71	2.30	17.83	0.82	13.97	3.86
Sturdi-Built Blue	QE-930	223	8.77	27.53	0.95	2.71	2.30	17.83	0.78	174.09	45.76
Frazier Blue	QE-988	6	8.72	28.16	1.00	2.71	2.30	17.83	0.82	4.93	1.25
Gloss Black	QE-J204	27	8.48	24.13	0.97	2.71	2.30	17.83	0.80	21.52	4.70
V-AGN	VS-001	599	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1376.76	160.76
V-OR	VS-002	689	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1583.62	184.92
									TOTALS:	6,364	1,378

Material	Product Code	Liquid Usage (gal)	Density (lb/gal)	Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
November-05											
Andersen Off White	QE-113	25	9.75	37.98	0.99	2.53	2.30	10.00	0.89	22.28	7.87
Vista Green	QE-415	26	9.03	31.37	1.00	2.71	2.30	17.83	0.82	21.37	6.26
Johns Import Green	QE-424	151	8.95	30.68	1.00	2.68	2.30	16.52	0.83	126.05	35.24
Interlake Green	QE-432	101	9.20	31.88	0.98	2.70	2.30	17.39	0.81	81.77	25.18
AGN Standard Green	QE-466	55	8.95	30.55	1.00	2.71	2.30	17.83	0.82	45.20	12.78
Interlake Orange	QE-535	109	8.96	31.45	1.00	2.63	2.30	14.35	0.86	93.36	26.11
AOR Standard Orange	QE-566	178	9.27	39.19	1.00	2.71	2.30	17.83	0.82	146.27	54.97
Andersen Yellow	QE-569	134	9.34	37.20	1.00	2.61	2.30	13.48	0.87	115.94	39.57
Pantone Yellow	QE-572	46	9.37	37.85	1.00	2.55	2.30	10.87	0.89	41.00	13.87
Inca Yellow	QE-574	728	9.26	36.76	1.00	2.60	2.30	13.04	0.87	633.04	210.64
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Gray	QE-647	86	9.27	33.41	1.00	2.66	2.30	15.65	0.84	72.54	22.64
Fire Red	QE-713	40	8.61	28.20	1.00	2.66	2.30	15.65	0.84	33.74	8.26
Inca Putty	QE-851	5	9.32	33.34	0.92	2.52	2.30	9.57	0.83	4.16	1.32
Royal Blue	QE-929	29	8.87	30.13	1.00	2.71	2.30	17.83	0.82	23.83	6.59
Sturdi-Built Blue	QE-930	174	8.77	27.53	0.95	2.71	2.30	17.83	0.78	135.83	35.71
Inca Blue	QE-989	625	8.68	26.72	0.97	2.71	2.30	17.83	0.80	498.18	123.21
V-AGN	VS-001	949	8.96	35.24	2.36	2.36	2.30	2.61	2.30	2181.21	254.70
V-OR	VS-002	1098	8.96	35.24	2.36	2.36	2.30	2.61	2.30	2523.68	294.69
									TOTALS:	6,788	1,175
December-05											
Lozier Almond	QE-117	2	9.57	36.34	1.00	2.62	2.30	13.91	0.86	1.72	0.59
Vista Green	QE-415	15	9.03	31.37	1.00	2.71	2.30	17.83	0.82	12.33	3.61
Interlake Green	QE-432	122	9.20	31.88	0.98	2.71	2.30	17.83	0.81	98.25	30.41
McCoy Green	QE-441	3	8.56	25.11	0.96	2.71	2.30	17.83	0.79	2.37	0.55
AGN Standard Green	QE-466	792	8.95	30.55	1.00	2.71	2.30	17.83	0.82	650.82	184.07
Andersen Orange	QE-522	355	9.17	33.31	0.99	2.57	2.30	11.74	0.87	310.19	92.17
Interlake Orange	QE-535	213	8.96	31.45	1.00	2.63	2.30	14.35	0.86	182.44	51.02
AOR Standard Orange	QE-566	178	9.27	39.19	1.00	2.71	2.30	17.83	0.82	146.27	54.97
Andersen Yellow	QE-569	20	9.34	37.20	1.00	2.61	2.30	13.48	0.87	17.30	5.91
Pantone Yellow	QE-572	38	9.37	37.85	1.00	2.55	2.30	10.87	0.89	33.87	11.46
Inca Yellow	QE-574	774	9.26	36.76	1.00	2.60	2.30	13.04	0.87	673.04	223.95
Dorfman Orange	QE-579	15	9.22	36.99	1.00	2.71	2.30	17.83	0.82	12.33	4.35
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Gray	QE-647	112	9.27	33.41	1.00	2.66	2.30	15.65	0.84	94.47	29.48
Kwai Gray	QE-649	5	8.73	28.21	1.00	2.71	2.30	17.83	0.82	4.11	1.05
Fire Red	QE-713	28	8.61	28.20	1.00	2.66	2.30	15.65	0.84	23.62	5.78
Andersen Reds	QE-733	55	8.67	29.45	0.98	2.57	2.30	11.74	0.86	47.57	11.94
Royal Blue	QE-929	20	8.87	30.13	1.00	2.71	2.30	17.83	0.82	16.43	4.54
Sturdi-Built Blue	QE-930	74	8.77	27.53	0.95	2.71	2.30	17.83	0.78	57.77	15.19
Inca Blue	QE-989	649	8.68	26.72	0.97	2.71	2.30	17.83	0.80	517.31	127.94
Gloss Black	QE-J204	3	8.48	24.13	0.97	2.71	2.30	17.83	0.80	2.39	0.52
V-AGN	VS-001	624	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1434.22	167.47
V-OR	VS-002	602	8.96	35.24	2.36	2.36	2.30	2.61	2.30	1383.66	161.57
									TOTALS:	5,731	1,192
									QTR-6	18,883	3,745

Material	Product Code	Liquid		Solids		VOC	VOC	Rule Limit	Reduction	Surplus	VOC	PM10
		Usage	Density	Content	as applied	less water & exempts	for rule compliance		as applied	Emissions	Emissions	
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)	
January-06												
Andersen White	QE-119	5	9.74	37.94	0.99	2.53	2.30	10.00	0.89	4.46	1.57	
Vista Green	QE-415	29	9.03	31.37	1.00	2.71	2.30	17.83	0.82	23.83	6.98	
Johns Import Green	QE-424	17	8.95	30.68	1.00	2.68	2.30	16.52	0.83	14.19	3.97	
Interlake Green	QE-432	208	9.20	31.88	0.98	2.71	2.30	17.83	0.81	167.50	51.85	
McCoy Green	QE-441	41	8.56	25.11	0.96	2.71	2.30	17.83	0.79	32.34	7.49	
AGN Standard Green	QE-466	1339	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1100.31	311.20	
Andersen Orange	QE-522	1271	9.17	33.31	0.99	2.57	2.30	11.74	0.87	1110.58	330.00	
Interlake Orange	QE-535	173	8.96	31.45	1.00	2.63	2.30	14.35	0.86	148.18	41.44	
AOR Standard Orange	QE-566	750	9.27	39.19	1.00	2.71	2.30	17.83	0.82	616.30	231.60	
Andersen Yellow	QE-569	49	9.34	37.20	1.00	2.61	2.30	13.48	0.87	42.40	14.47	
Pantone Yellow	QE-572	82	9.37	37.85	1.00	2.55	2.30	10.87	0.89	73.09	24.72	
Inca Yellow	QE-574	9	9.26	36.76	1.00	2.60	2.30	13.04	0.87	7.83	2.60	
Andersen Gray	QE-647	135	9.27	33.41	1.00	2.66	2.30	15.65	0.84	113.87	35.54	
Fire Red	QE-713	41	8.61	28.20	1.00	2.66	2.30	15.65	0.84	34.58	8.46	
Kwal Red	QE-734	15	8.63	27.99	0.94	2.59	2.30	12.61	0.82	12.32	3.08	
BNR Red	QE-739	74	8.58	28.66	0.98	2.54	2.30	10.43	0.88	64.95	15.47	
Royal Blue	QE-929	310	8.87	30.13	1.00	2.71	2.30	17.83	0.82	254.74	70.42	
Sturdi-Built Blue	QE-930	200	8.77	27.53	0.95	2.71	2.30	17.83	0.78	156.13	41.04	
Gloss Black	QE-J204	13	8.48	24.13	0.97	2.71	2.30	17.83	0.80	10.36	2.26	
TOTALS:										3,984	1,203	
February-06												
Andersen Off White	QE-113	114	9.75	37.98	0.99	2.53	2.30	10.00	0.89	101.57	35.88	
Designer White	QE-147	23	9.67	36.02	0.90	2.47	2.30	7.39	0.83	19.17	6.81	
Vista Green	QE-415	21	9.03	31.37	1.00	2.71	2.30	17.83	0.82	17.26	5.06	
Interlake Green	QE-432	118	9.20	31.88	0.98	2.71	2.30	17.83	0.81	95.03	29.42	
McCoy Green	QE-441	32	8.56	25.11	0.96	2.71	2.30	17.83	0.79	25.24	5.85	
AGN Standard Green	QE-466	1461	8.95	30.55	1.00	2.71	2.30	17.83	0.82	1200.56	339.55	
Andersen Orange	QE-522	899	9.17	33.31	0.99	2.57	2.30	11.74	0.87	785.53	233.41	
Interlake Orange	QE-535	237	8.96	31.45	1.00	2.63	2.30	14.35	0.86	203.00	56.77	
AOR Standard Orange	QE-566	50	9.27	39.19	1.00	2.71	2.30	17.83	0.82	41.09	15.44	
Andersen Yellow	QE-569	197	9.34	37.20	1.00	2.61	2.30	13.48	0.87	170.45	58.18	
Pantone Yellow	QE-572	90	9.37	37.85	1.00	2.55	2.30	10.87	0.89	80.22	27.13	
Andersen Gray	QE-647	135	9.27	33.41	1.00	2.66	2.30	15.65	0.84	113.87	35.54	
Fire Red	QE-713	41	8.61	28.20	1.00	2.66	2.30	15.65	0.84	34.58	8.46	
Kwal Red	QE-734	15	8.63	27.99	0.94	2.59	2.30	12.61	0.82	12.32	3.08	
BNR Red	QE-739	74	8.58	28.66	0.98	2.54	2.30	10.43	0.88	64.95	15.47	
Royal Blue	QE-929	310	8.87	30.13	1.00	2.71	2.30	17.83	0.82	254.74	70.42	
Sturdi-Built Blue	QE-930	168	8.77	27.53	0.95	2.71	2.30	17.83	0.78	131.15	34.48	
Gloss Black	QE-J204	13	8.48	24.13	0.97	2.71	2.30	17.83	0.80	10.36	2.26	
TOTALS:										3,260	947	

Material	Product Code	Liquid Usage	Density	Solids Content	VOC as applied	VOC less water & exempts	Rule Limit	Reduction for rule compliance	Surplus VOC as applied	VOC Emissions	PM10 Emissions
		(gal)	(lb/gal)	(% by wt)	(lb/gal)	(lb/gal)	(lb/gal)	(%)	(lb/gal)	(lb)	(lb)
March-06											
Lozier Almond	QE-117	51	9.57	36.34	1.00	2.62	2.30	13.91	0.86	43.90	15.08
Vista Green	QE-415	11	9.03	31.37	1.00	2.71	2.30	17.83	0.82	9.04	2.65
Interlake Green	QE-432	129	9.20	31.88	0.98	2.71	2.30	17.83	0.81	103.88	32.16
AGN Standard Green	QE-466	929	8.95	30.55	1.00	2.71	2.30	17.83	0.82	763.40	215.91
Lodi metal Tech Green	QE-478	10	8.93	29.78	0.90	2.54	2.30	10.43	0.81	8.06	2.26
Andersen Orange	QE-522	894	9.17	33.31	0.99	2.57	2.30	11.74	0.87	781.16	232.11
Interlake Orange	QE-535	124	8.96	31.45	1.00	2.63	2.30	14.35	0.86	106.21	29.70
AOR Standard Orange	QE-566	205	9.27	39.19	1.00	2.71	2.30	17.83	0.82	168.46	63.30
Andersen Yellow	QE-569	112	9.34	37.20	1.00	2.61	2.30	13.48	0.87	96.90	33.08
Lodi Metal Tech Orange	QE-570	10	8.71	28.98	1.00	2.71	2.30	17.83	0.82	8.22	2.15
Pantone Yellow	QE-572	497	9.37	37.85	1.00	2.55	2.30	10.87	0.89	442.98	149.82
Andersen Gray	QE-647	113	9.27	33.41	1.00	2.66	2.30	15.65	0.84	95.31	29.75
Toyota Gray	QE-664	110	9.91	39.32	1.00	2.55	2.30	10.87	0.89	98.04	36.43
Fire Red	QE-713	39	8.61	28.20	1.00	2.66	2.30	15.65	0.84	32.90	8.05
Kwal Red	QE-734	39	8.63	27.99	0.94	2.59	2.30	12.61	0.82	32.04	8.01
Bear Foot Pink	QE-736	15	9.67	36.07	0.90	2.47	2.30	7.39	0.83	12.50	4.45
Royal Blue	QE-929	303	8.87	30.13	1.00	2.71	2.30	17.83	0.82	248.99	68.83
Sturdi-Built Blue	QE-930	147	8.77	27.53	0.95	2.71	2.30	17.83	0.78	114.76	30.17
NC Blue	QE-951	15	8.77	30.93	1.17	2.83	2.30	23.04	0.90	13.51	3.46
Toyota Blue	QE-9003	104	8.84	27.74	0.81	2.63	2.30	14.35	0.69	72.15	21.68
Gloss Black	QE-J204	27	8.48	24.13	0.97	2.71	2.30	17.83	0.80	21.52	4.70
V-AGN	VS-001	330	8.96	35.24	2.36	2.36	2.30	2.61	2.30	758.48	88.57
V-OR	VS-002	330	8.96	35.24	2.36	2.36	2.30	2.61	2.30	758.48	88.57
									TOTALS:	4,747	1,156
									QTR-7	11,990	3,306
April-06											
Lozier Almond	QE-117	58	9.57	36.34	1.00	2.62	2.30	13.91	0.86	49.93	17.15
Andersen White	QE-119	444	9.74	37.94	0.99	2.53	2.30	10.00	0.89	395.60	139.46
Designer White	QE-147	20	9.67	36.02	0.90	2.47	2.30	7.39	0.83	16.67	5.92
Vista Green	QE-415	30	9.03	31.37	1.00	2.71	2.30	17.83	0.82	24.65	7.22
Interlake Green	QE-432	192	9.20	31.88	0.98	2.71	2.30	17.83	0.81	154.62	47.87
AGN Standard Green	QE-466	1012	8.95	30.55	1.00	2.71	2.30	17.83	0.82	831.60	235.20
Andersen Orange	QE-522	960	9.17	33.31	0.99	2.57	2.30	11.74	0.87	838.83	249.25
Interlake Orange	QE-535	234	8.96	31.45	1.00	2.63	2.30	14.35	0.86	200.43	56.05
AOR Standard Orange	QE-566	7	9.27	39.19	1.00	2.71	2.30	17.83	0.82	5.75	2.16
Andersen Yellow	QE-569	85	9.34	37.20	1.00	2.61	2.30	13.48	0.87	73.54	25.10
Pantone Yellow	QE-572	134	9.37	37.85	1.00	2.55	2.30	10.87	0.89	119.43	40.40
Ferguson Orange	QE-585	86	8.65	32.61	1.00	2.71	2.30	17.83	0.82	70.67	20.62
Andersen Gray	QE-647	90	9.27	33.41	1.00	2.66	2.30	15.65	0.84	75.91	23.69
Fire Red	QE-713	1115	8.61	28.20	1.00	2.66	2.30	15.65	0.84	940.48	230.12
Kwal Red	QE-734	9	8.63	27.99	0.94	2.59	2.30	12.61	0.82	7.39	1.85
Royal Blue	QE-929	166	8.87	30.13	1.00	2.71	2.30	17.83	0.82	136.41	37.71
Sturdi-Built Blue	QE-930	199	8.77	27.53	0.95	2.71	2.30	17.83	0.78	155.35	40.84
Reno Blue	QE-964	17	8.73	28.29	1.00	2.71	2.30	17.83	0.82	13.97	3.57
Gloss Black	QE-J204	45	8.48	24.13	0.97	2.71	2.30	17.83	0.80	35.87	7.83
									TOTALS:	3,702	1,035

Material	Product Code	Liquid		Solids Content (% by wt)	VOC as applied (lb/gal)	VOC less water & exempts (lb/gal)	Rule Limit (lb/gal)	Reduction for rule compliance (%)	Surplus VOC as applied (lb/gal)	VOC Emissions (lb)	PM10 Emissions (lb)
		Usage	Density								
		(gal)	(lb/gal)								
May-06											
Andersen White	QE-119	32	9.74	37.94	0.99	2.53	2.30	10.00	0.89	28.51	10.05
Designer White	QE-147	26	9.67	36.02	0.90	2.47	2.30	7.39	0.83	21.67	7.70
Vista Green	QE-415	21	9.03	31.37	1.00	2.71	2.30	17.83	0.82	17.26	5.06
Interlake Green	QE-432	19	9.20	31.88	0.98	2.71	2.30	17.83	0.81	15.30	4.74
McCoy Green	QE-441	473	8.56	25.11	0.96	2.71	2.30	17.83	0.79	373.14	86.42
Andersen Greens	QE-464	464	8.95	30.55	1.00	2.71	2.30	17.83	0.82	381.29	107.84
AGN Standard Green	QE-466	592	8.95	30.55	1.00	2.71	2.30	17.83	0.82	486.47	137.59
Andersen Orange	QE-522	490	9.17	33.31	0.99	2.57	2.30	11.74	0.87	428.15	127.22
Interlake Orange	QE-535	16	8.96	31.45	1.00	2.63	2.30	14.35	0.86	13.70	3.83
Andersen Oranges	QE-542	307	9.18	32.55	0.53	1.78	2.30	0.00	0.53	162.71	77.97
AOR Standard Orange	QE-566	29	9.27	39.19	1.00	2.71	2.30	17.83	0.82	23.83	8.96
Andersen Yellow	QE-569	75	9.34	37.20	1.00	2.61	2.30	13.48	0.87	64.89	22.15
Pantone Yellow	QE-572	233	9.37	37.85	1.00	2.55	2.30	10.87	0.89	207.67	70.24
Andersen Summit Yellow	QE-581	62	9.25	35.83	1.00	2.68	2.30	16.52	0.83	51.76	17.47
Andersen Gray	QE-647	125	9.27	33.41	1.00	2.66	2.30	15.65	0.84	105.43	32.91
Fire Red	QE-713	19	8.61	28.20	1.00	2.66	2.30	15.65	0.84	16.03	3.92
Royal Blue	QE-929	26	8.87	30.13	1.00	2.71	2.30	17.83	0.82	21.37	5.91
Sturdi-Built Blue	QE-930	83	8.77	27.53	0.95	2.71	2.30	17.83	0.78	64.79	17.03
Reno Blue	QE-964	19	8.73	28.29	1.00	2.71	2.30	17.83	0.82	15.61	3.99
Toyota Blue	QE-9003	3	8.84	27.74	0.81	2.63	2.30	14.35	0.69	2.08	0.63
Gloss Black	QE-J204	27	8.48	24.13	0.97	2.71	2.30	17.83	0.80	21.52	4.70
V-AGN	VS-001	349	8.96	35.24	2.36	2.36	2.30	2.61	2.30	802.15	93.67
V-OR	VS-002	342	8.96	35.24	2.36	2.36	2.30	2.61	2.30	786.06	91.79
									TOTALS:	4,083	932
June-06											
Andersen Off White	QE-113	13	9.75	37.98	0.99	2.53	2.30	10.00	0.89	11.58	4.09
Lozier Almond	QE-117	37	9.57	36.34	1.00	2.62	2.30	13.91	0.86	31.85	10.94
Andersen White	QE-119	36	9.74	37.94	0.99	2.53	2.30	10.00	0.89	32.08	11.31
Andersen White	QE-135	29	9.87	38.79	0.50	1.78	2.30	0.00	0.50	14.50	9.44
Andersen White	QE-138	20	9.87	38.79	0.50	1.78	2.30	0.00	0.50	10.00	6.51
Interlake Green	QE-432	82	9.20	31.88	0.98	2.71	2.30	17.83	0.81	66.03	20.44
Andersen Green	QE-442	16	8.92	29.85	0.50	1.88	2.30	0.00	0.50	8.00	3.62
Andersen Green	QE-443	3	8.92	29.85	0.50	1.88	2.30	0.00	0.50	1.50	0.68
AGN Std Green	QE-464	1169	8.95	30.55	1.00	2.71	2.30	17.83	0.82	960.61	271.69
Andersen Off Green	QE-468	7	9.64	36.05	0.89	2.43	2.30	5.65	0.84	5.88	2.07
Andersen Orange	QE-522	367	9.17	33.31	0.99	2.57	2.30	11.74	0.87	320.68	95.29
Interlake Orange	QE-535	101	8.96	31.45	1.00	2.63	2.30	14.35	0.86	86.51	24.19
And. Orange & Yellows	QE-542	692	9.18	32.55	0.53	1.78	2.30	0.00	0.53	366.76	175.76
And. Orange & Yellows	QE-544	115	9.18	32.55	0.53	1.78	2.30	0.00	0.53	60.95	29.21
And. Orange & Yellows	QE-545	79	9.18	32.55	0.53	1.78	2.30	0.00	0.53	41.87	20.07
And. Orange & Yellows	QE-552	438	9.18	32.55	0.53	1.78	2.30	0.00	0.53	232.14	111.25
AOR Standard Orange	QE-566	25	9.27	39.19	1.00	2.71	2.30	17.83	0.82	20.54	7.72
Andersen Yellow	QE-569	66	9.34	37.20	1.00	2.61	2.30	13.48	0.87	57.10	19.49
Pantone Yellow	QE-572	40	9.37	37.85	1.00	2.55	2.30	10.87	0.89	35.65	12.06
Cool Gray	QE-617	10	10.08	43.80	1.35	2.81	2.30	22.17	1.05	10.51	3.75
Andersen Pebble Gray	QE-626	402	9.33	31.80	0.51	2.57	2.30	11.74	0.45	180.95	101.38
Andersen Gray	QE-647	13	9.27	33.41	1.00	2.66	2.30	15.65	0.84	10.97	3.42
Fire Red	QE-713	7	8.61	28.20	1.00	2.66	2.30	15.65	0.84	5.90	1.44
Andersen Reds	QE-733	2	8.67	29.45	0.98	2.57	2.30	11.74	0.86	1.73	0.43
Kwal Red	QE-734	55	8.63	27.99	0.94	2.59	2.30	12.61	0.82	45.18	11.29
Andersen Tans	QE-862	55	9.07	30.09	0.51	1.73	2.30	0.00	0.51	28.05	12.76
Andersen Tans	QE-863	60	9.07	30.09	0.51	1.73	2.30	0.00	0.51	30.60	13.92
Andersen Blues	QE-915	15	8.87	30.13	1.00	2.71	2.30	17.83	0.82	12.33	3.41
Royal Blue	QE-929	20	8.87	30.13	1.00	2.71	2.30	17.83	0.82	16.43	4.54
Sturdi-Built Blue	QE-930	46	8.77	27.53	0.95	2.71	2.30	17.83	0.78	35.91	9.44
Sturdi-Built Blue	QE-954	159	8.78	27.68	0.51	1.73	2.30	0.00	0.51	81.09	32.85
Reno Blue	QE-964	110	8.73	28.29	1.00	2.71	2.30	17.83	0.82	90.39	23.09
Gloss Black	QE-J204	12	8.48	24.13	0.97	2.71	2.30	17.83	0.80	9.57	2.09
V-AGN	VS-001	246	8.96	35.24	2.36	2.36	2.30	2.61	2.30	565.41	66.02
V-OR	VS-002	152	8.96	35.24	2.36	2.36	2.30	2.61	2.30	349.36	40.79
									TOTALS:	3,763	1,140
									QTR-8	11,548	3,107

Appendix III
Permit to Operate for N-2368-1-3

San Joaquin Valley
Air Pollution Control District

COPY

PERMIT UNIT: N-2368-1-3

EXPIRATION DATE: 07/31/2007

EQUIPMENT DESCRIPTION:

CONVEYORIZED METAL PARTS & PRODUCTS COATING OPERATION CONSISTING OF ONE (1) 1.56 MMBTU/HR NATURAL GAS FIRED PRE-HEAT OVEN, ONE (1) EXEMPT 0.78 MMBTU/HR NATURAL GAS FIRED PRE-WASH OVEN, ONE (1) EXEMPT 0.78 MMBTU/HR NATURAL GAS FIRED CURING OVEN, AND TWO (2) JBI MODEL CIDB-2010-S SPRAY BOOTHS

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]
3. All painting shall be conducted in booth with filters in place, fan(s) operating, and doors closed. [District 2201 Rule]
4. The coating operation shall comply with Rule 4603 (Surface Coating of Metal Parts and Products). [District Rule 4603]
5. All fresh or spent coatings, adhesives, catalysts, thinners and solvents shall be stored in closed containers. Solvent laden cloth or paper shall be stored and disposed in closed non-absorbent containers. [District Rule 4603]
6. Until 11/14/02, VOC content of solvents used for clean-up and surface preparation, excluding cleaning of coating application equipment, shall not exceed 200 g/l (1.67 lb/gallon). [District Rule 4603]
7. Until 11/14/02, no materials containing VOC shall be used for spray equipment clean-up unless an enclosed system or equipment proven to be equally effective is used for cleaning. [District Rule 4603]
8. Only HVLP, electrostatic, electrodeposition, flow, roll, dip, brush or continuous coating application equipment shall be used, and the application equipment shall be operated in accordance with the manufacturer's recommendations. [District Rule 4603]
9. Permittee shall demonstrate that HVLP guns manufactured prior to 1/1/96 operate between 0.1 and 10 psig air atomizing pressure, by manufacturer's published technical material or by use of a certified air pressure tip gauge. [District Rule 4603]
10. VOC content of any coatings as applied, excluding water and exempt compounds, used for any metal parts or product shall not exceed any of the following limits: baked coating 275 g/l (2.3 lb/gal), air-dried coating: 340 g/l (2.8 lb/gal), air-dried dip coating of steel joists with coating viscosity, as applied, of more than 45.6 centistokes at 78 °F or an average dry-film thickness of greater than 2.0 millimeters: 340 g/l (2.8 lb/gal), air-dried dip coating of steel joists with coating viscosity, as applied, of less than or equal to 45.6 centistokes at 78 °F or an average dry-film thickness of less than or equal to 2.0 millimeters: 400 g/l (3.32 lb/gal). [District Rule 4603]
11. VOC content of baked specialty coatings as applied, excluding water and exempt compounds, used for metal parts or product shall not exceed any of the following limits: camouflage 360 g/l (3.0 lb/gal), extreme performance: 420 g/l (3.5 lb/gal), heat resistant: 360 g/l (3.0 lb/gal), high gloss: 360 g/l (3.0 lb/gal), high performance architectural: 420 g/l (3.5 lb/gal), high temperature: 420 g/l (3.5 lb/gal), metallic topcoat: 360 g/l (3.0 lb/gal), pretreatment wash primer: 420 g/l (3.5 lb/gal), silicone release: 420 g/l (3.5 lb/gal), solar absorbant: 360 g/l (3.0 lb/gal), and solid film lubricant: 880 g/l (7.3 lb/gal). [District Rule 4603]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. VOC content of air-dried specialty coatings as applied, excluding water and exempt compounds, used for metal parts or product shall not exceed any of the following limits: camouflage 420 g/l (3.5 lb/gal), extreme performance: 420 g/l (3.5 lb/gal), heat resistant: 420 g/l (3.5 lb/gal), high gloss: 420 g/l (3.5 lb/gal), high performance architectural: 420 g/l (3.5 lb/gal), high temperature: 420 g/l (3.5 lb/gal), metallic topcoat: 420 g/l (3.5 lb/gal), pretreatment wash primer: 420 g/l (3.5 lb/gal), silicone release: 420 g/l (3.5 lb/gal), solar absorbant: 420 g/l (3.5 lb/gal), and solid film lubricant: 880 g/l (7.3 lb/gal). [District Rule 4603]
13. Effective 11/15/02, cleaning activities that use solvents with a VOC content greater than 50 g/l (0.42 lb/gallon) shall be performed by one or more of the following methods: wipe cleaning; application of solvent from hand-held spray bottles from which solvents are dispensed without a propellant-induced force; non-atomized solvent flow method in which the cleaning solvent is collected in a container or a collection system which is closed except for solvent collection openings and, if necessary, openings to avoid excessive pressure build-up inside the container; or solvent flushing method in which the cleaning solvent is discharged into a container that is closed except for solvent collection openings and, if necessary, openings to avoid excessive pressure build-up inside the container. The discharged solvent from the equipment must be collected into containers without atomizing into the open air. The solvent may be flushed through the system by air or hydraulic pressure, or by pumping. [District Rule 4603]
14. Effective 11/15/02, the permittee shall not use materials with a VOC content greater than 50 g/l (0.42 lb/gallon) for spray equipment clean-up unless an enclosed system or equipment proven to be equally effective is used for cleaning. [District Rule 4603]
15. Effective 11/15/02 through 11/14/03, VOC content of solvents used shall not exceed any of the following limits: product cleaning during manufacturing process or surface preparation for coating application: 70 g/l (0.58 lb/gal), repair and maintenance cleaning (except, until June 30, 2005, cleaning of ultraviolet lamps used for the curing of ultraviolet coatings): 50 g/l (0.42 lb/gal), and cleaning of coating application equipment: 950 g/l (7.9 lb/gal) and solvent vapor pressure of 35 mm Hg at standard conditions. [District Rule 4603]
16. Effective 11/15/03, VOC content of solvents used shall not exceed any of the following limits: product cleaning during manufacturing process or surface preparation for coating application: 50 g/l (0.42 lb/gal), repair and maintenance cleaning (except, until June 30, 2005, cleaning of ultraviolet lamps used for the curing of ultraviolet coatings): 50 g/l (0.42 lb/gal), and cleaning of coating application equipment: 550 g/l (4.6 lb/gal). [District Rule 4603]
17. The VOC emissions due to the usage of coatings and solvents shall not exceed 174 pounds during any one day. [District Rule 2201]
18. The PM10 emissions due to the usage of coatings and solvents shall not exceed 3.7 pounds during any one day. [District Rule 2201]
19. The VOC emissions due to the usage of coatings and solvents shall not exceed 32,600 pounds during any one calendar year. [District Rule 2201]
20. The NOx emissions concentration due to the combustion of natural gas shall not exceed 0.1 lbs./MMBtu. [District Rule 2201]
21. The CO emissions concentration due to the combustion of natural gas shall not exceed 0.084 lbs./MMBtu. [District Rule 2201]
22. The VOC emissions concentration due to the combustion of natural gas shall not exceed 0.0055 lbs./MMBtu. [District Rule 2201]
23. The SOx emissions concentration due to the combustion of natural gas shall not exceed 0.00214 lbs./MMBtu. [District Rule 2201]
24. The PM10 emissions concentration due to combustion of natural gas shall not exceed 0.0076 lbs./MMBtu. [District Rule 2201]
25. Records shall be kept in accordance with Rule 4603 (Surface Coating of Metal Parts and Products). [District Rule 4603]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

26. Permittee shall maintain daily records of the following: quantity and type of coatings used, mix ratios of volume of components added to each coating, volume of coatings applied, VOC content of each coating as applied, and VOC content of each solvent. [District Rule 4603]
27. Effective 11/15/02 permittee shall keep the following records for solvent cleaning activities: manufacturers product data sheet or MSDS of solvents used, VOC content of solvents in g/l or lb/gal, and the type of cleaning activity for which each solvent is used. [District Rule 4603]
28. Maintain a daily record of the total quantity of VOC emitted in pounds from the use of coatings and solvents. [District Rule 2201 & 4603]
29. Maintain a record of the cumulative annual VOC emissions from the use of coatings and solvents in pounds. [District Rule 2201 & 1070]
30. Records shall be retained on-site for a minimum of five years and made available for District inspection upon request. [District Rule 4603]

These terms and conditions are part of the Facility-wide Permit to Operate.

Appendix IV
Draft ERC Certificates

San Joaquin Valley
Air Pollution Control District

Northern Regional Office • 4800 Enterprise Way • Modesto, CA 95356-8718

Emission Reduction Credit Certificate
N1062909-68-1

ISSUED TO: ANDERSEN RACK SYSTEMS, INC
ISSUED DATE: <DRAFT>
LOCATION OF REDUCTION: 1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

For VOC Reduction In The Amount Of:

Quarter 1	Quarter 2	Quarter 3	Quarter 4
7,335 lbs	7,335 lbs	7,335 lbs	7,335 lbs

Conditions Attached

Method Of Reduction

- Shutdown of Entire Stationary Source
 Shutdown of Emissions Units
 Other

Emissions reduction credits for the shutdown of the entire Anderson Rack Systems facility

Use of these credits outside the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) is not allowed without express written authorization by the SJVUAPCD.

Seyed Saadati, Executive Director / APCD

David Warner, Director of Permit Services

San Joaquin Valley
Air Pollution Control District

Northern Regional Office • 4800 Enterprise Way • Modesto, CA 95356-8718

Emission Reduction Credit Certificate
N1062909-68-4

ISSUED TO: ANDERSEN RACK SYSTEMS, INC
ISSUED DATE: <DRAFT>
LOCATION OF REDUCTION: 1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

For PM10 Reduction In The Amount Of:

Quarter 1	Quarter 2	Quarter 3	Quarter 4
300 lbs	303 lbs	306 lbs	306 lbs

Conditions Attached

Method Of Reduction

- Shutdown of Entire Stationary Source
 Shutdown of Emissions Units
 Other

Emissions reduction credits for the shutdown of the entire Anderson Rack Systems facility

Use of these credits outside the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) is not allowed without express written authorization by the SJVUAPCD.

Seyed Saadati, Executive Director / APCD

David Warner, Director of Permit Services



May 26, 2011

Bernardo Moreno
Hannibal Industries
Ref: Andersen Rack Systems, Inc.
3851 S. Santa Fe Ave
Los Angeles, CA 90058

RE: Notice of Final Action - Emission Reduction Credits
Project Number: N-1062909


Dear Mr. Moreno:

Enclosed is an invoice for the engineering evaluation fees pursuant to District Rule 3010. Please remit the amount owed, along with a copy of the attached invoice, within 60 days.

The ERC Certificates and a copy of the notice of final action will be mailed to you under a separate correspondence.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Rupri Gill at (209) 557-6400.

Sincerely,



Rupri Gill
Permit Services Manager

DW:rjd

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

Due Date
6/27/2011

Amount Due
\$ 4,740.00

Amount Enclosed

ERCFEE N1062909
2368 N86193 5/26/2011

RETURN THIS TOP PORTION ONLY WITH REMITTANCE TO:

HANNIBAL INDUSTRIES, INC.
3851 S. SANTA FE AVE.
LOS ANGELES, CA 90058

SJVAPCD
4800 Enterprise Way
Modesto, CA 95356-8718

Thank You!



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

SJVAPCD Tax ID: 77-0262563

ANDERSEN RACK SYSTEMS, INC
1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

Facility ID
N2368

Invoice Date
5/26/2011

Invoice Number
N86193

Invoice Type
Project: N1062909

PROJECT NUMBER: 1062909

APPLICATION FILING FEES	\$ 650.00
ENGINEERING TIME FEES	\$ 4,740.00
TOTAL FEES	\$ 5,390.00
LESS PREVIOUSLY PAID PROJECT FEES APPLIED TO THIS INVOICE	(\$ 650.00)
PROJECT FEES DUE (Enclosed is a detailed statement outlining the fees for each item.)	\$ 4,740.00

San Joaquin Valley Air Pollution Control District
4800 Enterprise Way, Modesto, CA 95356-8718, (209) 557-6400, Fax (209) 557-6475

Invoice Detail

Facility ID: N2368

ANDERSEN RACK SYSTEMS, INC
 1821 E CHARTER WAY
 A SUBSIDIARY OF HANNIBAL INDUSTRIES
 STOCKTON, CA 95205

Invoice Nbr: N86193
 Invoice Date: 5/26/2011
 Page: 1

Application Filing Fees

Project Nbr	Permit Number	Description	Application Fee
N1062909	N-2368-1062909-0	Emission Reduction Credit Banking Evaluation Fee	\$ 650.00

Total Application Filing Fees: \$ 650.00

Engineering Time Fees

Project Nbr	Quantity	Rate	Description	Fee
N1062909	53.9 hours	\$ 100.00 /h	Standard Engineering Time	\$ 5,390.00
			Less Credit For Application Filing Fees	(\$ 650.00)
			Standard Engineering Time SubTotal	\$ 4,740.00

Total Engineering Time Fees: \$ 4,740.00

Rick Dyer

From: Song Thao
Sent: Thursday, May 26, 2011 4:40 PM
To: Rick Dyer
Subject: RE: Final ERC letters - N1062909, N-2368

Hi Rick, just wanted to let you know that this will print June 2 because of the holiday.

From: Rick Dyer
Sent: Thursday, May 26, 2011 8:09 AM
To: Cristina Montoya; Diane Gaitan; Song Thao
Subject: Final ERC letters - N1062909, N-2368

Hi All,

Attached is the Final ERC packet for project N1062909, N-2369, Andersen Rack Systems.
We have printed and will send the invoice out today.
Please call me with any questions/issues.

Rick Dyer
x6458



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT



May 26, 2011

Bernardo Moreno
Hannibal Industries
Ref: Andersen Rack Systems, Inc.
3851 S. Santa Fe Ave
Los Angeles, CA 90058

COPY

RE: Notice of Final Action - Emission Reduction Credits
Project Number: N-1062909


Dear Mr. Moreno:

Enclosed is an invoice for the engineering evaluation fees pursuant to District Rule 3010. Please remit the amount owed, along with a copy of the attached invoice, within 60 days.

The ERC Certificates and a copy of the notice of final action will be mailed to you under a separate correspondence.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Rupi Gill at (209) 557-6400.

Sincerely,



Rupi Gill
Permit Services Manager

DW:rjd

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

Due Date
6/27/2011

Amount Due
\$ 4,740.00

Amount Enclosed

ERCFEE N1062909
2368 N86193 5/26/2011

RETURN THIS TOP PORTION ONLY, WITH REMITTANCE TO:

HANNIBAL INDUSTRIES, INC.
3851 S. SANTA FE AVE.
LOS ANGELES, CA 90058

SJVAPCD
4800 Enterprise Way
Modesto, CA 95356-8718

Thank You!



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

SJVAPCD Tax ID: 77-0262563

ANDERSEN RACK SYSTEMS, INC
1821 E CHARTER WAY
A SUBSIDIARY OF HANNIBAL INDUSTRIES
STOCKTON, CA 95205

Facility ID
N2368

Invoice Date
5/26/2011

Invoice Number
N86193

Invoice Type
Project: N1062909

PROJECT NUMBER: 1062909

APPLICATION FILING FEES	\$ 650.00
ENGINEERING TIME FEES	\$ 4,740.00
TOTAL FEES	\$ 5,390.00
LESS PREVIOUSLY PAID PROJECT FEES APPLIED TO THIS INVOICE	(\$ 650.00)
PROJECT FEES DUE (Enclosed is a detailed statement outlining the fees for each item.)	\$ 4,740.00

San Joaquin Valley Air Pollution Control District
4800 Enterprise Way, Modesto, CA 95356-8718, (209) 557-6400, Fax (209) 557-6475

Invoice Detail

Facility ID: N2368

ANDERSEN RACK SYSTEMS, INC
 1821 E CHARTER WAY
 A SUBSIDIARY OF HANNIBAL INDUSTRIES
 STOCKTON, CA 95205

Invoice Nbr: N86193
 Invoice Date: 5/26/2011
 Page: 1

Application Filing Fees

Project Nbr	Permit Number	Description	Application-Fee
N1062909	N-2368-1062909-0	Emission Reduction Credit Banking Evaluation Fee	\$ 650.00
Total Application Filing Fees:			\$ 650.00

Engineering Time Fees

Project Nbr	Quantity	Rate	Description	Fee
N1062909	53.9 hours	\$ 100.00 /h	Standard Engineering Time	\$ 5,390.00
			Less Credit For Application Filing Fees	(\$ 650.00)
			Standard Engineering Time SubTotal	<u>\$ 4,740.00</u>
Total Engineering Time Fees:				\$ 4,740.00

Rick Dyer

From: Rick Dyer
Sent: Monday, April 07, 2008 3:36 PM
To: 'bmoreno@e-hii.com'
Subject: Missing data sheets

Hi Bernardo,

I am missing the Maclac data sheets for the following coatings:

QE-126, QE-135, QE-138
QE-442, QE-443, QE-646, QE-468
QE-542, QE-544, QE-545, QE-552, QE-580
QE-617, QE-626
QE-733, QE-735
QE-852, QE-854, QE-862, QE-863
QE-915, QE-954.

I am also missing the data sheets for:
VS-001, VS-002

The Maclac data sheets are very good since they show the VOC content and the density and % solids for each coating. That data is needed for VOC and PM10 emissions credits calculations.

Once I receive the data sheets, I can complete the calculations.
Thanks,

Rick Dyer
AQE
SJVAPCD
209-557-6458



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

COPY

March 19, 2008

Bernardo Moreno
Hannibal Industries, Inc.
RE: Andersons Rack Systems, Inc.
3851 S.Santa Fe Ave.
Los Angeles, CA 90058

**Re: Notice of Receipt of Complete Application - Emission Reduction Credits
Project Number: N-1062906**

Dear Mr. Moreno:

The District has completed a preliminary review of your application for Emission Reduction Credits (ERCs) resulting from the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA.

Based on this preliminary review, the application appears to be complete. However, during processing of your application, the District may request additional information to clarify, correct, or otherwise supplement, the information on file.

Pursuant to District Rule 3060, your application may be subject to an hourly Engineering Evaluation Fee. If the applicable fees exceed the submitted application filing fee, the District will notify you at the conclusion of our review.

Thank you for your cooperation. Should you have any questions, please contact Mr. Jim Swaney at (209) 557-6400.

Sincerely,

David Warner
Director of Permit Services

Jim Swaney, P.E.
Permit Services Manager

DW:rd

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061
www.valleyair.org

Southern Region
2700 M Street, Suite 275
Bakersfield, CA 93301-2373
Tel: (661) 326-6900 FAX: (661) 326-6985



February 23, 2007

Bernardo Moreno
Hannibal Industries, Inc.
RE: Andersen Rack Systems, Inc.
3851 S. Sante Fe Ave.
Los Angeles, CA 90058

Re: Notice of Incomplete Application
Project Number: N-1062909

Dear Mr. Moreno:

The District has completed a preliminary review of your application for Emission Reduction Credits (ERCs) resulting from the shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA.

Your application remains incomplete and the following information is required prior to further processing:

- ✓ 1. Please submit Material Safety Data Sheets (MSDS) for each coating and solvent used at the facility. Note: pursuant to the coating usage records submitted, the submitted MSDS do not match the coatings that were used at the facility.
- ✓ 2. Please submit the type and usage quantity for each coating and solvent used at the facility for the period of January 1, 2006 through June 30, 2006. Note: the submitted usage information for 2006 did not list each coating and solvent, only a monthly total.
3. The VOC content in lb/gal or grams/liter (both less water and exempt compounds and as-applied) for each coating and solvent used at the facility.
4. The density in lb/gal or grams per liter of each coating used at the facility.
5. The solids content in lb/gal or percent by weight (if spray application is used) for each coating used at the facility.

In response, please refer to the above project number, and send to the attention of Mr. Rick Dyer.

Please submit the requested information within 90 days. The District will not be able to process your application until this information is received. Please note that the District's

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061
www.valleyair.org

Southern Region
2700 M Street, Suite 275
Bakersfield, CA 93301-2373
Tel: (661) 326-6900 FAX: (661) 326-6985


Mr. Moreno
Page 2
February 23, 2007

Small Business Assistance (SBA) office is available to assist you in this matter. You may contact an SBA engineer at (209) 557-6446.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Rick Dyer at (209) 557-6458.

Sincerely,

David Warner
Director of Permit Services

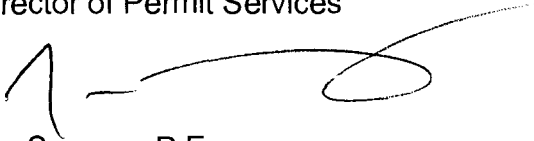A handwritten signature in black ink, appearing to read 'Jim Swaney', with a long horizontal flourish extending to the right.

Jim Swaney, P.E.
Permit Services Manager

DW:rd

TELEPHONE RECORD FORM

Project # N1062909

Date/Time/
Initials

Names of All Persons Involved and Conversation Record

11/1/06 RD	Discussed project with Bernardo Moreno (323)552-3146, of Hannibal Industries (parent of Anderson Pack). He told me that at this time they were only looking to bank VOC ERCs. They are evaluating whether to bank other emissions from the natural gas usage, but are uncertain. He told me the plant was in normal operation upto the shutdown and so the two year prior to the shutdown would be representative of normal conditions. I informed Mr Moreno that if the 2 years proceeding the shutdown were not representative of normal operations, he would need to send 5 years of records and the District would select 2 consecutive years that represented normal operations.
1/16/07 RD	Received a call from Bernardo Moreno (323)552-3146 from Hannibal Industries. We discussed the incomplete Application letter I sent on 11/6/06. He said he is still gathering information and will send me some information for review, shortly.
2/1/07 RD	Confirmed with Bernardo Moreno (323)552-3146 that this ERC banking project is for VOC's only. They will not pursue ERCs for natural gas combustion and are submitting only records of their painting operations.
2/21/07 RD	Called Bernardo Moreno (323)552-3146 to discuss an incomplete letter that I am sending him. Left a message for him to return my call.
2/13/08 RD	Called Berardo Moreno (323)552-3146 to discuss the project status with him & find out if they will be pursuing the project. Left a message to return my call.

TELEPHONE RECORD FORM

Project # N1062909

Date/Time/

Initials

Names of All Persons Involved and Conversation Record

2/19/08 RQ	<p>Called Bernardo Moreno (323)552-3146 to discuss project. He was not certain if they are going to pursue the project. He will talk with a fellow worker on Thursday when he returns. Mr. Moreno said he will call me this Thursday (2/21/08) after they decide. I reminded him to look at the incomplete letter for the project and that the District is very exacting in its determination and awarding of ERCs. They must have the necessary information for the District's evaluation.</p>
2/26/08 RQ	<p>Returned a call to Bernardo Moreno to discuss project. Left a message for him to return my call.</p>
3/3/08 RQ	<p>Returned a call to Bernardo Moreno. Left a message for him to return my call.</p>
3/3/08 ^{RQ} _{5:00 PM}	<p>Reviewed last incomplete letter & needed information with applicant. He said he will start sending the information to me tomorrow.</p>
3/17/08 RQ	<p>Called Bernardo Moreno and requested that he send me the product data sheets for QE-850 & QE-515 coatings. They were not included in the previous listings. Mr Moreno also said that if we could include PMA ERCs on this project, he wants to include them (as well as VOC ERCs). He said he will get the missing data sheets to me. I said I will continue with the project. If he does not provide the information for those coatings (or any others found to be missing) we will not include those coatings in the ERC evaluation.</p>
↓	↓

TELEPHONE RECORD FORM

3

Project # N106 7909

**Date/Time/
Initials**

Names of All Persons Involved and Conversation Record

4/17/08 RJS	Called Bernardo Moreno (323) 552-3146 to check the status of the missing coating data sheets. He said he would have the information sent to me in the next day or so.
5/1/08 RJS	Called Valspar (1-602-332-7371) to get info (VOC) on Augaspar 420 High Gloss AGN Green enamel. Left a message with Ryan McBloughlin.
5/1/08 RJS	Called MAELAC, John Davis to discuss the technical data sheets for the missing sheets for some of the coatings. He said he might be able to re-create some approximate VOC & PM information from their records. He would need authorization from Mike McGlennon. I called Mike McGlennon (same # 415-552-0311) & left a message to call me back.
5/1/08 RJS	Discussed project with John Davis @ MAELAC. He said he will prepare a product data sheet for each of the different color coatings. The info will be an average for all of the coatings of the same color. This will provide a close approximation for the VOC info we need. He plans to get the information to me by 5/5/08. Note, the product data sheets did not always contain the info needed.
5/16/2011 RJS	Confirmed with EPA, Laura Yannayon, (415) 972-3534, that the EPA had no comments.
5/16/2011 RJS	Called ARB, 916-327-5932, Art Diamond, to confirm ARB had no comments. Left a message to return my call.



San Joaquin Valley
Air Pollution Control District

COPY

November 6, 2006

Bernardo Moreno
Hannibal Industries, Inc.
RE: Andersen Rack Systems, Inc.
3851 S. Sante Fe Ave.
Los Angeles, CA 90058

Re: Notice of Incomplete Application
Project Number: N-1062909

Dear Mr. Moreno:

The District has received your application to bank Emission Reduction Credits (ERCs) resulting from shutdown of the steel storage systems manufacturing operation, at 1821 E Charter Way, Stockton, CA. Based on our preliminary review, the application has been determined to be incomplete. The following information is required prior to further processing:

1. Please submit monthly operational records for the Conveyorized Metal Parts and Products Coating Operation (permit unit N-2368-1) for the eight calendar quarters preceding the quarter in which the facility was shutdown. These monthly records will be used to quantify the actual emissions from your facility. The records should include:
 - The type and usage quantity of each coating and solvent used at the facility.
 - The VOC content in lb/gal or grams/liter (both less water and exempt compounds and as-applied) for each coating and solvent used at the facility.
 - The density in lb/gal or grams per liter of each coating used at the facility.
 - The solids content in lb/gal or percent by weight (if spray application is used) for each coating used at the facility.
 - The Material Safety Data Sheet for each coating and solvent used at the facility.
 - The natural gas consumption of the permitted curing oven. If the permitted oven does not have a dedicated fuel meter, the fuel consumption of all non-permitted equipment such as the pre-heat oven, the pre-wash oven, facility water heaters, and space heaters must be deducted from the facility's total fuel consumption.

In response, please refer to the above project number, and send to the attention of Mr. Rick Dyer.

Seyed Sadredin
Executive Director / Air Pollution Control Officer

Northern Region Office
4800 Enterprise Way
Modesto, CA 95356-8718
(209) 557-6400 • FAX (209) 557-6475

Central Region Office
1990 East Gettysburg Avenue
Fresno, CA 93726-0244
(559) 230-6000 • FAX (559) 230-6061
www.valleyair.org

Southern Region Office
2700 M Street, Suite 275
Bakersfield, CA 93301-2373
(661) 326-6900 • FAX (661) 326-6985

Mr. Moreno
Page 2
November 6, 2006

Please submit the requested information within 90 days. The District will not be able to process your application until this information is received. Please note that the District's Small Business Assistance (SBA) office is available to assist you in this matter. You may contact an SBA engineer at (209) 557-6446.

Per your written request, dated September 22, 2006, to cancel all permits at this facility, Permit To Operate N-2368-1-3 has been deleted. There are no permits currently active with the San Joaquin Valley Unified Air Pollution Control District for this facility.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Rick Dyer at (209) 557-6458.

Sincerely,

David Warner
Director of Permit Services

A handwritten signature in black ink, appearing to read 'Jim Swaney', with a long, sweeping horizontal stroke extending to the right.

Jim Swaney, P.E.
Permit Services Manager
DW:rd

c: Compliance – Jami Aggers
Administration

HANNIBAL

Industries Inc.

3851 S. Santa Fe Ave. Los Angeles, CA 90058 phone (323)-588-4261 fax 323-589-5640

RECEIVED

From: Bernardo Moreno
Engineering Manager

SEP 25 2005

To: Jim Swaney
Permit Services Department Manager at SJVACD Northern Region

SJVAPCD
NORTHERN REGION

Purpose: Cancellation of Permit to Operate

Date: September 22, 2006

Mr. Swaney;

I would like to inform you that Anderson Rack Systems located at 1821 E. Charter Way in Stockton CA 95205 shut down its operations on September 8th, 2006. Anderson Rack Systems with facility N-2368 was a pallet rack and cantilever manufacturing plant described as "METAL PARTS AND PRODUCTS COATINGS" in the Permit to Operate issued by SJVUAPCD with expiration date 07/31/07. Anderson Rack Systems water based wet paint line with Permit Unit N-2368-1-3 and expiration date 07/31/07 was last utilized on 07/28/06.

I am requesting the cancellation of all permits issued by the SJVUAPCD to this facility location.

I am in the process of filling out the application for Emission Reduction Credits (ERC) pursuant to District Rule 2301.

Please, let me know if there is anything else I have to do concerning this matter.

Thanks in advance for your help.

Bernardo Moreno

Bernardo Moreno 09-22-06

HANNIBAL industries inc.

3851 S. Santa Fe Ave. Los Angeles, CA 90058 323-588-4261 fax 323-589-5640

RECEIVED

AUG 23 2006

SJVAPCD
NORTHERN REGION

August 11, 2006

SJ COUNTY VALLEY UNIFIED
4230 KIERNAN AVENUE STE 130
MODESTO CA 95356

Dear Sir or Madam:


On July 5, 2006 Hannibal Industries (DBA **Andersen Rack**) announced to its employees at 1821 Charter Way in Stockton, CA that operations at the facility would be permanently closed on September 8, 2006. In compliance with the California WARN Act, state, county and city officials were also notified of Hannibal Industries (DBA **Andersen Rack**) action that same day.

In light of that announcement, Hannibal Industries Inc. (DBA **Andersen Rack**) is hereby informing you that as of September 1st 2006 your company will need to forward any outstanding invoices it has with **Andersen Rack** to:

Hannibal Industries Inc.
3851 South Santa Fe Avenue
Los Angeles CA 90058

Should you have any questions please contact John Ewing at 323.513.1211.

Best regards,

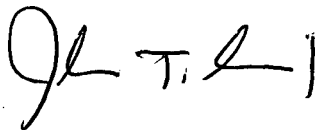

John Ewing
Corporate Controller
Hannibal Industries Inc. (DBA Andersen Rack)
323.513.1211
jewing@e-hii.com

#2365

HANNIBAL

industries inc.

3851 S. Santa Fe Ave. Los Angeles, CA 90058 323-588-4261 fax 323-589-5640



RECEIVED

AUG 22 2006

SJVAPCD
NORTHERN REGION

August 11, 2006

S.J. VALLEY UNIFIED APCD
4230 KIERNAN AVENUE
MODESTO CA 95356 9321

Dear Sir or Madam:

On July 5, 2006 Hannibal Industries (DBA **Andersen Rack**) announced to its employees at 1821 Charter Way in Stockton, CA that operations at the facility would be permanently closed on September 8, 2006. In compliance with the California WARN Act, state, county and city officials were also notified of Hannibal Industries (DBA **Andersen Rack**) action that same day.

In light of that announcement, Hannibal Industries Inc. (DBA **Andersen Rack**) is hereby informing you that as of September 1st 2006 your company will need to forward any outstanding invoices it has with **Andersen Rack** to:

Hannibal Industries Inc.
3851 South Santa Fe Avenue
Los Angeles CA 90058

Should you have any questions please contact John Ewing at 323.513.1211.

Best regards,

John Ewing
Corporate Controller
Hannibal Industries Inc. (DBA Andersen Rack)
323.513.1211
jewing@e-hii.com

#2368

San Joaquin Valley Air Pollution Control District

Application for



EMISSION REDUCTION CREDIT (ERC)

CONSOLIDATION OF ERC CERTIFICATES

1. ERC TO BE ISSUED TO: <u>Hannibal Industries Inc.</u>	Facility ID: <u>N - 2368</u> (if known)																																			
2. MAILING ADDRESS: Street/P.O. Box: <u>3851 S. Santa Fe ave.</u> City: <u>Los Angeles</u> State: <u>CA</u> Zip Code: <u>90058</u>																																				
3. LOCATION OF REDUCTION: Street: <u>1821 E. charter way</u> City: <u>Stockton CA 95205</u> _____/4 SECTION _____ TOWNSHIP _____ RANGE _____	4. DATE OF REDUCTION: <u>July 28th 2006</u>																																			
5. PERMIT NO(S): <u>N-2368-1-3</u> EXISTING ERC NO(S): _____																																				
6. METHOD RESULTING IN EMISSION REDUCTION: <input checked="" type="checkbox"/> SHUTDOWN <input type="checkbox"/> RETROFIT <input type="checkbox"/> PROCESS CHANGE <input type="checkbox"/> OTHER DESCRIPTION: _____ (Use additional sheets if necessary)																																				
7. REQUESTED ERCs (In Pounds Per Calendar Quarter):																																				
<table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;"></th> <th style="width: 15%;">VOC</th> <th style="width: 15%;">NOx</th> <th style="width: 15%;">CO</th> <th style="width: 15%;">PM10</th> <th style="width: 15%;">SOx</th> <th style="width: 15%;">OTHER</th> </tr> </thead> <tbody> <tr> <td>1ST QUARTER</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2ND QUARTER</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3RD QUARTER</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4TH QUARTER</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			VOC	NOx	CO	PM10	SOx	OTHER	1ST QUARTER							2ND QUARTER							3RD QUARTER							4TH QUARTER						
	VOC	NOx	CO	PM10	SOx	OTHER																														
1ST QUARTER																																				
2ND QUARTER																																				
3RD QUARTER																																				
4TH QUARTER																																				
8. SIGNATURE OF APPLICANT: <u>Bernardo Moreno</u>	TYPE OR PRINT TITLE OF APPLICANT: <u>Engineering Manager</u>																																			
9. TYPE OR PRINT NAME OF APPLICANT: <u>Bernardo Moreno</u>	DATE: <u>09-14-06</u> TELEPHONE NO: <u>(323) 552 3146</u>																																			

FOR APCD USE ONLY: 10/13/06

<div style="text-align: center; font-size: 2em; font-weight: bold; border: 1px solid black; padding: 5px;">RECEIVED</div> <div style="text-align: center; font-weight: bold;">OCT 16 2006</div> <div style="text-align: center; font-weight: bold;">SJVAPCD NORTHERN REGION</div>	FILING FEE RECEIVED: \$ <u>650⁰⁰ 74727</u> DATE PAID: _____ PROJECT NO.: <u>N1062909</u> FACILITY ID.: <u>N2368</u>
---	--

San Joaquin Valley Air Pollution Control District

Application for



EMISSION REDUCTION CREDIT (ERC)

CONSOLIDATION OF ERC CERTIFICATES

1. ERC TO BE ISSUED TO: <u>Hannibal Industries Inc.</u>		Facility ID: <u>N-2368</u> (if known)				
2. MAILING ADDRESS: Street/P.O. Box: <u>3851 S. Santa Fe ave.</u>						
City: <u>Los Angeles</u>		State: <u>CA</u> Zip Code: <u>90058</u>				
3. LOCATION OF REDUCTION: Street: <u>1821 E. charter way</u> City: <u>Stockton CA 95205</u> _____/4 SECTION _____ TOWNSHIP _____ RANGE _____		4. DATE OF REDUCTION: <u>July 28th 2006</u>				
5. PERMIT NO(S): <u>N-2368-1-3</u> EXISTING ERC NO(S):						
6. METHOD RESULTING IN EMISSION REDUCTION: <input checked="" type="checkbox"/> SHUTDOWN <input type="checkbox"/> RETROFIT <input type="checkbox"/> PROCESS CHANGE <input type="checkbox"/> OTHER DESCRIPTION: <div style="text-align: right;">(Use additional sheets if necessary)</div>						
7. REQUESTED ERCs (In Pounds Per Calendar Quarter):						
	VOC	NOx	CO	PM10	SOx	OTHER
1ST QUARTER						
2ND QUARTER						
3RD QUARTER						
4TH QUARTER						
8. SIGNATURE OF APPLICANT: <u>Bernardo Moreno</u>				TYPE OR PRINT TITLE OF APPLICANT: <u>Engineering Manager</u>		
9. TYPE OR PRINT NAME OF APPLICANT: <u>Bernardo Moreno</u>				DATE: <u>09-14-06</u>	TELEPHONE NO: <u>(323) 552 3146</u>	

FOR APCD USE ONLY:

<p>RECEIVED DATE STAMP <u>Oct 16 2006</u> SJVAPCD NORTHERN REGION</p>	<p style="text-align: right;">10-13-06</p> <p>FILING FEE RECEIVED: \$ _____</p> <p>DATE PAID:</p> <p>PROJECT NO.: <u>N1062909</u> FACILITY ID.: <u>N2368</u></p>
--	---

HANNIBAL

industries inc.



3851 S. Santa Fe Ave. Los Angeles, CA 90058 phone (323)-588-4261 fax 323-589-5640

From: Bernardo Moreno
Engineering Manager

To: Jim Swaney
Permit Services Department Manager at SJVACD Northern Region

RECEIVED

OCT 16 2006

SJVACD
NORTHERN REGION

Purpose: ERC Application

Date: October 10, 2006

Mr. Swaney;

Please, see the attached application for ERC credits. The application does not show the pounds per calendar quarter because I am still waiting for the records from Stockton, which I will receive within two weeks. I will send them to you as soon as I get them.

Thanks for your help.

Bernardo Moreno

Bernardo Moreno 10/10/06

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-113 ANDERSEN OFF WHITE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.75	Coating VOC:	303 G/L	2.53 Lb/gal
Solids by Weight %:	37.98	Material VOC:	119 G/L	0.99 Lb/gal
Solids by Volume %:	25.46	VOC Weight Ratio	=0.26 Lb VOC/Lb Solid	
Coverage @ 1 mil:	408 SqFt./Gal.	Gloss	= 80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-117 LOZIER ALMOND LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.57	Coating VOC:	314 G/L	2.62 Lb/gal
Solids by Weight %:	36.34	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	24.87	VOC Weight Ratio	=0.28 Lb VOC/Lb Solid	
Coverage @ 1 mil:	398 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-119 ANDERSEN WHITE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.74	Coating VOC:	303 G/L	2.53 Lb/gal
Solids by Weight %:	37.94	Material VOC:	119 G/L	0.99 Lb/gal
Solids by Volume %:	25.46	VOC Weight Ratio =	0.26 Lb VOC/Lb Solid	
Coverage @ 1 mil:	408 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-126 INTERLAKE WHITE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	9.72	Coating VOC:	299 G/L	2.49 Lb/gal
Solids by Weight %:	37.96	Material VOC:	118 G/L	0.98 Lb/gal
Solids by Volume %:	25.74	VOC Weight Ratio	=0.26 Lb VOC/Lb Solid	
Coverage @ 1 mil:	412 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable. Clean-up may usually be accomplished with water or a water-detergent combination. Use only with adequate ventilation. Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product.

Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-132 ANDERSEN WHITE ENAMEL

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color). This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	9.95	Coating VOC:	199 G/L	1.66 Lb/gal.
Solids by Weight %:	39.59	Material VOC:	60 G/L	0.50 Lb/gal
Solids by Volume %:	26.77	VOC Weight Ratio =13.00 Lb VOC/Lb Solid		
Coverage @ 1 mil:	429 SqFt./Gal.	Gloss = 80 @ 60 Deg		
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-135 & QE-138 AQUATEK ANDERSEN WHITE ENAMELS

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color) . This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Note: This data is an average of the two products listed

Weight per Gallon:	9.87	Coating VOC:	213 G/L	1.78 Lb/gal
Solids by Weight %:	38.79	Material VOC:	60 G/L	0.50 Lb/gal
Solids by Volume %:	26.40	VOC Weight Ratio =	0.13 Lb VOC/Lb Solid	
Coverage @ 1 mil:	423 SqFt./Gal.	Gloss =	80 @ 60 Deg	
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-147 DESIGNER WHITE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.67	Coating VOC:	296 G/L	2.47 Lb/gal
Solids by Weight %:	36.02	Material VOC:	108 G/L	0.90 Lb/gal
Solids by Volume %:	23.97	VOC Weight Ratio =	0.25 Lb VOC/Lb Solid	
Coverage @ 1 mil:	384 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-415 VISTA GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.03	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	31.37	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.56	VOC Weight Ratio	=0.35 Lb VOC/Lb Solid	
Coverage @ 1 mil:	377 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-424 JOHNS IMPORT GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.95	Coating VOC:	321 G/L	2.68 Lb/gal
Solids by Weight %:	30.68	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.55	VOC Weight Ratio =	0.36 Lb VOC/Lb Solid	
Coverage @ 1 mil:	377 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-432 INTERLAKE GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.20	Coating VOC:	324 G/L	2.70 Lb/gal
Solids by Weight %:	31.88	Material VOC:	118 G/L	0.98 Lb/gal
Solids by Volume %:	22.68	VOC Weight Ratio =	0.33 Lb VOC/Lb Solid	
Coverage @ 1 mil:	363 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-441 MCCOY GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.56	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	25.11	Material VOC:	115 G/L	0.96 Lb/gal
Solids by Volume %:	20.84	VOC Weight Ratio	=0.44 Lb VOC/Lb Solid	
Coverage @ 1 mil:	334 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-442 & QE-443 ANDERSEN GREENS AQUATEK

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color) . This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Note: Data is average for the two products listed

Weight per Gallon:	8.92	Coating VOC:	225 G/L	1.88 Lb/gal
Solids by Weight %:	29.85	Material VOC:	60 G/L	0.50 Lb/gal
Solids by Volume %:	23.20	VOC Weight Ratio	=0.18 Lb VOC/Lb Solid	
Coverage @ 1 mil:	372 SqFt./Gal.	Gloss = 80 @ 60 Deg		
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-466 AGN STANDARD GREEN LOW VOC AQUATEK ENAMEL

§ 464

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.95	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	30.55	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.36	VOC Weight Ratio =	0.36 Lb VOC/Lb Solid	
Coverage @ 1 mil:	374 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-468 ANDERSEN OFF GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.64	Coating VOC:	291 G/L	2.43 Lb/gal
Solids by Weight %:	36.05	Material VOC:	107 G/L	0.89 Lb/gal
Solids by Volume %:	24.26	VOC Weight Ratio =	0.25 Lb VOC/Lb Solid	
Coverage @ 1 mil:	389 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-474 VITMAR GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.28	Coating VOC:	299 G/L	2.49 Lb/gal
Solids by Weight %:	32.95	Material VOC:	107 G/L	0.89 Lb/gal
Solids by Volume %:	23.42	VOC Weight Ratio =	0.29 Lb VOC/Lb Solid	
Coverage @ 1 mil:	375 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-478 LODI METAL TECH GREEN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.93	Coating VOC:	305 G/L	2.54 Lb/gal
Solids by Weight %:	29.78	Material VOC:	108 G/L	0.90 Lb/gal
Solids by Volume %:	22.80	VOC Weight Ratio =	0.33 Lb VOC/Lb Solid	
Coverage @ 1 mil:	365 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

55 SERIES QE-510 CATERPILLAR YELLOW ENAMEL AQUATEK

Description

High quality fast dry acrylic alkyd waterborne enamel suitable for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.05	Coating VOC:	340 G/L	2.83 Lb/gal
Solids by Weight %:	32.60	Material VOC:	159 G/L	1.33 Lb/gal
Solids by Volume %:	24.41	VOC Weight Ratio =	0.44 Lb VOC/Lb Solid	
Coverage @ 1 mil:	391 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	25-35 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system. For maximum corrosion prevention we recommend using Maclac Aquatek Waterborne Primers. No Maclac paint product has ever contained any lead. But if you are preparing previously painted surfaces with unknown paints please observe the following precautions. Warning! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NOISH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Mixing & Thinning

Aquatek should be applied at the viscosity as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or waterborne compatible electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes.

Performance & Durability

Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "55MSD Aquatek Waterborne Enamels" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-515 YARDBIRD YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	9.15	Coating VOC:	310 G/L	2.58 Lb/gal
Solids by Weight %:	32.32	Material VOC:	115 G/L	0.96 Lb/gal
Solids by Volume %:	23.78	VOC Weight Ratio	=0.32 Lb VOC/Lb Solid	
Coverage @ 1 mil:	381 SqFt./Gal.	Gloss	= 80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable. Clean-up may usually be accomplished with water or a water-detergent combination. Use only with adequate ventilation. Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product.

Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-522 ANDERSEN ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.17	Coating VOC:	308 G/L	2.57 Lb/gal
Solids by Weight %:	33.31	Material VOC:	119 G/L	0.99 Lb/gal
Solids by Volume %:	24.70	VOC Weight Ratio =	0.32 Lb VOC/Lb Solid	
Coverage @ 1 mil:	396 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-535 INTERLAKE ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.96	Coating VOC:	315 G/L	2.63 Lb/gal
Solids by Weight %:	31.45	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	24.36	VOC Weight Ratio	=0.35 Lb VOC/Lb Solid	
Coverage @ 1 mil:	390 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-542 : QE-544 : QE-545 & QE-522 ANDERSEN ORANGES & YELLOWS

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color) . This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Note: data represents the average of the four listed products

Weight per Gallon:	9.18	Coating VOC:	214 G/L	1.78 Lb/gal
Solids by Weight %:	32.55	Material VOC:	64 G/L	0.53 Lb/gal
Solids by Volume %:	25.25	VOC Weight Ratio =	0.17 Lb VOC/Lb Solid	
Coverage @ 1 mil:	405 SqFt./Gal.	Gloss =	80 @ 60 Deg	
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-566 AOR STANDARD ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.27	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	39.19	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	29.91	VOC Weight Ratio =	0.27 Lb VOC/Lb Solid	
Coverage @ 1 mil:	479 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-569 ANDERSEN YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.34	Coating VOC:	313 G/L	2.61 Lb/gal
Solids by Weight %:	37.20	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	27.46	VOC Weight Ratio =	0.28 Lb VOC/Lb Solid	
Coverage @ 1 mil:	440 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-570 LODI METAL TECH ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.71	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	28.98	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.63	VOC Weight Ratio =	0.39 Lb VOC/Lb Solid	
Coverage @ 1 mil:	379 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-572 PANTONE YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.37	Coating VOC:	306 G/L	2.55 Lb/gal
Solids by Weight %:	37.85	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	28.05	VOC Weight Ratio =	0.28 Lb VOC/Lb Solid	
Coverage @ 1 mil:	449 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-574 INCA YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.26	Coating VOC:	312 G/L	2.60 Lb/gal
Solids by Weight %:	36.76	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	27.58	VOC Weight Ratio =	0.29 Lb VOC/Lb Solid	
Coverage @ 1 mil:	442 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-576 MONARCH ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.81	Coating VOC:	324 G/L	2.70 Lb/gal
Solids by Weight %:	29.20	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.08	VOC Weight Ratio =	0.38 Lb VOC/Lb Solid	
Coverage @ 1 mil:	370 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-579 DORFMAN ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.22	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	36.99	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	27.95	VOC Weight Ratio =	0.29 Lb VOC/Lb Solid	
Coverage @ 1 mil:	448 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-580 SAFETY YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	9.27	Coating VOC:	286 G/L	2.38 Lb/gal
Solids by Weight %:	36.82	Material VOC:	119 G/L	0.99 Lb/gal
Solids by Volume %:	27.78	VOC Weight Ratio	=0.29 Lb VOC/Lb Solid	
Coverage @ 1 mil:	445 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable. Clean-up may usually be accomplished with water or a water-detergent combination. Use only with adequate ventilation. Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product.

Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-581 ANDERSEN SUMMIT YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.25	Coating VOC:	321 G/L	2.68 Lb/gal
Solids by Weight %:	35.83	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	26.67	VOC Weight Ratio =	0.30 Lb VOC/Lb Solid	
Coverage @ 1 mil:	427 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-582 FRAZIER YELLOW LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.04	Coating VOC:	316 G/L	2.63 Lb/gal
Solids by Weight %:	31.25	Material VOC:	117 G/L	0.98 Lb/gal
Solids by Volume %:	23.53	VOC Weight Ratio =	0.34 Lb VOC/Lb Solid	
Coverage @ 1 mil:	377 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-585 FERGUSON ORANGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.65	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	32.61	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	27.61	VOC Weight Ratio =	0.35 Lb VOC/Lb Solid	
Coverage @ 1 mil:	442 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

55 SERIES QE-617 COOL GRAY AQUATEK

Description

High quality fast dry acrylic alkyd waterborne enamel suitable for direct to metal applications. This enamel provides excellent coverage (depending on color). Aquatek applies easily, flows out well, and dries to a tough film with excellent build. See 55 Series Product Line Information Sheet for more information.

Specifications

Weight per Gallon:	10.08	Coating VOC:	337 G/L	2.81 Lb/gal
Solids by Weight %:	43.80	Material VOC:	162 G/L	1.35 Lb/gal
Solids by Volume %:	29.58	VOC Weight Ratio =	0.30 Lb VOC/Lb Solid	
Coverage @ 1 mil:	474 SqFt./Gal.	Gloss =	80 @ 60 Deg	
Viscosity:	25 - 35 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system. For maximum corrosion prevention we recommend using Maclac Aquatek Waterborne Primers. No Maclac paint product has ever contained any lead. But if you are preparing previously painted surfaces with unknown paints please observe the following precautions. Warning! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NOISH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Mixing & Thinning

Aquatek should be applied at the viscosity as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or waterborne compatible electrostatic spray equipment. This enamel will dry to touch in 30-45 minutes and will dry to handle in 1 - 2 hours when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes.

Performance & Durability

Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product. Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Clean up may usually be accomplished with water or a water-detergent combination. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-620 YARDBIRD GRAY #2 LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.19	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	32.58	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.60	VOC Weight Ratio =	0.33 Lb VOC/Lb Solid	
Coverage @ 1 mil:	378 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-626 ANDERSEN PEBBLE GRAY

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color). This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	9.33	Coating VOC:	204 G/L	1.70 Lb/gal
Solids by Weight %:	31.80	Material VOC:	61 G/L	0.51 Lb/gal
Solids by Volume %:	22.79	VOC Weight Ratio =	0.17 Lb VOC/Lb Solid	
Coverage @ 1 mil:	365 SqFt./Gal.	Gloss =	80 @ 60 Deg	
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

55 SERIES QE-646 BENNET'S WHITE AQUATEK

Description

High quality fast dry acrylic alkyd waterborne enamel suitable for direct to metal applications. This enamel provides excellent coverage (depending on color). Aquatek applies easily, flows out well, and dries to a tough film with excellent build. See 55 Series Product Line Information Sheet for more information.

Specifications

Weight per Gallon:	10.07	Coating VOC:	337 G/L	2.81 Lb/gal
Solids by Weight %:	43.74	Material VOC:	162 G/L	1.35 Lb/gal
Solids by Volume %:	29.57	VOC Weight Ratio =	0.30 Lb VOC/Lb Solid	
Coverage @ 1 mil:	474 SqFt./Gal.	Gloss =	80 @ 60 Deg	
Viscosity:	25 - 35 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system. For maximum corrosion prevention we recommend using Maclac Aquatek Waterborne Primers. No Maclac paint product has ever contained any lead. But if you are preparing previously painted surfaces with unknown paints please observe the following precautions. Warning! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NOISH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Mixing & Thinning

Aquatek should be applied at the viscosity as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or waterborne compatible electrostatic spray equipment. This enamel will dry to touch in 30-45 minutes and will dry to handle in 1 - 2 hours when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes.

Performance & Durability

Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product. Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Clean up may usually be accomplished with water or a water-detergent combination. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-647 ANDERSEN GRAY LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.27	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	33.41	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.95	VOC Weight Ratio =	0.32 Lb VOC/Lb Solid	
Coverage @ 1 mil:	384 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-649 KWAL GRAY LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.73	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	28.21	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	22.71	VOC Weight Ratio	=0.40 Lb VOC/Lb Solid	
Coverage @ 1 mil:	364 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-654 ALLIED HSF GRAY LOW VOC AQUATEK ENAMEL

1693

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.48	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	34.48	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.41	VOC Weight Ratio	=0.30 Lb VOC/Lb Solid	
Coverage @ 1 mil:	375 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-655 SKECHER'S GRAY LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.17	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	32.46	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.62	VOC Weight Ratio	=0.33 Lb VOC/Lb Solid	
Coverage @ 1 mil:	378 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-664 TOYOTA GRAY LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.91	Coating VOC:	306 G/L	2.55 Lb/gal
Solids by Weight %:	39.32	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	25.90	VOC Weight Ratio =	0.25 Lb VOC/Lb Solid	
Coverage @ 1 mil:	415 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-713 FIRE RED LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.61	Coating VOC:	319 G/L	2.66 Lb/gal
Solids by Weight %:	28.20	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.88	VOC Weight Ratio =	0.41 Lb VOC/Lb Solid	
Coverage @ 1 mil:	383 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-733 & QE-735 ANDERSENS REDS LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Note: data presented is average of the two items listed

Weight per Gallon:	8.67	Coating VOC:	308 G/L	2.57 Lb/gal
Solids by Weight %:	29.45	Material VOC:	117 G/L	0.98 Lb/gal
Solids by Volume %:	21.09	VOC Weight Ratio	=0.38 Lb VOC/Lb Solid	
Coverage @ 1 mil:	338 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable. Clean-up may usually be accomplished with water or a water-detergent combination. Use only with adequate ventilation. Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product.

Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-734 KWAL RED LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.63	Coating VOC:	311 G/L	2.59 Lb/gal
Solids by Weight %:	27.99	Material VOC:	113 G/L	0.94 Lb/gal
Solids by Volume %:	23.42	VOC Weight Ratio =	0.38 Lb VOC/Lb Solid	
Coverage @ 1 mil:	375 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-736 BEAR FOOT PINK LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.67	Coating VOC:	296 G/L	2.47 Lb/gal
Solids by Weight %:	36.07	Material VOC:	108 G/L	0.90 Lb/gal
Solids by Volume %:	24.01	VOC Weight Ratio =	0.25 Lb VOC/Lb Solid	
Coverage @ 1 mil:	385 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-737 CRIMSON RED LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.59	Coating VOC:	309 G/L	2.58 Lb/gal
Solids by Weight %:	27.47	Material VOC:	113 G/L	0.94 Lb/gal
Solids by Volume %:	23.57	VOC Weight Ratio =	0.39 Lb VOC/Lb Solid	
Coverage @ 1 mil:	378 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-739 BNR RED LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.58	Coating VOC:	305 G/L	2.54 Lb/gal
Solids by Weight %:	28.66	Material VOC:	117 G/L	0.98 Lb/gal
Solids by Volume %:	24.66	VOC Weight Ratio =	0.39 Lb VOC/Lb Solid	
Coverage @ 1 mil:	395 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-848 BAGEL TAN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.60	Coating VOC:	317 G/L	2.64 Lb/gal
Solids by Weight %:	36.68	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	24.80	VOC Weight Ratio =	0.28 Lb VOC/Lb Solid	
Coverage @ 1 mil:	397 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-850 HOME DEPOT BEIGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	9.55	Coating VOC:	310 G/L	2.58 Lb/gal
Solids by Weight %:	36.35	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	25.12	VOC Weight Ratio	=0.28 Lb VOC/Lb Solid	
Coverage @ 1 mil:	402 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable. Clean-up may usually be accomplished with water or a water-detergent combination. Use only with adequate ventilation. Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product.

Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-851 INCA PUTTY LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.32	Coating VOC:	302 G/L	2.52 Lb/gal
Solids by Weight %:	33.34	Material VOC:	110 G/L	0.92 Lb/gal
Solids by Volume %:	23.62	VOC Weight Ratio =	0.29 Lb VOC/Lb Solid	
Coverage @ 1 mil:	378 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-852 & QE-854 ANDERSEN TANS LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Note: data presented is the average of the two products listed

Weight per Gallon:	9.65	Coating VOC:	309 G/L	2.58 Lb/gal
Solids by Weight %:	18.78	Material VOC:	117 G/L	0.98 Lb/gal
Solids by Volume %:	19.10	VOC Weight Ratio	=0.53 Lb VOC/Lb Solid	
Coverage @ 1 mil:	306 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable. Clean-up may usually be accomplished with water or a water-detergent combination. Use only with adequate ventilation. Since air quality regulations are not consistent around the country, nor are they consistent within the State of California, check local air quality regulations prior to using this product.

Since hazardous waste regulations are not consistent throughout the country contact your local hazardous waste agency with information from the MSDS to get instructions for proper disposal. Review the latest material safety data sheet for additional information on environmental & safe handling.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-855 FOOD MAX BEIGE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.61	Coating VOC:	314 G/L	2.62 Lb/gal
Solids by Weight %:	34.62	Material VOC:	112 G/L	0.93 Lb/gal
Solids by Volume %:	22.71	VOC Weight Ratio	=0.28 Lb VOC/Lb Solid	
Coverage @ 1 mil:	364 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-858 CSB BROWN LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.10	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	32.04	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.73	VOC Weight Ratio =	0.34 Lb VOC/Lb Solid	
Coverage @ 1 mil:	380 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

RECEIVED

MAY 07 2008

SJVAPCD
NORTHERN REGION

70 SERIES QE-862 & QE-863 ANDERSEN TANS AQUATEK

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color) . This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Note: data presented is the average of the two items listed

Weight per Gallon:	9.07	Coating VOC:	208 G/L	1.73 Lb/gal
Solids by Weight %:	30.09	Material VOC:	61 G/L	0.51 Lb/gal
Solids by Volume %:	23.03	VOC Weight Ratio =	0.18 Lb VOC/Lb Solid	
Coverage @ 1 mil:	369 SqFt./Gal.	Gloss =	80 @ 60 Deg	
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-929 ROYAL BLUE LOW VOC AQUATEK ENAMEL

915

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.87	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	30.13	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.60	VOC Weight Ratio	=0.37 Lb VOC/Lb Solid	
Coverage @ 1 mil:	378 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-930 STURDI-BUILT BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.77	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	27.53	Material VOC:	114 G/L	0.95 Lb/gal
Solids by Volume %:	21.85	VOC Weight Ratio =	0.39 Lb VOC/Lb Solid	
Coverage @ 1 mil:	350 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

55 SERIES QE-951 NC BLUE ENAMEL AQUATEK

Description

High quality fast dry acrylic alkyd waterborne enamel suitable for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.77	Coating VOC:	339 G/L	2.83 Lb/gal
Solids by Weight %:	30.93	Material VOC:	140 G/L	1.17 Lb/gal
Solids by Volume %:	25.07	VOC Weight Ratio =	0.43 Lb VOC/Lb Solid	
Coverage @ 1 mil:	402 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-26 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system. For maximum corrosion prevention we recommend using Maclac Aquatek Waterborne Primers. No Maclac paint product has ever contained any lead. But if you are preparing previously painted surfaces with unknown paints please observe the following precautions. Warning! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NOISH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Mixing & Thinning

Aquatek should be applied at the viscosity as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or waterborne compatible electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes.

Performance & Durability

Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "55MSD Aquatek Waterborne Enamels" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-954 ANDERSEN STURDI-BILT BLUE AQUATEK

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color) . This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	8.78	Coating VOC:	208 G/L	1.73 Lb/gal
Solids by Weight %:	27.68	Material VOC:	61 G/L	0.51 Lb/gal
Solids by Volume %:	23.10	VOC Weight Ratio	=0.21 Lb VOC/Lb Solid	
Coverage @ 1 mil:	370 SqFt./Gal.	Gloss = 80 @ 60 Deg		
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-955 ANDERSEN ROYAL BLUE AQUATEK

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color). This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	8.70	Coating VOC:	239 G/L	1.99 Lb/gal
Solids by Weight %:	27.58	Material VOC:	60 G/L	0.50 Lb/gal
Solids by Volume %:	23.14	VOC Weight Ratio =13.00 Lb VOC/Lb Solid		
Coverage @ 1 mil:	371 SqFt./Gal.	Gloss = 80 @ 60 Deg		
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-963 UNARCO BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.78	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	28.68	Material VOC:	119 G/L	0.99 Lb/gal
Solids by Volume %:	22.87	VOC Weight Ratio	=0.39 Lb VOC/Lb Solid	
Coverage @ 1 mil:	366 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-964 RENO BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.73	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	28.29	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	22.87	VOC Weight Ratio =	0.40 Lb VOC/Lb Solid	
Coverage @ 1 mil:	366 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

70 SERIES QE-981 BLUE AQUATEK

Description

This Reduced VOC Aquatek is high quality fast dry acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides good to excellent coverage with 0.7 to 1.2 mil dry film (hiding power varies with color). This reduced VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

Weight per Gallon:	8.70	Coating VOC:	226 G/L	1.88 Lb/gal
Solids by Weight %:	27.48	Material VOC:	60 G/L	0.50 Lb/gal
Solids by Volume %:	23.26	VOC Weight Ratio =13.00 Lb VOC/Lb Solid		
Coverage @ 1 mil:	373 SqFt./Gal.	Gloss = 80 @ 60 Deg		
Viscosity:	21-26 Seconds Ford 4			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Reduced VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Reduced VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment (designed for waterborne systems). This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Reduced VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Reduced VOC Aquatek is non-flammable and the dried film is considered non-hazardous. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean up may usually be accomplished with water or a water-detergent combination. See material safety data sheets for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-987 KWAL BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.72	Coating VOC:	324 G/L	2.70 Lb/gal
Solids by Weight %:	28.22	Material VOC:	119 G/L	0.99 Lb/gal
Solids by Volume %:	22.94	VOC Weight Ratio =	0.40 Lb VOC/Lb Solid	
Coverage @ 1 mil:	367 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-988 FRAZIER BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.72	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	28.16	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	22.89	VOC Weight Ratio	=0.40 Lb VOC/Lb Solid	
Coverage @ 1 mil:	367 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-989 INCA BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.68	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	26.72	Material VOC:	116 G/L	0.97 Lb/gal
Solids by Volume %:	21.81	VOC Weight Ratio =	0.41 Lb VOC/Lb Solid	
Coverage @ 1 mil:	349 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-991 SBL BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	9.07	Coating VOC:	323 G/L	2.69 Lb/gal
Solids by Weight %:	31.19	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	23.20	VOC Weight Ratio =	0.35 Lb VOC/Lb Solid	
Coverage @ 1 mil:	372 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-992 HANNIBAL MATERIAL-HANDLING BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.65	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	29.96	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	24.85	VOC Weight Ratio	=0.38 Lb VOC/Lb Solid	
Coverage @ 1 mil:	398 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-995 BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.47	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	25.74	Material VOC:	120 G/L	1.00 Lb/gal
Solids by Volume %:	22.44	VOC Weight Ratio	=0.45 Lb VOC/Lb Solid	
Coverage @ 1 mil:	359 SqFt./Gal.	Gloss = 80+ @ 60 Deg		
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R. J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R. J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-9003 TOYOTA BLUE LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.84	Coating VOC:	316 G/L	2.63 Lb/gal
Solids by Weight %:	27.74	Material VOC:	96.79 G/L	0.81 Lb/gal
Solids by Volume %:	19.41	VOC Weight Ratio =	0.32 Lb VOC/Lb Solid	
Coverage @ 1 mil:	311 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve. Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

Maclac Product Data Sheet

R. J. MCGLENNON CO. INC.
198 UTAH STREET
SAN FRANCISCO, CA 94103

PHONE (415) 552-0311
FAX (415) 552-8055

56 SERIES QE-J204 GLOSS BLACK LOW VOC AQUATEK ENAMEL

Description

A high quality fast dry Low VOC acrylic alkyd waterborne enamel for direct to metal applications. This enamel provides excellent coverage with 0.7 to 1.2 mil dry film (depending on color). Low VOC Aquatek applies easily, flows out well, and dries to a tough film with excellent build.

Specifications

These represent typical values only

Weight per Gallon:	8.48	Coating VOC:	325 G/L	2.71 Lb/gal
Solids by Weight %:	24.13	Material VOC:	116 G/L	0.97 Lb/gal
Solids by Volume %:	20.93	VOC Weight Ratio =	0.47 Lb VOC/Lb Solid	
Coverage @ 1 mil:	335 SqFt./Gal.	Gloss =	80+ @ 60 Deg	
Viscosity:	21-25 Seconds Zahn 3			

Surface Preparation

Surfaces must be commercially clean and free of dirt, grease and water. Remove any rust deposits. S.S.P.C. 3 power wash is the recommended cleaning system.

Mixing & Thinning

Low VOC Aquatek should be applied as supplied. However, a slight amount of thinning with water (5-10%) to accommodate application conditions is generally acceptable.

Application & Dry

Low VOC Aquatek is designed for spray application only. It is easily applied with conventional, airless, air-assist airless, HVLP or electrostatic spray equipment. This enamel will dry to touch in 30 minutes and will dry to handle in 1 hour when applied to approximately 1 mil dry film thickness (under standard conditions). For faster cure time this coating may be force dried at a maximum air temperature of 160° F for 15 minutes. This dry schedule will allow stacking and banding of metal products as they come off the production line.

Performance & Durability

Low VOC Aquatek forms a very durable finish with an excellent balance of flexibility, hardness and exterior durability.

Environmental & Safe Handling

Low VOC Aquatek is non-flammable and the dried film is non-toxic. Use only with adequate ventilation. Dispose of any product only in accordance with all applicable regulations. Clean-up may usually be accomplished with water or a water-detergent combination. See material safety data sheet titled "56MSD Aquatek Low VOC Enamels W/B" for full details.

LIMITED WARRANTY

The information contained herein is offered to assist customers in determining whether our products are suitable for their applications. We request that customers examine our products before use and satisfy themselves as to their suitability. We warrant that our products will meet our written specifications. Since application circumstances, substrate condition and product intermix are beyond our control, we cannot guarantee results under all possible situations. R.J. McGlennon Co. Inc. makes no representation as to the results the user will achieve.

Technical advice furnished by seller or any seller's agents shall not constitute a warranty. Any liability arising out of any condition resulting from the use of any R.J. McGlennon Co. Inc. product shall be limited to replacement of such product.

valspar

INDUSTRIAL

1101 South 3rd Street
Minneapolis, MN 55415

800-328-8044

Date: April 21, 2008

VS 002
(per applicant)

Also use for VS001

TECHNICAL DATA

Product Line: AQUASPAR 420
Product Number: WAE0011
Product Description: AQUASPAR 420 HIGH GLOSS ORANGE ENAMEL

SPECIFICATIONS	
Physical Properties:	
Viscosity (#2 EZ ZAHN CUP@ 77F):	35.00 - 38.00 SEC
Weight Per Gallon (Theoretical):	8.96 lbs./gallon
Solids by Weight (Theoretical):	35.24 %
Solids by Volume (Theoretical):	28.10 %
VOC (Theoretical):	2.36 lbs./gal
Weight of Total Volatiles:	64.76 %
% Water (Theoretical):	53.37 %
% Exempt Solvents (Theoretical):	0.20 %
HAPs Content:	0.67 lbs./solid gallon
VOC per gal. Coating Solids (Theoretical):	3.57 lbs VOC/gallon solid
OTHER INFORMATION	
Application Recommendations:	
Substrate/Pretreatment:	STEEL - IRON PHOSPHATE
Reduction:	NA
Reduction Solvent:	WATER AS NEEDED
Application:	SPRAY
Clean-Up Solvent:	WATER GLYCOL ETHER SOLVENT BLEND
Cure Cycle:	Air Dry: N/A Force Dry: 5 MINUTES AT 250 DEGREES F
Film Properties:	
Dry Film Thickness:	0.70 - 1.00 mils
Gloss (60 degrees):	90 MINIMUM
Gloss (20 degrees):	NA
Coverage @ 1 mil DFT:	450.72 sq. ft./gallon
	0007

The data on this sheet represent typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. Valspar assumes no obligation or liability for use of this information. **UNLESS VALSPAR AGREES OTHERWISE IN WRITING, VALSPAR MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR FREEDOM FROM PATENT INFRINGEMENT. VALSPAR WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.** Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option. This information in this sheet, as well as the products referenced herein, shall be considered "Confidential Information" pursuant to the Coatings Supply Agreement. Wet samples and uncured samples of these products shall be maintained as confidential and shall not be disclosed to any third party without the prior written permission of Valspar.

The Valspar Corporation Material Safety Data Sheet

VS 00Z
(Per Applicant)

1. PRODUCT AND COMPANY IDENTIFICATION

Material Identification

Product ID: WAE0011
Product Name: AQUASPAR 420 HIGH GLOSS ORANGE ENAMEL
Product Use: Paint product.
Print date: 17/Nov/2005
Revision Date: 16/Nov/2005

Company Identification

The Valspar Corporation
1101 Third Street South
Minneapolis, MN 55415
Manufacturer's Phone: 1-612-332-7371

24-Hour Medical Emergency Phone: 1-888-345-5732

2. COMPOSITION / INFORMATION ON HAZARDOUS INGREDIENTS

Common Name CAS-No.	Approx. Weight %	Chemical name
PROPYLENE GLYCOL MONO PROPYL ETHER 1569-01-3	1 - 5	2-Propanol, 1-propoxy-
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5	sec-Butyl alcohol
PROPRIETARY PIGMENT	1 - 5	PROPRIETARY PIGMENT
PROPRIETARY PIGMENT	1 - 5	PROPRIETARY PIGMENT

If this section is blank there are no hazardous components per OSHA guidelines.

3. HAZARDS IDENTIFICATION

Primary Routes of Exposure:

Inhalation
Ingestion
Skin absorption

Emergency Overview:

This section not in use.

This product contains ingredients that may contribute to the following potential acute health effects:

Inhalation Effects:

Harmful if inhaled. May affect the brain, nervous system, or respiratory system, causing dizziness, headache, nausea or respiratory irritation.

Eye Contact:

Corneal Injury/eye damage.

Skin Contact:

May cause moderate skin irritation.

Acute Ingestion:

None known

Other Effects:

May cause central nervous system depression.

This product contains ingredients that may contribute to the following potential chronic health effects:

Notice: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal. May cause eye damage and pain. May cause liver damage. May cause kidney damage. Possible sensitization.

See Section 11 for toxicological information about Mutagens, Teratogens and Carcinogens.

If this section is blank, no information is available.

4. FIRST AID MEASURES

Inhalation:

If affected by inhalation, move victim to fresh air. If symptoms persist, seek medical attention.

Eye Contact:

In case of contact, or suspected contact, immediately flush eyes with plenty of water for at least 15 minutes and get medical attention immediately after flushing.

Skin Contact:

In case of contact, immediately flush skin with plenty of soap and water for at least 15 minutes. If irritation persists get medical attention. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean contaminated shoes.

Ingestion:

If swallowed, get medical attention immediately.

Medical conditions aggravated by exposure: Any respiratory or skin condition.

5. FIRE FIGHTING MEASURES

Flash point (Fahrenheit):	115° F (46° C) TCC/PM
Lower explosive limit:	1 %
Upper explosive limit:	17 %
Autoignition temperature:	Not available. ° F (° C)
Sensitivity to impact:	No.
Sensitivity to static discharge:	Can be sensitive to static discharge hazards. Please see bonding and grounding information in Section 7.
Hazardous combustion products:	See Section 10.

Unusual fire and explosion hazards:

Contaminated rags, wipes, saw dust, etc., may catch fire spontaneously. Store waste under water in closed metal containers until disposed of in compliance with applicable regulations. Contains oxidizable materials.

Extinguishing media:

Carbon dioxide, dry chemical, foam and/or water fog.

Fire fighting procedures:

Use water spray to cool nearby containers and structures exposed to fire.

6. ACCIDENTAL RELEASE MEASURES

Action to be taken if material is released or spilled:

Ventilate area. Avoid breathing of vapors. Use self-containing breathing apparatus or airmask for large spills in a confined area. Wipe, scrape or soak up in an inert material and put in a container for disposal. See section 5, "Unusual Fire and Explosion Hazards", for proper container and storage procedures. Remove sources of ignition. Remove with inert absorbent and non sparking tools. Avoid contact with eyes.

7. HANDLING AND STORAGE

Precautions to be taken in handling and storage:

Keep away from heat, sparks, and flames. Keep container closed when not in use. Do not store above 120 degrees F. (49 degrees C). Based on flash point and vapor pressure, suitable storage should be provided in accordance with OSHA regulation 1910.106, Ontario OH&S regulation 851 section 22. Empty containers may contain product residue, including flammable or explosive vapors. Do not cut, puncture or weld on or near container. All label warnings must be observed until the container has been commercially cleaned or reconditioned. If the product is used near or above the flashpoint, an ignition hazard may be present. Activities, uses, or operations which liberate vapor (such as mixing or free fall of liquids) may also present an ignition hazard. Please ensure containers and other interconnected equipment are properly bonded and grounded at all times.

8. PERSONAL PROTECTIVE EQUIPMENT AND EXPOSURE CONTROLS

Personal Protective Equipment

Eye and face protection:

Avoid contact with eyes. Wear chemical goggles if there is the possibility of contact or splashing in the eye.

Skin protection:

Appropriate chemical resistant gloves should be worn. To prevent skin contact wear protective clothing covering all exposed areas.

Respiratory protection:

If exposure cannot be controlled below applicable limits, use the appropriate NIOSH approved respirator such as an air purifying respirator with organic vapor cartridge and dust/mist filter. Consult the respirator manufacturer's literature to ensure that the respirator will provide adequate protection. Read and follow all respirator manufacturer's instructions.

Ventilation

Required when spraying or applying in confined area. Ventilation equipment should be explosion proof.

Exposure Guidelines

OSHA Permissible Exposure Limits (PEL's)

Common Name CAS-No.	Approx. Weight %	TWA (final)	Ceilings limits (final)	Skin designations
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5	450 mg/m ³ 150 ppm		
PROPRIETARY PIGMENT	1 - 5	5 mg/m ³ Respirable fraction. 15 mg/m ³ Total dust. Respirable fraction. Listed. Total dust. Listed.		
PROPRIETARY PIGMENT	1 - 5	10 mg/m ³ Fume. 5 mg/m ³ Respirable fraction. 15 mg/m ³ Total dust. Respirable fraction. Listed. Total dust. Listed.		

ACGIH Threshold Limit Value (TLV's)

Common Name CAS-No.	Approx. Weight %	TWA	STEL	Ceiling limits	Skin designations
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5	100 ppm			
PROPRIETARY PIGMENT	1 - 5	10 mg/m ³ Inhalable particles. 3 mg/m ³ Respirable particles.			
PROPRIETARY PIGMENT	1 - 5	5 mg/m ³ Dust and fume. Fe 10 mg/m ³ Inhalable particles. 3 mg/m ³ Respirable particles. 10 mg/m ³ The value is for particulate matter containing no asbestos and <1% crystalline silica.			

If this section is blank, no information is available.

9. PHYSICAL PROPERTIES

Odor:	Normal for this product type.
Physical State:	Liquid
pH:	Not determined.
Vapor pressure:	24 mmHG @ 68° F (20° C)
Vapor density (air = 1.0):	4
Boiling point:	210° F (99° C)
Solubility in water:	Soluble
Coefficient of water/oil distribution:	Not determined.

Density (lbs per US gallon):	8.94
Specific Gravity	1.07
Evaporation rate (butyl acetate = 1.0):	1.3

10. STABILITY AND REACTIVITY

Stability	Stable
Conditions to Avoid:	None known.
Incompatibility:	Strong oxidizers.
Hazardous Polymerization:	None anticipated.
Hazardous Decomposition Products:	Carbon monoxide and carbon dioxide.

Sensitivity to static discharge: Can be sensitive to static discharge hazards. Please see bonding and grounding information in Section 7.

11. TOXICOLOGICAL INFORMATION

Mutagens:

Teratogens:

Carcinogens:

If this section is blank, no information is available.

12. ECOLOGICAL DATA

Not available at this time.

13. DISPOSAL CONSIDERATIONS

Disposal should be made in accordance with federal, state and local regulations.

14. TRANSPORTATION INFORMATION

U.S. Department of Transportation

Proper Shipping Name:	PAINT
Hazard Class:	3
UN ID Number:	UN1263
Packing Group:	III

49 CFR Hazardous Material Regulations Parts 100-180

The supplier will apply the combustible liquid exception in 49 CFR 173.150(f), limited quantity or "does not sustain combustion" exceptions and consumer commodity rules, when authorized. Please check 49 CFR Parts 100-180 to determine if the use of these exceptions applies to your shipments when re-shipping our products.

International Air Transport Association:

Proper Shipping Name:	PAINT
Hazard Class:	3
UN ID Number:	UN1263
Packing Group:	III

International Maritime Organization:

Product ID: WAE0011

Proper Shipping Name: PAINT
 Hazard Class: 3
 UN ID Number: UN1263
 Packing Group: III

15. REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS:

Common Name CAS-No.	Approx. Weight %	SARA 302	SARA 313	CERCLA RQ IN LBS.
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5		form R reporting required for 1.0% de minimis concentration	

SARA 311/312 Hazard Class:

Acute: Yes
 Chronic: Yes
 Flammability: Yes
 Reactivity: No
 Sudden Pressure: No

U.S. STATE REGULATIONS:

Pennsylvania Right To Know:

PROPRIETARY PIGMENT	Trade Secret
PROPRIETARY PIGMENT	Trade Secret
SECONDARY BUTYL ALCOHOL	78-92-2
PROPYLENE GLYCOL MONO PROPYL ETHER	1569-01-3

Additional Non-Hazardous Materials

PROPRIETARY RESIN	Trade Secret
WATER	7732-18-5

Rule 66 status of product Not photochemically reactive.

INTERNATIONAL REGULATIONS - Chemical Inventories

TSCA Inventory: All components of this product are in compliance with U.S. TSCA Chemical Substance Inventory Requirements.

Canada Domestic Substances List: Not all components in this product are listed on the Domestic Substances List.

16. OTHER INFORMATION

HMIS Codes

Health: 3
Flammability: 2
Reactivity: 1
PPE: X - See Section 8 for Personal Protective Equipment (PPE).

Abbreviations:

OSHA - Occupational Safety and Health Administration, IARC - International Agency for Research on Cancer, NIOSH - National Institute of Occupational Safety and Health, NTP - National Toxicology Program, ACGIH - American Conference of Governmental Industrial Hygienists, SCAQMD - South Coast Air Quality Management District, TSCA - Toxic Substances Control Act, IATA - International Air Transport Association, IMO - International Maritime Organization, DOT - Department of Transportation, NA - Not applicable, NOT ESTAB - Not established, N.A.V. - Not available, RQ - Reportable quantity, WT - Weight, MG/CU M - Milligrams per cubic meter, G/L - Grams per liter, MM - Millimeters, MPPCF - Millions of particles per cubic foot, PPM - parts per million, PPT - parts per thousand, TCC/PM - Tag closed cup / Pensky-Martens, PB - Lead, PEL - Permissible exposure level, TWA - Time Weighted Average, STEL - Short term exposure limit, C - Celsius, F - Fahrenheit.

Disclaimer:

The data on this sheet represent typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. Valspar assumes no obligation or liability for use of this information. UNLESS VALSPAR AGREES OTHERWISE IN WRITING, VALSPAR MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR FREEDOM FROM PATENT INFRINGEMENT. VALSPAR WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option. This MSDS contains additional information required by the state of Pennsylvania.

The Valspar Corporation Material Safety Data Sheet

VS-001
(per Applicant)

1. PRODUCT AND COMPANY IDENTIFICATION

Material Identification

Product ID: WAG0054
Product Name: AQUASPAR 420 HIGH GLOSS AGN GREEN ENAMEL
Product Use: Paint product.
Print date: 17/Nov/2005
Revision Date: 16/Nov/2005

Refer to the label

Company Identification

The Valspar Corporation
1101 Third Street South
Minneapolis, MN 55415
Manufacturer's Phone: 1-612-332-7371

24-Hour Medical Emergency Phone: 1-888-345-5732

2. COMPOSITION / INFORMATION ON HAZARDOUS INGREDIENTS

Common Name CAS-No.	Approx. Weight %	Chemical name
PROPRIETARY PIGMENT	5 - 10	PROPRIETARY PIGMENT
PROPYLENE GLYCOL MONO PROPYL ETHER 1569-01-3	1 - 5	2-Propanol, 1-propoxy-
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5	sec-Butyl alcohol
CARBON BLACK 1333-86-4	.1 - 1	CARBON BLACK

If this section is blank there are no hazardous components per OSHA guidelines.

3. HAZARDS IDENTIFICATION

Primary Routes of Exposure:

Inhalation
Ingestion
Skin absorption

Emergency Overview:

This section not in use.

This product contains ingredients that may contribute to the following potential acute health effects:

Inhalation Effects:

Harmful if inhaled. May affect the brain, nervous system, or respiratory system, causing dizziness, headache, nausea or respiratory irritation.

Eye Contact:

Corneal Injury/eye damage.

Skin Contact:

May cause moderate skin irritation.

Acute Ingestion:

None known

Other Effects:

May cause central nervous system depression.

This product contains ingredients that may contribute to the following potential chronic health effects:

Notice: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal. May cause eye damage and pain. Possible cancer hazard. Contains ingredients which may cause cancer based on animal data. Risk of cancer depends on duration and level of exposure. May cause kidney damage. May cause liver damage. Possible sensitization.

See Section 11 for toxicological information about Mutagens, Teratogens and Carcinogens.

If this section is blank, no information is available.

4. FIRST AID MEASURES

Inhalation:

If affected by inhalation, move victim to fresh air. If symptoms persist, seek medical attention.

Eye Contact:

In case of contact, or suspected contact, immediately flush eyes with plenty of water for at least 15 minutes and get medical attention immediately after flushing.

Skin Contact:

In case of contact, immediately flush skin with plenty of soap and water for at least 15 minutes. If irritation persists get medical attention. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean contaminated shoes.

Ingestion:

If swallowed, get medical attention immediately.

Medical conditions aggravated by exposure: Any respiratory or skin condition.

5. FIRE FIGHTING MEASURES

Flash point (Fahrenheit):	115° F (46° C) TCC/PM
Lower explosive limit:	1 %
Upper explosive limit:	17 %
Autoignition temperature:	Not available. ° F (° C)
Sensitivity to impact:	No.
Sensitivity to static discharge:	Can be sensitive to static discharge hazards. Please see bonding and grounding information in Section 7.
Hazardous combustion products:	See Section 10.

Unusual fire and explosion hazards:

Contaminated rags, wipes, saw dust, etc., may catch fire spontaneously. Store waste under water in closed metal containers until disposed of in compliance with applicable regulations. Contains oxidizable materials.

Extinguishing media:

Carbon dioxide, dry chemical, foam and/or water fog.

Fire fighting procedures:

Use water spray to cool nearby containers and structures exposed to fire.

6. ACCIDENTAL RELEASE MEASURES

Action to be taken if material is released or spilled:

Ventilate area. Avoid breathing of vapors. Use self-containing breathing apparatus or airmask for large spills in a confined area. Wipe, scrape or soak up in an inert material and put in a container for disposal. See section 5, "Unusual Fire and Explosion Hazards", for proper container and storage procedures. Remove sources of ignition. Remove with inert absorbent and non sparking tools. Avoid contact with eyes.

7. HANDLING AND STORAGE

Precautions to be taken in handling and storage:

Keep away from heat, sparks, and flames. Keep container closed when not in use. Do not store above 120 degrees F. (49 degrees C). Based on flash point and vapor pressure, suitable storage should be provided in accordance with OSHA regulation 1910.106, Ontario OH&S regulation 851 section 22. Empty containers may contain product residue, including flammable or explosive vapors. Do not cut, puncture or weld on or near container. All label warnings must be observed until the container has been commercially cleaned or reconditioned. If the product is used near or above the flashpoint, an ignition hazard may be present. Activities, uses, or operations which liberate vapor (such as mixing or free fall of liquids) may also present an ignition hazard. Please ensure containers and other interconnected equipment are properly bonded and grounded at all times.

8. PERSONAL PROTECTIVE EQUIPMENT AND EXPOSURE CONTROLS

Personal Protective Equipment**Eye and face protection:**

Avoid contact with eyes. Wear chemical goggles if there is the possibility of contact or splashing in the eye.

Skin protection:

Appropriate chemical resistant gloves should be worn. To prevent skin contact wear protective clothing covering all exposed areas.

Respiratory protection:

If exposure cannot be controlled below applicable limits, use the appropriate NIOSH approved respirator such as an air purifying respirator with organic vapor cartridge and dust/mist filter. Consult the respirator manufacturer's literature to ensure that the respirator will provide adequate protection. Read and follow all respirator manufacturer's instructions.

Ventilation

Required when spraying or applying in confined area. Ventilation equipment should be explosion proof.

Exposure Guidelines**OSHA Permissible Exposure Limits (PEL's)**

Common Name CAS-No.	Approx. Weight %	TWA (final)	Ceilings limits (final)	Skin designations
PROPRIETARY PIGMENT	5 - 10	5 mg/m ³ Respirable fraction. 15 mg/m ³ Total dust. Respirable fraction. Listed. Total dust. Listed.		
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5	450 mg/m ³ 150 ppm		
CARBON BLACK 1333-86-4	.1 - 1	3.5 mg/m ³ 5 mg/m ³ Respirable fraction. 15 mg/m ³ Total dust. Respirable fraction. Listed. Total dust. Listed.		

ACGIH Threshold Limit Value (TLV's)

Common Name CAS-No.	Approx. Weight %	TWA	STEL	Ceiling limits	Skin designations
PROPRIETARY PIGMENT	5 - 10	10 mg/m ³ Inhalable particles. 3 mg/m ³ Respirable particles.			
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5	100 ppm			
CARBON BLACK 1333-86-4	.1 - 1	3.5 mg/m ³ 10 mg/m ³ Inhalable particles. 3 mg/m ³ Respirable particles.			

If this section is blank, no information is available.

9. PHYSICAL PROPERTIES

Odor:	Normal for this product type.
Physical State:	Liquid
pH:	Not determined.
Vapor pressure:	24 mmHG @ 68° F (20° C)
Vapor density (air = 1.0):	4
Boiling point:	210° F (99° C)
Solubility in water:	Soluble
Coefficient of water/oil distribution:	Not determined.
Density (lbs per US gallon):	8.95
Specific Gravity	1.07
Evaporation rate (butyl acetate = 1.0):	1.3

10. STABILITY AND REACTIVITY

Stability
Conditions to Avoid:
Incompatibility:
Hazardous Polymerization:
Hazardous Decomposition Products:

Stable
None known.
Strong oxidizers.
None anticipated.
Carbon monoxide and carbon dioxide. Metal oxide fumes.

Sensitivity to static discharge:

Can be sensitive to static discharge hazards. Please see bonding and grounding information in Section 7.

11. TOXICOLOGICAL INFORMATION

Mutagens:

Teratogens:

Carcinogens:

Common Name CAS-No.	Approx. Weight %	IARC Group 1 - Human Evidence	IARC Group 2A - limited human data	IARC Group 2b - sufficient animal data
CARBON BLACK 1333-86-4	.1 - 1			Monograph 65, 1996

If this section is blank, no information is available.

12. ECOLOGICAL DATA

Not available at this time.

13. DISPOSAL CONSIDERATIONS

Disposal should be made in accordance with federal, state and local regulations.

14. TRANSPORTATION INFORMATION

U.S. Department of Transportation

Proper Shipping Name: PAINT
Hazard Class: 3
UN ID Number: UN1263
Packing Group: III

49 CFR Hazardous Material Regulations Parts 100-180

The supplier will apply the combustible liquid exception in 49 CFR 173.150(f), limited quantity or "does not sustain combustion" exceptions and consumer commodity rules, when authorized. Please check 49 CFR Parts 100-180 to determine if the use of these exceptions applies to your shipments when re-shipping our products.

International Air Transport Association:

Proper Shipping Name: PAINT
Hazard Class: 3
UN ID Number: UN1263
Packing Group: III

International Maritime Organization:

Proper Shipping Name: PAINT

Product ID: WAG0054

Hazard Class: 3
 UN ID Number: UN1263
 Packing Group: III

15. REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS:

Common Name CAS-No.	Approx. Weight %	SARA 302	SARA 313	CERCLA RQ IN LBS.
SECONDARY BUTYL ALCOHOL 78-92-2	1 - 5		form R reporting required for 1.0% de minimis concentration	

SARA 311/312 Hazard Class:

Acute: Yes
 Chronic: Yes
 Flammability: Yes
 Reactivity: No
 Sudden Pressure: No

U.S. STATE REGULATIONS:

Pennsylvania Right To Know:

PROPRIETARY PIGMENT	Trade Secret
PROPYLENE GLYCOL MONO PROPYL ETHER	1569-01-3
SECONDARY BUTYL ALCOHOL	78-92-2

Additional Non-Hazardous Materials

PROPRIETARY RESIN	Trade Secret
WATER	7732-18-5

Rule 66 status of product Not photochemically reactive.

INTERNATIONAL REGULATIONS - Chemical Inventories

TSCA Inventory: All components of this product are in compliance with U.S. TSCA Chemical Substance Inventory Requirements.

Canada Domestic Substances List: Not all components in this product are listed on the Domestic Substances List.

16. OTHER INFORMATION

HMIS Codes

Health: 3
 Flammability: 2
 Reactivity: 1
 PPE: X - See Section 8 for Personal Protective Equipment (PPE).

Abbreviations:

OSHA - Occupational Safety and Health Administration, IARC - International Agency for Research on Cancer, NIOSH - National Institute of Occupational Safety and Health, NTP - National Toxicology Program, ACGIH - American Conference of Governmental Industrial Hygienists, SCAQMD - South Coast Air Quality Management District, TSCA - Toxic Substances Control Act, IATA - International Air Transport Association, IMO - International Maritime Organization, DOT - Department of Transportation, NA - Not applicable, NOT ESTAB - Not established, N.A.V. - Not available, RQ - Reportable quantity, WT - Weight, MG/CU M - Milligrams per cubic meter, G/L - Grams per liter, MM - Millimeters, MPPCF - Millions of particles per cubic foot, PPM - parts per million, PPT - parts per thousand, TCC/PM - Tag closed cup / Pensky-Martens, PB - Lead, PEL - Permissible exposure level, TWA - Time Weighted Average, STEL - Short term exposure limit, C - Celsius, F - Fahrenheit.

Disclaimer:

The data on this sheet represent typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. Valspar assumes no obligation or liability for use of this information. UNLESS VALSPAR AGREES OTHERWISE IN WRITING, VALSPAR MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR FREEDOM FROM PATENT INFRINGEMENT. VALSPAR WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option. This MSDS contains additional information required by the state of Pennsylvania.

M A T E R I A L S A F E T Y D A T A S H E E T

56 SERIES AQUATEK WATERBORNE ENAMELS

Aquatek Waterborne Enamels (56 Series)

To: MSDS User

Please find enclosed the material safety data sheet as per your request. The information presented in these forms is believed to be correct and sufficient to meet the requirements of the OSHA Hazard Communication Standard 29CFR 1910.1200. These forms should be made available to all those who handle or may otherwise be exposed to the product(s).

The supplied material safety data sheet covers the common hazardous ingredients associated with more than one product. This is supplied in accordance with 29CFR 1910.1200 paragraph (g)(4), and Cal OSHA T8 CCR section 5194 (g)(4) which states: "where complex mixtures have similar hazards and contents ...but the specific composition varies from mixture to mixture ... the manufacturer may prepare one material safety data sheet to apply to all of these similar mixtures. This MSDS and environmental data sheet is designed to address the safe use and handling of the R.J. McGlennon Company products that are listed below. It is not intended to address specific technical properties of an individual product. See R.J. McGlennon Co. individual **Product Data Sheets** for VOC and other specific technical data.

This MSDS (identified as 56MSD Aquatek Waterborne Enamels) covers the following Aquatek products.

Products in 56 Series

QE-113 Andersen Off White	QE-654 Allied HSF Gray
QE-117 Lozier Almond	QE-655 Skecher's Gray
QE-119 Andersen White	QE-664 Toyota Gray
QE-147 Designer White	QE-713 Fire Red
QE-415 Vista Green	QE-734 Kwal Red
QE-424 Johns Import Green	QE-736 Bear Foot Pink
QE-441 McCoy Green	QE-737 Crimson Red
QE-466 Andersen John's Import	QE-739 BNR Red
QE-474 Vitmar Green	QE-848 Bagel Tan
QE-478 Lodi Metal Tech Green	QE-851 Inca Putty
QE-510 Caterpillar Yellow	QE-855 Food Max Beige
QE-522 Andersen Orange	QE-858 CBS Brown
QE-535 Interlake Orange	QE-9003 Toyota Blue
QE-566 AOR Standard Orange	QE-929 Royal Blue
QE-569 Andersen Yellow	QE-930 Sturdi-Built Blue
QE-570 Lodi Metal Tech Orange	QE-963 Unarco Blue
QE-572 Pantone Yellow	QE-964 Reno Blue
QE-574 Inca Yellow	QE-987 Kwal Blue
QE-576 Monarch Orange	QE-988 Frazier Blue
QE-579 Dorfman Orange	QE-989 Inca Blue
QE-581 Andersen Summit Yellow	QE-991 SBL Blue
QE-582 Frazier Yellow	QE-992 Hannibal Material-Handling Blue
QE-585 Ferguson Orange	
QE-620 Yardbird Gray #2	QE-995 Blue
QE-647 Andersen Gray	QEJ-204 Gloss Black
QE-649 Kwal Gray	

M A T E R I A L S A F E T Y D A T A S H E E T

56 SERIES AQUATEK - ALL COLORS

Page: 1
05/21/07

PRODUCT NAME: 56 SERIES AQUATEK - ALL COLORS
PRODUCT CODE: 56MSD

HMS CODES: H F R P
1 0 0 H

===== SECTION I - MANUFACTURER IDENTIFICATION =====

MANUFACTURER'S NAME: R. J. McGLENNON CO. INC.
ADDRESS : 198 UTAH ST.
SAN FRANCISCO, CA 94103

EMERGENCY PHONE : (800)424-9300 DATE REVISED : 01/12/06
INFORMATION PHONE : (415)552-0311 NAME OF PREPARER : J. Davis
DATE PRINTED : 05/21/07

===== SECTION II - HAZARDOUS INGREDIENTS/SARA III INFORMATION =====

REPORTABLE COMPONENTS	CAS NUMBER	VAPOR PRESSURE MM HG @ TEMP	WEIGHT PERCENT
* # GLYCOL ETHER EB OSHA PEL EXPOSURE LIMIT: 25 ppm TWA ACGIH TLV EXPOSURE LIMIT: 25 ppm skin OSHA TWA EXPOSURE LIMIT: 240 mg/cu.m.	111-76-2	0.40 20 Deg C	5.20
* SECONDARY BUTYL ALCOHOL OSHA PEL EXPOSURE LIMIT: 150 ppm ACGIH TLV EXPOSURE LIMIT: 100 ppm OTHER EXPOSURE LIMIT: 100 ppm	78-92-2	12.5 68 Deg F	3.95
* Cobalt Carboxylate (cobalt compound - constituent of drier) OSHA PEL 0.1mg/cu.m. (as Co) ACGIH TLV 0.02 mg/cu.m. (as Co)	27253-31-2	NA NA	.20

* Indicates this product contains EPCRA section 313 chemical(s) subject to the reporting requirements of the Emergency Planning and Community Right-To-Know Act of 1986 (40 CFR 372).

This information must be included in all MSDS's that are copied and distributed for this material. *# Note for Glycol Ether EB - this solvent is no longer on the 40CFR63.112 HAPS list but it is EPCRA section 313 reportable

This product contain a low level of water miscible coalescing solvents.

===== SECTION III - PHYSICAL/CHEMICAL CHARACTERISTICS =====

BOILING RANGE: 212 - 250 Deg F SPECIFIC GRAVITY (H2O=1): 1.18
VAPOR DENSITY: HEAVIER THAN AIR EVAPORATION RATE: SLOWER THAN ETHER
SOLUBILITY IN WATER: COMPLETE
APPEARANCE AND ODOR: OPAQUE LIQUID WITH SLIGHT AMMONIA & GLYCOL ETHER ODOR

===== SECTION IV - FIRE AND EXPLOSION HAZARD DATA =====

FLASH POINT: NONE METHOD USED: N/A
FLAMMABLE LIMITS IN AIR BY % OF VOLUME- LOWER: NONE UPPER: NONE

EXTINGUISHING MEDIA: FOAM, CO2, WATER FOG

SPECIAL FIREFIGHTING PROCEDURES

PRODUCT AS SUPPLIED IS NON-FLAMMABLE. IN THE EVENT THIS MATERIAL IS INVOLVED IN A FIRE, WEAR SELF CONTAINED BREATHING APPARATUS, AND FULL PROTECTIVE EQUIPMENT.

UNUSUAL FIRE AND EXPLOSION HAZARDS

CLOSED CONTAINERS MAY EXPLODE FROM BUILD UP OF STEAM PRESSURE IF EXPOSED TO EXTREME HEAT OR FIRE. WATER STREAM MAY BE USED TO COOL CONTAINERS.

===== SECTION V - REACTIVITY DATA =====

STABILITY

STABLE

CONDITIONS TO AVOID

N/A

INCOMPATIBILITY (MATERIALS TO AVOID)

STRONG ACIDS AND BASES

HAZARDOUS DECOMPOSITION OR BYPRODUCTS

CARBON DIOXIDE, CARBON MONOXIDE, HYDROCARBON COMPOUNDS

HAZARDOUS POLYMERIZATION

WILL NOT OCCUR

===== SECTION VI - HEALTH HAZARD DATA =====

INHALATION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

NASAL AND RESPIRATORY IRRITATION, POSSIBLE DIZZINESS OR NAUSEA.

SKIN AND EYE CONTACT HEALTH RISKS AND SYMPTOMS OF EXPOSURE

EYES: PRIMARY IRRITATION, TEARING AND REDNESS. SKIN: POSSIBLE IRRITATION.

SKIN ABSORPTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

MODERATE IRRITATION, REDNESS.

INGESTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

SINGLE DOSE ORAL TOXICITY OF PRODUCT IS LOW.

HEALTH HAZARDS (ACUTE AND CHRONIC)

NONE KNOWN ON PRODUCT AS SUPPLIED

HOWEVER, OVER EXPOSURE TO SECTION II COMPONENTS CAN CAUSE DIZZINESS, NAUSEA OR HEADACHE. EXCESSIVE SKIN CONTACT CAN CAUSE DERMATITIS. EYE CONTACT CAN CAUSE IRRITATION.

CARCINOGENICITY: NTP CARCINOGEN: No IARC MONOGRAPHS: No OSHA REGULATED: No

N/A

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE

OVER EXPOSURE TO SECTION II COMPONENTS CAN AGGRAVATE PRE-EXISTING DISORDERS OF KIDNEYS, LIVER AND RESPIRATORY SYSTEM.

EMERGENCY AND FIRST AID PROCEDURES

EYES: FLUSH GENTLY WITH WATER FOR 15 MINUTES, IF ANY IRRITATION PERSISTS, SEEK MEDICAL ATTENTION.

SKIN: WASH AFFECTED AREA WITH SOAP AND WATER, IF ANY IRRITATION DEVELOPS AND PERSISTS, SEEK MEDICAL ATTENTION.

INHALATION: REMOVE TO FRESH AIR, IF DIZZINESS OR NAUSEA PERSISTS, SEEK MEDICAL ATTENTION.

===== SECTION VII - PRECAUTIONS FOR SAFE HANDLING AND USE =====

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED

SOAK UP WITH INERT ABSORBENT. DO NOT ALLOW MATERIAL TO ENTER DRAINS, SEWER SYSTEM. VENTILATE AREA.

WASTE DISPOSAL METHOD

FOR NON-DRIED MATERIAL THAT STILL CONTAINS SECTION II COMPONENTS: DISPOSE OF IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS. THE FULLY DRIED MATERIAL DOES NOT CONTAIN ANY OSHA DEFINED HAZARDOUS MATERIALS, AND MAY BE DISPOSED OF IN ACCORDANCE WITH ALL APPLICABLE REGULATIONS.

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING

USE ONLY WITH VENTILATION THAT KEEPS SECTION II COMPONENTS BELOW PERMISSIBLE EXPOSURE LIMITS. KEEP CONTAINERS UPRIGHT AND SEALED. AVOID STORAGE ABOVE 120 Deg.F. KEEP FROM FREEZING.

OTHER PRECAUTIONS

AVOID SKIN AND EYE CONTACT. DO NOT BREATHE VAPORS. DO NOT TAKE INTERNALLY. USE ONLY WITH ADEQUATE VENTILATION. DUST FROM SANDING THE DRIED MATERIAL SHOULD BE TREATED AS NUISANCE DUST - THE USE OF A PARTICULATE DUST MASK IS RECOMMENDED. ALL PERSONS WHO USE THIS MATERIAL SHOULD READ AND UNDERSTAND ALL MANUFACTURERS' INSTRUCTIONS AND PRECAUTIONS PRIOR TO USE. THIS MATERIAL IS INTENDED FOR USE IN AN INDUSTRIAL ENVIRONMENT BY TRAINED PERSONNEL ONLY.

===== SECTION VIII - CONTROL MEASURES =====

M A T E R I A L S A F E T Y D A T A S H E E T

56 SERIES AQUATEK - ALL COLORS

Page: 3
05/21/07

RESPIRATORY PROTECTION

PROVIDE SUFFICIENT MECHANICAL (GENERAL OR LOCAL) VENTILATION TO KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS. IF VENTILATION CANNOT KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS, THEN A NIOSH/OSHA APPROVED MECHANICAL / CHEMICAL RESPIRATOR FOR USE WITH ORGANIC SOLVENTS MAY BE USED (CONSULT INDUSTRIAL HYGIENIST).

VENTILATION

SUFFICIENT TO KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS

PROTECTIVE GLOVES

IMPERVIOUS GLOVES ARE RECOMMENDED (CONSULT INDUSTRIAL HYGIENIST).

EYE PROTECTION

SAFETY GLASSES WITH SIDE SHIELDS ARE RECOMMENDED TO PREVENT CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT

EYE WASH STATION. TO PREVENT REPEATED OR PROLONGED CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

WORK/HYGIENIC PRACTICES

WASH HANDS BEFORE EATING.

===== SECTION IX - DISCLAIMER =====

THE INFORMATION IN THIS MSDS AND ENVIRONMENTAL DATA SHEET WAS OBTAINED FROM SOURCES WHICH WE BELIEVE ARE RELIABLE. HOWEVER, THE INFORMATION IS PROVIDED WITHOUT ANY REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, REGARDING ITS ACCURACY OR COMPLETENESS. RECIPIENTS ARE ADVISED TO CONFIRM THE CURRENT ACCURACY IN ADVANCE OF NEEDS.

Aquatek Waterborne Enamels (55 Series)

To: MSDS User

Please find enclosed the material safety data sheet as per your request. The information presented in these forms is believed to be correct and sufficient to meet the requirements of the OSHA Hazard Communication Standard 29CFR 1910.1200.

These forms should be made available to all those who handle or may otherwise be exposed to the product(s).

The supplied material safety data sheet covers the common hazardous ingredients associated with more than one product. This is supplied in accordance with 29CFR 1910.1200 paragraph (g)(4), and Cal OSHA T8 CCR section 5194 (g)(4) which states: "where complex mixtures have similar hazards and contents ...but the specific composition varies from mixture to mixture ... the manufacturer may prepare one material safety data sheet to apply to all of these similar mixtures.

This MSDS and environmental data sheet is designed to address the safe use and handling of the R.J. McGlennon Company products that are listed below. It is not intended to address specific technical properties of an individual product.

See R.J. McGlennon Co. individual **Product Data Sheets** for VOC and other specific technical data.

This MSDS (identified as 55MSD Aquatek Waterborne Enamels) covers all Enamel products (both stock and custom) which are labeled as a 55 series Enamel.

Following is a listing of our stock products that are made in this 55 series.

Stock Products in 55 Series

QE-103 GMC White
QE-105 Gloss White
QE-403 Safety Green
QE-404 John Deere Green
QE-501 New Caterpillar Yellow
QE-505 Visibility Yellow
QE-506 Osha Safety Yellow
QE-507 School Bus Yellow
QE-508 Omaha Orange
QE-510 Caterpillar Yellow
QE-511 International Orange
QE-600 Dark Gray
QE-601 Light Gray
QE-602 Industrial Gray
QE-704 Safety Red
QE-705 Industrial Red
QE-803 Seal Brown
QE-804 Deep Brown

M A T E R I A L S A F E T Y D A T A S H E E T

55 SERIES AQUATEK WATERBORNE ENAMELS

Page:
08/09/05

QE-907 Deep Blue
QE-908 Light Blue
QE-909 Safety Blue
QE-909 NC Blue
QEJ-202 Gloss Black
QEK-100 Semi-Gloss Black
QEK-101 Flat Black

M A T E R I A L S A F E T Y D A T A S H E E T

55 SERIES AQUATEK WATERBORNE ENAMELS

Page:
08/09/05

PRODUCT NAME: 55 SERIES AQUATEK WATERBORNE ENAMELS
PRODUCT CODE: 55MSD

HMIS CODES: H F R P
1 0 0 H

===== SECTION I - MANUFACTURER IDENTIFICATION =====

MANUFACTURER'S NAME: R. J. McGLENNON CO. INC.
ADDRESS : 198 UTAH ST.
SAN FRANCISCO, CA 94103

EMERGENCY PHONE : (800)424-9300 DATE REVISED :
INFORMATION PHONE : (415)552-0311 NAME OF PREPARER : J. Davis
DATE PRINTED : 08/09/05

===== SECTION II - HAZARDOUS INGREDIENTS/SARA III INFORMATION =====

REPORTABLE COMPONENTS	CAS NUMBER	VAPOR PRESSURE MM HG @ TEMP	WEIGHT PERCENT
* GLYCOL ETHER EB OSHA PEL EXPOSURE LIMIT: 25ppm SKIN ACGIH TLV EXPOSURE LIMIT: 25ppm SKIN OTHER EXPOSURE LIMIT: N/A	111-76-2	0.66 68 Deg F	8.
ISOBUTYL ALCOHOL OSHA PEL EXPOSURE LIMIT: 50 ACGIH TLV EXPOSURE LIMIT: 50 OTHER EXPOSURE LIMIT: N/A	78-83-1	8.8 68 Deg F	4.5

* Indicates toxic chemical(s) subject to the reporting requirements of section 313 of Title III and of 40 CFR 372.
Note: This product contains a moderate level of water miscible co-solvents.

===== SECTION III - PHYSICAL/CHEMICAL CHARACTERISTICS =====

BOILING RANGE: 212 - 250 Deg F SPECIFIC GRAVITY (H2O=1): 1.22
VAPOR DENSITY: HEAVIER THAN AIR EVAPORATION RATE: SLOWER THAN ETHER
SOLUBILITY IN WATER: COMPLETE
APPEARANCE AND ODOR: OPAQUE LIQUID WITH SLIGHT AMMONIA & GLYCOL ETHER ODOR

===== SECTION IV - FIRE AND EXPLOSION HAZARD DATA =====

FLASH POINT: NONE METHOD USED: N/A
FLAMMABLE LIMITS IN AIR BY % OF VOLUME- LOWER: NONE UPPER: NONE

EXTINGUISHING MEDIA: FOAM, CO2, WATER FOG

SPECIAL FIREFIGHTING PROCEDURES

PRODUCT AS SUPPLIED IS NON-FLAMMABLE. IN THE EVENT THIS MATERIAL IS INVOLVED IN A FIRE, WEAR SELF CONTAINED BREATHING APPARATUS, AND FULL PROTECTIVE EQUIPMENT.

UNUSUAL FIRE AND EXPLOSION HAZARDS

CLOSED CONTAINERS MAY EXPLODE FROM BUILD UP OF STEAM PRESSURE IF EXPOSED TO EXTREME HEAT OR FIRE. WATER STREAM MAY BE USED TO COOL CONTAINERS.

M A T E R I A L S A F E T Y D A T A S H E E T

55 SERIES AQUATEK WATERBORNE ENAMELS

Page:
08/09/05

===== SECTION V - REACTIVITY DATA =====

STABILITY

STABLE

CONDITIONS TO AVOID

STRONG OXIDIZING AGENTS.

INCOMPATIBILITY (MATERIALS TO AVOID)

STRONG ACIDS AND BASES

HAZARDOUS DECOMPOSITION OR BYPRODUCTS

CARBON DIOXIDE, CARBON MONOXIDE, HYDROCARBON COMPOUNDS

HAZARDOUS POLYMERIZATION

WILL NOT OCCUR

===== SECTION VI - HEALTH HAZARD DATA =====

INHALATION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

NASAL AND RESPIRATORY IRRITATION, POSSIBLE DIZZINESS OR NAUSEA.

SKIN AND EYE CONTACT HEALTH RISKS AND SYMPTOMS OF EXPOSURE

EYES: PRIMARY IRRITATION, TEARING AND REDNESS. SKIN: POSSIBLE IRRITATION.

SKIN ABSORPTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

MODERATE IRRITATION, REDNESS.

INGESTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

SINGLE DOSE ORAL TOXICITY OF PRODUCT IS LOW.

HEALTH HAZARDS (ACUTE AND CHRONIC)

NONE KNOWN ON PRODUCT AS SUPPLIED

HOWEVER, OVER EXPOSURE TO SECTION II COMPONENTS CAN CAUSE DIZZINESS, NAUSEA OR HEADACHE. EXCESSIVE SKIN CONTACT CAN CAUSE DERMATITIS. EYE CONTACT CAN CAUSE IRRITATION.

CARCINOGENICITY: NTP CARCINOGEN: No IARC MONOGRAPHS: No OSHA REGULATED: No

N/A

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE

OVER EXPOSURE TO SECTION II COMPONENTS CAN AGGRAVATE PRE-EXISTING DISORDERS OF KIDNEYS, LIVER AND RESPIRATORY SYSTEM.

EMERGENCY AND FIRST AID PROCEDURES

EYES: FLUSH GENTLY WITH WATER FOR 15 MINUTES, IF ANY IRRITATION PERSISTS, SEEK MEDICAL ATTENTION.

SKIN: WASH AFFECTED AREA WITH SOAP AND WATER, IF ANY IRRITATION DEVELOPS AND PERSISTS, SEEK MEDICAL ATTENTION.

INHALATION: REMOVE TO FRESH AIR, IF DIZZINESS OR NAUSEA PERSISTS, SEEK MEDICAL ATTENTION.

===== SECTION VII - PRECAUTIONS FOR SAFE HANDLING AND USE =====

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED

SOAK UP WITH INERT ABSORBENT. DO NOT ALLOW MATERIAL TO ENTER DRAINS, SEWER SYSTEM, OR VENTILATE AREA.

WASTE DISPOSAL METHOD

FOR NON-DRIED MATERIAL THAT STILL CONTAINS SECTION II COMPONENTS: DISPOSE OF IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS. THE FULLY DRIED MATERIAL DOES NOT CONTAIN ANY OSHA DEFINED HAZARDOUS MATERIALS, AND MAY BE DISPOSED OF IN ACCORDANCE WITH ALL APPLICABLE REGULATIONS.

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING

USE ONLY WITH VENTILATION THAT KEEPS SECTION II COMPONENTS BELOW PERMISSABLE EXPOSURE LIMITS. KEEP CONTAINERS UPRIGHT AND SEALED. AVOID STORAGE ABOVE 120 Deg.F. KEEP FROM FREEZING.

OTHER PRECAUTIONS

AVOID SKIN AND EYE CONTACT. DO NOT BREATHE VAPORS. DO NOT TAKE INTERNALLY. USE ONLY WITH ADEQUATE VENTILATION. DUST FROM SANDING THE DRIED MATERIAL SHOULD BE TREATED AS NUISANCE DUST - THE USE OF A PARTICULATE DUST MASK IS RECOMMENDED. ALL PERSONS WHO USE THIS MATERIAL SHOULD READ AND UNDERSTAND ALL MANUFACTURERS' INSTRUCTIONS AND PRECAUTIONS PRIOR TO USE. THIS MATERIAL IS INTENDED FOR USE IN AN INDUSTRIAL ENVIRONMENT BY TRAINED PERSONNEL ONLY.

===== SECTION VIII - CONTROL MEASURES =====

RESPIRATORY PROTECTION

PROVIDE SUFFICIENT MECHANICAL (GENERAL OR LOCAL) VENTILATION TO KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS. IF VENTILATION CANNOT KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS, THEN A NIOSH/OSHA APPROVED MECHANICAL / CHEMICAL RESPIRATOR FOR USE WITH ORGANIC SOLVENTS MAY BE USED (CONSULT INDUSTRIAL HYGIENIST).

VENTILATION

M A T E R I A L S A F E T Y D A T A S H E E T

55 SERIES AQUATEK WATERBORNE ENAMELS

Page:
08/09/05

SUFFICIENT TO KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS

PROTECTIVE GLOVES

IMPERVIOUS GLOVES ARE RECOMMENDED (CONSULT INDUSTRIAL HYGIENIST).

EYE PROTECTION

SAFETY GLASSES WITH SIDE SHIELDS ARE RECOMMENDED TO PREVENT CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT

EYE WASH STATION. TO PREVENT REPEATED OR PROLONGED CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

WORK/HYGIENIC PRACTICES

WASH HANDS BEFORE EATING.

===== **SECTION IX - DISCLAIMER** =====

THE INFORMATION IN THIS MSDS AND ENVIRONMENTAL DATA SHEET WAS OBTAINED FROM SOURCES WHICH WE BELIEVE ARE RELIABLE. HOWEVER, THE INFORMATION IS PROVIDED WITHOUT ANY REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, REGARDING ITS ACCURACY OR COMPLETENESS. RECIPIENTS ARE ADVISED TO CONFIRM THE CURRENT ACCURACY IN ADVANCE OF NEEDS.

M A T E R I A L S A F E T Y D A T A S H E E T

70 SERIES AQUATEK WATERBORNE ENAMELS

Aquatek Waterborne Enamels (70 Series)

To: MSDS User

Please find enclosed the material safety data sheet as per your request. The information presented in these forms is believed to be correct and sufficient to meet the requirements of the OSHA Hazard Communication Standard 29CFR 1910.1200.

These forms should be made available to all those who handle or may otherwise be exposed to the product(s).

The supplied material safety data sheet covers the common hazardous ingredients associated with more than one product. This is supplied in accordance with 29CFR 1910.1200 paragraph (g)(4), and Cal OSHA T8 CCR section 5194 (g)(4) which states: "where complex mixtures have similar hazards and contents ...but the specific composition varies from mixture to mixture ... the manufacturer may prepare one material safety data sheet to apply to all of these similar mixtures.

This MSDS and environmental data sheet is designed to address the safe use and handling of the R.J. McGlennon Company products that are listed below. It is not intended to address specific technical properties of an individual product.

See R.J. McGlennon Co. individual **Product Data Sheets** for VOC and other specific technical data.

This MSDS (identified as 70MSD Aquatek Waterborne Enamels) covers the following products in this 70 series.

Products in 70 Series

QE-132 Andersen White

QE-981 Blue

QE-955 Andersen Royal Blue

M A T E R I A L S A F E T Y D A T A S H E E T

70 SERIES AQUATEK - ALL COLORS

Page: 1

05/21/07

PRODUCT NAME: 70 SERIES AQUATEK - ALL COLORS
 PRODUCT CODE: 70MSD

HMIS CODES: H F R P
 1 0 0 H

===== SECTION I - MANUFACTURER IDENTIFICATION =====

MANUFACTURER'S NAME: R. J. McGLENNON CO. INC.
 ADDRESS : 198 UTAH ST.
 SAN FRANCISCO, CA 94103

EMERGENCY PHONE : (800) 424-9300 DATE REVISED :
 INFORMATION PHONE : (415) 552-0311 NAME OF PREPARER : J. Davis
 DATE PRINTED : 05/21/07

===== SECTION II - HAZARDOUS INGREDIENTS/SARA III INFORMATION =====

REPORTABLE COMPONENTS	CAS NUMBER	VAPOR PRESSURE MM HG @ TEMP	WEIGHT PERCENT
* # GLYCOL ETHER EB OSHA PEL EXPOSURE LIMIT: 25 ppm TWA ACGIH TLV EXPOSURE LIMIT: 25 ppm skin OSHA TWA EXPOSURE LIMIT: 240 mg/cu.m.	111-76-2	0.40 20 Deg C	1.30
* NORMAL BUTYL ALCOHOL OSHA PEL EXPOSURE LIMIT: 100 ppm ACGIH TLV EXPOSURE LIMIT: 50 ppm OTHER EXPOSURE LIMIT: 50 ppm	71-36-3	4.2 68 Deg F	1.30
* Cobalt Carboxylate (cobalt compound - constituent of drier) OSHA PEL 0.1mg/cu.m. (as Co) ACGIH TLV 0.02 mg/cu.m. (as Co)	27253-31-2	NA NA	.15

* Indicates this product contains EPCRA section 313 chemical(s) subject to the reporting requirements of the Emergency Planning and Community Right-To-Know Act of 1986 (40 CFR 372).

This information must be included in all MSDS's that are copied and distributed for this material. *# Note for Glycol Ether EB - this solvent is no longer on the 40CFR63.112 HAPS list but it is EPCRA section 313 reportable

This product contain a low level of water miscible coalescing solvents.

===== SECTION III - PHYSICAL/CHEMICAL CHARACTERISTICS =====

BOILING RANGE: 212 - 250 Deg F SPECIFIC GRAVITY (H2O=1): 1.07
 VAPOR DENSITY: HEAVIER THAN AIR EVAPORATION RATE: SLOWER THAN ETHER
 SOLUBILITY IN WATER: COMPLETE
 APPEARANCE AND ODOR: OPAQUE LIQUID WITH SLIGHT AMMONIA & GLYCOL ETHER ODOR

===== SECTION IV - FIRE AND EXPLOSION HAZARD DATA =====

FLASH POINT: NONE METHOD USED: N/A
 FLAMMABLE LIMITS IN AIR BY % OF VOLUME- LOWER: NONE UPPER: NONE

EXTINGUISHING MEDIA: FOAM, CO2, WATER FOG

SPECIAL FIREFIGHTING PROCEDURES

PRODUCT AS SUPPLIED IS NON-FLAMMABLE. IN THE EVENT THIS MATERIAL IS INVOLVED IN A FIRE, WEAR SELF CONTAINED BREATHING APPARATUS, AND FULL PROTECTIVE EQUIPMENT.

UNUSUAL FIRE AND EXPLOSION HAZARDS

CLOSED CONTAINERS MAY EXPLODE FROM BUILD UP OF STEAM PRESSURE IF EXPOSED TO EXTREME HEAT OR FIRE. WATER STREAM MAY BE USED TO COOL CONTAINERS.

=====**SECTION V - REACTIVITY DATA**=====**STABILITY**

STABLE

CONDITIONS TO AVOID

N/A

INCOMPATIBILITY (MATERIALS TO AVOID)

STRONG ACIDS AND BASES

HAZARDOUS DECOMPOSITION OR BYPRODUCTS

CARBON DIOXIDE, CARBON MONOXIDE, HYDROCARBON COMPOUNDS

HAZARDOUS POLYMERIZATION

WILL NOT OCCUR

=====**SECTION VI - HEALTH HAZARD DATA**=====**INHALATION HEALTH RISKS AND SYMPTOMS OF EXPOSURE**

NASAL AND RESPIRATORY IRRITATION, POSSIBLE DIZZINESS OR NAUSEA.

SKIN AND EYE CONTACT HEALTH RISKS AND SYMPTOMS OF EXPOSURE

EYES: PRIMARY IRRITATION, TEARING AND REDNESS. SKIN: POSSIBLE IRRITATION.

SKIN ABSORPTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

MODERATE IRRITATION, REDNESS.

INGESTION HEALTH RISKS AND SYMPTOMS OF EXPOSURE

SINGLE DOSE ORAL TOXICITY OF PRODUCT IS LOW.

HEALTH HAZARDS (ACUTE AND CHRONIC)

NONE KNOWN ON PRODUCT AS SUPPLIED

HOWEVER, OVER EXPOSURE TO SECTION II COMPONENTS CAN CAUSE DIZZINESS, NAUSEA OR HEADACHE. EXCESSIVE SKIN CONTACT CAN CAUSE DERMATITIS. EYE CONTACT CAN CAUSE IRRITATION.

CARCINOGENICITY: NTP CARCINOGEN: No IARC MONOGRAPHS: No OSHA REGULATED: No

N/A

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE

OVER EXPOSURE TO SECTION II COMPONENTS CAN AGGRAVATE PRE-EXISTING DISORDERS OF KIDNEYS, LIVER AND RESPIRATORY SYSTEM.

EMERGENCY AND FIRST AID PROCEDURES

EYES: FLUSH GENTLY WITH WATER FOR 15 MINUTES, IF ANY IRRITATION PERSISTS, SEEK MEDICAL ATTENTION.

SKIN: WASH AFFECTED AREA WITH SOAP AND WATER, IF ANY IRRITATION DEVELOPS AND PERSISTS, SEEK MEDICAL ATTENTION.

INHALATION: REMOVE TO FRESH AIR, IF DIZZINESS OR NAUSEA PERSISTS, SEEK MEDICAL ATTENTION.

=====**SECTION VII - PRECAUTIONS FOR SAFE HANDLING AND USE**=====**STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED**

SOAK UP WITH INERT ABSORBENT. DO NOT ALLOW MATERIAL TO ENTER DRAINS, SEWER SYSTEM. VENTILATE AREA.

WASTE DISPOSAL METHOD

FOR NON-DRIED MATERIAL THAT STILL CONTAINS SECTION II COMPONENTS: DISPOSE OF IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS. THE FULLY DRIED MATERIAL DOES NOT CONTAIN ANY OSHA DEFINED HAZARDOUS MATERIALS, AND MAY BE DISPOSED OF IN ACCORDANCE WITH ALL APPLICABLE REGULATIONS.

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING

USE ONLY WITH VENTILATION THAT KEEPS SECTION II COMPONENTS BELOW PERMISSIBLE EXPOSURE LIMITS. KEEP CONTAINERS UPRIGHT AND SEALED. AVOID STORAGE ABOVE 120 Deg.F. KEEP FROM FREEZING.

OTHER PRECAUTIONS

AVOID SKIN AND EYE CONTACT. DO NOT BREATHE VAPORS. DO NOT TAKE INTERNALLY. USE ONLY WITH ADEQUATE VENTILATION. DUST FROM SANDING THE DRIED MATERIAL SHOULD BE TREATED AS NUISANCE DUST - THE USE OF A PARTICULATE DUST MASK IS RECOMMENDED. ALL PERSONS WHO USE THIS MATERIAL SHOULD READ AND UNDERSTAND ALL MANUFACTURERS' INSTRUCTIONS AND PRECAUTIONS PRIOR TO USE. THIS MATERIAL IS INTENDED FOR USE IN AN INDUSTRIAL ENVIRONMENT BY TRAINED PERSONNEL ONLY.

=====**SECTION VIII - CONTROL MEASURES**=====

M A T E R I A L S A F E T Y D A T A S H E E T

~~70 SERIES AQUATEK M-A ALL COLORS~~ M A T E R I A L S A F E T Y D A T A S H E E T

Page: 3

05/21/07

~~55 SERIES AQUATEK WATERBORNE ENAMELS~~

~~Page:~~

08/09/05

RESPIRATORY PROTECTION

PROVIDE SUFFICIENT MECHANICAL (GENERAL OR LOCAL) VENTILATION TO KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS.

IF VENTILATION CANNOT KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS, THEN A NIOSH/OSHA APPROVED MECHANICAL / CHEMICAL RESPIRATOR FOR USE WITH ORGANIC SOLVENTS MAY BE USED (CONSULT INDUSTRIAL HYGIENIST).

VENTILATION

SUFFICIENT TO KEEP SECTION II COMPONENTS BELOW THEIR EXPOSURE LIMITS

PROTECTIVE GLOVES

IMPERVIOUS GLOVES ARE RECOMMENDED (CONSULT INDUSTRIAL HYGIENIST).

EYE PROTECTION

SAFETY GLASSES WITH SIDE SHIELDS ARE RECOMMENDED TO PREVENT CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT

EYE WASH STATION. TO PREVENT REPEATED OR PROLONGED CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

WORK/HYGIENIC PRACTICES

WASH HANDS BEFORE EATING.

===== **SECTION IX - DISCLAIMER** =====

THE INFORMATION IN THIS MSDS AND ENVIRONMENTAL DATA SHEET WAS OBTAINED FROM SOURCES WHICH WE BELIEVE ARE RELIABLE. HOWEVER, THE INFORMATION IS PROVIDED WITHOUT ANY REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, REGARDING ITS ACCURACY OR COMPLETENESS. RECIPIENTS ARE ADVISED TO CONFIRM THE CURRENT ACCURACY IN ADVANCE OF NEEDS.

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

Gals Used

Total Emissions

6/30/2004

Totals

93

74.40

Pounds

✓ = entered

7/1/2004	MCG	11	M	✓QE-441	2.12	0.80	8.80
7/1/2004	AGN	31	M	✓QE-466	2.12	0.80	24.80
7/1/2004	OR	25	M	✓QE-522	2.21	0.80	20.00
7/1/2004	IO	3	M	✓QE-535	2.21	0.80	2.40

Gals Used

Total Emissions

7/1/2004

Totals

70

56.00

Pounds

7/6/2004	AGN	120	M	✓QE-466	2.12	0.80	96.00
7/6/2004	IO	22	M	✓QE-535	2.21	0.80	17.60
7/6/2004	GN	8	M	✓QE-415	2.12	0.80	6.40

Gals Used

Total Emissions

7/6/2004

Totals

150

120.00

Pounds

7/7/2004	BL	47	M	✓QE-930	2.21	0.80	37.60
7/7/2004	OR	58	M	✓QE-522	2.21	0.80	46.40
7/7/2004	IO	30	M	✓QE-535	2.21	0.80	24.00

Gals Used

Total Emissions

7/7/2004

Totals

135

108.00

Pounds

7/8/2004	BL	33	M	✓QE-930	2.21	0.80	26.40
7/8/2004	AOR	51	M	✓QE-566	2.12	0.80	40.80
7/8/2004	OR	70	M	✓QE-522	2.21	0.80	56.00
7/8/2004	GN	5	M	✓QE-415	2.12	0.80	4.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>7/8/2004</u>	<u>Totals</u>	159		127.20		Pounds

7/9/2004	BK	15	M	QE-J204	✓ 2.11	0.80	12.00
7/9/2004	IG	17	M	QE-432	✓ 2.12	0.80	13.60
7/9/2004	MCG	12	M	QE-441	✓ 2.12	0.80	9.60
7/9/2004	AGN	35	M	QE-466	✓ 2.12	0.80	28.00
7/9/2004	AOR	46	M	QE-566	✓ 2.12	0.80	36.80
7/9/2004	GY	8	M	QE-647	✓	0.80	6.40
7/9/2004	OR	26	M	QE-522	✓ 2.21	0.80	20.80
7/9/2004	YL	8	M	QE-569	✓ 2.21	0.80	6.40

		Gals Used		Total Emissions		
<u>7/9/2004</u>	<u>Totals</u>	167		133.60		Pounds

7/12/2004	BL	28	M	✓ QE-930	2.21	0.80	22.40
7/12/2004	NCB	8	M	✓ QE-951	2.25	0.83	6.64
7/12/2004	AGN	5	M	✓ QE-466	2.12	0.80	4.00
7/12/2004	OR	16	M	✓ QE-522	2.21	0.80	12.80
7/12/2004	IO	20	M	✓ QE-535	2.21	0.80	16.00
7/12/2004	IG	4	M	✓ QE-432	2.12	0.80	3.20
7/12/2004	YL	17	M	✓ QE-569	2.21	0.80	13.60

		Gals Used		Total Emissions		
<u>7/12/2004</u>	<u>Totals</u>	98		78.64		Pounds

7/13/2004	AGN	50	M	✓ QE-466	2.12	0.80	40.00
7/13/2004	OR	54	M	✓ QE-522	2.21	0.80	43.20
7/13/2004	IO	23	M	✓ QE-535	2.21	0.80	18.40

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>7/13/2004</u>	<u>Totals</u>	127		101.60		Pounds

7/14/2004	AGN	30	M	✓ QE-466	2.12	0.80	24.00
7/14/2004	OR	50	M	✓ QE-522	2.21	0.80	40.00

		Gals Used		Total Emissions		
<u>7/14/2004</u>	<u>Totals</u>	80		64.00		Pounds

7/15/2004	BL	12	M	✓ QE-930	2.21	0.80	9.60
7/15/2004	AGN	60	M	✓ QE-466	2.12	0.80	48.00
7/15/2004	GY	4	M	✓ QE-647		0.80	3.20
7/15/2004	OR	40	M	✓ QE-522	2.21	0.80	32.00
7/15/2004	YY	15	M	✓ QE-515	2.20	0.80	12.00
7/15/2004	FR	8	M	✓ QE-713	2.21	0.81	6.48

		Gals Used		Total Emissions		
<u>7/15/2004</u>	<u>Totals</u>	139		111.28		Pounds

7/16/2004	DHR		M	QE-735	2.10	0.80	0.00
7/16/2004	MCG	8	M	✓ QE-441	2.12	0.80	6.40
7/16/2004	OR	51	M	✓ QE-522	2.21	0.80	40.80
7/16/2004	IO	30	M	✓ QE-535	2.21	0.80	24.00
7/16/2004	IG	15	M	✓ QE-432	2.12	0.80	12.00
7/16/2004	YL	3	M	✓ QE-569	2.21	0.80	2.40

		Gals Used		Total Emissions		
<u>7/16/2004</u>	<u>Totals</u>	107		85.60		Pounds

7/19/2004	AGN	60	M	✓ QE-466	2.12	0.80	48.00
7/19/2004	GY	20	M	✓ QE-647		0.80	16.00
7/19/2004	OR	60	M	✓ QE-522	2.21	0.80	48.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
7/19/2004	IO	10	M	✓QE-535	2.21	0.80	8.00

Gals Used Total Emissions

<u>7/19/2004</u>	<u>Totals</u>	150		120.00	Pounds
------------------	---------------	-----	--	--------	--------

7/20/2004	AGN	40	M	✓QE-466	2.12	0.80	32.00
7/20/2004	OR	75	M	✓QE-522	2.21	0.80	60.00
7/20/2004	GN	27	M	✓QE-415	2.12	0.80	21.60

Gals Used Total Emissions

<u>7/20/2004</u>	<u>Totals</u>	142		113.60	Pounds
------------------	---------------	-----	--	--------	--------

7/21/2004	HDC	81	M	✓QE-850	2.22	0.81	65.61
7/21/2004	AGN	30	M	✓QE-466	2.12	0.80	24.00
7/21/2004	OR	20	M	✓QE-522	2.21	0.80	16.00
7/21/2004	IG	20	M	✓QE-432	2.12	0.80	16.00

Gals Used Total Emissions

<u>7/21/2004</u>	<u>Totals</u>	151		121.61	Pounds
------------------	---------------	-----	--	--------	--------

7/22/2004	HDC	74	M	✓QE-850	2.22	0.81	59.94
7/22/2004	AGN	60	M	✓QE-466	2.12	0.80	48.00
7/22/2004	AOR	40	M	✓QE-566	2.12	0.80	32.00
7/22/2004	OR	32	M	✓QE-522	2.21	0.80	25.60
7/22/2004	KWG	2	M	✓QE-649	2.21	0.80	1.60

Gals Used Total Emissions

<u>7/22/2004</u>	<u>Totals</u>	208		167.14	Pounds
------------------	---------------	-----	--	--------	--------

7/23/2004	AGN	17	M	✓QE-466	2.12	0.80	13.60
7/23/2004	GY	38	M	✓QE-647		0.80	30.40
7/23/2004	OR	41	M	✓QE-522	2.21	0.80	32.80
7/23/2004	IO	54	M	✓QE-535	2.21	0.80	43.20

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>7/23/2004</u>	<u>Totals</u>	150		120.00		Pounds

7/24/2004	HDC	74	M	✓QE-850	2.22	0.81	59.94
7/24/2004	AGN	62	M	✓QE-466	2.12	0.80	49.60
7/24/2004	OR	35	M	✓QE-522	2.21	0.80	28.00

		Gals Used		Total Emissions		
<u>7/24/2004</u>	<u>Totals</u>	171		137.54		Pounds

7/26/2004	HDC	149	M	✓QE-850	2.22	0.81	120.69
-----------	-----	-----	---	---------	------	------	--------

		Gals Used		Total Emissions		
<u>7/26/2004</u>	<u>Totals</u>	149		120.69		Pounds

7/27/2004	HDC	87	M	✓qe-850	2.22	0.81	70.47
7/27/2004	AGN	63	M	✓QE-466	2.12	0.80	50.40

		Gals Used		Total Emissions		
<u>7/27/2004</u>	<u>Totals</u>	150		120.87		Pounds

7/28/2004	AGN	86	M	✓QE-466	2.12	0.80	68.80
7/28/2004	GY	10	M	✓QE-647		0.80	8.00
7/28/2004	OR	90	M	✓QE-522	2.21	0.80	72.00

		Gals Used		Total Emissions		
<u>7/28/2004</u>	<u>Totals</u>	186		148.80		Pounds

7/29/2004	AW	14	M	✓QE-132	2.17	0.79	11.06
7/29/2004	BL	26	M	✓QE-930	2.21	0.80	20.80
7/29/2004	AGN	35	M	✓QE-466	2.12	0.80	28.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
7/29/2004	OR	75	✓ M	QE-522	2.21	0.80	60.00
7/29/2004	IG	4	✓ M	QE-432	2.12	0.80	3.20
7/29/2004	FR	22	✓ M	QE-713	2.21	0.81	17.82
7/29/2004	IO	12	✓ M	QE-535	2.21	0.80	9.60

Gals Used			Total Emissions	
<u>7/29/2004</u>	<u>Totals</u>	188	150.48	Pounds

7/30/2004	AGN	61	✓ M	QE-466	2.12	0.80	48.80
7/30/2004	GY	8	✓ M	QE-647		0.80	6.40
7/30/2004	OR	60	✓ M	QE-522	2.21	0.80	48.00
7/30/2004	HDC	62	✓ M	QE-850	2.22	0.81	50.22

Gals Used			Total Emissions	
<u>7/30/2004</u>	<u>Totals</u>	191	153.42	Pounds

7/31/2004	HDC	60	M ✓	QE-850	2.22	0.81	48.60
-----------	-----	----	-----	--------	------	------	-------

Gals Used			Total Emissions	
<u>7/31/2004</u>	<u>Totals</u>	60	48.60	Pounds

7/04
8/04

8/2/2004	HDC	5	M ✓	QE-850	2.22	0.81	4.05
8/2/2004	AGN	40	M ✓	QE-466	2.12	0.80	32.00
8/2/2004	OR	66	M ✓	QE-522	2.21	0.80	52.80

Gals Used			Total Emissions	
<u>8/2/2004</u>	<u>Totals</u>	111	88.85	Pounds

8/3/2004	DHR	40 ✓	M	QE-735	2.10	0.80	32.00
8/3/2004	AGN	30	M ✓	QE-466	2.12	0.80	24.00
8/3/2004	OR	3	M ✓	QE-522	2.21	0.80	2.40

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>8/3/2004</u>	<u>Totals</u>	73		58.40		Pounds

8/4/2004	DHR	42	M	qe-735	2.10	0.80	33.60
8/4/2004	AGN	40	M	✓QE-466	2.12	0.80	32.00
8/4/2004	OR	6	M	✓QE-522	2.21	0.80	4.80

		Gals Used		Total Emissions		
<u>8/4/2004</u>	<u>Totals</u>	88		70.40		Pounds

8/5/2004	JIG	22	M	✓QE-424	2.12	0.80	17.60
8/5/2004	MCG	21	M	✓QE-441	2.12	0.80	16.80
8/5/2004	GY	2	M	✓QE-647		0.80	1.60
8/5/2004	OR	68	M	✓QE-522	2.21	0.80	54.40
8/5/2004	KWG	3	M	✓QE-649	2.21	0.80	2.40

		Gals Used		Total Emissions		
<u>8/5/2004</u>	<u>Totals</u>	116		92.80		Pounds

8/6/2004	RB	45	M	✓QE-929	2.70	0.83	37.35
8/6/2004	AGN	41	M	✓QE-466	2.12	0.80	32.80
8/6/2004	JIG	8	M	✓QE-424	2.12	0.80	6.40
8/6/2004	GN	1	M	✓QE-415	2.12	0.80	0.80
8/6/2004	PY	12	M	QE-572	2.20	0.80	9.60

		Gals Used		Total Emissions		
<u>8/6/2004</u>	<u>Totals</u>	107		86.95		Pounds

8/9/2004	RB	15	M	✓QE-929	2.70	0.83	12.45
8/9/2004	AGN	70	M	✓QE-466	2.12	0.80	56.00
8/9/2004	OR	20	M	✓QE-522	2.21	0.80	16.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>8/9/2004</u>	<u>Totals</u>		105		84.45	Pounds

8/10/2004	RB	45	M	✓QE-929	2.70	0.83	37.35
8/10/2004	AGN	59	M	✓QE-466	2.12	0.80	47.20
8/10/2004	OR	20	M	✓QE-522	2.21	0.80	16.00
8/10/2004	YL	1	M	✓QE-569	2.21	0.80	0.80

			Gals Used	Total Emissions		
<u>8/10/2004</u>	<u>Totals</u>		125		101.35	Pounds

8/11/2004	IB	41	M	✓QE-989	2.12	0.80	32.80
8/11/2004	AGN	33	M	✓QE-466	2.12	0.80	26.40
8/11/2004	AOR	8	M	✓QE-566	2.12	0.80	6.40
8/11/2004	OR	59	M	✓QE-522	2.21	0.80	47.20

			Gals Used	Total Emissions		
<u>8/11/2004</u>	<u>Totals</u>		141		112.80	Pounds

8/12/2004	IB	34	M	✓QE-989	2.12	0.80	27.20
8/12/2004	BL	43	M	✓QE-930	2.21	0.80	34.40
8/12/2004	RB	60	M	✓QE-929	2.70	0.83	49.80
8/12/2004	AGN	3	M	✓QE-466	2.12	0.80	2.40

			Gals Used	Total Emissions		
<u>8/12/2004</u>	<u>Totals</u>		140		113.80	Pounds

8/13/2004	IB	13	M	✓QE-989	2.12	0.80	10.40
8/13/2004	RB	58	M	✓QE-929	2.70	0.83	48.14
8/13/2004	IP	27	M	✓QE-851	2.10	0.80	21.60
8/13/2004	AGN	4	M	✓QE-466	2.12	0.80	3.20
8/13/2004	AOR	8	M	✓QE-566	2.12	0.80	6.40

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
8/13/2004	OR	17	M	✓QE-522	2.21	0.80	13.60

		Gals Used	Total Emissions	
<u>8/13/2004</u>	<u>Totals</u>	127	103.34	Pounds

8/14/2004	BL	30	M	✓QE-930	2.21	0.80	24.00
8/14/2004	RB	122	M	✓QE-929	2.70	0.83	101.26

		Gals Used	Total Emissions	
<u>8/14/2004</u>	<u>Totals</u>	152	125.26	Pounds

8/15/2004	IP	26	M	✓QE-851	2.10	0.80	20.80
8/15/2004	RB	13	M	✓QE-929	2.70	0.83	10.79
8/15/2004	IB	10	M	✓QE-989	2.12	0.80	8.00
8/15/2004	AGN	15	M	✓QE-466	2.12	0.80	12.00
8/15/2004	OR	17	M	✓QE-522	2.21	0.80	13.60

		Gals Used	Total Emissions	
<u>8/15/2004</u>	<u>Totals</u>	81	65.19	Pounds

8/16/2004	BL	26	M	✓qe-930	2.21	0.80	20.80
8/16/2004	RB	65	M	✓QE-929	2.70	0.83	53.95
8/16/2004	IP	12	M	✓QE-851	2.10	0.80	9.60
8/16/2004	AOR	43	M	✓QE-566	2.12	0.80	34.40
8/16/2004	GY	6	M	✓QE-647		0.80	4.80
8/16/2004	OR	22	M	✓QE-522	2.21	0.80	17.60

		Gals Used	Total Emissions	
<u>8/16/2004</u>	<u>Totals</u>	174	141.15	Pounds

8/17/2004	RBL	1	M	✓QE-964	2.21	0.81	0.81
8/17/2004	RB	50	M	✓QE-929	2.70	0.83	41.50
8/17/2004	AGN	80	M	✓QE-466	2.12	0.80	64.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
8/17/2004	<u>Totals</u>		131		106.31	Pounds

8/18/2004	BL	4	M	✓qe-930	2.21	0.80	3.20
8/18/2004	RB	125	M	✓QE-929	2.70	0.83	103.75
8/18/2004	AGN	61	M	✓QE-466	2.12	0.80	48.80
8/18/2004	AOR	34	M	✓QE-566	2.12	0.80	27.20
8/18/2004	OR	9	M	✓QE-522	2.21	0.80	7.20
8/18/2004	GN	2	M	✓QE-415	2.12	0.80	1.60

			Gals Used	Total Emissions		
8/18/2004	<u>Totals</u>		235		191.75	Pounds

8/19/2004	RB	52	M	✓qe-929	2.70	0.83	43.16
8/19/2004	V-AGN	15	V	✓VS-001		0.98	14.70
8/19/2004	AOR	110	M	✓QE-566	2.12	0.80	88.00
8/19/2004	V-OR	20	V	✓VS-002		0.98	19.60

			Gals Used	Total Emissions		
8/19/2004	<u>Totals</u>		197		165.46	Pounds

8/20/2004	V-AGN	50	V	VS-001		0.98	49.00
8/20/2004	AGN	27	M	✓QE-466	2.12	0.80	21.60
8/20/2004	AOR	20	M	✓QE-566	2.12	0.80	16.00
8/20/2004	GY	1	M	✓QE-647		0.80	0.80
8/20/2004	OR	47	M	✓QE-522	2.21	0.80	37.60

			Gals Used	Total Emissions		
8/20/2004	<u>Totals</u>		145		125.00	Pounds

8/21/2004	RB	140	M	✓QE-929	2.70	0.83	116.20
8/21/2004	LWG	68	M	QE-653	2.22	0.81	55.08

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>8/21/2004</u>	<u>Totals</u>		208		171.28	Pounds

8/22/2004	OR	90	M	✓ QE-522	2.21	0.80	72.00
-----------	----	----	---	----------	------	------	-------

			Gals Used	Total Emissions		
<u>8/22/2004</u>	<u>Totals</u>		90		72.00	Pounds

8/23/2004	RB	19	M	✓ qe-929	2.70	0.83	15.77
8/23/2004	AGN	83	M	✓ QE-466	2.12	0.80	66.40
8/23/2004	GY	2	M	✓ QE-647		0.80	1.60
8/23/2004	OR	62	M	✓ QE-522	2.21	0.80	49.60

			Gals Used	Total Emissions		
<u>8/23/2004</u>	<u>Totals</u>		166		133.37	Pounds

8/24/2004	RB	5	M	✓ qe-929	2.70	0.83	4.15
8/24/2004	AGN	46	M	✓ QE-466	2.12	0.80	36.80
8/24/2004	AOR	65	M	✓ QE-566	2.12	0.80	52.00
8/24/2004	OR	48	M	✓ QE-522	2.21	0.80	38.40

			Gals Used	Total Emissions		
<u>8/24/2004</u>	<u>Totals</u>		164		131.35	Pounds

8/25/2004	WC	4	M	QE-852	2.10	0.80	3.20
8/25/2004	AGN	52	M	✓ QE-466	2.12	0.80	41.60
8/25/2004	AOR	85	M	✓ QE-566	2.12	0.80	68.00
8/25/2004	OR	20	M	✓ QE-522	2.21	0.80	16.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>8/25/2004</u>	<u>Totals</u>		161		128.80	Pounds

8/26/2004	AGN	85	M	✓ QE-466	2.12	0.80	68.00
8/26/2004	AOR	21	M	✓ QE-566	2.12	0.80	16.80
8/26/2004	OR	52	M	✓ QE-522	2.21	0.80	41.60

			Gals Used	Total Emissions		
<u>8/26/2004</u>	<u>Totals</u>		158		126.40	Pounds

8/27/2004	BK	1	M	✓ qe-j204	2.11	0.80	0.80
8/27/2004	BL	7	M	✓ QE-930	2.21	0.80	5.60
8/27/2004	AGN	30	M	✓ QE-466	2.12	0.80	24.00
8/27/2004	AOR	27	M	✓ QE-566	2.12	0.80	21.60
8/27/2004	GY	7	M	✓ QE-647		0.80	5.60
8/27/2004	OR	61	M	✓ QE-522	2.21	0.80	48.80
8/27/2004	GN	2	M	✓ QE-415	2.12	0.80	1.60
8/27/2004	YL	1	M	✓ QE-569	2.21	0.80	0.80

			Gals Used	Total Emissions		
<u>8/27/2004</u>	<u>Totals</u>		136		108.80	Pounds

8/30/2004	AGN	75	M	✓ QE-466	2.12	0.80	60.00
8/30/2004	OR	80	M	✓ QE-522	2.21	0.80	64.00

			Gals Used	Total Emissions		
<u>8/30/2004</u>	<u>Totals</u>		155		124.00	Pounds

8/31/2004	BL	11	M	✓ QE-930	2.21	0.80	8.80
8/31/2004	AGN	41	M	✓ QE-466	2.12	0.80	32.80
8/31/2004	GY	7	M	✓ QE-647		0.80	5.60
8/31/2004	OR	70	M	✓ QE-522	2.21	0.80	56.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>8/31/2004</u>	<u>Totals</u>		129		103.20	Pounds

9/1/2004	OR	78	M	✓qe-522	2.21	0.80	62.40
----------	----	----	---	---------	------	------	-------

			Gals Used	Total Emissions		
<u>9/1/2004</u>	<u>Totals</u>		78		62.40	Pounds

9/2/2004	V-AGN	65	V	✓VS-001		0.98	63.70
9/2/2004	AGN	35	M	✓QE-466	2.12	0.80	28.00
9/2/2004	V-OR	35	V	✓VS-002		0.98	34.30

			Gals Used	Total Emissions		
<u>9/2/2004</u>	<u>Totals</u>		135		126.00	Pounds

9/3/2004	BK	3	M	✓QE-J204	2.11	0.80	2.40
9/3/2004	BL	2	M	✓QE-930	2.21	0.80	1.60
9/3/2004	RB	3	M	✓QE-929	2.70	0.83	2.49
9/3/2004	V-AGN	32	V	✓VS-001		0.98	31.36
9/3/2004	AOR	10	M	✓QE-566	2.12	0.80	8.00
9/3/2004	GY	7	M	✓QE-647		0.80	5.60
9/3/2004	OR	70	M	✓QE-522	2.21	0.80	56.00
9/3/2004	FR	1	M	✓QE-713	2.21	0.81	0.81

			Gals Used	Total Emissions		
<u>9/3/2004</u>	<u>Totals</u>		128		108.26	Pounds

9/7/2004	BL	5	M	✓qe-930	2.21	0.80	4.00
9/7/2004	RB	38	M	✓QE-929	2.70	0.83	31.54
9/7/2004	AGN	33	M	✓QE-466	2.12	0.80	26.40
9/7/2004	V-AGN	30	V	✓VS-001		0.98	29.40
9/7/2004	OR	72	M	✓QE-522	2.21	0.80	57.60

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
9/7/2004	YL	10	M	✓QE-569	2.21	0.80	8.00

Gals Used Total Emissions

<u>9/7/2004</u>	<u>Totals</u>	188		156.94	Pounds
-----------------	---------------	-----	--	--------	--------

9/8/2004	AGN	58	M	✓QE-466	2.12	0.80	46.40
9/8/2004	V-AGN	30	V	✓VS-001		0.98	29.40
9/8/2004	OR	80	M	✓QE-522	2.21	0.80	64.00

Gals Used Total Emissions

<u>9/8/2004</u>	<u>Totals</u>	168		139.80	Pounds
-----------------	---------------	-----	--	--------	--------

9/9/2004	AGN	101	M	✓QE-466	2.12	0.80	80.80
9/9/2004	AOR	17	M	✓QE-566	2.12	0.80	13.60
9/9/2004	GY	7	M	✓QE-647		0.80	5.60
9/9/2004	OR	25	M	✓QE-522	2.21	0.80	20.00

Gals Used Total Emissions

<u>9/9/2004</u>	<u>Totals</u>	150		120.00	Pounds
-----------------	---------------	-----	--	--------	--------

9/10/2004	AGN	95	M	✓QE-466	2.12	0.80	76.00
9/10/2004	AOR	12	M	✓QE-566	2.12	0.80	9.60
9/10/2004	OR	75	M	✓QE-522	2.21	0.80	60.00

Gals Used Total Emissions

<u>9/10/2004</u>	<u>Totals</u>	182		145.60	Pounds
------------------	---------------	-----	--	--------	--------

9/13/2004	AGN	121	M	✓QE-466	2.12	0.80	96.80
9/13/2004	GY	13	M	✓QE-647		0.80	10.40
9/13/2004	OR	32	M	✓QE-522	2.21	0.80	25.60
9/13/2004	IO	4	M	✓QE-535	2.21	0.80	3.20

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
9/13/2004	<u>Totals</u>		170		136.00	Pounds

9/14/2004	BL	5	M	✓qe-930	2.21	0.80	4.00
9/14/2004	AGN	18	M	✓QE-466	2.12	0.80	14.40
9/14/2004	AOR	75	M	✓QE-566	2.12	0.80	60.00
9/14/2004	GY	30	M	✓QE-647		0.80	24.00
9/14/2004	OR	28	M	✓QE-522	2.21	0.80	22.40

			Gals Used	Total Emissions		
9/14/2004	<u>Totals</u>		156		124.80	Pounds

9/15/2004	AGN	70	M	✓QE-466	2.12	0.80	56.00
9/15/2004	AOR	40	M	✓QE-566	2.12	0.80	32.00
9/15/2004	OR	36	M	✓QE-522	2.21	0.80	28.80

			Gals Used	Total Emissions		
9/15/2004	<u>Totals</u>		146		116.80	Pounds

9/16/2004	BK	10	M	✓QE-J204	2.11	0.80	8.00
9/16/2004	BL	2	M	✓QE-930	2.21	0.80	1.60
9/16/2004	IG	14	M	✓QE-432	2.12	0.80	11.20
9/16/2004	AGN	20	M	✓QE-466	2.12	0.80	16.00
9/16/2004	AOR	43	M	✓QE-566	2.12	0.80	34.40
9/16/2004	GY	12	M	✓QE-647		0.80	9.60
9/16/2004	OR	80	M	✓QE-522	2.21	0.80	64.00
9/16/2004	IO	17	M	✓QE-535	2.21	0.80	13.60

			Gals Used	Total Emissions		
9/16/2004	<u>Totals</u>		198		158.40	Pounds

9/17/2004	GN	1	M	✓qe-415	2.12	0.80	0.80
-----------	----	---	---	---------	------	------	------

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
9/17/2004	AGN	60	M	✓QE-466	2.12	0.80	48.00
9/17/2004	AOR	45	M	✓QE-566	2.12	0.80	36.00
9/17/2004	OR	55	M	✓QE-522	2.21	0.80	44.00
9/17/2004	GN	2	M	✓QE-415	2.12	0.80	1.60
9/17/2004	YL	2	M	✓QE-569	2.21	0.80	1.60

		Gals Used	Total Emissions	
<u>9/17/2004</u>	<u>Totals</u>	165	132.00	Pounds

9/20/2004	AGN	4	M	✓QE-466	2.12	0.80	3.20
9/20/2004	AOR	90	M	✓QE-566	2.12	0.80	72.00
9/20/2004	OR	30	M	✓QE-522	2.21	0.80	24.00
9/20/2004	DOA	20	M	✓QE-579	2.10	0.80	16.00
9/20/2004	PY	3	M	✓QE-572	2.20	0.80	2.40

		Gals Used	Total Emissions	
<u>9/20/2004</u>	<u>Totals</u>	147	117.60	Pounds

9/21/2004	DOA	42	M	✓QE-579	2.10	0.80	33.60
9/21/2004	AGN	38	M	✓QE-466	2.12	0.80	30.40
9/21/2004	AOR	16	M	✓QE-566	2.12	0.80	12.80
9/21/2004	OR	37	M	✓QE-522	2.21	0.80	29.60
9/21/2004	IO	28	M	✓QE-535	2.21	0.80	22.40
9/21/2004	IG	18	M	✓QE-432	2.12	0.80	14.40
9/21/2004	PY	2	M	✓QE-572	2.20	0.80	1.60

		Gals Used	Total Emissions	
<u>9/21/2004</u>	<u>Totals</u>	181	144.80	Pounds

9/22/2004	BL	11	M	✓QE-930	2.21	0.80	8.80
9/22/2004	AGN	140	M	✓QE-466	2.12	0.80	112.00
9/22/2004	GY	8	M	✓QE-647		0.80	6.40
9/22/2004	OR	2	M	✓QE-522	2.21	0.80	1.60

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>9/22/2004</u>	<u>Totals</u>	161		128.80		Pounds

9/23/2004	AGN	42	M	✓QE-466	2.12	0.80	33.60
9/23/2004	AOR	85	M	✓QE-566	2.12	0.80	68.00
9/23/2004	OR	35	M	✓QE-522	2.21	0.80	28.00

		Gals Used		Total Emissions		
<u>9/23/2004</u>	<u>Totals</u>	162		129.60		Pounds

9/24/2004	BL	2	M	✓QE-930	2.21	0.80	1.60
9/24/2004	MCG	13	M	✓QE-441	2.12	0.80	10.40
9/24/2004	AGN	65	M	✓QE-466	2.12	0.80	52.00
9/24/2004	AOR	9	M	✓QE-566	2.12	0.80	7.20
9/24/2004	OR	35	M	✓QE-522	2.21	0.80	28.00
9/24/2004	GN	4	M	✓QE-415	2.12	0.80	3.20
9/24/2004	YL	2	M	✓QE-569	2.21	0.80	1.60

		Gals Used		Total Emissions		
<u>9/24/2004</u>	<u>Totals</u>	130		104.00		Pounds

9/25/2004	AGN	130	M	✓QE-466	2.12	0.80	104.00
-----------	-----	-----	---	---------	------	------	--------

		Gals Used		Total Emissions		
<u>9/25/2004</u>	<u>Totals</u>	130		104.00		Pounds

9/27/2004	BK	34	M	✓qe-j204	2.11	0.80	27.20
9/27/2004	DW	5	M	✓QE-147	2.10	0.80	4.00
9/27/2004	AGN	33	M	✓QE-466	2.12	0.80	26.40
9/27/2004	GY	20	M	✓QE-647		0.80	16.00
9/27/2004	OR	80	M	✓QE-522	2.21	0.80	64.00
9/27/2004	YL	20	M	✓QE-569	2.21	0.80	16.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>9/27/2004</u>	<u>Totals</u>	192		153.60		Pounds

9/28/2004	OR	125	M	✓QE-522	2.21	0.80	100.00
9/28/2004	AGN	22	M	✓QE-466	2.12	0.80	17.60
9/28/2004	AOR	40	M	✓QE-566	2.12	0.80	32.00

		Gals Used		Total Emissions		
<u>9/28/2004</u>	<u>Totals</u>	187		149.60		Pounds

9/29/2004	BL	6	M	✓qe-930	2.21	0.80	4.80
9/29/2004	AGN	70	M	✓QE-466	2.12	0.80	56.00
9/29/2004	OR	45	M	✓QE-522	2.21	0.80	36.00
9/29/2004	IG	1	M	✓QE-432	2.12	0.80	0.80

		Gals Used		Total Emissions		
<u>9/29/2004</u>	<u>Totals</u>	122		97.60		Pounds

9/30/2004	BK	48	M	✓QE-J204	2.11	0.80	38.40
9/30/2004	AGN	110	M	✓QE-466	2.12	0.80	88.00
9/30/2004	PY	25	M	✓QE-572	2.20	0.80	20.00

		Gals Used		Total Emissions		
<u>9/30/2004</u>	<u>Totals</u>	183		146.40		Pounds

10/1/2004	GN	38	M	✓QE-415	2.12	0.80	30.40
10/1/2004	AGN	15	M	✓QE-466	2.12	0.80	12.00
10/1/2004	GY	3	M	✓QE-647		0.80	2.40
10/1/2004	OR	70	M	✓QE-522	2.21	0.80	56.00
10/1/2004	IO	10	M	✓QE-535	2.21	0.80	8.00
10/1/2004	YL	5	M	✓QE-569	2.21	0.80	4.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>10/1/2004</u>	<u>Totals</u>		141		112.80	Pounds

10/4/2004	JIG	15	M	✓QE-424	2.12	0.80	12.00
10/4/2004	AGN	17	M	✓QE-466	2.12	0.80	13.60
10/4/2004	V-OR	30	V	✓VS-002		0.98	29.40
10/4/2004	IG	60	M	✓QE-432	2.12	0.80	48.00
10/4/2004	IO	17	M	✓QE-535	2.21	0.80	13.60

			Gals Used	Total Emissions		
<u>10/4/2004</u>	<u>Totals</u>		139		116.60	Pounds

10/5/2004	AGN	62	M	✓QE-466	2.12	0.80	49.60
10/5/2004	GY	30	M	✓QE-647		0.80	24.00
10/5/2004	V-OR	20	V	✓VS-002		0.98	19.60
10/5/2004	IO	20	M	✓QE-535	2.21	0.80	16.00

			Gals Used	Total Emissions		
<u>10/5/2004</u>	<u>Totals</u>		132		109.20	Pounds

10/6/2004	AGN	30	M	✓QE-466	2.12	0.80	24.00
10/6/2004	AOR	10	M	✓QE-566	2.12	0.80	8.00
10/6/2004	GY	12	M	✓QE-647		0.80	9.60
10/6/2004	OR	24	M	✓QE-522	2.21	0.80	19.20
10/6/2004	IO	17	M	✓QE-535	2.21	0.80	13.60
10/6/2004	YL	25	M	✓QE-569	2.21	0.80	20.00

			Gals Used	Total Emissions		
<u>10/6/2004</u>	<u>Totals</u>		118		94.40	Pounds

10/7/2004	BL	12	M	✓QE-930	2.21	0.80	9.60
10/7/2004	AGN	23	M	✓QE-466	2.12	0.80	18.40

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
10/7/2004	AOR	1	M	✓QE-566	2.12	0.80	0.80
10/7/2004	GY	22	M	✓QE-647		0.80	17.60
10/7/2004	OR	21	M	✓QE-522	2.21	0.80	16.80
10/7/2004	IO	27	M	✓QE-535	2.21	0.80	21.60
10/7/2004	YL	17	M	✓QE-569	2.21	0.80	13.60

		Gals Used	Total Emissions	
<u>10/7/2004</u>	<u>Totals</u>	123	98.40	Pounds

10/15/2004	BK	30	M	✓QE-J204	2.11	0.80	24.00
10/15/2004	AGN	25	M	✓QE-466	2.12	0.80	20.00
10/15/2004	RB	18	M	✓QE-929	2.70	0.83	14.94
10/15/2004	OR	25	M	✓QE-522	2.21	0.80	20.00
10/15/2004	GN	6	M	✓QE-415	2.12	0.80	4.80
10/15/2004	YL	11	M	✓QE-569	2.21	0.80	8.80

		Gals Used	Total Emissions	
<u>10/15/2004</u>	<u>Totals</u>	115	92.54	Pounds

10/19/2004	IG	17	M	✓qe-432	2.12	0.80	13.60
10/19/2004	GY	25	M	✓QE-647		0.80	20.00
10/19/2004	IO	30	M	QE-535	2.21	0.80	24.00

		Gals Used	Total Emissions	
<u>10/19/2004</u>	<u>Totals</u>	72	57.60	Pounds

10/20/2004	IO	10	M	✓qe-535	2.21	0.80	8.00
10/20/2004	AGN	59	M	✓QE-466	2.12	0.80	47.20
10/20/2004	GY	8	M	✓QE-647		0.80	6.40
10/20/2004	RB	40	M	✓QE-929	2.70	0.83	33.20

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used	Total Emissions	
<u>10/20/2004</u>	<u>Totals</u>	117	94.80	Pounds

10/21/2004	OR	23	M ✓qe-522	2.21	0.80	18.40
10/21/2004	RB	48	M ✓QE-929	2.70	0.83	39.84
10/21/2004	IO	27	M ✓QE-535	2.21	0.80	21.60
10/21/2004	GY	3	M ✓QE-647		0.80	2.40
10/21/2004	YL	3	M ✓QE-569	2.21	0.80	2.40

		Gals Used	Total Emissions	
<u>10/21/2004</u>	<u>Totals</u>	104	84.64	Pounds

10/22/2004	OR	30	M ✓QE-522	2.21	0.80	24.00
10/22/2004	AGN	10	M ✓QE-466	2.12	0.80	8.00
10/22/2004	BL	38	M ✓QE-930	2.21	0.80	30.40
10/22/2004	RB	7	M ✓QE-929	2.70	0.83	5.81

		Gals Used	Total Emissions	
<u>10/22/2004</u>	<u>Totals</u>	85	68.21	Pounds

10/23/2004	RB	40	M ✓QE-929	2.70	0.83	33.20
10/23/2004	OR	16	M ✓QE-522	2.21	0.80	12.80
10/23/2004	IG	4	M ✓QE-432	2.12	0.80	3.20

		Gals Used	Total Emissions	
<u>10/23/2004</u>	<u>Totals</u>	60	49.20	Pounds

10/25/2004	HDC	69	M ✓QE-850	2.22	0.81	55.89
10/25/2004	AGN	40	M ✓QE-466	2.12	0.80	32.00
10/25/2004	OR	15	M ✓QE-522	2.21	0.80	12.00
10/25/2004	BK	24	M ✓QE-J204	2.11	0.80	19.20
10/25/2004	FR	8	M ✓QE-713	2.21	0.81	6.48

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
10/25/2004	RB	15	M	✓QE-929	2.70	0.83	12.45

Gals Used Total Emissions

<u>10/25/2004 Totals</u>	171	138.02	Pounds
--------------------------	-----	--------	--------

10/26/2004	HDC	55	M	✓QE-850	2.22	0.81	44.55
10/26/2004	RB	50	M	✓QE-929	2.70	0.83	41.50
10/26/2004	OR	11	M	✓QE-522	2.21	0.80	8.80

Gals Used Total Emissions

<u>10/26/2004 Totals</u>	116	94.85	Pounds
--------------------------	-----	-------	--------

10/27/2004	BL	55	M	✓QE-930	2.21	0.80	44.00
10/27/2004	AGN	22	M	✓QE-466	2.12	0.80	17.60
10/27/2004	FR	5	M	✓QE-713	2.21	0.81	4.05
10/27/2004	BFTDP	15	M	✓QE-736	2.10	0.80	12.00
10/27/2004	IG	10	M	✓QE-432	2.12	0.80	8.00
10/27/2004	HDC	78	M	✓QE-850	2.22	0.81	63.18
10/27/2004	GY	6	M	✓QE-647		0.80	4.80

Gals Used Total Emissions

<u>10/27/2004 Totals</u>	191	153.63	Pounds
--------------------------	-----	--------	--------

10/28/2004	RB	50	M	✓qe-929	2.70	0.83	41.50
10/28/2004	BL	3	M	✓QE-930	2.21	0.80	2.40
10/28/2004	AGN	18	M	✓QE-466	2.12	0.80	14.40
10/28/2004	OR	24	M	✓QE-522	2.21	0.80	19.20
10/28/2004	IO	20	M	✓QE-535	2.21	0.80	16.00

Gals Used Total Emissions

<u>10/28/2004 Totals</u>	115	93.50	Pounds
--------------------------	-----	-------	--------

10/29/2004	DOA	2	M	✓QE-579	2.10	0.80	1.60
------------	-----	---	---	---------	------	------	------

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
10/29/2004	OR	10	M	✓QE-522	2.21	0.80	8.00
10/29/2004	RB	5	M	✓QE-929	2.70	0.83	4.15
10/29/2004	MTAN	20	M	✓QE-854	2.10	0.80	16.00
10/29/2004	HDC	77	M	✓QE-850	2.22	0.81	62.37

	Gals Used	Total Emissions	
<u>10/29/2004 Totals</u>	114	92.12	Pounds

10/30/2004	HDC	34	M	✓qe-850	2.22	0.81	27.54
10/30/2004	RB	20	M	✓QE-929	2.70	0.83	16.60
10/30/2004	BFTDP	15	M	✓QE-736	2.10	0.80	12.00

	Gals Used	Total Emissions	
<u>10/30/2004 Totals</u>	69	56.14	Pounds

10/31/2004	RB	55	M	✓QE-929	2.70	0.83	45.65
------------	----	----	---	---------	------	------	-------

	Gals Used	Total Emissions	
<u>10/31/2004 Totals</u>	55	45.65	Pounds

11/1/2004	RB	12	M	✓qe-929	2.70	0.83	9.96
11/1/2004	HDC	92	M	✓QE-850	2.22	0.81	74.52
11/1/2004	OR	35	M	✓QE-522	2.21	0.80	28.00
11/1/2004	YL	3	M	✓QE-569	2.21	0.80	2.40

	Gals Used	Total Emissions	
<u>11/1/2004 Totals</u>	142	114.88	Pounds

11/2/2004	RB	35	M	✓QE-929	2.70	0.83	29.05
11/2/2004	HDC	39	M	✓QE-850	2.22	0.81	31.59
11/2/2004	MTAN	10	M	✓QE-854	2.10	0.80	8.00
11/2/2004	AGN	73	M	✓QE-466	2.12	0.80	58.40

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>11/2/2004</u>	<u>Totals</u>		157		127.04	Pounds

11/3/2004	AGN	95	M	✓QE-466	2.12	0.80	76.00
11/3/2004	BL	30	M	✓QE-930	2.21	0.80	24.00
11/3/2004	GY	5	M	✓QE-647		0.80	4.00
11/3/2004	GN	2	M	✓QE-415	2.12	0.80	1.60
11/3/2004	OR	18	M	✓QE-522	2.21	0.80	14.40
11/3/2004	YL	27	M	✓QE-569	2.21	0.80	21.60

			Gals Used	Total Emissions		
<u>11/3/2004</u>	<u>Totals</u>		177		141.60	Pounds

11/4/2004	AGN	61	M	✓QE-466	2.12	0.80	48.80
11/4/2004	OR	56	M	✓QE-522	2.21	0.80	44.80
11/4/2004	AOR	7	M	✓QE-566	2.12	0.80	5.60
11/4/2004	YL	17	M	✓QE-569	2.21	0.80	13.60
11/4/2004	BL	18	M	✓QE-930	2.21	0.80	14.40

			Gals Used	Total Emissions		
<u>11/4/2004</u>	<u>Totals</u>		159		127.20	Pounds

11/5/2004	YL	24	M	✓QE-569	2.21	0.80	19.20
11/5/2004	OR	18	M	✓QE-522	2.21	0.80	14.40
11/5/2004	AGN	31	M	✓QE-466	2.12	0.80	24.80
11/5/2004	HDC	44	M	✓QE-850	2.22	0.81	35.64

			Gals Used	Total Emissions		
<u>11/5/2004</u>	<u>Totals</u>		117		94.04	Pounds

11/6/2004	HDC	103	M	✓qe-850	2.22	0.81	83.43
-----------	-----	-----	---	---------	------	------	-------

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>11/6/2004</u>	<u>Totals</u>		103		83.43	Pounds

11/7/2004	OR	24	M	✓QE-522	2.21	0.80	19.20
11/7/2004	AGN	60	M	✓QE-466	2.12	0.80	48.00
11/7/2004	BL	68	M	✓QE-930	2.21	0.80	54.40

			Gals Used	Total Emissions		
<u>11/7/2004</u>	<u>Totals</u>		152		121.60	Pounds

11/8/2004	HDC	107	M	✓QE-850	2.22	0.81	86.67
11/8/2004	MCG	10	M	✓QE-441	2.12	0.80	8.00
11/8/2004	AGN	52	M	✓QE-466	2.12	0.80	41.60
11/8/2004	OR	19	M	✓QE-522	2.21	0.80	15.20

			Gals Used	Total Emissions		
<u>11/8/2004</u>	<u>Totals</u>		188		151.47	Pounds

11/9/2004	OR	34	M	✓qe-522	2.21	0.80	27.20
11/9/2004	HDC	100	M	✓QE-850	2.22	0.81	81.00

			Gals Used	Total Emissions		
<u>11/9/2004</u>	<u>Totals</u>		134		108.20	Pounds

11/10/2004	HDC	100	M	✓qe-850	2.22	0.81	81.00
11/10/2004	BL	9	M	✓QE-930	2.21	0.80	7.20
11/10/2004	OR	20	M	✓QE-522	2.21	0.80	16.00
11/10/2004	YL	10	M	✓QE-569	2.21	0.80	8.00
11/10/2004	IG	4	M	✓QE-432	2.12	0.80	3.20
11/10/2004	IO	10	M	✓QE-535	2.21	0.80	8.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

				Gals Used	Total Emissions		
<u>11/10/2004 Totals</u>				153		123.40	Pounds

11/11/2004	HDC	125	M	✓qe-850	2.22	0.81	101.25
11/11/2004	OR	12	M	✓QE-522	2.21	0.80	9.60
11/11/2004	AGN	27	M	✓QE-466	2.12	0.80	21.60

				Gals Used	Total Emissions		
<u>11/11/2004 Totals</u>				164		132.45	Pounds

11/12/2004	AGN	22	M	✓QE-466	2.12	0.80	17.60
11/12/2004	HDC	113	M	✓QE-850	2.22	0.81	91.53
11/12/2004	OR	5	M	✓QE-522	2.21	0.80	4.00

				Gals Used	Total Emissions		
<u>11/12/2004 Totals</u>				140		113.13	Pounds

11/13/2004	HDC	114	M	✓QE-850	2.22	0.81	92.34
11/13/2004	AOR	40	M	✓QE-566	2.12	0.80	32.00
11/13/2004	PY	30	M	✓QE-572	2.20	0.80	24.00

				Gals Used	Total Emissions		
<u>11/13/2004 Totals</u>				184		148.34	Pounds

11/15/2004	SY	60	M	✓qe-580	2.20	0.80	48.00
11/15/2004	RB	85	M	✓QE-929	2.70	0.83	70.55
11/15/2004	GY	12	M	✓QE-647		0.80	9.60

				Gals Used	Total Emissions		
<u>11/15/2004 Totals</u>				157		128.15	Pounds

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
11/16/2004	RB	111	M	✓QE-929	2.70	0.83	92.13
11/16/2004	OR	52	M	✓QE-522	2.21	0.80	41.60
11/16/2004	AGN	13	M	✓QE-466	2.12	0.80	10.40

	Gals Used	Total Emissions	
<u>11/16/2004 Totals</u>	176	144.13	Pounds

11/17/2004	AGN	98	M	✓QE-466	2.12	0.80	78.40
11/17/2004	YL	41	M	✓QE-569	2.21	0.80	32.80
11/17/2004	OR	16	M	✓QE-522	2.21	0.80	12.80
11/17/2004	V-OR	38	V	✓VS-002		0.98	37.24

	Gals Used	Total Emissions	
<u>11/17/2004 Totals</u>	193	161.24	Pounds

11/18/2004	AGN	56	M	✓QE-466	2.12	0.80	44.80
11/18/2004	GY	4	M	✓QE-647		0.80	3.20
11/18/2004	BL	10	M	✓QE-930	2.21	0.80	8.00
11/18/2004	MCG	6	M	✓QE-441	2.12	0.80	4.80
11/18/2004	OR	42	M	✓QE-522	2.21	0.80	33.60
11/18/2004	RB	76	M	✓QE-929	2.70	0.83	63.08

	Gals Used	Total Emissions	
<u>11/18/2004 Totals</u>	194	157.48	Pounds

11/19/2004	RB	96	M	✓qe-929	2.70	0.83	79.68
11/19/2004	OR	33	M	✓QE-522	2.21	0.80	26.40
11/19/2004	AGN	12	M	✓QE-466	2.12	0.80	9.60
11/19/2004	BL	5	M	✓QE-930	2.21	0.80	4.00

	Gals Used	Total Emissions	
<u>11/19/2004 Totals</u>	146	119.68	Pounds

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
11/20/2004	RB	186	M	✓QE-929	2.70	0.83	154.38

	Gals Used	Total Emissions	
<u>11/20/2004 Totals</u>	186	154.38	Pounds

11/21/2004	OR	62	M	✓QE-522	2.21	0.80	49.60
11/21/2004	AGN	53	M	✓QE-466	2.12	0.80	42.40
11/21/2004	GN	48	M	✓QE-415	2.12	0.80	38.40

	Gals Used	Total Emissions	
<u>11/21/2004 Totals</u>	163	130.40	Pounds

11/22/2004	GN	24	M	✓qe-415	2.12	0.80	19.20
11/22/2004	AGN	92	M	✓QE-466	2.12	0.80	73.60
11/22/2004	IG	74	M	✓QE-432	2.12	0.80	59.20
11/22/2004	OR	43	M	✓QE-522	2.21	0.80	34.40

	Gals Used	Total Emissions	
<u>11/22/2004 Totals</u>	233	186.40	Pounds

11/23/2004	RB	144	M	✓QE-929	2.70	0.83	119.52
11/23/2004	OR	55	M	✓QE-522	2.21	0.80	44.00
11/23/2004	IO	19	M	✓QE-535	2.21	0.80	15.20

	Gals Used	Total Emissions	
<u>11/23/2004 Totals</u>	218	178.72	Pounds

11/24/2004	RB	68	M	✓qe-929	2.70	0.83	56.44
11/24/2004	IO	35	M	✓QE-535	2.21	0.80	28.00
11/24/2004	AOR	5	M	✓QE-566	2.12	0.80	4.00
11/24/2004	IG	15	M	✓QE-432	2.12	0.80	12.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

				Gals Used	Total Emissions		
<u>11/24/2004 Totals</u>				123	100.44	Pounds	

11/28/2004	AGN	159	M	✓QE-466	2.12	0.80	127.20
------------	-----	-----	---	---------	------	------	--------

				Gals Used	Total Emissions		
<u>11/28/2004 Totals</u>				159	127.20	Pounds	

11/29/2004	AGN	41	M	✓QE-466	2.12	0.80	32.80
11/29/2004	OR	115	M	✓QE-522	2.21	0.80	92.00
11/29/2004	IO	35	M	✓QE-535	2.21	0.80	28.00

				Gals Used	Total Emissions		
<u>11/29/2004 Totals</u>				191	152.80	Pounds	

11/30/2004	AGN	46	M	✓QE-466	2.12	0.80	36.80
11/30/2004	OR	123	M	✓QE-522	2.21	0.80	98.40
11/30/2004	YL	4	M	✓QE-569	2.21	0.80	3.20
11/30/2004	IO	10	M	✓QE-535	2.21	0.80	8.00
11/30/2004	IG	93	M	✓QE-432	2.12	0.80	74.40

				Gals Used	Total Emissions		
<u>11/30/2004 Totals</u>				276	220.80	Pounds	

12/1/2004	AGN	80	M	✓QE-466	2.12	0.80	64.00
12/1/2004	GY	14	M	✓QE-647		0.80	11.20
12/1/2004	BL	21	M	✓QE-930	2.21	0.80	16.80
12/1/2004	YL	55	M	✓QE-569	2.21	0.80	44.00
12/1/2004	GN	3	M	✓QE-415	2.12	0.80	2.40

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>12/1/2004</u>	<u>Totals</u>		173		138.40	Pounds

12/2/2004	IG	51	M	✓QE-432	2.12	0.80	40.80
12/2/2004	OR	101	M	✓QE-522	2.21	0.80	80.80
12/2/2004	GY	24	M	✓QE-647		0.80	19.20
12/2/2004	RB	14	M	✓QE-929	2.70	0.83	11.62

			Gals Used	Total Emissions		
<u>12/2/2004</u>	<u>Totals</u>		190		152.42	Pounds

12/3/2004	IO	33	M	✓QE-535	2.21	0.80	26.40
12/3/2004	PY	5	M	✓QE-572	2.20	0.80	4.00
12/3/2004	YL	3	M	✓QE-569	2.21	0.80	2.40
12/3/2004	AGN	39	M	✓QE-466	2.12	0.80	31.20
12/3/2004	HDC	10	M	✓QE-850	2.22	0.81	8.10
12/3/2004	OR	44	M	✓QE-522	2.21	0.80	35.20

			Gals Used	Total Emissions		
<u>12/3/2004</u>	<u>Totals</u>		134		107.30	Pounds

12/6/2004	AGN	91	M	✓QE-466	2.12	0.80	72.80
12/6/2004	OR	93	M	✓QE-522	2.21	0.80	74.40
12/6/2004	KWG	5	M	✓QE-649	2.21	0.80	4.00

			Gals Used	Total Emissions		
<u>12/6/2004</u>	<u>Totals</u>		189		151.20	Pounds

12/7/2004	OR	100	M	✓QE-522	2.21	0.80	80.00
12/7/2004	AGN	60	M	✓QE-466	2.12	0.80	48.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>12/7/2004</u>	<u>Totals</u>	160		128.00		Pounds

12/8/2004	GY	30	M	✓QE-647		0.80	24.00
12/8/2004	AGN	153	M	✓QE-466	2.12	0.80	122.40
12/8/2004	OR	5	M	✓QE-522	2.21	0.80	4.00

		Gals Used		Total Emissions		
<u>12/8/2004</u>	<u>Totals</u>	188		150.40		Pounds

12/9/2004	FR	10	M	✓qe-713	2.21	0.81	8.10
12/9/2004	OR	71	M	✓QE-522	2.21	0.80	56.80
12/9/2004	PY	21	M	✓QE-572	2.20	0.80	16.80
12/9/2004	AGN	19	M	✓QE-466	2.12	0.80	15.20
12/9/2004	RB	29	M	✓QE-929	2.70	0.83	24.07

		Gals Used		Total Emissions		
<u>12/9/2004</u>	<u>Totals</u>	150		120.97		Pounds

12/10/2004	AGN	103	M	✓QE-466	2.12	0.80	82.40
12/10/2004	IO	27	M	✓QE-535	2.21	0.80	21.60
12/10/2004	OR	3	M	✓QE-522	2.21	0.80	2.40
12/10/2004	IG	7	M	✓QE-432	2.12	0.80	5.60

		Gals Used		Total Emissions		
<u>12/10/2004</u>	<u>Totals</u>	140		112.00		Pounds

12/11/2004	OR	120	M	✓QE-522	2.21	0.80	96.00
------------	----	-----	---	---------	------	------	-------

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>12/11/2004</u>	<u>Totals</u>		120		96.00	Pounds

12/12/2004	YL	99	M	✓QE-569	2.21	0.80	79.20
12/12/2004	AGN	24	M	✓QE-466	2.12	0.80	19.20

			Gals Used	Total Emissions		
<u>12/12/2004</u>	<u>Totals</u>		123		98.40	Pounds

12/13/2004	AGN	110	M	✓QE-466	2.12	0.80	88.00
12/13/2004	OR	51	M	✓QE-522	2.21	0.80	40.80

			Gals Used	Total Emissions		
<u>12/13/2004</u>	<u>Totals</u>		161		128.80	Pounds

12/14/2004	RB	38	M	✓QE-929	2.70	0.83	31.54
12/14/2004	OR	80	M	✓QE-522	2.21	0.80	64.00
12/14/2004	JIG	5	M	✓QE-424	2.12	0.80	4.00
12/14/2004	AGN	50	M	✓QE-466	2.12	0.80	40.00

			Gals Used	Total Emissions		
<u>12/14/2004</u>	<u>Totals</u>		173		139.54	Pounds

12/15/2004	AGN	63	M	✓QE-466	2.12	0.80	50.40
12/15/2004	PY	20	M	✓QE-572	2.20	0.80	16.00
12/15/2004	YL	55	M	✓QE-569	2.21	0.80	44.00

			Gals Used	Total Emissions		
<u>12/15/2004</u>	<u>Totals</u>		138		110.40	Pounds

12/16/2004	GY	92	M	✓qe-647		0.80	73.60
------------	----	----	---	---------	--	------	-------

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
12/16/2004	OR	73	M	✓QE-522	2.21	0.80	58.40

	Gals Used	Total Emissions	
<u>12/16/2004 Totals</u>	165	132.00	Pounds

12/17/2004	AGN	40	M	✓QE-466	2.12	0.80	32.00
12/17/2004	OR	3	M	✓QE-522	2.21	0.80	2.40
12/17/2004	SMY	1	M	✓qe-581	2.10	0.80	0.80
12/17/2004	SBL	15	M	✓QE-991	2.21	0.80	12.00
12/17/2004	GN	2	M	✓QE-415	2.12	0.80	1.60
12/17/2004	DW	5	M	✓QE-147	2.10	0.80	4.00
12/17/2004	RB	65	M	✓QE-929	2.70	0.83	53.95
12/17/2004	HDC	8	M	✓QE-850	2.22	0.81	6.48
12/17/2004	AOR	4	M	✓QE-566	2.12	0.80	3.20

	Gals Used	Total Emissions	
<u>12/17/2004 Totals</u>	143	116.43	Pounds

12/18/2004	RB	45	M	✓QE-929	2.70	0.83	37.35
12/18/2004	OR	116	M	✓QE-522	2.21	0.80	92.80

	Gals Used	Total Emissions	
<u>12/18/2004 Totals</u>	161	130.15	Pounds

12/20/2004	AGN	102	M	✓QE-466	2.12	0.80	81.60
12/20/2004	OR	41	M	✓QE-522	2.21	0.80	32.80

	Gals Used	Total Emissions	
<u>12/20/2004 Totals</u>	143	114.40	Pounds

12/21/2004	AGN	50	M	✓QE-466	2.12	0.80	40.00
12/21/2004	OR	79	M	✓QE-522	2.21	0.80	63.20
12/21/2004	GY	10	M	✓QE-647		0.80	8.00

(5)

EMISSIONS 10:14:08 AM 5/22/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
12/21/2004	YL	34	M	✓ QE-569	2.21	0.80	27.20
12/21/2004	IW	10	✓ M	QE-126	2.17	0.79	7.90

		Gals Used	Total Emissions	
<u>12/21/2004</u>	<u>Totals</u>	183	146.30	Pounds

12/22/2004	OR	114	M	✓ qe-522	2.21	0.80	91.20
12/22/2004	AOR	3	M	✓ QE-566	2.12	0.80	2.40

		Gals Used	Total Emissions	
<u>12/22/2004</u>	<u>Totals</u>	117	93.60	Pounds

12/27/2004	OR	29	M	✓ QE-522	2.21	0.80	23.20
12/27/2004	AGN	133	M	✓ QE-466	2.12	0.80	106.40
12/27/2004	IW	15	M	✓ QE-126	2.17	0.79	11.85

		Gals Used	Total Emissions	
<u>12/27/2004</u>	<u>Totals</u>	177	141.45	Pounds

12/28/2004	AOR	50	M	✓ qe-566	2.12	0.80	40.00
12/28/2004	YL	22	M	✓ QE-569	2.21	0.80	17.60
12/28/2004	OR	81	M	✓ QE-522	2.21	0.80	64.80

		Gals Used	Total Emissions	
<u>12/28/2004</u>	<u>Totals</u>	153	122.40	Pounds

12/29/2004	OR	100	M	✓ qe-522	2.21	0.80	80.00
12/29/2004	AGN	57	M	✓ QE-466	2.12	0.80	45.60

		Gals Used	Total Emissions	
<u>12/29/2004</u>	<u>Totals</u>	157	125.60	Pounds

(5)

EMISSIONS 10:14:08 AM 5/22/2006

<u>Date Used</u>	<u>Color</u>	<u>Qty Used</u>	<u>Vendor</u>	<u>Code</u>	<u>VOC Less</u>	<u>VOC Incl</u>	<u>Emissions</u>
12/30/2004	AGN	153	M	QE-466	2.12	0.80	122.40

	<u>Gals Used</u>	<u>Total Emissions</u>	
<u>12/30/2004 Totals</u>	153	122.40	Pounds

	<u>Gals Used</u>	<u>Total Emissions</u>	
<u>Period Totals:</u>	41,299	33,008.81	Pounds

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
1/5/2005	AGN	✓73	M	✓QE-466	2.12	0.80	58.40
1/5/2005	OR	122	M	✓QE-522	2.21	0.80	97.60

Gals Used			Total Emissions	
<u>1/5/2005</u>	<u>Totals</u>	195	156.00	Pounds

1/6/2005	AGN	99	M	✓QE-466	2.12	0.80	79.20
1/6/2005	OR	33	M	✓QE-522	2.21	0.80	26.40
1/6/2005	SBL	35	M	✓QE-991	2.21	0.80	28.00

Gals Used			Total Emissions	
<u>1/6/2005</u>	<u>Totals</u>	167	133.60	Pounds

1/7/2005	GY	37	M	✓QE-647		0.80	29.60
1/7/2005	AGN	15	M	✓QE-466	2.12	0.80	12.00
1/7/2005	PY	9	M	✓QE-572	2.20	0.80	7.20
1/7/2005	OR	27	M	✓QE-522	2.21	0.80	21.60
1/7/2005	SBL	10	M	✓QE-991	2.21	0.80	8.00
1/7/2005	RB	10	M	✓QE-929	2.70	0.83	8.30

Gals Used			Total Emissions	
<u>1/7/2005</u>	<u>Totals</u>	108	86.70	Pounds

1/8/2005	FR	15	M	✓qe-713	2.21	0.81	12.15
1/8/2005	BK	21	M	✓QE-J204	2.11	0.80	16.80
1/8/2005	SMY	110	M	✓QE-581	2.10	0.80	88.00

Gals Used			Total Emissions	
<u>1/8/2005</u>	<u>Totals</u>	146	116.95	Pounds

1/10/2005	AGN	74	M	✓QE-466	2.12	0.80	59.20
1/10/2005	GN	12	M	✓QE-415	2.12	0.80	9.60
1/10/2005	BL	24	M	✓QE-930	2.21	0.80	19.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
1/10/2005	AOR	5	M	✓QE-566	2.12	0.80	4.00
1/10/2005	OR	50	M	✓QE-522	2.21	0.80	40.00

		Gals Used	Total Emissions	
<u>1/10/2005</u>	<u>Totals</u>	165	132.00	Pounds

1/11/2005	OR	50	M	✓QE-522	2.21	0.80	40.00
1/11/2005	BK	33	M	✓QE-J204	2.11	0.80	26.40
1/11/2005	GY	25	M	✓QE-647		0.80	20.00
1/11/2005	AGN	41	M	✓QE-466	2.12	0.80	32.80
1/11/2005	GN	1	M	✓QE-415	2.12	0.80	0.80
1/11/2005	HMB	6	M	✓QE-992	2.21	0.80	4.80
1/11/2005	BL	3	M	✓QE-930	2.21	0.80	2.40

		Gals Used	Total Emissions	
<u>1/11/2005</u>	<u>Totals</u>	159	127.20	Pounds

1/12/2005	BK	7	M	✓QE-J204	2.11	0.80	5.60
1/12/2005	BL	32	M	✓QE-930	2.21	0.80	25.60
1/12/2005	AOR	10	M	✓QE-566	2.12	0.80	8.00
1/12/2005	AGN	10	M	✓QE-466	2.12	0.80	8.00
1/12/2005	OR	41	M	✓QE-522	2.21	0.80	32.80
1/12/2005	GY	15	M	✓QE-647		0.80	12.00
1/12/2005	HMB	6	M	✓QE-992	2.21	0.80	4.80

		Gals Used	Total Emissions	
<u>1/12/2005</u>	<u>Totals</u>	121	96.80	Pounds

1/13/2005	OR	34	M	✓qe-522	2.21	0.80	27.20
1/13/2005	AGN	45	M	✓QE-466	2.12	0.80	36.00
1/13/2005	YL	3	M	✓QE-569	2.21	0.80	2.40
1/13/2005	BL	5	M	✓QE-930	2.21	0.80	4.00
1/13/2005	IO	19	M	✓QE-535	2.21	0.80	15.20
1/13/2005	VG	8	M	✓QE-474	2.10	0.80	6.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
1/13/2005	MCG	8	M	✓QE-441	2.12	0.80	6.40

			Gals Used	Total Emissions		
<u>1/13/2005</u>	<u>Totals</u>		122		97.60	Pounds

1/14/2005	OR	27	M	✓qe-522	2.21	0.80	21.60
1/14/2005	AGN	21	M	✓QE-466	2.12	0.80	16.80
1/14/2005	VG	11	M	✓QE-474	2.10	0.80	8.80
1/14/2005	PY	12	M	✓QE-572	2.20	0.80	9.60
1/14/2005	GY	15	M	✓QE-647		0.80	12.00
1/14/2005	AOR	2	M	✓QE-566	2.12	0.80	1.60

			Gals Used	Total Emissions		
<u>1/14/2005</u>	<u>Totals</u>		88		70.40	Pounds

1/17/2005	AGN	62	M	✓QE-466	2.12	0.80	49.60
1/17/2005	DOA	21	M	✓QE-579	2.10	0.80	16.80
1/17/2005	V-OR	34	V	✓VS-002		0.98	33.32
1/17/2005	IO	34	M	✓QE-535	2.21	0.80	27.20

			Gals Used	Total Emissions		
<u>1/17/2005</u>	<u>Totals</u>		151		126.92	Pounds

1/18/2005	IO	43	M	✓qe-535	2.21	0.80	34.40
1/18/2005	DOA	21	M	✓qe-579	2.10	0.80	16.80
1/18/2005	AGN	41	M	✓QE-466	2.12	0.80	32.80
1/18/2005	IG	21	M	✓qe-432	2.12	0.80	16.80
1/18/2005	YL	27	M	✓qe-569	2.21	0.80	21.60

			Gals Used	Total Emissions		
<u>1/18/2005</u>	<u>Totals</u>		153		122.40	Pounds

1/19/2005	OR	43	M	✓qe-522	2.21	0.80	34.40
-----------	----	----	---	---------	------	------	-------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
1/19/2005	AGN	31	M	✓QE-466	2.12	0.80	24.80
1/19/2005	DOA	8	M	✓qe-579	2.10	0.80	6.40
1/19/2005	IG	18	M	✓qe-432	2.12	0.80	14.40
1/19/2005	YL	7	M	✓qe-569	2.21	0.80	5.60
1/19/2005	MCG	15	M	✓qe-441	2.12	0.80	12.00
1/19/2005	AOR	2	M	✓qe-566	2.12	0.80	1.60

Gals Used

Total Emissions

<u>1/19/2005</u>	<u>Totals</u>	124		99.20	Pounds
------------------	---------------	-----	--	-------	--------

1/20/2005	AGN	31	M	✓QE-466	2.12	0.80	24.80
1/20/2005	IG	27	M	✓qe-432	2.12	0.80	21.60
1/20/2005	GN	5	M	✓qe-415	2.12	0.80	4.00
1/20/2005	V-OR	72	V	✓VS-002		0.98	70.56
1/20/2005	FR	4	M	✓qe-713	2.21	0.81	3.24
1/20/2005	GY	2	M	✓qe-647		0.80	1.60
1/20/2005	BL	43	M	✓qe-930	2.21	0.80	34.40

Gals Used

Total Emissions

<u>1/20/2005</u>	<u>Totals</u>	184		160.20	Pounds
------------------	---------------	-----	--	--------	--------

1/22/2005	OR	50	M	✓qe-522	2.21	0.80	40.00
1/22/2005	AGN	15	M	✓QE-466	2.12	0.80	12.00
1/22/2005	IO	45	M	✓qe-535	2.21	0.80	36.00

Gals Used

Total Emissions

<u>1/22/2005</u>	<u>Totals</u>	110		88.00	Pounds
------------------	---------------	-----	--	-------	--------

1/24/2005	V-OR	50	V	✓vs-002		0.98	49.00
1/24/2005	IG	12	M	✓qe-432	2.12	0.80	9.60
1/24/2005	AGN	52	M	✓QE-466	2.12	0.80	41.60
1/24/2005	FMB	15	M	✓qe-855	2.10	0.80	12.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>1/24/2005</u>	<u>Totals</u>		129		112.20	Pounds

1/25/2005	IG	36	M	✓qe-432	2.12	0.80	28.80
1/25/2005	AGN	26	M	✓QE-466	2.12	0.80	20.80
1/25/2005	V-OR	67	V	✓vs-002		0.98	65.66
1/25/2005	GY	12	M	✓qe-647		0.80	9.60
1/25/2005	IO	2	M	✓qe-535	2.21	0.80	1.60

			Gals Used	Total Emissions		
<u>1/25/2005</u>	<u>Totals</u>		143		126.46	Pounds

1/26/2005	IG	19	M	✓QE-432	2.12	0.80	15.20
1/26/2005	IO	27	M	✓QE-535	2.21	0.80	21.60
1/26/2005	AGN	31	M	✓QE-466	2.12	0.80	24.80
1/26/2005	BT	40	M	✓QE-848	2.16	0.80	32.00
1/26/2005	MO	15	M	✓QE-576	2.21	0.80	12.00
1/26/2005	V-OR	18	V	✓VS-002		0.98	17.64

			Gals Used	Total Emissions		
<u>1/26/2005</u>	<u>Totals</u>		150		123.24	Pounds

1/27/2005	V-OR	15	V	✓vs-002		0.98	14.70
1/27/2005	OR	78	M	✓qe-522	2.21	0.80	62.40
1/27/2005	VG	16	M	✓qe-474	2.10	0.80	12.80
1/27/2005	AGN	43	M	✓QE-466	2.12	0.80	34.40

			Gals Used	Total Emissions		
<u>1/27/2005</u>	<u>Totals</u>		152		124.30	Pounds

1/28/2005	OR	88	M	✓qe-522	2.21	0.80	70.40
1/28/2005	YL	2	M	✓QE-569	2.21	0.80	1.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
1/28/2005	AGN	17	M	✓QE-466	2.12	0.80	13.60
1/28/2005	V-OR	55	V	✓VS-002		0.98	53.90

			Gals Used	Total Emissions		
<u>1/28/2005</u>	<u>Totals</u>		162		139.50	Pounds

1/31/2005	AGN	100	M	✓QE-466	2.12	0.80	80.00
1/31/2005	FR	43	M	✓QE-713	2.21	0.81	34.83
1/31/2005	CRR	24	M	✓QE-737	2.10	0.80	19.20
1/31/2005	HMB	26	M	✓QE-992	2.21	0.80	20.80

			Gals Used	Total Emissions		
<u>1/31/2005</u>	<u>Totals</u>		193		154.83	Pounds

2/1/2005	AGN	62	M	✓QE-466	2.12	0.80	49.60
2/1/2005	FR	20	M	✓QE-713	2.21	0.81	16.20
2/1/2005	GY	51	M	✓QE-647		0.80	40.80
2/1/2005	OR	27	M	✓QE-522	2.21	0.80	21.60

			Gals Used	Total Emissions		
<u>2/1/2005</u>	<u>Totals</u>		160		128.20	Pounds

2/2/2005	AGN	48	M	✓QE-466	2.12	0.80	38.40
2/2/2005	GY	40	M	✓QE-647		0.80	32.00
2/2/2005	OR	45	M	✓QE-522	2.21	0.80	36.00
2/2/2005	YL	3	M	✓QE-569	2.21	0.80	2.40
2/2/2005	SBL	7	M	✓QE-991	2.21	0.80	5.60
2/2/2005	SMY	27	M	✓QE-581	2.10	0.80	21.60

			Gals Used	Total Emissions		
<u>2/2/2005</u>	<u>Totals</u>		170		136.00	Pounds

2/3/2005	AGN	50	M	✓QE-466	2.12	0.80	40.00
----------	-----	----	---	---------	------	------	-------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
2/3/2005	V-AGN	63	V	✓ vs-001		0.98	61.74
2/3/2005	OR	33	M	✓ QE-522	2.21	0.80	26.40
2/3/2005	RB	10	M	✓ QE-929	2.70	0.83	8.30
2/3/2005	FR	28	M	✓ QE-713	2.21	0.81	22.68
2/3/2005	MCG	8	M	✓ QE-441	2.12	0.80	6.40

Gals Used			Total Emissions	
<u>2/3/2005</u>	<u>Totals</u>	192	165.52	Pounds

2/4/2005	BL	21	M	✓ qe-930	2.21	0.80	16.80
2/4/2005	V-AGN	65	V	✓ vs-001		0.98	63.70
2/4/2005	OR	43	M	✓ QE-522	2.21	0.80	34.40
2/4/2005	GY	5	M	✓ QE-647		0.80	4.00

Gals Used			Total Emissions	
<u>2/4/2005</u>	<u>Totals</u>	134	118.90	Pounds

2/7/2005	V-OR	45	V	✓ vs-002		0.98	44.10
2/7/2005	V-OR	90	V	✓ VS-002		0.98	88.20
2/7/2005	RB	10	M	✓ QE-929	2.70	0.83	8.30
2/7/2005	V-AGN	46	V	✓ VS-001		0.98	45.08

Gals Used			Total Emissions	
<u>2/7/2005</u>	<u>Totals</u>	191	185.68	Pounds

Mon

2/8/2005	V-AGN	105	V	✓ VS-001		0.98	102.90
2/8/2005	IG	10	M	✓ QE-432	2.12	0.80	8.00
2/8/2005	GY	30	M	✓ QE-647		0.80	24.00
2/8/2005	V-OR	9	V	✓ VS-002		0.98	8.82

Gals Used			Total Emissions	
<u>2/8/2005</u>	<u>Totals</u>	154	143.72	Pounds

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
2/9/2005	IO	0	M	✓QE-535	2.21	0.80	0.00
2/9/2005	GY	41	M	✓QE-647		0.80	32.80
2/9/2005	V-OR	94	V	✓VS-002		0.98	92.12
2/9/2005	MCG	25	M	✓QE-441	2.12	0.80	20.00

		Gals Used	Total Emissions	
<u>2/9/2005</u>	<u>Totals</u>	160	144.92	Pounds

2/10/2005	GY	24	M	✓qe-647		0.80	19.20
2/10/2005	V-AGN	80	V	✓VS-001		0.98	78.40
2/10/2005	V-OR	35	V	✓VS-002		0.98	34.30
2/10/2005	MCG	2	M	✓QE-441	2.12	0.80	1.60

		Gals Used	Total Emissions	
<u>2/10/2005</u>	<u>Totals</u>	141	133.50	Pounds

2/11/2005	GY	22	M	✓QE-647		0.80	17.60
2/11/2005	AOR	26	M	✓QE-566	2.12	0.80	20.80
2/11/2005	V-OR	41	V	✓VS-002		0.98	40.18
2/11/2005	V-AGN	25	V	✓VS-001		0.98	24.50
2/11/2005	BK	12	M	✓QE-J204	2.11	0.80	9.60

		Gals Used	Total Emissions	
<u>2/11/2005</u>	<u>Totals</u>	126	112.68	Pounds

2/14/2005	V-AGN	123	V	✓vs-001		0.98	120.54
2/14/2005	RBL	12	M	✓QE-964	2.21	0.81	9.72
2/14/2005	V-OR	25	V	✓VS-002		0.98	24.50

		Gals Used	Total Emissions	
<u>2/14/2005</u>	<u>Totals</u>	160	154.76	Pounds

2/15/2005	V-OR	47	V	✓VS-002		0.98	46.06
-----------	------	----	---	---------	--	------	-------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
2/15/2005	GY	10	M	✓QE-647		0.80	8.00
2/15/2005	V-AGN	39	V	✓VS-001		0.98	38.22
2/15/2005	BK	9	M	✓QE-J204	2.11	0.80	7.20
2/15/2005	GN	12	M	✓QE-415	2.12	0.80	9.60

Gals Used			Total Emissions		
<u>2/15/2005</u>	<u>Totals</u>	117		109.08	Pounds

2/16/2005	OR	52	M	✓QE-522	2.21	0.80	41.60
2/16/2005	V-AGN	26	V	✓VS-001		0.98	25.48
2/16/2005	IO	0	M	✓QE-535	2.21	0.80	0.00
2/16/2005	BL	15	M	✓QE-930	2.21	0.80	12.00

Gals Used			Total Emissions		
<u>2/16/2005</u>	<u>Totals</u>	93		79.08	Pounds

2/17/2005	BL	36	M	✓QE-930	2.21	0.80	28.80
2/17/2005	OR	43	M	✓QE-522	2.21	0.80	34.40
2/17/2005	V-AGN	42	V	✓VS-001		0.98	41.16
2/17/2005	BK	9	M	✓QE-J204	2.11	0.80	7.20
2/17/2005	IO	0	M	✓QE-535	2.21	0.80	0.00
2/17/2005	YL	21	M	✓QE-569	2.21	0.80	16.80

Gals Used			Total Emissions		
<u>2/17/2005</u>	<u>Totals</u>	151		128.36	Pounds

2/18/2005	YL	74	M	✓QE-569	2.21	0.80	59.20
2/18/2005	OR	9	M	✓QE-522	2.21	0.80	7.20
2/18/2005	IG	6	M	✓QE-432	2.12	0.80	4.80
2/18/2005	FR	17	M	✓QE-713	2.21	0.81	13.77
2/18/2005	AGN	32	M	✓QE-466	2.12	0.80	25.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>2/18/2005</u>	<u>Totals</u>		138		110.57	Pounds

2/22/2005	OR	43	M	✓qe-522	2.21	0.80	34.40
2/22/2005	V-AGN	14	V	✓vs-001		0.98	13.72
2/22/2005	AGN	99	M	✓QE-466	2.12	0.80	79.20

			Gals Used	Total Emissions		
<u>2/22/2005</u>	<u>Totals</u>		156		127.32	Pounds

2/23/2005	AGN	110	M	✓QE-466	2.12	0.80	88.00
2/23/2005	OR	40	M	✓qe-522	2.21	0.80	32.00
2/23/2005	IO	0	M	✓qe-535	2.21	0.80	0.00

			Gals Used	Total Emissions		
<u>2/23/2005</u>	<u>Totals</u>		150		120.00	Pounds

2/24/2005	OR	50	M	✓qe-522	2.21	0.80	40.00
2/24/2005	AGN	114	M	✓QE-466	2.12	0.80	91.20
2/24/2005	IG	10	M	✓qe-432	2.12	0.80	8.00

			Gals Used	Total Emissions		
<u>2/24/2005</u>	<u>Totals</u>		174		139.20	Pounds

2/25/2005	AGN	50	M	✓QE-466	2.12	0.80	40.00
2/25/2005	BT	5	M	✓qe-848	2.16	0.80	4.00
2/25/2005	GY	15	M	✓qe-647		0.80	12.00
2/25/2005	BL	17	M	✓qe-930	2.21	0.80	13.60
2/25/2005	OR	37	M	✓qe-522	2.21	0.80	29.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

Gals Used Total Emissions

<u>2/25/2005</u>	<u>Totals</u>				124		99.20	Pounds
------------------	---------------	--	--	--	-----	--	-------	--------

2/28/2005	OR	67	M	✓qe-522			2.21	0.80	53.60
2/28/2005	AGN	91	M	✓QE-466			2.12	0.80	72.80

Gals Used Total Emissions

<u>2/28/2005</u>	<u>Totals</u>				158		126.40	Pounds
------------------	---------------	--	--	--	-----	--	--------	--------

3/1/2005	AGN	122	M	✓QE-466			2.12	0.80	97.60
----------	-----	-----	---	---------	--	--	------	------	-------

Gals Used Total Emissions

<u>3/1/2005</u>	<u>Totals</u>				122		97.60	Pounds
-----------------	---------------	--	--	--	-----	--	-------	--------

3/2/2005	AGN	81	M	✓QE-466			2.12	0.80	64.80
3/2/2005	BL	16	M	✓QE-930			2.21	0.80	12.80
3/2/2005	OR	62	M	✓QE-522			2.21	0.80	49.60

Gals Used Total Emissions

<u>3/2/2005</u>	<u>Totals</u>				159		127.20	Pounds
-----------------	---------------	--	--	--	-----	--	--------	--------

3/3/2005	AGN	93	M	✓QE-466			2.12	0.80	74.40
3/3/2005	MCG	4	M	✓QE-441			2.12	0.80	3.20
3/3/2005	BK	10	M	✓QE-J204			2.11	0.80	8.00
3/3/2005	IO	0	M	✓QE-535			2.21	0.80	0.00
3/3/2005	IG	0	M	✓QE-432			2.12	0.80	0.00
3/3/2005	OR	19	M	✓QE-522			2.21	0.80	15.20

Gals Used Total Emissions

<u>3/3/2005</u>	<u>Totals</u>				126		100.80	Pounds
-----------------	---------------	--	--	--	-----	--	--------	--------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
3/4/2005	YL	10	M	✓QE-569	2.21	0.80	8.00
3/4/2005	OR	50	M	✓QE-522	2.21	0.80	40.00
3/4/2005	GY	27	M	✓QE-647		0.80	21.60
3/4/2005	AGN	12	M	✓QE-466	2.12	0.80	9.60

Gals Used			Total Emissions		
<u>3/4/2005</u>	<u>Totals</u>	99		79.20	Pounds

3/7/2005	AGN	99	M	✓QE-466	2.12	0.80	79.20
----------	-----	----	---	---------	------	------	-------

Gals Used			Total Emissions		
<u>3/7/2005</u>	<u>Totals</u>	99		79.20	Pounds

3/8/2005	AGN	101	M	✓QE-466	2.12	0.80	80.80
3/8/2005	OR	19	M	✓QE-522	2.21	0.80	15.20

Gals Used			Total Emissions		
<u>3/8/2005</u>	<u>Totals</u>	120		96.00	Pounds

3/9/2005	GY	20	M	✓QE-647		0.80	16.00
3/9/2005	OR	31	M	✓QE-522	2.21	0.80	24.80
3/9/2005	IO	9	M	✓QE-535	2.21	0.80	7.20
3/9/2005	FR	31	M	✓QE-713	2.21	0.81	25.11
3/9/2005	AGN	12	M	✓QE-466	2.12	0.80	9.60

Gals Used			Total Emissions		
<u>3/9/2005</u>	<u>Totals</u>	103		82.71	Pounds

3/10/2005	AGN	62	M	✓QE-466	2.12	0.80	49.60
3/10/2005	IG	0	M	✓QE-432	2.12	0.80	0.00
3/10/2005	DW	15	M	✓QE-147	2.10	0.80	12.00
3/10/2005	BL	5	M	✓QE-930	2.21	0.80	4.00
3/10/2005	RB	4	M	✓QE-929	2.70	0.83	3.32

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
3/10/2005	GY	10	M	✓QE-647		0.80	8.00
3/10/2005	MCG	4	M	✓QE-441	2.12	0.80	3.20
3/10/2005	YL	10	M	✓QE-569	2.21	0.80	8.00
3/10/2005	OR	45	M	✓QE-522	2.21	0.80	36.00

Gals Used

Total Emissions

<u>3/10/2005</u>	<u>Totals</u>	155		124.12	Pounds
------------------	---------------	-----	--	--------	--------

3/11/2005	OR	50	M	✓QE-522	2.21	0.80	40.00
3/11/2005	V-OR	35	V	✓VS-002		0.98	34.30
3/11/2005	AGN	21	M	✓QE-466	2.12	0.80	16.80
3/11/2005	FR	12	M	✓QE-713	2.21	0.81	9.72
3/11/2005	IG	0	M	✓QE-432	2.12	0.80	0.00
3/11/2005	IO	7	M	✓QE-535	2.21	0.80	5.60

Gals Used

Total Emissions

<u>3/11/2005</u>	<u>Totals</u>	125		106.42	Pounds
------------------	---------------	-----	--	--------	--------

3/14/2005	AGN	60	M	✓QE-466	2.12	0.80	48.00
3/14/2005	DW	10	M	✓QE-147	2.10	0.80	8.00
3/14/2005	GN	4	M	✓QE-415	2.12	0.80	3.20
3/14/2005	V-OR	91	V	✓VS-002		0.98	89.18
3/14/2005	AOR	9	M	✓QE-566	2.12	0.80	7.20
3/14/2005	GY	2	M	✓QE-647		0.80	1.60

Gals Used

Total Emissions

<u>3/14/2005</u>	<u>Totals</u>	176		157.18	Pounds
------------------	---------------	-----	--	--------	--------

3/15/2005	V-OR	54	V	✓VS-002		0.98	52.92
3/15/2005	AOR	14	M	✓QE-566	2.12	0.80	11.20
3/15/2005	IO	12	M	✓QE-535	2.21	0.80	9.60
3/15/2005	IG	20	M	✓QE-432	2.12	0.80	16.00
3/15/2005	BK	19	M	✓QE-J204	2.11	0.80	15.20
3/15/2005	AGN	48	M	✓QE-466	2.12	0.80	38.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>3/15/2005</u>	<u>Totals</u>		167		143.32	Pounds

3/16/2005	V-AGN	83	V	VS-001	0.98	81.34
3/16/2005	RB	41	M	QE-929	2.70	0.83
3/16/2005	GN	5	M	QE-415	2.12	0.80
3/16/2005	IG	9	M	QE-432	2.12	0.80

			Gals Used	Total Emissions		
<u>3/16/2005</u>	<u>Totals</u>		138		126.57	Pounds

3/17/2005	RB	11	M	✓QE-929	2.70	0.83
3/17/2005	V-OR	37	V	✓VS-002	0.98	36.26
3/17/2005	AOR	41	M	✓QE-566	2.12	0.80
3/17/2005	BL	5	M	✓QE-930	2.21	0.80
3/17/2005	PCG	10	M	✓QE-617	2.22	0.81
3/17/2005	V-AGN	27	V	✓VS-001	0.98	26.46

			Gals Used	Total Emissions		
<u>3/17/2005</u>	<u>Totals</u>		131		116.75	Pounds

3/18/2005	V-AGN	72	V	✓VS-001	0.98	70.56
3/18/2005	V-OR	35	V	✓VS-002	0.98	34.30
3/18/2005	CY	5	M	✓QE-510	2.10	0.80
3/18/2005	YL	12	M	✓QE-569	2.21	0.80
3/18/2005	AOR	3	M	✓QE-566	2.12	0.80
3/18/2005	IG	3	M	✓QE-432	2.12	0.80

			Gals Used	Total Emissions		
<u>3/18/2005</u>	<u>Totals</u>		130		123.26	Pounds

3/21/2005	V-AGN	44	V	✓vs-001	0.98	43.12
-----------	-------	----	---	---------	------	-------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
3/21/2005	IO	65	M	✓QE-535	2.21	0.80	52.00
3/21/2005	RB	9	M	✓QE-929	2.70	0.83	7.47
3/21/2005	YL	29	M	✓QE-569	2.21	0.80	23.20

		Gals Used	Total Emissions	
<u>3/21/2005</u>	<u>Totals</u>	147	125.79	Pounds

3/22/2005	YL	87	M	✓QE-569	2.21	0.80	69.60
3/22/2005	MCG	24	M	✓QE-441	2.12	0.80	19.20
3/22/2005	V-AGN	20	V	✓VS-001		0.98	19.60
3/22/2005	GY	5	M	✓QE-647		0.80	4.00

		Gals Used	Total Emissions	
<u>3/22/2005</u>	<u>Totals</u>	136	112.40	Pounds

3/23/2005	V-AGN	9	V	✓VS-001		0.98	8.82
3/23/2005	IO	19	M	✓QE-535	2.21	0.80	15.20
3/23/2005	V-OR	27	V	✓VS-002		0.98	26.46
3/23/2005	IG	7	M	✓QE-432	2.12	0.80	5.60
3/23/2005	AOR	7	M	✓QE-566	2.12	0.80	5.60
3/23/2005	GY	3	M	✓QE-647		0.80	2.40
3/23/2005	RB	33	M	✓QE-929	2.70	0.83	27.39

		Gals Used	Total Emissions	
<u>3/23/2005</u>	<u>Totals</u>	105	91.47	Pounds

3/24/2005	RB	83	M	✓QE-929	2.70	0.83	68.89
3/24/2005	AOW	64	M	✓QE-113	2.70	1.20	76.80

		Gals Used	Total Emissions	
<u>3/24/2005</u>	<u>Totals</u>	147	145.69	Pounds

3/25/2005	AOW	27	M	✓qe-113	2.70	1.20	32.40
-----------	-----	----	---	---------	------	------	-------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
3/25/2005	GY	2	M	✓QE-647		0.80	1.60
3/25/2005	IO	19	M	✓QE-535	2.21	0.80	15.20
3/25/2005	AOR	26	M	✓QE-566	2.12	0.80	20.80
3/25/2005	IG	22	M	✓QE-432	2.12	0.80	17.60

Gals Used

Total Emissions

<u>3/25/2005</u>	<u>Totals</u>	96		87.60	Pounds
------------------	---------------	----	--	-------	--------

3/28/2005	AOW	79	M	✓qe-113 ✓	2.70	1.20	94.80
3/28/2005	V-AGN	34	V	✓VS-001		0.98	33.32
3/28/2005	OR	2	M	✓QE-522 ✓	2.21	0.80	1.60
3/28/2005	RB	36	M	✓QE-929	2.70	0.83	29.88

Gals Used

Total Emissions

<u>3/28/2005</u>	<u>Totals</u>	151		159.60	Pounds
------------------	---------------	-----	--	--------	--------

3/29/2005	RB	92	M	✓QE-929	2.70	0.83	76.36
3/29/2005	AOW	72	M	✓QE-113	2.70	1.20	86.40
3/29/2005	IG	10	M	✓QE-432	2.12	0.80	8.00

Gals Used

Total Emissions

<u>3/29/2005</u>	<u>Totals</u>	174		170.76	Pounds
------------------	---------------	-----	--	--------	--------

3/30/2005	AOW	78	M	✓qe-113	2.70	1.20	93.60
3/30/2005	V-OR	41	V	✓VS-002		0.98	40.18
3/30/2005	YL	12	M	✓QE-569	2.21	0.80	9.60
3/30/2005	V-AGN	34	V	✓VS-001		0.98	33.32
3/30/2005	AGN	50	M	✓QE-466	2.12	0.80	40.00
3/30/2005	IG	12	M	✓QE-432	2.12	0.80	9.60
3/30/2005	IO	10	M	✓QE-535	2.21	0.80	8.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

Gals Used Total Emissions

<u>3/30/2005</u>	<u>Totals</u>			237		234.30	Pounds
------------------	---------------	--	--	-----	--	--------	--------

Wed.

3/31/2005	AOR	3	M	✓qe-566	2.12	0.80	2.40
3/31/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
3/31/2005	RB	35	M	✓QE-929	2.70	0.83	29.05
3/31/2005	BL	33	M	✓QE-930	2.21	0.80	26.40
3/31/2005	AGN	99	M	✓QE-466	2.12	0.80	79.20
3/31/2005	V-OR	81	V	✓VS-002		0.98	79.38
3/31/2005	YL	5	M	✓QE-569	2.21	0.80	4.00

Gals Used Total Emissions

<u>3/31/2005</u>	<u>Totals</u>			266		228.43	Pounds
------------------	---------------	--	--	-----	--	--------	--------

Thur

4/4/2005	IO	24	M	✓qe-535	2.21	0.80	19.20
4/4/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
4/4/2005	V-OR	72	V	✓VS-002		0.98	70.56
4/4/2005	YL	5	M	✓QE-569	2.21	0.80	4.00

Gals Used Total Emissions

<u>4/4/2005</u>	<u>Totals</u>			156		137.76	Pounds
-----------------	---------------	--	--	-----	--	--------	--------

4/5/2005	AGN	67	M	✓QE-466	2.12	0.80	53.60
4/5/2005	V-OR	63	V	✓VS-002		0.98	61.74
4/5/2005	BK	12	M	✓QE-J204	2.11	0.80	9.60
4/5/2005	GY	14	M	✓QE-647		0.80	11.20

Gals Used Total Emissions

<u>4/5/2005</u>	<u>Totals</u>			156		136.14	Pounds
-----------------	---------------	--	--	-----	--	--------	--------

4/6/2005	AGN	67	M	✓QE-466	2.12	0.80	53.60
4/6/2005	RB	24	M	✓QE-929	2.70	0.83	19.92

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
4/6/2005	V-OR	21	V	✓VS-002		0.98	20.58
4/6/2005	V-AGN	33	V	✓VS-001		0.98	32.34

		Gals Used	Total Emissions	
<u>4/6/2005</u>	<u>Totals</u>	145	126.44	Pounds

4/7/2005	V-OR	28	V	vs-002		0.98	27.44
4/7/2005	V-AGN	12	V	VS-001		0.98	11.76
4/7/2005	PY	120	M	QE-572	2.20	0.80	96.00
4/7/2005	CY	8	M	QE-510	2.10	0.80	6.40
4/7/2005	RB	38	M	QE-929	2.70	0.83	31.54

		Gals Used	Total Emissions	
<u>4/7/2005</u>	<u>Totals</u>	206	173.14	Pounds

4/8/2005	V-AGN	27	V	✓VS-001		0.98	26.46
4/8/2005	GN	3	M	✓QE-415	2.12	0.80	2.40
4/8/2005	ALG	55	M	✓QE-654	2.22	0.80	44.00
4/8/2005	DOA	43	M	✓QE-579	2.10	0.80	34.40

		Gals Used	Total Emissions	
<u>4/8/2005</u>	<u>Totals</u>	128	107.26	Pounds

4/11/2005	DOA	48	M	✓qe-579	2.10	0.80	38.40
4/11/2005	V-AGN	72	V	✓VS-001		0.98	70.56
4/11/2005	IO	21	M	✓QE-535	2.21	0.80	16.80

		Gals Used	Total Emissions	
<u>4/11/2005</u>	<u>Totals</u>	141	125.76	Pounds

4/12/2005	V-AGN	93	V	✓vs-001		0.98	91.14
4/12/2005	V-OR	48	V	✓VS-002		0.98	47.04
4/12/2005	ALG	33	M	✓QE-654	2.22	0.80	26.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>4/12/2005</u>	<u>Totals</u>		174		164.58	Pounds

4/13/2005	V-OR	9	V	✓ vs-002	0.98	8.82
4/13/2005	AOR	12	M	✓ QE-566	2.12	0.80
4/13/2005	IG	40	M	✓ QE-432	2.12	0.80
4/13/2005	V-AGN	41	V	✓ VS-001	0.98	40.18
4/13/2005	BL	70	M	✓ QE-930	2.21	0.80

			Gals Used	Total Emissions		
<u>4/13/2005</u>	<u>Totals</u>		172		146.60	Pounds

4/14/2005	PY	210	M	✓ qe-572	2.20	0.80
-----------	----	-----	---	----------	------	------

			Gals Used	Total Emissions		
<u>4/14/2005</u>	<u>Totals</u>		210		168.00	Pounds

4/15/2005	V-OR	27	V	✓ vs-002	0.98	26.46
4/15/2005	V-AGN	7	V	✓ VS-001	0.98	6.86
4/15/2005	BL	102	M	✓ QE-930	2.21	0.80

			Gals Used	Total Emissions		
<u>4/15/2005</u>	<u>Totals</u>		136		114.92	Pounds

4/16/2005	BL	187	M	✓ qe-930	2.21	0.80
-----------	----	-----	---	----------	------	------

			Gals Used	Total Emissions		
<u>4/16/2005</u>	<u>Totals</u>		187		149.60	Pounds

4/18/2005	BL	110	M	✓ QE-930	2.21	0.80
4/18/2005	PY	106	M	✓ QE-572	2.20	0.80

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>4/18/2005</u>	<u>Totals</u>		216		172.80	Pounds

4/19/2005	PY	40	V	✓qe-572	2.20	0.80	32.00
4/19/2005	V-OR	100	V	✓VS-002		0.98	98.00
4/19/2005	V-AGN	34	V	✓VS-001		0.98	33.32

			Gals Used	Total Emissions		
<u>4/19/2005</u>	<u>Totals</u>		174		163.32	Pounds

4/20/2005	RB	31	M	✓qe-929	2.70	0.83	25.73
4/20/2005	V-OR	10	V	✓VS-002		0.98	9.80
4/20/2005	V-AGN	55	V	✓VS-001		0.98	53.90
4/20/2005	BL	55	M	✓QE-930	2.21	0.80	44.00
4/20/2005	GY	19	M	✓QE-647		0.80	15.20

			Gals Used	Total Emissions		
<u>4/20/2005</u>	<u>Totals</u>		170		148.63	Pounds

4/21/2005	V-OR	65	V	✓vs-002✓		0.98	63.70
4/21/2005	LOR	5	M	✓QE-570	1.60	0.80	4.00
4/21/2005	PY	88	M	✓QE-572	2.20	0.80	70.40
4/21/2005	RB	1	M	✓QE-929	2.70	0.83	0.83
4/21/2005	V-AGN	41	V	✓VS-001✓		0.98	40.18

			Gals Used	Total Emissions		
<u>4/21/2005</u>	<u>Totals</u>		200		179.11	Pounds

Then

4/22/2005	MCG	3	M	✓QE-441	2.12	0.80	2.40
4/22/2005	CY	3	M	✓QE-510	2.10	0.80	2.40
4/22/2005	IG	7	M	✓QE-432	2.12	0.80	5.60
4/22/2005	GN	4	M	✓QE-415	2.12	0.80	3.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
4/22/2005	BK	3	M	✓ QE-J204	2.11	0.80	2.40
4/22/2005	V-AGN	60	V	✓ VS-001		0.98	58.80
4/22/2005	V-OR	55	V	✓ VS-002		0.98	53.90

		Gals Used	Total Emissions	
<u>4/22/2005</u>	<u>Totals</u>	135	128.70	Pounds

4/25/2005	V-AGN	30	V	✓ vs-001		0.98	29.40
4/25/2005	V-OR	78	V	✓ VS-002		0.98	76.44
4/25/2005	AOR	4	M	✓ QE-566	2.12	0.80	3.20
4/25/2005	GY	6	M	✓ QE-647		0.80	4.80
4/25/2005	IO	7	M	✓ QE-535	2.21	0.80	5.60
4/25/2005	BL	55	M	✓ QE-930	2.21	0.80	44.00

		Gals Used	Total Emissions	
<u>4/25/2005</u>	<u>Totals</u>	180	163.44	Pounds

4/26/2005	V-AGN	146	V	✓ VS-001		0.98	143.08
4/26/2005	V-OR	5	V	✓ VS-002		0.98	4.90
4/26/2005	BL	8	M	✓ QE-930	2.21	0.80	6.40
4/26/2005	AGN	24	M	✓ QE-466	2.12	0.80	19.20
4/26/2005	KWG	5	M	✓ QE-649	2.21	0.80	4.00

		Gals Used	Total Emissions	
<u>4/26/2005</u>	<u>Totals</u>	188	177.58	Pounds

Tues

4/27/2005	AGN	106	M	✓ QE-466	2.12	0.80	84.80
4/27/2005	BL	2	M	✓ QE-930	2.21	0.80	1.60
4/27/2005	V-OR	34	V	✓ VS-002		0.98	33.32

		Gals Used	Total Emissions	
<u>4/27/2005</u>	<u>Totals</u>	142	119.72	Pounds

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
4/28/2005	V-OR	131	V	✓vs-002		0.98	128.38
4/28/2005	IO	27	M	✓QE-535	2.21	0.80	21.60
4/28/2005	IG	24	M	✓QE-432	2.12	0.80	19.20
4/28/2005	AGN	26	M	✓QE-466	2.12	0.80	20.80
4/28/2005	GN	2	M	✓QE-415	2.12	0.80	1.60

Gals Used Total Emissions

<u>4/28/2005</u> Totals	210	191.58	Pounds
-------------------------	-----	--------	--------

Thurs

4/29/2005	AGN	76	M	✓QE-466	2.12	0.80	60.80
-----------	-----	----	---	---------	------	------	-------

Gals Used Total Emissions

<u>4/29/2005</u> Totals	76	60.80	Pounds
-------------------------	----	-------	--------

5/2/2005	AGN	98	M	✓QE-466	2.12	0.80	78.40
5/2/2005	V-OR	100	V	✓VS-002		0.98	98.00

Gals Used Total Emissions

<u>5/2/2005</u> Totals	198	176.40	Pounds
------------------------	-----	--------	--------

Mon

5/3/2005	DOA	22	M	✓QE-579	2.10	0.80	17.60
5/3/2005	V-OR	60	V	✓VS-002		0.98	58.80
5/3/2005	AOR	12	M	✓QE-566	2.12	0.80	9.60
5/3/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
5/3/2005	GY	17	M	✓QE-647		0.80	13.60
5/3/2005	IG	4	M	✓QE-432	2.12	0.80	3.20
5/3/2005	FR	9	M	✓QE-713	2.21	0.81	7.29
5/3/2005	V-AGN	26	V	✓VS-001		0.98	25.48

Gals Used Total Emissions

<u>5/3/2005</u> Totals	160	143.57	Pounds
------------------------	-----	--------	--------

5/4/2005	V-AGN	170	V	✓VS-001		0.98	166.60
----------	-------	-----	---	---------	--	------	--------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>5/4/2005</u>	<u>Totals</u>		170		166.60	Pounds

5/5/2005	V-OR	42	V	vs-002		0.98	41.16
5/5/2005	OR	81	M	✓QE-522	2.21	0.80	64.80
5/5/2005	V-AGN	45	V	✓VS-001		0.98	44.10

			Gals Used	Total Emissions		
<u>5/5/2005</u>	<u>Totals</u>		168		150.06	Pounds

5/6/2005	V-AGN	55	V	✓vs-001		0.98	53.90
5/6/2005	MCG	15	M	✓QE-441	2.12	0.80	12.00
5/6/2005	DOA	33	M	✓QE-579	2.10	0.80	26.40
5/6/2005	OR	31	M	✓QE-522	2.21	0.80	24.80

			Gals Used	Total Emissions		
<u>5/6/2005</u>	<u>Totals</u>		134		117.10	Pounds

5/9/2005	AGN	72	M	✓QE-466	2.12	0.80	57.60
5/9/2005	OR	65	M	✓QE-522	2.21	0.80	52.00
5/9/2005	IO	14	M	✓QE-535	2.21	0.80	11.20
5/9/2005	MCG	18	M	✓QE-441	2.12	0.80	14.40

			Gals Used	Total Emissions		
<u>5/9/2005</u>	<u>Totals</u>		169		135.20	Pounds

5/10/2005	MCG	12	M	✓qe-441	2.12	0.80	9.60
5/10/2005	AGN	59	M	✓QE-466	2.12	0.80	47.20
5/10/2005	AOR	55	M	✓QE-566	2.12	0.80	44.00
5/10/2005	OR	21	M	✓QE-522	2.21	0.80	16.80

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>5/10/2005</u>	<u>Totals</u>		147		117.60	Pounds

5/11/2005	AOR	45	M	✓qe-566	2.12	0.80	36.00
5/11/2005	FYL	20	M	✓qe-582	2.21	0.80	16.00
5/11/2005	HMB	63	M	✓QE-992	2.21	0.80	50.40
5/11/2005	YL	12	M	✓QE-569	2.21	0.80	9.60
5/11/2005	IO	5	M	✓QE-535	2.21	0.80	4.00

			Gals Used	Total Emissions		
<u>5/11/2005</u>	<u>Totals</u>		145		116.00	Pounds

5/12/2005	AGN	35	M	✓QE-466	2.12	0.80	28.00
5/12/2005	OR	100	M	✓QE-522	2.21	0.80	80.00
5/12/2005	GY	3	M	✓QE-647		0.80	2.40
5/12/2005	BL	3	M	✓QE-930	2.21	0.80	2.40

			Gals Used	Total Emissions		
<u>5/12/2005</u>	<u>Totals</u>		141		112.80	Pounds

5/13/2005	AGN	31	M	✓QE-466	2.12	0.80	24.80
5/13/2005	GY	10	M	✓QE-647		0.80	8.00
5/13/2005	AOR	44	M	✓QE-566	2.12	0.80	35.20
5/13/2005	OR	53	M	✓QE-522	2.21	0.80	42.40
5/13/2005	RRB	40	WASTE	✓QE-981	2.21	0.50	20.00

			Gals Used	Total Emissions		
<u>5/13/2005</u>	<u>Totals</u>		178		130.40	Pounds

5/16/2005	OR	93	M	✓qe-522	2.21	0.80	74.40
5/16/2005	AGN	74	M	✓QE-466	2.12	0.80	59.20
5/16/2005	JIG	30	M	✓QE-424	2.12	0.80	24.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>5/16/2005</u>	<u>Totals</u>		197		157.60	Pounds

5/17/2005	LA	14	M	✓qe-117	2.16	0.80	11.20
5/17/2005	AGN	30	M	✓QE-466	2.12	0.80	24.00
5/17/2005	OR	80	M	✓QE-522	2.21	0.80	64.00
5/17/2005	IG	14	M	✓QE-432	2.12	0.80	11.20

			Gals Used	Total Emissions		
<u>5/17/2005</u>	<u>Totals</u>		138		110.40	Pounds

5/18/2005	OR	93	M	✓qe-522	2.21	0.80	74.40
5/18/2005	PY	5	M	✓QE-572	2.20	0.80	4.00
5/18/2005	GY	8	M	✓QE-647		0.80	6.40
5/18/2005	V-AGN	50	V	✓VS-001		0.98	49.00
5/18/2005	IG	10	M	✓QE-432	2.12	0.80	8.00
5/18/2005	IO	5	M	✓QE-535	2.21	0.80	4.00

			Gals Used	Total Emissions		
<u>5/18/2005</u>	<u>Totals</u>		171		145.80	Pounds

5/19/2005	OR	43	M	✓qe-522	2.21	0.80	34.40
5/19/2005	V-AGN	16	V	✓VS-001 ✓		0.98	15.68
5/19/2005	AOR	55	M	✓QE-566	2.12	0.80	44.00
5/19/2005	BK	8	M	✓QE-J204 ✓	2.11	0.80	6.40
5/19/2005	GY	8	M	✓QE-647 ✓		0.80	6.40
5/19/2005	HMB	75	M	✓QE-992 ✓	2.21	0.80	60.00

			Gals Used	Total Emissions		
<u>5/19/2005</u>	<u>Totals</u>		205		166.88	Pounds

5/20/2005	PY	17	M	✓qe-572	2.20	0.80	13.60
-----------	----	----	---	---------	------	------	-------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
5/20/2005	BL	10	M	✓QE-930	2.21	0.80	8.00
5/20/2005	RB	5	M	✓QE-929	2.70	0.83	4.15
5/20/2005	V-AGN	35	V	✓VS-001		0.98	34.30
5/20/2005	YL	5	M	✓QE-569 ✓	2.21	0.80	4.00
5/20/2005	V-OR	47	V	✓VS-002		0.98	46.06

			Gals Used	Total Emissions		
<u>5/20/2005</u>	<u>Totals</u>		119		110.11	Pounds

5/21/2005	V-OR	225	V	✓VS-002		0.98	220.50
5/21/2005	V-AGN	39	V	✓VS-001		0.98	38.22

			Gals Used	Total Emissions		
<u>5/21/2005</u>	<u>Totals</u>		264		258.72	Pounds

S a A

5/23/2005	V-AGN	50	V	✓vs-001 ✓		0.98	49.00
5/23/2005	RB	37	M	✓QE-929	2.70	0.83	30.71
5/23/2005	PY	5	M	✓QE-572	2.20	0.80	4.00
5/23/2005	V-OR	30	V	✓VS-002 ✓		0.98	29.40

			Gals Used	Total Emissions		
<u>5/23/2005</u>	<u>Totals</u>		122		113.11	Pounds

5/24/2005	GN	52	M	✓qe-415 ✓	2.12	0.80	41.60
5/24/2005	V-AGN	40	V	✓VS-001 ✓		0.98	39.20
5/24/2005	V-OR	75	V	✓VS-002 ✓		0.98	73.50
5/24/2005	PY	4	M	✓QE-572	2.20	0.80	3.20
5/24/2005	GY	20	M	✓QE-647		0.80	16.00
5/24/2005	AOR	17	M	✓QE-566	2.12	0.80	13.60
5/24/2005	RB	55	M	✓QE-929	2.70	0.83	45.65

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>5/24/2005</u>	<u>Totals</u>		263		232.75	Pounds

5/25/2005	RB	48	M	✓qe-929	2.70	0.83	39.84
5/25/2005	BL	5	M	✓QE-930	2.21	0.80	4.00
5/25/2005	AOR	15	M	✓QE-566	2.12	0.80	12.00
5/25/2005	V-OR	27	V	✓VS-002		0.98	26.46
5/25/2005	V-AGN	38	V	✓VS-001		0.98	37.24
5/25/2005	GN	51	M	✓QE-415	2.12	0.80	40.80

			Gals Used	Total Emissions		
<u>5/25/2005</u>	<u>Totals</u>		184		160.34	Pounds

5/26/2005	V-AGN	34	V	✓vs-001		0.98	33.32
5/26/2005	V-OR	60	V	✓VS-002		0.98	58.80
5/26/2005	AOR	36	M	✓QE-566	2.12	0.80	28.80
5/26/2005	FR	19	M	✓QE-713	2.21	0.81	15.39
5/26/2005	GN	14	M	✓QE-415	2.12	0.80	11.20
5/26/2005	GY	17	M	✓QE-647		0.80	13.60
5/26/2005	IG	10	M	✓QE-432	2.12	0.80	8.00
5/26/2005	IO	10	M	✓QE-535	2.21	0.80	8.00
5/26/2005	LOR	12	M	✓QE-570	1.60	0.80	9.60
5/26/2005	MCG	4	M	✓QE-441	2.12	0.80	3.20
5/26/2005	UNB	55	M	✓QE-963	2.12	0.50	27.50

			Gals Used	Total Emissions		
<u>5/26/2005</u>	<u>Totals</u>		271		217.41	Pounds

Thm

5/27/2005	UNB	55	M	✓QE-963	2.12	0.50	27.50
5/27/2005	RB	45	M	✓QE-929	2.70	0.83	37.35
5/27/2005	V-AGN	37	V	✓VS-001		0.98	36.26

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>5/27/2005</u>	<u>Totals</u>		137		101.11	Pounds

5/28/2005	UNB	45	M	✓QE-963	2.12	0.50	22.50
5/28/2005	GN	45	M	✓QE-415	2.12	0.80	36.00
5/28/2005	SKG	29	M	✓QE-655	2.22	0.80	23.20
5/28/2005	V-OR	83	V	✓VS-002		0.98	81.34
5/28/2005	V-AGN	30	V	✓VS-001		0.98	29.40

			Gals Used	Total Emissions		
<u>5/28/2005</u>	<u>Totals</u>		232		192.44	Pounds

5/31/2005	SKG	57	M	✓qe-655	2.22	0.80	45.60
5/31/2005	YL	3	M	✓QE-569	2.21	0.80	2.40
5/31/2005	V-AGN	30	V	✓VS-001		0.98	29.40
5/31/2005	V-OR	24	V	✓VS-002		0.98	23.52

			Gals Used	Total Emissions		
<u>5/31/2005</u>	<u>Totals</u>		114		100.92	Pounds

6/1/2005	UNB	47	dispos.	✓QE-963	2.12	0.50	23.50
6/1/2005	V-AGN	40	V	✓vs-001		0.98	39.20
6/1/2005	V-OR	80	V	✓VS-002		0.98	78.40

			Gals Used	Total Emissions		
<u>6/1/2005</u>	<u>Totals</u>		167		141.10	Pounds

6/2/2005	BL	38	M	✓qe-930	2.21	0.80	30.40
6/2/2005	V-AGN	40	V	✓VS-001 ✓		0.98	39.20
6/2/2005	YL	20	M	✓QE-569	2.21	0.80	16.00
6/2/2005	AOR	3	M	✓QE-566	2.12	0.80	2.40
6/2/2005	V-OR	53	V	✓VS-002 ✓		0.98	51.94

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
6/2/2005	IO	11	M	✓QE-535	2.21	0.80	8.80

Gals Used Total Emissions

<u>6/2/2005</u>	<u>Totals</u>	165		148.74	Pounds
-----------------	---------------	-----	--	--------	--------

6/3/2005	IO	36	M	✓qe-535	2.21	0.80	28.80
6/3/2005	LA	15	M	✓QE-117	2.16	0.80	12.00
6/3/2005	PY	5	M	✓QE-572	2.20	0.80	4.00
6/3/2005	BL	5	M	✓QE-930	2.21	0.80	4.00
6/3/2005	IG	30	M	✓QE-432	2.12	0.80	24.00
6/3/2005	V-OR	8	V	✓VS-002		0.98	7.84
6/3/2005	AOW	36	M	✓QE-113	2.70	1.20	43.20
6/3/2005	KB	5	M	✓QE-987	2.21	0.80	4.00
6/3/2005	GY	10	M	✓QE-647		0.80	8.00

Gals Used Total Emissions

<u>6/3/2005</u>	<u>Totals</u>	150		135.84	Pounds
-----------------	---------------	-----	--	--------	--------

6/4/2005	AOW	46	M	✓QE-113	2.70	1.20	55.20
6/4/2005	BL	8	M	✓QE-930	2.21	0.80	6.40
6/4/2005	V-OR	55	V	✓VS-002		0.98	53.90
6/4/2005	V-AGN	91	V	✓VS-001		0.98	89.18

Gals Used Total Emissions

<u>6/4/2005</u>	<u>Totals</u>	200		204.68	Pounds
-----------------	---------------	-----	--	--------	--------

Gal.

6/6/2005	BL	19	M	✓qe-930	2.21	0.80	15.20
6/6/2005	GY	1	M	✓QE-647		0.80	0.80
6/6/2005	AOW	130	M	✓QE-113	2.70	1.20	156.00

Gals Used Total Emissions

<u>6/6/2005</u>	<u>Totals</u>	150		172.00	Pounds
-----------------	---------------	-----	--	--------	--------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
6/7/2005	AOW	55	M	✓QE-113	2.70	1.20	66.00
6/7/2005	BL	27	M	✓QE-930	2.21	0.80	21.60
6/7/2005	YL	7	M	✓QE-569	2.21	0.80	5.60
6/7/2005	V-OR	36	V	✓VS-002		0.98	35.28
6/7/2005	V-AGN	20	V	✓VS-001		0.98	19.60

Gals Used			Total Emissions	
<u>6/7/2005</u>	<u>Totals</u>	145	148.08	Pounds

6/8/2005	V-AGN	10	V	✓vs-001		0.98	9.80
6/8/2005	AGN	38	M	✓QE-466	2.12	0.80	30.40
6/8/2005	BL	29	M	✓QE-930	2.21	0.80	23.20
6/8/2005	YL	5	M	✓QE-569	2.21	0.80	4.00
6/8/2005	GY	9	M	✓QE-647		0.80	7.20
6/8/2005	V-OR	55	V	✓VS-002 ✓		0.98	53.90
6/8/2005	BK	36	M	✓QE-J204	2.11	0.80	28.80

Gals Used			Total Emissions	
<u>6/8/2005</u>	<u>Totals</u>	182	157.30	Pounds

6/9/2005	V-OR	60	V	✓VS-002		0.98	58.80
6/9/2005	AGN	17	M	✓QE-466	2.12	0.80	13.60
6/9/2005	IO	31	M	✓QE-535	2.21	0.80	24.80
6/9/2005	AOW	42	M	✓QE-113	2.70	1.20	50.40
6/9/2005	IG	3	M	✓QE-432	2.12	0.80	2.40
6/9/2005	AOR	9	M	✓QE-566	2.12	0.80	7.20
6/9/2005	BL	35	M	✓QE-930	2.21	0.80	28.00

Gals Used			Total Emissions	
<u>6/9/2005</u>	<u>Totals</u>	197	185.20	Pounds

Then

6/10/2005	RB	25	M	✓QE-929	2.70	0.83	20.75
6/10/2005	PY	19	M	✓QE-572	2.20	0.80	15.20
6/10/2005	IG	14	M	✓QE-432	2.12	0.80	11.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
6/10/2005	BL	19	M	✓QE-930	2.21	0.80	15.20
6/10/2005	AOR	5	M	✓QE-566	2.12	0.80	4.00
6/10/2005	BK	33	M	✓QE-J204	2.11	0.80	26.40
6/10/2005	AGN	21	M	✓QE-466 ✓	2.12	0.80	16.80

		Gals Used	Total Emissions	
6/10/2005	<u>Totals</u>	136	109.55	Pounds

6/11/2005	AGN	33	M	✓QE-466	2.12	0.80	26.40
6/11/2005	RB	24	M	✓QE-929	2.70	0.83	19.92
6/11/2005	V-OR	60	V	✓VS-002		0.98	58.80
6/11/2005	BL	19	M	✓QE-930	2.21	0.80	15.20

		Gals Used	Total Emissions	
6/11/2005	<u>Totals</u>	136	120.32	Pounds

6/13/2005	V-OR	82	V	✓vs-002 ✓		0.98	80.36
6/13/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
6/13/2005	BK	19	M	✓QE-J204 ✓	2.11	0.80	15.20
6/13/2005	IO	15	M	✓QE-535	2.21	0.80	12.00
6/13/2005	RB	5	M	✓QE-929	2.70	0.83	4.15
6/13/2005	IG	12	M	✓QE-432 ✓	2.12	0.80	9.60
6/13/2005	AOR	2	M	✓QE-566 ✓	2.12	0.80	1.60
6/13/2005	HMB	3	M	✓QE-992	2.21	0.80	2.40

		Gals Used	Total Emissions	
6/13/2005	<u>Totals</u>	193	169.31	Pounds

6/14/2005	BK	74	M	✓QE-J204	2.11	0.80	59.20
6/14/2005	RB	31	M	✓QE-929	2.70	0.83	25.73
6/14/2005	AGN	12	M	✓QE-466	2.12	0.80	9.60
6/14/2005	IG	2	M	✓QE-432	2.12	0.80	1.60
6/14/2005	BL	1	M	✓QE-930	2.21	0.80	0.80
6/14/2005	V-OR	64	V	✓VS-002		0.98	62.72

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>6/14/2005</u>	<u>Totals</u>		184		159.65	Pounds

6/15/2005	V-OR	71	V	✓ vs-002		0.98	69.58
6/15/2005	AGN	98	M	✓ QE-466	2.12	0.80	78.40
6/15/2005	RB	46	M	✓ QE-929	2.70	0.83	38.18

			Gals Used	Total Emissions		
<u>6/15/2005</u>	<u>Totals</u>		215		186.16	Pounds

wed

6/16/2005	RB	57	M	✓ qe-929	2.70	0.83	47.31
6/16/2005	BL	7	M	✓ QE-930	2.21	0.80	5.60
6/16/2005	V-OR	37	V	✓ VS-002		0.98	36.26
6/16/2005	AGN	27	M	✓ QE-466	2.12	0.80	21.60
6/16/2005	GY	7	M	✓ QE-647		0.80	5.60
6/16/2005	GN	5	M	✓ QE-415	2.12	0.80	4.00
6/16/2005	AOR	28	M	✓ QE-566	2.12	0.80	22.40

			Gals Used	Total Emissions		
<u>6/16/2005</u>	<u>Totals</u>		168		142.77	Pounds

6/17/2005	IO	25	M	✓ QE-535	2.21	0.80	20.00
6/17/2005	IG	19	M	✓ QE-432	2.12	0.80	15.20
6/17/2005	GY	2	M	✓ QE-647		0.80	1.60
6/17/2005	BL	7	M	✓ QE-930	2.21	0.80	5.60
6/17/2005	YL	7	M	✓ QE-569	2.21	0.80	5.60
6/17/2005	AOR	20	M	✓ QE-566	2.12	0.80	16.00
6/17/2005	RB	45	M	✓ QE-929	2.70	0.83	37.35
6/17/2005	V-OR	29	V	✓ VS-002		0.98	28.42
6/17/2005	AGN	9	M	✓ QE-466	2.12	0.80	7.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>6/17/2005</u>	<u>Totals</u>		163	136.97		Pounds

6/18/2005	OR	75	M	✓ QE-522	2.21	0.80	60.00
6/18/2005	RB	60	M	✓ QE-929	2.70	0.83	49.80
6/18/2005	AGN	4	M	✓ QE-466	2.12	0.80	3.20

			Gals Used	Total Emissions		
<u>6/18/2005</u>	<u>Totals</u>		139	113.00		Pounds

6/20/2005	RB	14	M	✓ qe-929	2.70	0.83	11.62
6/20/2005	OR	36	M	✓ QE-522	2.21	0.80	28.80
6/20/2005	AGN	27	M	✓ QE-466	2.12	0.80	21.60
6/20/2005	BK	5	M	✓ QE-J204	2.11	0.80	4.00

			Gals Used	Total Emissions		
<u>6/20/2005</u>	<u>Totals</u>		82	66.02		Pounds

6/21/2005	OR	62	M	✓ qe-522	2.21	0.80	49.60
6/21/2005	AGN	30	M	✓ QE-466	2.12	0.80	24.00
6/21/2005	RB	20	M	✓ QE-929	2.70	0.83	16.60
6/21/2005	IG	4	M	✓ QE-432	2.12	0.80	3.20
6/21/2005	YL	4	M	✓ QE-569	2.21	0.80	3.20

			Gals Used	Total Emissions		
<u>6/21/2005</u>	<u>Totals</u>		120	96.60		Pounds

6/22/2005	PY	24	M	✓ QE-572	2.20	0.80	19.20
6/22/2005	CY	5	M	✓ QE-510	2.10	0.80	4.00
6/22/2005	IO	10	M	✓ QE-535	2.21	0.80	8.00
6/22/2005	GY	7	M	✓ QE-647		0.80	5.60
6/22/2005	OR	85	M	✓ QE-522	2.21	0.80	68.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
6/22/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00

			Gals Used	Total Emissions		
<u>6/22/2005</u>	<u>Totals</u>		186		148.80	Pounds

6/23/2005	OR	52	M	✓QE-522	2.21	0.80	41.60
6/23/2005	AGN	18	M	✓QE-466	2.12	0.80	14.40
6/23/2005	PY	108	M	✓QE-572	2.20	0.80	86.40
6/23/2005	CY	4	M	✓QE-510	2.10	0.80	3.20
6/23/2005	RB	14	M	✓QE-929	2.70	0.83	11.62

			Gals Used	Total Emissions		
<u>6/23/2005</u>	<u>Totals</u>		196		157.22	Pounds

6/24/2005	OR	20	M	✓QE-522	2.21	0.80	16.00
6/24/2005	V-OR	38	V	✓VS-002		0.98	37.24
6/24/2005	JIG	10	M	✓QE-424	2.12	0.80	8.00
6/24/2005	AGN	9	M	✓QE-466	2.12	0.80	7.20
6/24/2005	BK	9	M	✓QE-J204	2.11	0.80	7.20
6/24/2005	RB	5	M	✓QE-929	2.70	0.83	4.15
6/24/2005	PCG	65	M	✓QE-617	2.22	0.81	52.65

			Gals Used	Total Emissions		
<u>6/24/2005</u>	<u>Totals</u>		156		132.44	Pounds

6/27/2005	PCG	113	M	✓QE-617	2.22	0.81	91.53
6/27/2005	AGN	40	M	✓QE-466	2.12	0.80	32.00
6/27/2005	RB	4	M	✓QE-929	2.70	0.83	3.32
6/27/2005	PY	26	M	✓QE-572	2.20	0.80	20.80

			Gals Used	Total Emissions		
<u>6/27/2005</u>	<u>Totals</u>		183		147.65	Pounds

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
6/28/2005	V-OR	74	V	✓vs-002		0.98	72.52
6/28/2005	AGN	40	M	✓QE-466	2.12	0.80	32.00
6/28/2005	LA	15	M	✓QE-117	2.16	0.80	12.00
6/28/2005	GY	12	M	✓QE-647		0.80	9.60
6/28/2005	IG	56	M	✓QE-432	2.12	0.80	44.80
6/28/2005	IO	12	M	✓QE-535	2.21	0.80	9.60

Gals Used Total Emissions

<u>6/28/2005</u> Totals	209	180.52	Pounds
-------------------------	-----	--------	--------

Tues

6/29/2005	V-OR	92	V	✓vs-002		0.98	90.16
6/29/2005	AGN	37	M	✓QE-466	2.12	0.80	29.60
6/29/2005	IO	12	M	✓QE-535	2.21	0.80	9.60
6/29/2005	IG	14	M	✓QE-432	2.12	0.80	11.20
6/29/2005	FR	9	M	✓QE-713	2.21	0.81	7.29
6/29/2005	PCG	15	M	✓QE-617	2.22	0.81	12.15

Gals Used Total Emissions

<u>6/29/2005</u> Totals	179	160.00	Pounds
-------------------------	-----	--------	--------

6/30/2005	AGN	40	M	✓QE-466	2.12	0.80	32.00
6/30/2005	GN	12	M	✓QE-415	2.12	0.80	9.60
6/30/2005	IO	43	M	✓QE-535	2.21	0.80	34.40
6/30/2005	RB	5	M	✓QE-929	2.70	0.83	4.15
6/30/2005	BK	6	M	✓QE-J204	2.11	0.80	4.80
6/30/2005	BL	3	M	✓QE-930	2.21	0.80	2.40
6/30/2005	V-OR	57	V	✓VS-002		0.98	55.86

Gals Used Total Emissions

<u>6/30/2005</u> Totals	166	143.21	Pounds
-------------------------	-----	--------	--------

7/1/2005	V-OR	34	V	✓vs-002		0.98	33.32
7/1/2005	AGN	39	M	✓QE-466	2.12	0.80	31.20
7/1/2005	MCG	19	M	✓QE-441	2.12	0.80	15.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
7/1/2005	PCG	3	M	✓QE-617	2.22	0.81	2.43

Gals Used			Total Emissions	
<u>7/1/2005</u>	<u>Totals</u>	95	82.15	Pounds

7/5/2005	V-AGN	60	V	✓vs-001		0.98	58.80
7/5/2005	OR	20	M	✓QE-522	2.21	0.80	16.00
7/5/2005	MCG	12	M	✓QE-441	2.12	0.80	9.60
7/5/2005	BL	8	M	✓QE-930	2.21	0.80	6.40
7/5/2005	PY	46	M	✓QE-572	2.20	0.80	36.80
7/5/2005	YL	3	M	✓QE-569	2.21	0.80	2.40
7/5/2005	LA	10	M	✓QE-117	2.16	0.80	8.00

Gals Used			Total Emissions	
<u>7/5/2005</u>	<u>Totals</u>	159	138.00	Pounds

7/6/2005	V-AGN	50	V	✓VS-001		0.98	49.00
7/6/2005	OR	12	M	✓QE-522	2.21	0.80	9.60
7/6/2005	IO	39	M	✓QE-535	2.21	0.80	31.20
7/6/2005	BL	10	M	✓QE-930	2.21	0.80	8.00
7/6/2005	LA	5	M	✓QE-117	2.16	0.80	4.00
7/6/2005	AOW	9	M	✓QE-113	2.70	1.20	10.80
7/6/2005	KWG	5	M	✓QE-649	2.21	0.80	4.00

Gals Used			Total Emissions	
<u>7/6/2005</u>	<u>Totals</u>	130	116.60	Pounds

7/7/2005	OR	51	M	✓QE-522	2.21	0.80	40.80
7/7/2005	V-AGN	26	V	✓VS-001		0.98	25.48
7/7/2005	BL	42	M	✓QE-930	2.21	0.80	33.60
7/7/2005	GY	10	M	✓QE-647		0.80	8.00
7/7/2005	AOR	5	M	✓QE-566	2.12	0.80	4.00
7/7/2005	RBL	7	M	✓QE-964	2.21	0.81	5.67
7/7/2005	JIG	3	M	✓QE-424	2.12	0.80	2.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
7/7/2005	PY	12	M	✓QE-572	2.20	0.80	9.60

			Gals Used	Total Emissions		
<u>7/7/2005</u>	<u>Totals</u>		156		129.55	Pounds

7/8/2005	V-AGN	28	V	✓VS-001		0.98	27.44
7/8/2005	PY	75	M	✓QE-572	2.20	0.80	60.00
7/8/2005	RBL	2	M	✓QE-964	2.21	0.81	1.62
7/8/2005	BL	27	M	✓QE-930	2.21	0.80	21.60

			Gals Used	Total Emissions		
<u>7/8/2005</u>	<u>Totals</u>		132		110.66	Pounds

7/11/2005	OR	43	M	✓qe-522	2.21	0.80	34.40
7/11/2005	V-AGN	14	V	✓VS-001		0.98	13.72
7/11/2005	DW	5	M	✓QE-147	2.10	0.80	4.00
7/11/2005	PY	46	M	✓QE-572	2.20	0.80	36.80

			Gals Used	Total Emissions		
<u>7/11/2005</u>	<u>Totals</u>		108		88.92	Pounds

7/12/2005	PY	19	M	✓qe-572	2.20	0.80	15.20
7/12/2005	V-AGN	26	V	✓VS-001		0.98	25.48
7/12/2005	OR	9	M	✓QE-522	2.21	0.80	7.20
7/12/2005	BL	67	M	✓QE-930	2.21	0.80	53.60
7/12/2005	RB	3	M	✓QE-929	2.70	0.83	2.49

			Gals Used	Total Emissions		
<u>7/12/2005</u>	<u>Totals</u>		124		103.97	Pounds

7/13/2005	DW	15	M	✓qe-147	2.10	0.80	12.00
7/13/2005	V-AGN	15	V	✓VS-001		0.98	14.70
7/13/2005	BL	67	M	✓QE-930	2.21	0.80	53.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
7/13/2005	BK	3	M	✓QE-J204	2.11	0.80	2.40
7/13/2005	GY	10	M	✓QE-647		0.80	8.00

Gals Used Total Emissions

<u>7/13/2005</u>	<u>Totals</u>	110		90.70	Pounds
------------------	---------------	-----	--	-------	--------

7/14/2005	PY	102	M	✓QE-572	2.20	0.80	81.60
7/14/2005	RB	40	M	✓QE-929	2.70	0.83	33.20
7/14/2005	OR	17	M	✓QE-522	2.21	0.80	13.60

Gals Used Total Emissions

<u>7/14/2005</u>	<u>Totals</u>	159		128.40	Pounds
------------------	---------------	-----	--	--------	--------

7/15/2005	RB	59	M	✓qe-929	2.70	0.83	48.97
7/15/2005	OR	29	M	✓QE-522	2.21	0.80	23.20
7/15/2005	GY	10	M	✓QE-647		0.80	8.00
7/15/2005	V-AGN	3	V	✓VS-001		0.98	2.94
7/15/2005	AOR	8	M	✓QE-566	2.12	0.80	6.40
7/15/2005	PY	2	M	✓QE-572	2.20	0.80	1.60

Gals Used Total Emissions

<u>7/15/2005</u>	<u>Totals</u>	111		91.11	Pounds
------------------	---------------	-----	--	-------	--------

7/18/2005	V-AGN	60	V	✓vs-001		0.98	58.80
7/18/2005	RB	21	M	✓QE-929	2.70	0.83	17.43
7/18/2005	PY	50	M	✓QE-572	2.20	0.80	40.00
7/18/2005	OR	50	M	✓QE-522	2.21	0.80	40.00

Gals Used Total Emissions

<u>7/18/2005</u>	<u>Totals</u>	181		156.23	Pounds
------------------	---------------	-----	--	--------	--------

7/19/2005	OR	75	M	✓qe-522	2.21	0.80	60.00
7/19/2005	V-AGN	83	V	✓VS-001		0.98	81.34

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
7/19/2005	AOR	15	M	✓QE-566	2.12	0.80	12.00
7/19/2005	AOW	35	M	✓QE-113	2.70	1.20	42.00

		Gals Used	Total Emissions	
<u>7/19/2005</u>	<u>Totals</u>	208	195.34	Pounds

7/20/2005	V-AGN	28	V	✓vs-001		0.98	27.44
7/20/2005	OR	22	M	✓QE-522	2.21	0.80	17.60
7/20/2005	YL	65	M	✓QE-569	2.21	0.80	52.00
7/20/2005	BL	14	M	✓QE-930	2.21	0.80	11.20
7/20/2005	GY	20	M	✓QE-647		0.80	16.00
7/20/2005	GN	2	M	✓QE-415	2.12	0.80	1.60

		Gals Used	Total Emissions	
<u>7/20/2005</u>	<u>Totals</u>	151	125.84	Pounds

7/21/2005	OR	86	M	✓qe-522	2.21	0.80	68.80
7/21/2005	AGN	48	M	✓QE-466	2.12	0.80	38.40
7/21/2005	YL	54	M	✓qe-569	2.21	0.80	43.20
7/21/2005	RB	3	M	✓QE-929	2.70	0.83	2.49
7/21/2005	MCG	4	M	✓QE-441	2.12	0.80	3.20
7/21/2005	GY	3	M	✓QE-647		0.80	2.40
7/21/2005	CY	2	M	✓QE-510	2.10	0.80	1.60

		Gals Used	Total Emissions	
<u>7/21/2005</u>	<u>Totals</u>	200	160.09	Pounds

7/22/2005	YL	71	M	✓qe-569	2.21	0.80	56.80
7/22/2005	OR	7	M	✓QE-522	2.21	0.80	5.60
7/22/2005	AGN	7	M	✓QE-466	2.12	0.80	5.60
7/22/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
7/22/2005	GY	5	M	✓QE-647		0.80	4.00
7/22/2005	IG	7	M	✓QE-432	2.12	0.80	5.60
7/22/2005	IO	7	M	✓QE-535	2.21	0.80	5.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>7/22/2005</u>	<u>Totals</u>		114		91.20	Pounds

7/23/2005	YL	137	M	✓QE-569	2.21	0.80	109.60
7/23/2005	OR	49	M	✓QE-522	2.21	0.80	39.20

			Gals Used	Total Emissions		
<u>7/23/2005</u>	<u>Totals</u>		186		148.80	Pounds

7/25/2005	AGN	110	M	✓QE-466	2.12	0.80	88.00
7/25/2005	OR	49	M	✓QE-522	2.21	0.80	39.20
7/25/2005	GN	9	M	✓QE-415	2.12	0.80	7.20
7/25/2005	IO	31	M	✓QE-535	2.21	0.80	24.80

			Gals Used	Total Emissions		
<u>7/25/2005</u>	<u>Totals</u>		199		159.20	Pounds

7/26/2005	AGN	50	M	✓QE-466	2.12	0.80	40.00
7/26/2005	OR	65	M	✓QE-522	2.21	0.80	52.00
7/26/2005	YL	44	M	✓QE-569	2.21	0.80	35.20
7/26/2005	PY	12	M	✓QE-572	2.20	0.80	9.60
7/26/2005	BK	40	M	✓QE-J204	2.11	0.80	32.00

			Gals Used	Total Emissions		
<u>7/26/2005</u>	<u>Totals</u>		211		168.80	Pounds

7/27/2005	AOR	100	M	✓qe-566	2.12	0.80	80.00
7/27/2005	AGN	32	M	✓QE-466	2.12	0.80	25.60
7/27/2005	OR	22	M	✓QE-522	2.21	0.80	17.60
7/27/2005	IG	10	M	✓QE-432	2.12	0.80	8.00
7/27/2005	RB	2	M	✓QE-929	2.70	0.83	1.66
7/27/2005	GY	2	M	✓QE-647		0.80	1.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>7/27/2005</u>	<u>Totals</u>		168		134.46	Pounds

7/28/2005	AOR	60	M	✓QE-566	2.12	0.80	48.00
7/28/2005	AGN	20	M	✓QE-466	2.12	0.80	16.00
7/28/2005	OR	54	M	✓QE-522	2.21	0.80	43.20
7/28/2005	V-OR	7	V	✓VS-002		0.98	6.86
7/28/2005	IG	13	M	✓QE-432	2.12	0.80	10.40
7/28/2005	IO	31	M	✓QE-535	2.21	0.80	24.80
7/28/2005	BNR	75	M	✓QE-739	2.21	0.81	60.75

			Gals Used	Total Emissions		
<u>7/28/2005</u>	<u>Totals</u>		260		210.01	Pounds

thru

7/29/2005	AGN	74	M	✓QE-466	2.12	0.80	59.20
7/29/2005	V-AGN	29	V	✓VS-001		0.98	28.42
7/29/2005	V-OR	20	V	✓VS-002		0.98	19.60
7/29/2005	YG	15	M	✓QE-620	2.22	0.81	12.15

			Gals Used	Total Emissions		
<u>7/29/2005</u>	<u>Totals</u>		138		119.37	Pounds

7/30/2005	V-AGN	119	V	✓VS-001		0.98	116.62
7/30/2005	V-OR	80	V	✓VS-002		0.98	78.40

			Gals Used	Total Emissions		
<u>7/30/2005</u>	<u>Totals</u>		199		195.02	Pounds

Sat

7/31/2005	V-AGN	77	V	✓VS-001		0.98	75.46
7/31/2005	AOR	60	M	✓QE-566	2.12	0.80	48.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>7/31/2005</u>	<u>Totals</u>		137		123.46	Pounds

8/1/2005 AOR 162 M ✓qe-566 2.12 0.80 129.60

			Gals Used	Total Emissions		
<u>8/1/2005</u>	<u>Totals</u>		162		129.60	Pounds

8/2/2005 V-OR 144 V ✓vs-002 0.98 141.12
 8/2/2005 V-AGN 94 V ✓VS-001 0.98 92.12

			Gals Used	Total Emissions		
<u>8/2/2005</u>	<u>Totals</u>		238		233.24	Pounds

Tuls

8/3/2005 V-OR 61 V ✓vs-002 0.98 59.78
 8/3/2005 V-AGN 24 V ✓VS-001 0.98 23.52
 8/3/2005 AOR 40 M ✓QE-566 2.12 0.80 32.00
 8/3/2005 IG 52 M ✓QE-432 2.12 0.80 41.60
 8/3/2005 CY 5 M ✓QE-510 2.10 0.80 4.00

			Gals Used	Total Emissions		
<u>8/3/2005</u>	<u>Totals</u>		182		160.90	Pounds

8/4/2005 V-OR 132 V ✓vs-002 0.98 129.36
 8/4/2005 V-AGN 45 V ✓VS-001 0.98 44.10
 8/4/2005 AOR 15 M ✓QE-566 2.12 0.80 12.00

			Gals Used	Total Emissions		
<u>8/4/2005</u>	<u>Totals</u>		192		185.46	Pounds

Thm

8/5/2005 V-OR 14 V ✓vs-002 0.98 13.72

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
8/5/2005	V-AGN	41	V	✓VS-001		0.98	40.18
8/5/2005	AOR	7	M	✓QE-566	2.12	0.80	5.60
8/5/2005	FR	20	M	✓QE-713	2.21	0.81	16.20
8/5/2005	IO	24	M	✓QE-535	2.21	0.80	19.20
8/5/2005	IG	15	M	✓QE-432	2.12	0.80	12.00
8/5/2005	BL	2	M	✓QE-930	2.21	0.80	1.60
8/5/2005	BK	2	M	✓QE-J204	2.11	0.80	1.60

		Gals Used	Total Emissions	
<u>8/5/2005</u>	<u>Totals</u>	125	110.10	Pounds

8/6/2005	V-AGN	75	V	✓vs-001		0.98	73.50
8/6/2005	V-OR	50	V	✓VS-002		0.98	49.00
8/6/2005	IO	69	M	✓QE-535	2.21	0.80	55.20

		Gals Used	Total Emissions	
<u>8/6/2005</u>	<u>Totals</u>	194	177.70	Pounds

Sat

8/8/2005	V-OR	94	V	✓VS-002		0.98	92.12
8/8/2005	V-AGN	58	V	✓VS-001		0.98	56.84
8/8/2005	IG	10	M	✓QE-432	2.12	0.80	8.00

		Gals Used	Total Emissions	
<u>8/8/2005</u>	<u>Totals</u>	162	156.96	Pounds

8/9/2005	V-AGN	91	V	✓VS-001		0.98	89.18
8/9/2005	V-OR	90	V	✓VS-002		0.98	88.20

		Gals Used	Total Emissions	
<u>8/9/2005</u>	<u>Totals</u>	181	177.38	Pounds

Tues

8/10/2005	GY	44	M	✓QE-647		0.80	35.20
8/10/2005	V-AGN	69	V	✓VS-001		0.98	67.62

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
8/10/2005	V-OR	22	V	✓VS-002		0.98	21.56

		Gals Used	Total Emissions	
<u>8/10/2005</u>	<u>Totals</u>	135	124.38	Pounds

8/11/2005	V-AGN	81	V	✓vs-001		0.98	79.38
8/11/2005	V-OR	81	V	✓VS-002		0.98	79.38
8/11/2005	YL	2	M	✓QE-569	2.21	0.80	1.60
8/11/2005	FR	2	M	✓QE-713	2.21	0.81	1.62

		Gals Used	Total Emissions	
<u>8/11/2005</u>	<u>Totals</u>	166	161.98	Pounds

8/12/2005	V-OR	60	V	✓vs-002		0.98	58.80
8/12/2005	V-AGN	40	V	✓VS-001		0.98	39.20
8/12/2005	GY	7	M	✓QE-647		0.80	5.60
8/12/2005	AOR	3	M	✓QE-566	2.12	0.80	2.40

		Gals Used	Total Emissions	
<u>8/12/2005</u>	<u>Totals</u>	110	106.00	Pounds

8/13/2005	V-AGN	84	V	✓VS-001		0.98	82.32
8/13/2005	IG	13	M	✓QE-432	2.12	0.80	10.40
8/13/2005	IO	10	M	✓QE-535	2.21	0.80	8.00

		Gals Used	Total Emissions	
<u>8/13/2005</u>	<u>Totals</u>	107	100.72	Pounds

8/15/2005	AGN	74	M	✓QE-466	2.12	0.80	59.20
8/15/2005	OR	50	M	✓QE-522	2.21	0.80	40.00
8/15/2005	YG	3	M	✓QE-620	2.22	0.81	2.43

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>8/15/2005</u>	<u>Totals</u>		127		101.63	Pounds

8/16/2005	AGN	94	M	✓QE-466	2.12	0.80	75.20
8/16/2005	OR	43	M	✓QE-522	2.21	0.80	34.40

			Gals Used	Total Emissions		
<u>8/16/2005</u>	<u>Totals</u>		137		109.60	Pounds

8/17/2005	AGN	66	M	✓QE-466	2.12	0.80	52.80
8/17/2005	OR	44	M	✓QE-522	2.21	0.80	35.20
8/17/2005	BK	6	M	✓QE-J204	2.11	0.80	4.80
8/17/2005	IG	13	M	✓QE-432	2.12	0.80	10.40
8/17/2005	GN	7	M	✓QE-415	2.12	0.80	5.60
8/17/2005	AOR	2	M	✓QE-566	2.12	0.80	1.60
8/17/2005	IO	3	M	✓QE-535	2.21	0.80	2.40

			Gals Used	Total Emissions		
<u>8/17/2005</u>	<u>Totals</u>		141		112.80	Pounds

8/18/2005	AGN	70	M	✓QE-466	2.12	0.80	56.00
8/18/2005	OR	77	M	✓QE-522	2.21	0.80	61.60
8/18/2005	GY	44	M	✓QE-647		0.80	35.20
8/18/2005	BL	13	M	✓QE-930	2.21	0.80	10.40
8/18/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
8/18/2005	MCG	7	M	✓QE-441	2.12	0.80	5.60

			Gals Used	Total Emissions		
<u>8/18/2005</u>	<u>Totals</u>		221		176.80	Pounds

Thur

8/19/2005	OR	60	M	✓qe-522	2.21	0.80	48.00
8/19/2005	AGN	50	M	✓QE-466	2.12	0.80	40.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
8/19/2005	RB	3	M	✓QE-929	2.70	0.83	2.49
8/19/2005	YL	29	M	✓QE-569	2.21	0.80	23.20
8/19/2005	GY	2	M	✓QE-647		0.80	1.60
8/19/2005	IG	2	M	✓QE-432	2.12	0.80	1.60

		Gals Used	Total Emissions	
<u>8/19/2005</u>	<u>Totals</u>	146	116.89	Pounds

8/20/2005	AGN	32	M	✓QE-466	2.12	0.80	25.60
8/20/2005	OR	62	M	✓QE-522	2.21	0.80	49.60
8/20/2005	AOR	15	M	✓QE-566	2.12	0.80	12.00
8/20/2005	PY	10	M	✓QE-572	2.20	0.80	8.00
8/20/2005	GY	2	M	✓QE-647		0.80	1.60

		Gals Used	Total Emissions	
<u>8/20/2005</u>	<u>Totals</u>	121	96.80	Pounds

8/22/2005	OR	54	M	✓qe-522	2.21	0.80	43.20
8/22/2005	AGN	27	M	✓QE-466	2.12	0.80	21.60
8/22/2005	AOR	34	M	✓QE-566	2.12	0.80	27.20
8/22/2005	RB	19	M	✓QE-929	2.70	0.83	15.77
8/22/2005	PY	14	M	✓QE-572	2.20	0.80	11.20

		Gals Used	Total Emissions	
<u>8/22/2005</u>	<u>Totals</u>	148	118.97	Pounds

8/23/2005	OR	26	M	✓QE-522	2.21	0.80	20.80
8/23/2005	AGN	21	M	✓QE-466	2.12	0.80	16.80
8/23/2005	YL	45	M	✓QE-569	2.21	0.80	36.00
8/23/2005	GY	22	M	✓QE-647		0.80	17.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>8/23/2005</u>	<u>Totals</u>	114		91.20		Pounds

8/24/2005	AGN	47	M	✓QE-466	2.12	0.80	37.60
8/24/2005	OR	77	M	✓QE-522	2.21	0.80	61.60
8/24/2005	GY	27	M	✓QE-647		0.80	21.60
8/24/2005	FR	1	M	✓QE-713	2.21	0.81	0.81

		Gals Used		Total Emissions		
<u>8/24/2005</u>	<u>Totals</u>	152		121.61		Pounds

8/25/2005	AGN	46	M	✓QE-466	2.12	0.80	36.80
8/25/2005	OR	52	M	✓QE-522	2.21	0.80	41.60
8/25/2005	AOR	7	M	✓QE-566	2.12	0.80	5.60
8/25/2005	GY	44	M	✓QE-647		0.80	35.20
8/25/2005	KWG	5	M	✓QE-649	2.21	0.80	4.00
8/25/2005	BK	13	M	✓QE-J204	2.11	0.80	10.40

		Gals Used		Total Emissions		
<u>8/25/2005</u>	<u>Totals</u>	167		133.60		Pounds

8/26/2005	OR	30	M	✓QE-522	2.21	0.80	24.00
8/26/2005	AGN	19	M	✓QE-466	2.12	0.80	15.20
8/26/2005	PY	54	M	✓QE-572	2.20	0.80	43.20
8/26/2005	IO	3	M	✓QE-535	2.21	0.80	2.40
8/26/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
8/26/2005	DBL	10	M	✓QE-995	2.70	0.20	2.00
8/26/2005	BL	15	M	✓QE-930	2.21	0.80	12.00
8/26/2005	GY	15	M	✓QE-647		0.80	12.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>8/26/2005</u>	<u>Totals</u>		156		118.80	Pounds

8/27/2005	GY	79	M	✓QE-647		0.80	63.20
8/27/2005	AGN	86	M	✓QE-466	2.12	0.80	68.80
8/27/2005	OR	48	M	✓QE-522	2.21	0.80	38.40

			Gals Used	Total Emissions		
<u>8/27/2005</u>	<u>Totals</u>		213		170.40	Pounds

8/29/2005	BL	55	M	✓QE-930	2.21	0.80	44.00
8/29/2005	AGN	28	M	✓QE-466	2.12	0.80	22.40
8/29/2005	OR	3	M	✓QE-522	2.21	0.80	2.40
8/29/2005	YL	40	M	✓QE-569	2.21	0.80	32.00
8/29/2005	RB	26	M	✓QE-929	2.70	0.83	21.58
8/29/2005	PY	31	M	✓QE-572	2.20	0.80	24.80

			Gals Used	Total Emissions		
<u>8/29/2005</u>	<u>Totals</u>		183		147.18	Pounds

8/30/2005	GY	73	M	✓qe-647		0.80	58.40
8/30/2005	RB	53	M	✓QE-929	2.70	0.83	43.99
8/30/2005	PY	34	M	✓QE-572	2.20	0.80	27.20
8/30/2005	BL	24	M	✓QE-930	2.21	0.80	19.20
8/30/2005	OR	10	M	✓QE-522	2.21	0.80	8.00

			Gals Used	Total Emissions		
<u>8/30/2005</u>	<u>Totals</u>		194		156.79	Pounds

8/31/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
8/31/2005	OR	80	M	✓QE-522	2.21	0.80	64.00
8/31/2005	RB	57	M	✓QE-929	2.70	0.83	47.31

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
8/31/2005	YL	17	M	✓QE-569	2.21	0.80	13.60
8/31/2005	IG	3	M	✓QE-432	2.12	0.80	2.40

		Gals Used	Total Emissions	
<u>8/31/2005</u>	<u>Totals</u>	212	171.31	Pounds

9/01/2005	OR	98	M	✓qe-522	2.21	0.80	78.40
9/01/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
9/01/2005	GY	29	M	✓QE-647		0.80	23.20
9/01/2005	IG	4	M	✓QE-432	2.12	0.80	3.20

		Gals Used	Total Emissions	
<u>9/01/2005</u>	<u>Totals</u>	186	148.80	Pounds

9/02/2005	GY	55	M	✓QE-647		0.80	44.00
9/02/2005	PY	44	M	✓QE-572	2.20	0.80	35.20
9/02/2005	OR	10	M	✓QE-522	2.21	0.80	8.00
9/02/2005	AGN	9	M	✓QE-466	2.12	0.80	7.20

		Gals Used	Total Emissions	
<u>9/02/2005</u>	<u>Totals</u>	118	94.40	Pounds

9/03/2005	AGN	101	M	✓QE-466	2.12	0.80	80.80
9/03/2005	OR	70	M	✓QE-522	2.21	0.80	56.00
9/03/2005	PY	22	M	✓QE-572	2.20	0.80	17.60

		Gals Used	Total Emissions	
<u>9/03/2005</u>	<u>Totals</u>	193	154.40	Pounds

9/06/2005	AGN	33	M	✓QE-466	2.12	0.80	26.40
9/06/2005	OR	50	M	✓QE-522	2.21	0.80	40.00
9/06/2005	IG	64	M	✓QE-432	2.12	0.80	51.20
9/06/2005	IO	45	M	✓QE-535	2.21	0.80	36.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>9/06/2005</u>	<u>Totals</u>		192		153.60	Pounds

9/7/2005	AGN	87	M	✓QE-466	2.12	0.80	69.60
9/7/2005	OR	45	M	✓QE-522	2.21	0.80	36.00
9/7/2005	IO	22	M	✓QE-535	2.21	0.80	17.60
9/7/2005	GY	24	M	✓QE-647		0.80	19.20
9/7/2005	AOR	10	M	✓QE-566	2.12	0.80	8.00

			Gals Used	Total Emissions		
<u>9/7/2005</u>	<u>Totals</u>		188		150.40	Pounds

9/8/2005	AGN	51	M	✓QE-466	2.12	0.80	40.80
9/8/2005	OR	24	M	✓QE-522	2.21	0.80	19.20
9/8/2005	GY	53	M	✓QE-647		0.80	42.40
9/8/2005	IG	24	M	✓QE-432	2.12	0.80	19.20
9/8/2005	RB	10	M	✓QE-929	2.70	0.83	8.30

			Gals Used	Total Emissions		
<u>9/8/2005</u>	<u>Totals</u>		162		129.90	Pounds

9/9/2005	AGN	36	M	✓QE-466	2.12	0.80	28.80
9/9/2005	OR	42	M	✓QE-522	2.21	0.80	33.60
9/9/2005	GY	37	M	✓QE-647		0.80	29.60
9/9/2005	IG	19	M	✓QE-432	2.12	0.80	15.20
9/9/2005	GN	5	M	✓QE-415	2.12	0.80	4.00
9/9/2005	BL	3	M	✓QE-930	2.21	0.80	2.40
9/9/2005	YL	6	M	✓QE-569	2.21	0.80	4.80

			Gals Used	Total Emissions		
<u>9/9/2005</u>	<u>Totals</u>		148		118.40	Pounds

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
9/10/2005	OR	84	M	✓QE-522	2.21	0.80	67.20
9/10/2005	AGN	43	M	✓QE-466	2.12	0.80	34.40
9/10/2005	GY	27	M	✓QE-647		0.80	21.60

		Gals Used	Total Emissions	
<u>9/10/2005</u>	<u>Totals</u>	154	123.20	Pounds

9/11/2005	AGN	79	M	✓QE-466	2.12	0.80	63.20
9/11/2005	RB	44	M	✓QE-929	2.70	0.83	36.52
9/11/2005	FR	44	M	✓QE-713	2.21	0.81	35.64

		Gals Used	Total Emissions	
<u>9/11/2005</u>	<u>Totals</u>	167	135.36	Pounds

9/12/2005	OR	87	M	✓qe-522	2.21	0.80	69.60
9/12/2005	AGN	45	M	✓QE-466	2.12	0.80	36.00
9/12/2005	FR	53	M	✓QE-713	2.21	0.81	42.93
9/12/2005	BL	19	M	✓QE-930	2.21	0.80	15.20

		Gals Used	Total Emissions	
<u>9/12/2005</u>	<u>Totals</u>	204	163.73	Pounds

9/13/2005	AGN	46	M	✓QE-466	2.12	0.80	36.80
9/13/2005	IO	62	M	✓QE-535	2.21	0.80	49.60
9/13/2005	FR	16	M	✓QE-713	2.21	0.81	12.96
9/13/2005	AOR	5	M	✓QE-566	2.12	0.80	4.00
9/13/2005	OR	84	M	✓QE-522	2.21	0.80	67.20

		Gals Used	Total Emissions	
<u>9/13/2005</u>	<u>Totals</u>	213	170.56	Pounds

9/14/2005	AGN	74	M	✓QE-466	2.12	0.80	59.20
9/14/2005	V-AGN	15	V	✓VS-001		0.98	14.70

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
9/14/2005	OR	109	M	✓QE-522	2.21	0.80	87.20

		Gals Used	Total Emissions	
<u>9/14/2005</u>	<u>Totals</u>	198	161.10	Pounds

9/15/2005	OR	127	M	✓QE-522	2.21	0.80	101.60
9/15/2005	V-AGN	41	V	✓VS-001		0.98	40.18
9/15/2005	MCG	5	M	✓QE-441	2.12	0.80	4.00

		Gals Used	Total Emissions	
<u>9/15/2005</u>	<u>Totals</u>	173	145.78	Pounds

9/16/2005	V-AGN	39	V	✓vs-001		0.98	38.22
9/16/2005	AGN	65	M	✓QE-466	2.12	0.80	52.00
9/16/2005	BL	18	M	✓QE-930	2.21	0.80	14.40
9/16/2005	LA	10	M	✓QE-117	2.16	0.80	8.00
9/16/2005	GY	3	M	✓QE-647		0.80	2.40
9/16/2005	OR	3	M	✓QE-522	2.21	0.80	2.40

		Gals Used	Total Emissions	
<u>9/16/2005</u>	<u>Totals</u>	138	117.42	Pounds

9/17/2005	AGN	143	M	✓QE-466	2.12	0.80	114.40
9/17/2005	OR	16	M	✓QE-522	2.21	0.80	12.80

		Gals Used	Total Emissions	
<u>9/17/2005</u>	<u>Totals</u>	159	127.20	Pounds

9/18/2005	OR	61	M	✓QE-522	2.21	0.80	48.80
9/18/2005	V-OR	150	V	✓VS-002		0.98	147.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

Gals Used Total Emissions

<u>9/18/2005</u>	<u>Totals</u>	211			195.80		Pounds
------------------	---------------	-----	--	--	--------	--	--------

SUN?

9/19/2005	V-OR	76	V	✓ VS-002		0.98	74.48
9/19/2005	V-AGN	34	V	✓ VS-001		0.98	33.32
9/19/2005	IY	32	M	✓ QE-574	2.10	0.80	25.60
9/19/2005	IB	15	M	✓ QE-989	2.12	0.80	12.00

Gals Used Total Emissions

<u>9/19/2005</u>	<u>Totals</u>	157			145.40		Pounds
------------------	---------------	-----	--	--	--------	--	--------

9/20/2005	GN	72	M	✓ QE-415	2.12	0.80	57.60
9/20/2005	AGN	67	M	✓ QE-466	2.12	0.80	53.60
9/20/2005	V-OR	25	V	✓ VS-002		0.98	24.50
9/20/2005	FR	7	M	✓ QE-713	2.21	0.81	5.67
9/20/2005	IO	9	M	✓ QE-535	2.21	0.80	7.20
9/20/2005	PY	26	M	✓ QE-572	2.20	0.80	20.80

Gals Used Total Emissions

<u>9/20/2005</u>	<u>Totals</u>	206			169.37		Pounds
------------------	---------------	-----	--	--	--------	--	--------

9/21/2005	OR	110	M	✓ QE-522	2.21	0.80	88.00
9/21/2005	V-OR	50	V	✓ VS-002		0.98	49.00
9/21/2005	GY	10	M	✓ QE-647		0.80	8.00

Gals Used Total Emissions

<u>9/21/2005</u>	<u>Totals</u>	170			145.00		Pounds
------------------	---------------	-----	--	--	--------	--	--------

9/22/2005	V-AGN	40	V	✓ VS-001 ✓		0.98	39.20
9/22/2005	AGN	55	M	✓ QE-466	2.12	0.80	44.00
9/22/2005	OR	60	M	✓ QE-522	2.21	0.80	48.00
9/22/2005	BK	9	M	✓ QE-J204 ✓	2.11	0.80	7.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
9/22/2005	GY	21	M	✓QE-647		0.80	16.80

			Gals Used	Total Emissions		
<u>9/22/2005</u>	<u>Totals</u>		185		155.20	Pounds

9/23/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
9/23/2005	V-AGN	50	V	✓VS-001		0.98	49.00
9/23/2005	OR	40	M	✓QE-522	2.21	0.80	32.00
9/23/2005	RB	4	M	✓QE-929	2.70	0.83	3.32

			Gals Used	Total Emissions		
<u>9/23/2005</u>	<u>Totals</u>		149		128.32	Pounds

9/24/2005	V-AGN	61	V	✓VS-001		0.98	59.78
9/24/2005	AGN	19	M	✓QE-466	2.12	0.80	15.20
9/24/2005	OR	17	M	✓QE-522	2.21	0.80	13.60
9/24/2005	YL	9	M	✓QE-569	2.21	0.80	7.20
9/24/2005	GY	5	M	✓QE-647		0.80	4.00
9/24/2005	IG	78	M	✓QE-432	2.12	0.80	62.40

			Gals Used	Total Emissions		
<u>9/24/2005</u>	<u>Totals</u>		189		162.18	Pounds

9/25/2005	OR	72	M	✓QE-522	2.21	0.80	57.60
9/25/2005	IO	94	M	✓QE-535	2.21	0.80	75.20

			Gals Used	Total Emissions		
<u>9/25/2005</u>	<u>Totals</u>		166		132.80	Pounds

9/26/2005	GY	63	M	✓qe-647		0.80	50.40
9/26/2005	SMY	29	M	✓QE-581	2.10	0.80	23.20
9/26/2005	LA	10	M	✓QE-117	2.16	0.80	8.00
9/26/2005	PY	4	M	✓QE-572	2.20	0.80	3.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
9/26/2005	OR	24	M	✓QE-522	2.21	0.80	19.20

			Gals Used	Total Emissions		
<u>9/26/2005</u>	<u>Totals</u>		130		104.00	Pounds

9/27/2005	AGN	98	M	✓QE-466	2.12	0.80	78.40
9/27/2005	OR	36	M	✓QE-522	2.21	0.80	28.80
9/27/2005	LA	10	M	✓QE-117	2.16	0.80	8.00
9/27/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
9/27/2005	SBL	9	M	✓QE-991	2.21	0.80	7.20
9/27/2005	IG	19	M	✓QE-432	2.12	0.80	15.20

			Gals Used	Total Emissions		
<u>9/27/2005</u>	<u>Totals</u>		182		145.60	Pounds

9/28/2005	OR	155	M	✓qe-522	2.21	0.80	124.00
9/28/2005	AGN	42	M	✓QE-466	2.12	0.80	33.60

			Gals Used	Total Emissions		
<u>9/28/2005</u>	<u>Totals</u>		197		157.60	Pounds

9/29/2005	AGN	146	M	✓QE-466	2.12	0.80	116.80
9/29/2005	GN	3	M	✓QE-415	2.12	0.80	2.40
9/29/2005	IO	68	M	✓QE-535	2.21	0.80	54.40
9/29/2005	OR	10	M	✓QE-522	2.21	0.80	8.00

			Gals Used	Total Emissions		
<u>9/29/2005</u>	<u>Totals</u>		227		181.60	Pounds

THM

9/30/2005	OR	105	M	✓qe-522	2.21	0.80	84.00
9/30/2005	AGN	50	M	✓QE-466	2.12	0.80	40.00

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>9/30/2005</u>	<u>Totals</u>		155		124.00	Pounds

10/1/2005 AGN 163 M ✓QE-466 2.12 0.80 130.40

			Gals Used	Total Emissions		
<u>10/1/2005</u>	<u>Totals</u>		163		130.40	Pounds

10/2/2005 OR 55 M ✓QE-522 2.21 0.80 44.00
 10/2/2005 V-OR 110 V ✓VS-002 0.98 107.80

			Gals Used	Total Emissions		
<u>10/2/2005</u>	<u>Totals</u>		165		151.80	Pounds

10/3/2005 V-OR 15 V ✓vs-002 ✓ 0.98 14.70
 10/3/2005 AGN 33 M ✓QE-466 2.12 0.80 26.40
 10/3/2005 V-AGN 20 V ✓VS-001 ✓ 0.98 19.60
 10/3/2005 GY 62 M ✓QE-647 0.80 49.60
 10/3/2005 YL 4 M ✓QE-569 2.21 0.80 3.20

			Gals Used	Total Emissions		
<u>10/3/2005</u>	<u>Totals</u>		134		113.50	Pounds

10/4/2005 V-OR 34 V ✓vs-002 0.98 33.32
 10/4/2005 V-AGN 84 V ✓VS-001 0.98 82.32
 10/4/2005 CRR 47 M ✓QE-737 2.10 0.80 37.60
 10/4/2005 YL 15 M ✓QE-569 2.21 0.80 12.00
 10/4/2005 FB 6 M ✓QE-988 1.60 0.80 4.80
 10/4/2005 BL 17 M ✓QE-930 2.21 0.80 13.60

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>10/4/2005</u>	<u>Totals</u>		203		183.64	Pounds

10/5/2005	V-AGN	31	V	✓ VS-001	0.98	30.38
10/5/2005	V-OR	144	V	✓ VS-002	0.98	141.12

			Gals Used	Total Emissions		
<u>10/5/2005</u>	<u>Totals</u>		175		171.50	Pounds

10/6/2005	V-AGN	80	V	✓ VS-001	0.98	78.40
10/6/2005	V-OR	80	V	✓ VS-002	0.98	78.40
10/6/2005	BL	10	M	✓ QE-930	2.21	0.80

			Gals Used	Total Emissions		
<u>10/6/2005</u>	<u>Totals</u>		170		164.80	Pounds

10/7/2005	V-AGN	5	V	✓ VS-001	0.98	4.90
10/7/2005	V-OR	140	V	✓ VS-002	0.98	137.20

			Gals Used	Total Emissions		
<u>10/7/2005</u>	<u>Totals</u>		145		142.10	Pounds

10/8/2005	V-OR	60	V	✓ VS-002	0.98	58.80
10/8/2005	V-AGN	94	V	✓ VS-001	0.98	92.12

			Gals Used	Total Emissions		
<u>10/8/2005</u>	<u>Totals</u>		154		150.92	Pounds

10/10/2005	CSB-B	60	M	✓ QE-858	2.10	1.20
10/10/2005	IP	84	M	✓ QE-851	2.10	0.80
10/10/2005	V-OR	17	V	✓ VS-002	0.98	16.66

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
10/10/2005	OR	12	M	✓QE-522	2.21	0.80	9.60
10/10/2005	V-AGN	29	V	✓VS-001		0.98	28.42

	Gals Used	Total Emissions	
<u>10/10/2005 Totals</u>	202	193.88	Pounds

Mon

10/11/2005	V-AGN	41	V	✓vs-001		0.98	40.18
10/11/2005	OR	73	M	✓QE-522	2.21	0.80	58.40
10/11/2005	CSB-B	60	M	✓QE-858	2.10	1.20	72.00
10/11/2005	IG	9	M	✓QE-432	2.12	0.80	7.20
10/11/2005	IO	5	M	✓QE-535	2.21	0.80	4.00

	Gals Used	Total Emissions	
<u>10/11/2005 Totals</u>	188	181.78	Pounds

Tues

10/12/2005	OR	65	M	✓qe-522	2.21	0.80	52.00
10/12/2005	V-AGN	41	V	✓VS-001		0.98	40.18
10/12/2005	IP	62	M	✓QE-851	2.10	0.80	49.60
10/12/2005	BL	28	M	✓QE-930	2.21	0.80	22.40

	Gals Used	Total Emissions	
<u>10/12/2005 Totals</u>	196	164.18	Pounds

10/13/2005	V-AGN	81	V	✓vs-001		0.98	79.38
10/13/2005	OR	28	M	✓QE-522	2.21	0.80	22.40
10/13/2005	YL	39	M	✓QE-569	2.21	0.80	31.20
10/13/2005	BK	10	M	✓QE-J204	2.11	0.80	8.00
10/13/2005	GY	20	M	✓QE-647		0.80	16.00
10/13/2005	CSB-B	10	M	✓QE-858	2.10	1.20	12.00
10/13/2005	CY	3	M	✓QE-510	2.10	0.80	2.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>10/13/2005 Totals</u>		191		171.38		Pounds

10/14/2005	CSB-B	51	M	✓qe-858	2.10	1.20	61.20
10/14/2005	V-AGN	83	V	✓VS-001		0.98	81.34
10/14/2005	IG	3	M	✓QE-432	2.12	0.80	2.40
10/14/2005	IO	10	M	✓QE-535	2.21	0.80	8.00
10/14/2005	AOR	12	M	✓QE-566	2.12	0.80	9.60

		Gals Used		Total Emissions		
<u>10/14/2005 Totals</u>		159		162.54		Pounds

10/15/2005	V-AGN	10	V	✓VS-001		0.98	9.80
10/15/2005	AGN	70	M	✓QE-466	2.12	0.80	56.00
10/15/2005	OR	32	M	✓QE-522	2.21	0.80	25.60

		Gals Used		Total Emissions		
<u>10/15/2005 Totals</u>		112		91.40		Pounds

10/17/2005	OR	86	M	✓qe-522	2.21	0.80	68.80
10/17/2005	AGN	7	M	✓QE-466	2.12	0.80	5.60
10/17/2005	IP	68	M	✓QE-851	2.10	0.80	54.40

		Gals Used		Total Emissions		
<u>10/17/2005 Totals</u>		161		128.80		Pounds

10/18/2005	AGN	96	M	✓QE-466	2.12	0.80	76.80
10/18/2005	OR	66	M	✓QE-522	2.21	0.80	52.80
10/18/2005	GY	7	M	✓QE-647		0.80	5.60
10/18/2005	BL	21	M	✓QE-930	2.21	0.80	16.80
10/18/2005	IG	3	M	✓QE-432	2.12	0.80	2.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used	Total Emissions	
<u>10/18/2005</u>	<u>Totals</u>	193	154.40	Pounds

10/19/2005	AGN	67	M	✓QE-466	2.12	0.80	53.60
10/19/2005	OR	51	M	✓QE-522	2.21	0.80	40.80
10/19/2005	V-OR	60	V	✓VS-002		0.98	58.80
10/19/2005	YL	29	M	✓QE-569	2.21	0.80	23.20

		Gals Used	Total Emissions	
<u>10/19/2005</u>	<u>Totals</u>	207	176.40	Pounds

Wed

10/20/2005	YL	78	M	✓QE-569	2.21	0.80	62.40
10/20/2005	GY	15	M	✓QE-647		0.80	12.00
10/20/2005	OR	60	M	✓QE-522	2.21	0.80	48.00

		Gals Used	Total Emissions	
<u>10/20/2005</u>	<u>Totals</u>	153	122.40	Pounds

10/21/2005	AGN	84	M	✓QE-466	2.12	0.80	67.20
10/21/2005	OR	56	M	✓QE-522	2.21	0.80	44.80
10/21/2005	GN	15	M	✓QE-415	2.12	0.80	12.00
10/21/2005	PY	3	M	✓QE-572	2.20	0.80	2.40
10/21/2005	BL	2	M	✓QE-930	2.21	0.80	1.60
10/21/2005	YL	3	M	✓QE-569	2.21	0.80	2.40

		Gals Used	Total Emissions	
<u>10/21/2005</u>	<u>Totals</u>	163	130.40	Pounds

10/22/2005	AGN	148	M	✓QE-466	2.12	0.80	118.40
------------	-----	-----	---	---------	------	------	--------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used	Total Emissions	
<u>10/22/2005</u>	<u>Totals</u>	148	118.40	Pounds

10/23/2005	AOR	53	M	✓QE-566	2.12	0.80	42.40
10/23/2005	GY	70	M	✓QE-647		0.80	56.00
10/23/2005	BL	38	M	✓QE-930	2.21	0.80	30.40

		Gals Used	Total Emissions	
<u>10/23/2005</u>	<u>Totals</u>	161	128.80	Pounds

10/24/2005	BL	68	M	✓qe-930	2.21	0.80	54.40
10/24/2005	AGN	34	M	✓QE-466	2.12	0.80	27.20
10/24/2005	GY	19	M	✓QE-647		0.80	15.20
10/24/2005	OR	53	M	✓QE-522	2.21	0.80	42.40
10/24/2005	AOR	50	M	✓QE-566	2.12	0.80	40.00

		Gals Used	Total Emissions	
<u>10/24/2005</u>	<u>Totals</u>	224	179.20	Pounds

Mon

10/25/2005	AGN	59	M	✓QE-466	2.12	0.80	47.20
10/25/2005	OR	46	M	✓QE-522	2.21	0.80	36.80
10/25/2005	PY	86	M	✓QE-572	2.20	0.80	68.80
10/25/2005	GY	12	M	✓QE-647		0.80	9.60

		Gals Used	Total Emissions	
<u>10/25/2005</u>	<u>Totals</u>	203	162.40	Pounds

10/26/2005	AGN	28	M	✓QE-466	2.12	0.80	22.40
10/26/2005	AOR	65	M	✓QE-566	2.12	0.80	52.00
10/26/2005	GY	65	M	✓QE-647		0.80	52.00
10/26/2005	OR	76	M	✓QE-522	2.21	0.80	60.80

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>10/26/2005 Totals</u>			234	187.20	Pounds	

Wed

10/27/2005	GY	74	M	✓qe-647	0.80	59.20	
10/27/2005	AOR	41	M	✓QE-566	2.12	0.80	32.80
10/27/2005	BL	29	M	✓QE-930	2.21	0.80	23.20
10/27/2005	OR	62	M	✓QE-522	2.21	0.80	49.60
10/27/2005	AGN	62	M	✓QE-466	2.12	0.80	49.60
10/27/2005	YL	17	M	✓QE-569	2.21	0.80	13.60
10/27/2005	GN	5	M	✓QE-415	2.12	0.80	4.00

			Gals Used	Total Emissions		
<u>10/27/2005 Totals</u>			290	232.00	Pounds	

Thurs

10/28/2005	AGN	129	M	✓QE-466	2.12	0.80	103.20
10/28/2005	OR	17	M	✓QE-522	2.21	0.80	13.60
10/28/2005	PCG	7	M	✓QE-617	2.22	0.81	5.67
10/28/2005	IG	3	M	✓QE-432	2.12	0.80	2.40
10/28/2005	IO	2	M	✓QE-535	2.21	0.80	1.60

			Gals Used	Total Emissions		
<u>10/28/2005 Totals</u>			158	126.47	Pounds	

10/29/2005	GY	54	M	✓QE-647	0.80	43.20	
10/29/2005	OR	183	M	✓QE-522	2.21	0.80	146.40

			Gals Used	Total Emissions		
<u>10/29/2005 Totals</u>			237	189.60	Pounds	

Sat

10/30/2005	V-OR	25	V	✓VS-002	0.98	24.50	
10/30/2005	OR	24	M	✓QE-522	2.21	0.80	19.20
10/30/2005	AOR	116	M	✓QE-566	2.12	0.80	92.80

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>10/30/2005 Totals</u>			165	136.50	Pounds	

10/31/2005	AGN	151	M	✓QE-466	2.12	0.80	120.80
10/31/2005	AW	18	M	✓QE-132	2.17	0.79	14.22
10/31/2005	IO	38	M	✓QE-535	2.21	0.80	30.40
10/31/2005	IG	33	M	✓QE-432	2.12	0.80	26.40
10/31/2005	RB	17	M	✓QE-929	2.70	0.83	14.11
10/31/2005	BL	10	M	✓QE-930	2.21	0.80	8.00
10/31/2005	V-OR	4	V	✓VS-002		0.98	3.92
10/31/2005	GY	2	M	✓QE-647		0.80	1.60

			Gals Used	Total Emissions		
<u>10/31/2005 Totals</u>			273	219.45	Pounds	

[Handwritten scribble] *Mon*

11/1/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
11/1/2005	V-OR	17	V	✓VS-002		0.98	16.66
11/1/2005	PY	12	M	✓QE-572	2.20	0.80	9.60
11/1/2005	GY	10	M	✓QE-647		0.80	8.00
11/1/2005	YL	12	M	✓QE-569	2.21	0.80	9.60
11/1/2005	BL	101	M	✓QE-930	2.21	0.80	80.80
11/1/2005	IP	5	M	✓QE-851	2.10	0.80	4.00
11/1/2005	IG	10	M	✓QE-432	2.12	0.80	8.00

			Gals Used	Total Emissions		
<u>11/1/2005 Totals</u>			222	180.66	Pounds	

Tues

11/2/2005	V-AGN	75	V	✓VS-001		0.98	73.50
11/2/2005	V-OR	46	V	✓VS-002		0.98	45.08
11/2/2005	IO	22	M	✓QE-535	2.21	0.80	17.60
11/2/2005	BL	20	M	✓QE-930	2.21	0.80	16.00
11/2/2005	PCG	7	M	✓QE-617	2.22	0.81	5.67

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions	
<u>11/2/2005</u>	<u>Totals</u>	170		157.85	Pounds

11/4/2005	V-AGN	45	V	✓VS-001	0.98	44.10
11/4/2005	V-OR	77	V	✓VS-002	0.98	75.46
11/4/2005	RB	4	M	✓QE-929	2.70	0.83
11/4/2005	BL	4	M	✓QE-930	2.21	0.80
11/4/2005	YL	15	M	✓QE-569	2.21	0.80

		Gals Used		Total Emissions	
<u>11/4/2005</u>	<u>Totals</u>	145		138.08	Pounds

11/5/2005	V-OR	125	V	✓VS-002	0.98	122.50
11/5/2005	V-AGN	50	V	✓VS-001	0.98	49.00
11/5/2005	GY	14	M	✓QE-647	0.80	11.20

		Gals Used		Total Emissions	
<u>11/5/2005</u>	<u>Totals</u>	189		182.70	Pounds

Sat

11/6/2005	V-AGN	30	V	✓VS-001	0.98	29.40
11/6/2005	AOR	120	M	✓QE-566	2.12	0.80

		Gals Used		Total Emissions	
<u>11/6/2005</u>	<u>Totals</u>	150		125.40	Pounds

11/7/2005	AOR	48	M	✓qe-566	2.12	0.80
11/7/2005	IO	47	M	✓QE-535	2.21	0.80
11/7/2005	V-AGN	40	V	✓VS-001	0.98	39.20
11/7/2005	V-OR	21	V	✓VS-002	0.98	20.58
11/7/2005	GN	5	M	✓QE-415	2.12	0.80

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions	
<u>11/7/2005</u>	<u>Totals</u>	161		139.78	Pounds

11/8/2005	V-AGN	123	V	✓ vs-001	0.98	120.54
11/8/2005	V-OR	76	V	✓ VS-002	0.98	74.48
11/8/2005	YL	4	M	✓ QE-569	2.21	0.80
11/8/2005	BL	2	M	✓ QE-930	2.21	0.80
11/8/2005	GY	11	M	✓ QE-647	0.80	8.80

		Gals Used		Total Emissions	
<u>11/8/2005</u>	<u>Totals</u>	216		208.62	Pounds

Tues

11/9/2005	V-OR	62	V	✓ VS-002	0.98	60.76
11/9/2005	V-AGN	68	V	✓ VS-001	0.98	66.64
11/9/2005	AOW	25	M	✓ QE-113	2.70	1.20
11/9/2005	GY	7	M	✓ QE-647	0.80	5.60
11/9/2005	FR	19	M	✓ QE-713	2.21	0.81
11/9/2005	PY	34	M	✓ QE-572	2.20	0.80

		Gals Used		Total Emissions	
<u>11/9/2005</u>	<u>Totals</u>	215		205.59	Pounds

wed

11/10/2005	V-AGN	50	V	✓ vs-001	0.98	49.00
11/10/2005	V-OR	15	V	✓ VS-002	0.98	14.70
11/10/2005	AOR	10	M	✓ QE-566	2.12	0.80
11/10/2005	RB	25	M	✓ QE-929	2.70	0.83
11/10/2005	GN	5	M	✓ QE-415	2.12	0.80
11/10/2005	FR	21	M	✓ QE-713	2.21	0.81
11/10/2005	BL	21	M	✓ QE-930	2.21	0.80
11/10/2005	IG	17	M	✓ QE-432	2.12	0.80

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>11/10/2005 Totals</u>			164	143.86	Pounds	

11/11/2005	V-OR	68	V	✓ VS-002	0.98	66.64
11/11/2005	V-AGN	55	V	✓ VS-001	0.98	53.90
11/11/2005	BL	9	M	✓ QE-930	2.21	0.80

			Gals Used	Total Emissions		
<u>11/11/2005 Totals</u>			132	127.74	Pounds	

11/12/2005	V-OR	85	V	✓ VS-002	0.98	83.30
11/12/2005	V-AGN	67	V	✓ VS-001	0.98	65.66

			Gals Used	Total Emissions		
<u>11/12/2005 Totals</u>			152	148.96	Pounds	

11/13/2005	IB	64	M	✓ QE-989	2.12	0.80
11/13/2005	IY	110	M	✓ QE-574	2.10	0.80

			Gals Used	Total Emissions		
<u>11/13/2005 Totals</u>			174	139.20	Pounds	

11/14/2005	IY	137	M	✓ QE-574	2.10	0.80
11/14/2005	V-AGN	32	V	✓ VS-001	0.98	31.36
11/14/2005	IG	33	M	✓ QE-432	2.12	0.80

			Gals Used	Total Emissions		
<u>11/14/2005 Totals</u>			202	167.36	Pounds	

11/15/2005	IB	78	M	✓ qe-989	2.12	0.80
11/15/2005	V-AGN	17	V	✓ vs-001	0.98	16.66

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
11/15/2005	GN	8	M	✓QE-415	2.12	0.80	6.40
11/15/2005	V-OR	29	V	✓VS-002		0.98	28.42
11/15/2005	IG	10	M	✓QE-432	2.12	0.80	8.00
11/15/2005	GY	20	M	✓QE-647		0.80	16.00

	Gals Used	Total Emissions	
<u>11/15/2005 Totals</u>	162	137.88	Pounds

11/17/2005	IB	40	M	✓qe-989 ✓	2.12	0.80	32.00
11/17/2005	V-OR	62	V	✓VS-002 ✓		0.98	60.76
11/17/2005	IO	40	M	✓QE-535	2.21	0.80	32.00
11/17/2005	IG	31	M	✓QE-432	2.12	0.80	24.80
11/17/2005	V-AGN	3	V	✓VS-001 ✓		0.98	2.94
11/17/2005	GY	2	M	✓QE-647		0.80	1.60

	Gals Used	Total Emissions	
<u>11/17/2005 Totals</u>	178	154.10	Pounds

11/18/2005	IB	90	M	✓QE-989	2.12	0.80	72.00
11/18/2005	V-AGN	33	V	✓VS-001		0.98	32.34
11/18/2005	GN	4	M	✓QE-415 ✓	2.12	0.80	3.20
11/18/2005	GY	10	M	✓QE-647		0.80	8.00

	Gals Used	Total Emissions	
<u>11/18/2005 Totals</u>	137	115.54	Pounds

11/19/2005	IB	76	M	✓qe-989	2.12	0.80	60.80
11/19/2005	V-AGN	78	V	✓vs-001		0.98	76.44

	Gals Used	Total Emissions	
<u>11/19/2005 Totals</u>	154	137.24	Pounds

11/20/2005	V-OR	118	V	✓vs-002		0.98	115.64
------------	------	-----	---	---------	--	------	--------

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
11/20/2005	JIG	31	M	✓qe-424	2.12	0.80	24.80

			Gals Used	Total Emissions	
<u>11/20/2005</u>	<u>Totals</u>		149	140.44	Pounds

11/21/2005	JIG	48	M	✓qe-424	2.12	0.80	38.40
11/21/2005	YL	72	M	✓qe-569	2.21	0.80	57.60
11/21/2005	IB	34	M	✓QE-989	2.12	0.80	27.20
11/21/2005	GN	4	M	✓QE-415	2.12	0.80	3.20
11/21/2005	V-OR	7	V	✓VS-002		0.98	6.86

			Gals Used	Total Emissions	
<u>11/21/2005</u>	<u>Totals</u>		165	133.26	Pounds

11/22/2005	IY	210	M	✓qe-574	2.10	0.80	168.00
------------	----	-----	---	---------	------	------	--------

			Gals Used	Total Emissions	
<u>11/22/2005</u>	<u>Totals</u>		210	168.00	Pounds

11/23/2005	V-AGN	98	V	✓VS-001		0.98	96.04
11/23/2005	V-OR	65	V	✓VS-002		0.98	63.70

			Gals Used	Total Emissions	
<u>11/23/2005</u>	<u>Totals</u>		163	159.74	Pounds

11/26/2005	IB	85	M	✓QE-989	2.12	0.80	68.00
11/26/2005	IY	103	M	✓QE-574	2.10	0.80	82.40

			Gals Used	Total Emissions	
<u>11/26/2005</u>	<u>Totals</u>		188	150.40	Pounds

11/27/2005 2.12

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
11/27/2005	V-OR	145	V	✓VS-002		0.98	142.10
11/27/2005	BL	17	M	✓QE-930	2.21	0.80	13.60
11/27/2005	GY	12	M	✓QE-647		0.80	9.60

	Gals Used	Total Emissions	
<u>11/27/2005 Totals</u>	174	165.30	Pounds

11/28/2005	IB	73	M	✓QE-989	2.12	0.80	58.40
11/28/2005	V-OR	17	V	✓VS-002		0.98	16.66
11/28/2005	JIG	72	M	✓QE-424	2.12	0.80	57.60

	Gals Used	Total Emissions	
<u>11/28/2005 Totals</u>	162	132.66	Pounds

11/29/2005	IB	85	M	✓qe-989	2.12	0.80	68.00
11/29/2005	V-AGN	19	V	✓VS-001		0.98	18.62
11/29/2005	YL	31	M	✓QE-569	2.21	0.80	24.80
11/29/2005	IY	58	M	✓QE-574	2.10	0.80	46.40

	Gals Used	Total Emissions	
<u>11/29/2005 Totals</u>	193	157.82	Pounds

11/30/2005	V-AGN	66	V	✓VS-001		0.98	64.68
11/30/2005	V-OR	63	V	✓VS-002		0.98	61.74
11/30/2005	IY	110	M	✓QE-574	2.10	0.80	88.00

	Gals Used	Total Emissions	
<u>11/30/2005 Totals</u>	239	214.42	Pounds

wed.

12/1/2005	IY	89	M	✓QE-574	2.10	0.80	71.20
12/1/2005	GY	27	M	✓QE-647		0.80	21.60
12/1/2005	V-AGN	38	V	✓VS-001		0.98	37.24
12/1/2005	OR	19	M	✓QE-522	2.21	0.80	15.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
12/1/2005	BL	17	M	✓QE-930	2.21	0.80	13.60
12/1/2005	IO	7	M	✓QE-535	2.21	0.80	5.60

		Gals Used	Total Emissions	
<u>12/1/2005</u>	<u>Totals</u>	197	164.44	Pounds

12/2/2005	V-AGN	37	V	✓VS-001		0.98	36.26
12/2/2005	OR	36	M	✓QE-522	2.21	0.80	28.80
12/2/2005	IB	55	M	✓QE-989	2.12	0.80	44.00
12/2/2005	BL	10	M	✓QE-930	2.21	0.80	8.00
12/2/2005	GY	9	M	✓QE-647		0.80	7.20
12/2/2005	RB	15	M	✓QE-929	2.70	0.83	12.45

		Gals Used	Total Emissions	
<u>12/2/2005</u>	<u>Totals</u>	162	136.71	Pounds

12/3/2005	IB	175	M	✓QE-989	2.12	0.80	140.00
12/3/2005	IY	51	M	✓QE-574	2.10	0.80	40.80

		Gals Used	Total Emissions	
<u>12/3/2005</u>	<u>Totals</u>	226	180.80	Pounds

Sat

12/4/2005	IY	167	M	✓QE-574	2.10	0.80	133.60
-----------	----	-----	---	---------	------	------	--------

		Gals Used	Total Emissions	
<u>12/4/2005</u>	<u>Totals</u>	167	133.60	Pounds

12/5/2005	IY	127	M	✓QE-574	2.10	0.80	101.60
12/5/2005	CR	55	M	✓QE-733	2.12	0.80	44.00
12/5/2005	PY	13	M	✓QE-572	2.20	0.80	10.40
12/5/2005	V-AGN	24	V	✓VS-001		0.98	23.52

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

			Gals Used	Total Emissions		
<u>12/5/2005 Totals</u>			219	179.52	Pounds	

Mon

12/6/2005	V-AGN	91	V	✓ vs-001	0.98	89.18
12/6/2005	V-OR	79	V	✓ VS-002	0.98	77.42
12/6/2005	IB	44	M	✓ QE-989	2.12	0.80
12/6/2005	KWG	5	M	✓ QE-649	2.21	0.80

			Gals Used	Total Emissions		
<u>12/6/2005 Totals</u>			219	205.80	Pounds	

Tues

12/7/2005	IB	155	M	✓ QE-989	2.12	0.80
12/7/2005	V-AGN	74	V	✓ VS-001	0.98	72.52
12/7/2005	AOR	9	M	✓ QE-566	2.12	0.80

			Gals Used	Total Emissions		
<u>12/7/2005 Totals</u>			238	203.72	Pounds	

Wed

12/8/2005	V-OR	100	V	✓ vs-002	0.98	98.00
12/8/2005	IO	7	M	✓ QE-535	2.21	0.80
12/8/2005	GY	12	M	✓ QE-647	0.80	9.60
12/8/2005	BL	4	M	✓ QE-930	2.21	0.80
12/8/2005	V-AGN	110	V	✓ VS-001	0.98	107.80
12/8/2005	MCG	3	M	✓ QE-441	2.12	0.80
12/8/2005	YL	5	M	✓ QE-569	2.21	0.80

			Gals Used	Total Emissions		
<u>12/8/2005 Totals</u>			241	230.60	Pounds	

Thur

12/9/2005	AGN	30	M	✓ QE-466	2.12	0.80
12/9/2005	V-AGN	55	V	✓ VS-001	0.98	53.90
12/9/2005	V-OR	32	V	✓ VS-002	0.98	31.36

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
12-9-2005	IG	12	M	✓QE-432	2.12	0.80	9.60
12-9-2005	LA	2	M	✓QE-117	2.16	0.80	1.60
12-9-2005	IO	12	M	✓QE-535	2.21	0.80	9.60

		Gals Used	Total Emissions	
<u>12-9-2005</u>	<u>Totals</u>	143	130.06	Pounds

12/10/2005	IO	127	M	✓QE-535	2.21	0.80	101.60
12/10/2005	V-OR	75	V	✓VS-002		0.98	73.50

		Gals Used	Total Emissions	
<u>12/10/2005</u>	<u>Totals</u>	202	175.10	Pounds

Sat

12/11/2005	IY	156	M	✓QE-574	2.10	0.80	124.80
------------	----	-----	---	---------	------	------	--------

		Gals Used	Total Emissions	
<u>12/11/2005</u>	<u>Totals</u>	156	124.80	Pounds

12/12/2005	V-OR	179	V	✓VS-002		0.98	175.42
12/12/2005	V-AGN	85	V	✓VS-001		0.98	83.30
12/12/2005	GY	3	M	✓QE-647		0.80	2.40
12/12/2005	YL	6	M	✓QE-569	2.21	0.80	4.80

		Gals Used	Total Emissions	
<u>12/12/2005</u>	<u>Totals</u>	273	265.92	Pounds

Mon

12/13/2005	AGN	51	M	✓QE-466 ✓	2.12	0.80	40.80
12/13/2005	V-OR	27	V	✓VS-002		0.98	26.46
12/13/2005	IG	110	M	✓QE-432 ✓	2.12	0.80	88.00
12/13/2005	IB	67	M	✓QE-989	2.12	0.80	53.60
12/13/2005	BK	3	M	✓QE-J204	2.11	0.80	2.40

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used	Total Emissions	
<u>12/13/2005 Totals</u>		258	211.26	Pounds

Tues

12/14/2005	AGN	27	M	✓QE-466 ✓	2.12	0.80	21.60
12/14/2005	V-AGN	36	V	✓VS-001		0.98	35.28
12/14/2005	V-OR	110	V	✓VS-002		0.98	107.80
12/14/2005	IB	43	M	✓QE-989	2.12	0.80	34.40
12/14/2005	GN	12	M	✓QE-415 ✓	2.12	0.80	9.60

		Gals Used	Total Emissions	
<u>12/14/2005 Totals</u>		228	208.68	Pounds

wed

12/15/2005	V-AGN	74	V	✓VS-001 ✓		0.98	72.52
12/15/2005	AGN	55	M	✓QE-466	2.12	0.80	44.00
12/15/2005	OR	10	M	✓QE-522	2.21	0.80	8.00
12/15/2005	BL	10	M	✓QE-930	2.21	0.80	8.00
12/15/2005	AOR	13	M	✓QE-566	2.12	0.80	10.40
12/15/2005	PY	2	M	✓QE-572	2.20	0.80	1.60
12/15/2005	GY	34	M	✓QE-647		0.80	27.20
12/15/2005	RB	2	M	✓QE-929 ✓	2.70	0.83	1.66

		Gals Used	Total Emissions	
<u>12/15/2005 Totals</u>		200	173.38	Pounds

12/16/2005	FR	28	M	✓QE-713	2.21	0.81	22.68
12/16/2005	PCG	25	M	✓QE-617	2.22	0.81	20.25
12/16/2005	AOR	101	M	✓QE-566	2.12	0.80	80.80
12/16/2005	OR	3	M	✓QE-522	2.21	0.80	2.40

		Gals Used	Total Emissions	
<u>12/16/2005 Totals</u>		157	126.13	Pounds

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used	Color	Qty Used	Vendor	Code	VOC Less	VOC Incl	Emissions
12/17/2005	IO	60	M	✓QE-535	2.21	0.80	48.00
12/17/2005	AOR	55	M	✓QE-566	2.12	0.80	44.00
12/17/2005	OR	94	M	✓QE-522	2.21	0.80	75.20
12/17/2005	DOA	15	M	✓QE-579	2.10	0.80	12.00

			Gals Used	Total Emissions		
<u>12/17/2005 Totals</u>			224	179.20	Pounds	

12/18/2005	IY	184	M	✓QE-574	2.10	0.80	147.20
------------	----	-----	---	---------	------	------	--------

			Gals Used	Total Emissions		
<u>12/18/2005 Totals</u>			184	147.20	Pounds	

12/19/2005	AGN	141	M	✓QE-466 ✓	2.12	0.80	112.80
12/19/2005	BL	33	M	✓QE-930	2.21	0.80	26.40
12/19/2005	GN	3	M	✓QE-415 ✓	2.12	0.80	2.40
12/19/2005	RB	3	M	✓QE-929	2.70	0.83	2.49
12/19/2005	OR	26	M	✓QE-522 ✓	2.21	0.80	20.80

			Gals Used	Total Emissions		
<u>12/19/2005 Totals</u>			206	164.89	Pounds	

12/20/2005	IB	29	M	✓QE-989	2.12	0.80	23.20
12/20/2005	PY	5	M	✓QE-572	2.20	0.80	4.00
12/20/2005	OR	71	M	✓QE-522	2.21	0.80	56.80
12/20/2005	AGN	96	M	✓QE-466	2.12	0.80	76.80

			Gals Used	Total Emissions		
<u>12/20/2005 Totals</u>			201	160.80	Pounds	

12/21/2005	AGN	207	M	✓qe-466	2.12	0.80	165.60
12/21/2005	OR	9	M	✓QE-522	2.21	0.80	7.20

(5)

EMISSIONS 4:04:52 PM 5/16/2006

Date Used Color Qty Used Vendor Code VOC Less VOC Incl Emissions

		Gals Used		Total Emissions		
<u>12/21/2005 Totals</u>		216		172.80		Pounds

12/23/2005	PY	18	M	✓QE-572	2.20	0.80	14.40
12/23/2005	YL	9	M	✓QE-569	2.21	0.80	7.20
12/23/2005	AGN	82	M	✓QE-466	2.12	0.80	65.60
12/23/2005	OR	87	M	✓QE-522	2.21	0.80	69.60
12/23/2005	GY	5	M	✓QE-647		0.80	4.00

		Gals Used		Total Emissions		
<u>12/23/2005 Totals</u>		201		160.80		Pounds

12/24/2005	AGN	103	M	✓QE-466	2.12	0.80	82.40
12/24/2005	GY	22	M	✓QE-647		0.80	17.60
12/24/2005	IB	81	M	✓qe-989	2.12	0.80	64.80

		Gals Used		Total Emissions		
<u>12/24/2005 Totals</u>		206		164.80		Pounds

		Gals Used		Total Emissions		
<u>Period Totals:</u>		48,332		41,403.94		Pounds

REV'D 3/08

(4) DAILY PAINT USAGE 5:44:00 PM 3/21/2007

Emmision Calc (VOC per Gal * Gals)

WK Day Date Used Shift Start Time Quit Time Persons Reg Hours OT Hours Total Hours Line Time ColorTime Code Gals Color Vendor

Reg Hours OT Hours Total Hours Gals Used

		Totals of								14,568	
--	--	-----------	--	--	--	--	--	--	--	--------	--

1 Mond 1/2/2006 1 0500 1130 14 84.00 84.00 4.7 QE-566 165 acr M

4.70

Reg Hours OT Hours Total Hours Gals Used

		1/2/2006	Totals of	84.00		84.00		165	
--	--	----------	-----------	-------	--	-------	--	-----	--

1 Tues 1/3/2006 1 0500 1530 14 140.00 140.00 7.3 QE-566 220 acr M

7.30

Reg Hours OT Hours Total Hours Gals Used

		1/3/2006	Totals of	140.00		140.00		220	
--	--	----------	-----------	--------	--	--------	--	-----	--

1 Wedn 1/4/2006 1 0500 1630 14 154.00 154.00 7.7 QE-466 203 agn M

7.70

Reg Hours OT Hours Total Hours Gals Used

		1/4/2006	Totals of	154.00		154.00		203	
--	--	----------	-----------	--------	--	--------	--	-----	--

1 Thurs 1/5/2006 1 0500 1630 14 154.00 154.00 7.8 QE-522 159 or M

1 Thurs 1/5/2006 1 QE-466 27 agn M

7.80

Reg Hours OT Hours Total Hours Gals Used

		1/5/2006	Totals of	154.00		154.00		186	
--	--	----------	-----------	--------	--	--------	--	-----	--

1 Friday 1/6/2006 1 0500 1230 14 105.00 105.00 5.5 QE-466 67 agn M

1 Friday 1/6/2006 1 QE-415 7 gn M

1 Friday 1/6/2006 1 QE-J204 20 bk M

1 Friday 1/6/2006 1 QE-441 41 mcg M

1 Friday 1/6/2006 1 QE-647 20 gy M

1 Friday 1/6/2006 1 QE-929 7 rb M

1 Friday 1/6/2006 1 QE-930 2 bl M

5.50

Reg Hours OT Hours Total Hours Gals Used

		1/6/2006	Totals of	105.00		105.00		164	
--	--	----------	-----------	--------	--	--------	--	-----	--

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
1	Satur	1/7/2006	1	0500	1430	15	135.00		135.00	6.5		QE-522	220 ✓	or	M
6.50															
Reg Hours OT Hours Total Hours Gals Used															
				1/7/2006	Totals of	135.00		135.00				220			
1	Sund	1/8/2006	1	0500	1330	14	112.00		112.00	5.9		QE-566	180 ✓	aor	M
5.90															
Reg Hours OT Hours Total Hours Gals Used															
				1/8/2006	Totals of	112.00		112.00				180			
2	Mond	1/9/2006	1	0500	1630	14	140.00		140.00	8.3		QE-566 ✓	86 ✓	aor	M
2	Mond	1/9/2006	1									QE-466 ✓	70	agn	M
2	Mond	1/9/2006	1									QE-535 ✓	7	io	M
2	Mond	1/9/2006	1									QE-432 ✓	23	ig	M
8.30															
Reg Hours OT Hours Total Hours Gals Used															
				1/9/2006	Totals of	140.00		140.00				186			
2	Tues	1/10/2006	1	0500	1530	14	126.00		126.00	6.9		QE-535 ✓	27	io	M
2	Tues	1/10/2006	1									QE-713 ✓	3	fr	M
2	Tues	1/10/2006	1									QE-432 ✓	12	ig	M
2	Tues	1/10/2006	1									QE-466 ✓	27	agn	M
2	Tues	1/10/2006	1									QE-572 ✓	17	py	M
2	Tues	1/10/2006	1									QE-522 ✓	55	or	M
2	Tues	1/10/2006	1									QE-119 ✓	5	aw	M
6.90															
Reg Hours OT Hours Total Hours Gals Used															
				1/10/2006	Totals of	126.00		126.00				146			
2	Thurs	1/12/2006	1	0500	1630	15	165.00		165.00	7.4		QE-466 ✓	122	agn	M
2	Thurs	1/12/2006	1									QE-566 ✓	76	aor	M
2	Thurs	1/12/2006	1									QE-522 ✓	25	or	M
7.40															
Reg Hours OT Hours Total Hours Gals Used															
				1/12/2006	Totals of	165.00		165.00				223			
2	Friday	1/13/2006	1	200	1200	14	140.00		140.00	//		QE-424 ✓	17	jig	M
2	Friday	1/13/2006	1									QE-466 ✓	110	agn	M
2	Friday	1/13/2006	1									QE-566 ✓	6	aor	M
2	Friday	1/13/2006	1									QE-415 ✓	2	gn	M
2	Friday	1/13/2006	1									QE-522 ✓	32	or	M
2	Friday	1/13/2006	1									QE-647 ✓	2	gy	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor					
													Reg Hours OT Hours Total Hours Gals Used							
													1/13/2006	Totals of	140.00	140.00	169			
2	Satur	1/14/2006	1	0500	1330	12	96.00		96.00	/		QE-522 ✓	73	or	M					
2	Satur	1/14/2006	1									QE-466 ✓	86	agn	M					
													Reg Hours OT Hours Total Hours Gals Used							
													1/14/2006	Totals of	96.00	96.00	159			
2	Sund	1/15/2006	1	0500	1330	12	69.00		69.00	5.8		QE-522 ✓	89	or	M					
5.80													Reg Hours OT Hours Total Hours Gals Used							
													1/15/2006	Totals of	69.00	69.00	89			
3	Mond	1/16/2006	1	0500	1430	10	90.00		90.00	6.4		QE-466 ✓	108	agn	M					
3	Mond	1/16/2006	1									QE-522 ✓	50	or	M					
6.40													Reg Hours OT Hours Total Hours Gals Used							
													1/16/2006	Totals of	90.00	90.00	158			
3	Tues	1/17/2006	1	0500	1430	15	135.00		135.00	6.6		QE-522 ✓	58	or	M					
3	Tues	1/17/2006	1									QE-466 ✓	106	agn	M					
3	Tues	1/17/2006	1									QE-J204 ✓	7	bk	M					
3	Tues	1/17/2006	1									QE-569 ✓	5	yl	M					
6.60													Reg Hours OT Hours Total Hours Gals Used							
													1/17/2006	Totals of	135.00	135.00	176			
3	Wedn	1/18/2006	1	0500	1330	15	112.00		112.00	5.9		QE-647 ✓	14	gy	M					
3	Wedn	1/18/2006	1									QE-466 ✓	91	agn	M					
3	Wedn	1/18/2006	1									QE-522 ✓	31	or	M					
3	Wedn	1/18/2006	1									QE-535 ✓	15	io	M					
3	Wedn	1/18/2006	1									QE-415 ✓	10	gn	M					
5.90													Reg Hours OT Hours Total Hours Gals Used							
													1/18/2006	Totals of	112.00	112.00	161			
3	Thurs	1/19/2006	1	0500	1330	15	120.00		120.00	5.4		QE-522 ✓	79	or	M					
3	Thurs	1/19/2006	1									QE-466 ✓	33	agn	M					
3	Thurs	1/19/2006	1									QE-930 ✓	10	bl	M					

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
----	-----	-----------	-------	------------	-----------	---------	-----------	----------	-------------	-----------	-----------	------	------	-------	--------

5.40

		Reg Hours	OT Hours	Total Hours	Gals Used	
1/19/2006	Totals of	120.00		120.00	120.00	122

3	Friday	1/20/2006	1	0500	1200	15	105.00		105.00	4.6		QE-522	31	or	M
3	Friday	1/20/2006	1									QE-466	4	agn	M
3	Friday	1/20/2006	1									QE-535	45	lo	M
3	Friday	1/20/2006	1									QE-432	15	ig	M
3	Friday	1/20/2006	1									QE-930	24	bl	M

4.60

		Reg Hours	OT Hours	Total Hours	Gals Used	
1/20/2006	Totals of	105.00		105.00	105.00	119

4	Mond	1/23/2006	1	0500	10	15	75.00		75.00	4.7		QE-432	26	ig	M
4	Mond	1/23/2006	1									QE-572	31	py	M
4	Mond	1/23/2006	1									QE-522	48	or	M
4	Mond	1/23/2006	1									QE-466	10	agn	M

4.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
1/23/2006	Totals of	75.00		75.00	75.00	115

4	Tues	1/24/2006	1	0500	1330	14	112.00		112.00	5.6		QE-432	41	ig	M
4	Tues	1/24/2006	1									QE-569	24	yl	M
4	Tues	1/24/2006	1									QE-466	22	agn	M
4	Tues	1/24/2006	1									QE-535	27	lo	M
4	Tues	1/24/2006	1									QE-572	14	py	M
4	Tues	1/24/2006	1									QE-522	19	or	M

5.60

		Reg Hours	OT Hours	Total Hours	Gals Used	
1/24/2006	Totals of	112.00		112.00	112.00	147

4	Wedn	1/25/2006	1	0500	1430	15	135.00		135.00	6.8		QE-522	75	or	M
4	Wedn	1/25/2006	1									QE-647	22	gy	M
4	Wedn	1/25/2006	1									QE-930	14	bl	M
4	Wedn	1/25/2006	1									QE-466	46	agn	M
4	Wedn	1/25/2006	1									QE-432	30	ig	M
4	Wedn	1/25/2006	1									QE-569	2	yl	M

6.80

		Reg Hours	OT Hours	Total Hours	Gals Used	
1/25/2006	Totals of	135.00		135.00	135.00	189

4	Thurs	1/26/2006	1	0500	1430	15	135.00		135.00	7.2		QE-432	26	ig	M
---	-------	-----------	---	------	------	----	--------	--	--------	-----	--	--------	----	----	---

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
4	Thurs	1/26/2006	1									QE-569	✓ 13	yl	M
4	Thurs	1/26/2006	1									QE-574	✓ 9	iy	M
4	Thurs	1/26/2006	1									QE-647	✓ 26	gy	M
4	Thurs	1/26/2006	1									QE-566	✓ 17	aor	M
4	Thurs	1/26/2006	1									QE-J204	✓ 5	bk	M
4	Thurs	1/26/2006	1									QE-522	✓ 43	or	M
4	Thurs	1/26/2006	1									QE-535	✓ 26	io	M
4	Thurs	1/26/2006	1									QE-466	✓ 33	agn	M

7.20

		Reg Hours	OT Hours	Total Hours	Gals Used
1/26/2006	Totals of	135.00		135.00	198

4	Friday	1/27/2006	1	0500	1200	15	105.00		105.00	4.9		QE-647	✓ 4	gy	M
4	Friday	1/27/2006	1									QE-569	✓ 5	yl	M
4	Friday	1/27/2006	1									QE-466	✓ 58	agn	M
4	Friday	1/27/2006	1									QE-432	✓ 35	ig	M
4	Friday	1/27/2006	1									QE-535	✓ 26	io	M
4	Friday	1/27/2006	1									QE-522	✓ 17	or	M

4.90

		Reg Hours	OT Hours	Total Hours	Gals Used
1/27/2006	Totals of	105.00		105.00	145

1	Satur	01/28/2006	1	0500	1130	14	84.00		84.00	4.7		QE-955	✓ 165	rb	M
---	-------	------------	---	------	------	----	-------	--	-------	-----	--	--------	-------	----	---

4.70

		Reg Hours	OT Hours	Total Hours	Gals Used
01/28/2006	Totals of	84.00		84.00	165

5	Mond	1/30/2006	1	0500	1330	14	112.00		112.00	6		QE-522	✓ 92	or	M
5	Mond	1/30/2006	1									QE-647	✓ 22	gy	M
5	Mond	1/30/2006	1									QE-466	✓ 56	agn	M

6.00

		Reg Hours	OT Hours	Total Hours	Gals Used
1/30/2006	Totals of	112.00		112.00	170

5	Tues	1/31/2006	1	0500	1330	15	120.00		120.00	6.2		QE-647	✓ 26	gy	M
5	Tues	1/31/2006	1									QE-415	✓ 10	gn	M
5	Tues	1/31/2006	1									QE-466	✓ 60	agn	M
5	Tues	1/31/2006	1									QE-522	✓ 75	or	M
5	Tues	1/31/2006	1									QE-572	✓ 20	py	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
----	-----	-----------	-------	------------	-----------	---------	-----------	----------	-------------	-----------	-----------	------	------	-------	--------

6.20

Reg Hours OT Hours Total Hours Gals Used

1/31/2006	Totals of	120.00	120.00	191
-----------	-----------	--------	--------	-----

5	Wedn	2/1/2006	1	0500	1330	15	120.00		120.00	6		QE-522 ✓	22	or	M
5	Wedn	2/1/2006	1									QE-535 ✓	34	io	M
5	Wedn	2/1/2006	1									QE-113 ✓	29	aow	M
5	Wedn	2/1/2006	1									QE-466 ✓	90	agn	M
5	Wedn	2/1/2006	1									QE-929 ✓	27	rb	M

6.00

Reg Hours OT Hours Total Hours Gals Used

2/1/2006	Totals of	120.00	120.00	202
----------	-----------	--------	--------	-----

5	Thurs	2/2/2006	1	0500	1430	15	135.00		135.00	6.7		QE-929 ✓	14	rb	M
5	Thurs	2/2/2006	1									QE-647 ✓	17	gy	M
5	Thurs	2/2/2006	1									QE-466 ✓	43	agn	M
5	Thurs	2/2/2006	1									QE-535 ✓	50	io	M
5	Thurs	2/2/2006	1									QE-522 ✓	69	or	M
5	Thurs	2/2/2006	1									QE-572 ✓	12	py	M

6.70

Reg Hours OT Hours Total Hours Gals Used

2/2/2006	Totals of	135.00	135.00	205
----------	-----------	--------	--------	-----

5	Friday	2/3/2006	1	0500	1200	15	105.00		105.00	5		QE-113 ✓	26	aow	M
5	Friday	2/3/2006	1									QE-930 ✓	38	bl	M
5	Friday	2/3/2006	1									QE-713 ✓	27	fr	M
5	Friday	2/3/2006	1									QE-415 ✓	15	gn	M
5	Friday	2/3/2006	1									QE-535 ✓	19	io	M

5.00

Reg Hours OT Hours Total Hours Gals Used

2/3/2006	Totals of	105.00	105.00	125
----------	-----------	--------	--------	-----

6	Mond	2/6/2006	1	0500	1430	14	126.00		126.00	7		QE-466 ✓	85	agn	M
6	Mond	2/6/2006	1									QE-929 ✓	93	rb	M
6	Mond	2/6/2006	1									QE-432 ✓	32	ig	M

7.00

Reg Hours OT Hours Total Hours Gals Used

2/6/2006	Totals of	126.00	126.00	210
----------	-----------	--------	--------	-----

6	Tues	2/7/2006	1	0500	1430	14	126.00		126.00	6.7		QE-929 ✓	10	rb	M
6	Tues	2/7/2006	1									QE-113 ✓	47	aow	M
6	Tues	2/7/2006	1									QE-535 ✓	15	io	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
6	Tues	2/7/2006	1									QE-147	23	dw	M
6	Tues	2/7/2006	1									QE-466	55	agn	M
6	Tues	2/7/2006	1									QE-432	12	ig	M
6	Tues	2/7/2006	1									QE-647	19	gy	M
6	Tues	2/7/2006	1									QE-J204	3	bk	M

6.70

Reg Hours	OT Hours	Total Hours	Gals Used
2/7/2006	Totals of	126.00	126.00
			184

6	Wedn	2/8/2006	1	0500	1430	13	117.00		117.00	6.7		QE-522	112	or	M
6	Wedn	2/8/2006	1									QE-647	10	gy	M
6	Wedn	2/8/2006	1									QE-466	55	agn	M
6	Wedn	2/8/2006	1									QE-566	9	aor	M
6	Wedn	2/8/2006	1									QE-713	14	fr	M

6.70

Reg Hours	OT Hours	Total Hours	Gals Used
2/8/2006	Totals of	117.00	117.00
			200

6	Thurs	2/9/2006	1	0500	1430	15	135.00		135.00	6.5		QE-415	6	gn	M
6	Thurs	2/9/2006	1									QE-466	59	agn	M
6	Thurs	2/9/2006	1									QE-441	32	mcg	M
6	Thurs	2/9/2006	1									QE-647	8	gy	M
6	Thurs	2/9/2006	1									QE-522	17	or	M
6	Thurs	2/9/2006	1									QE-929	24	rb	M
6	Thurs	2/9/2006	1									QE-569	15	yl	M
6	Thurs	2/9/2006	1									QE-739	5	bnr	M
6	Thurs	2/9/2006	1									QE-535	5	io	M

6.50

Reg Hours	OT Hours	Total Hours	Gals Used
2/9/2006	Totals of	135.00	135.00
			168

6	Friday	2/10/2006	1	0500	1300	15	105.00		105.00	4.6		QE-569	18	yl	M
6	Friday	2/10/2006	1									QE-466	55	agn	M
6	Friday	2/10/2006	1									QE-535	17	io	M
6	Friday	2/10/2006	1									QE-522	45	or	M

4.60

Reg Hours	OT Hours	Total Hours	Gals Used
2/10/2006	Totals of	105.00	105.00
			135

6	Satur	2/11/2006	1	0500	1300	15	105.00		105.00	5.6		QE-572	68	py	M
6	Satur	2/11/2006	1									QE-566	38	aor	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
6	Satur	2/11/2006	1									QE-522	✓ 22	or	M
5.60															
Reg Hours OT Hours Total Hours Gals Used															
2/11/2006 Totals of 105.00 105.00 128															
7	Mond	2/13/2006	1	0500	1330	15	120.00		120.00	6		QE-929	✓ 43	rb	M
7	Mond	2/13/2006	1									QE-466	✓ 44	agn	M
7	Mond	2/13/2006	1									QE-522	✓ 45	or	M
7	Mond	2/13/2006	1									QE-569	✓ 29	yl	M
6.00															
Reg Hours OT Hours Total Hours Gals Used															
2/13/2006 Totals of 120.00 120.00 161															
7	Tues	2/14/2006	1	0500	1330	15	120.00		120.00	5.6		QE-930	✓ 45	bl	M
7	Tues	2/14/2006	1									QE-466	✓ 19	agn	M
7	Tues	2/14/2006	1									QE-522	✓ 63	or	M
7	Tues	2/14/2006	1									QE-535	✓ 10	io	M
7	Tues	2/14/2006	1									QE-432	✓ 10	ig	M
5.60															
Reg Hours OT Hours Total Hours Gals Used															
2/14/2006 Totals of 120.00 120.00 147															
7	Wedn	2/15/2006	1	0500	1330	15	120.00		120.00	6.1		QE-734	✓ 15	kr	M
7	Wedn	2/15/2006	1									QE-522	✓ 28	or	M
7	Wedn	2/15/2006	1									QE-466	✓ 17	agn	M
7	Wedn	2/15/2006	1												
6.10															
Reg Hours OT Hours Total Hours Gals Used															
2/15/2006 Totals of 120.00 120.00 60															
7	Thurs	2/16/2006	1									QE-466	✓ 116	agn	M
7	Thurs	2/16/2006	1									QE-522	✓ 39	or	M
7	Thurs	2/16/2006	1									QE-569	✓ 34	yl	M
7	Thurs	2/16/2006	1									QE-739	✓ 24	bnr	M
7	Thurs	2/16/2006	1									QE-J204	✓ 4	bk	M
6.10															
Reg Hours OT Hours Total Hours Gals Used															
2/16/2006 Totals of 150.00 150.00 217															
7	Friday	2/17/2006	1	0500	1530	15	150.00		150.00	8		QE-929	✓ 14	rb	M
7	Friday	2/17/2006	1	0500	1230	15	105.00		105.00	4.9		QE-739	✓ 20	bnr	M
7	Friday	2/17/2006	1									QE-522	✓ 42	or	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
7	Friday	2/17/2006	1									QE-466	✓ 114	agn	M
12.90															
Reg Hours OT Hours Total Hours Gals Used															
2/17/2006 Totals of 255.00 255.00 190															
7	Satur	2/18/2006	1	0500	1430	15	135.00		135.00	6.2		QE-466	✓ 86	agn	M
7	Satur	2/18/2006	1									QE-929	✓ 43	rb	M
7	Satur	2/18/2006	1									QE-522	✓ 31	or	M
7	Satur	2/18/2006	1									QE-647	✓ 29	gy	M
6.20															
Reg Hours OT Hours Total Hours Gals Used															
2/18/2006 Totals of 135.00 135.00 189															
8	Tues	2/21/2006	1	0500	1530	13	130.00		130.00	8.2		QE-569	✓ 81	yl	M
8	Tues	2/21/2006	1									QE-522	✓ 12	or	M
8	Tues	2/21/2006	1									QE-466	✓ 7	agn	M
8	Tues	2/21/2006	1									QE-930	✓ 45	bl	M
8	Tues	2/21/2006	1									QE-432	✓ 20	ig	M
8	Tues	2/21/2006	1									QE-929	✓ 5	rb	M
8.20															
Reg Hours OT Hours Total Hours Gals Used															
2/21/2006 Totals of 130.00 130.00 170															
8	Wedn	2/22/2006	1	0500	1530	14	140.00		140.00	7.7		QE-522	✓ 95	or	M
8	Wedn	2/22/2006	1									QE-647	✓ 15	gy	M
8	Wedn	2/22/2006	1									QE-432	✓ 22	ig	M
8	Wedn	2/22/2006	1									QE-535	✓ 24	io	M
8	Wedn	2/22/2006	1									QE-930	✓ 40	bl	M
8	Wedn	2/22/2006	1									QE-566	✓ 3	aor	M
8	Wedn	2/22/2006	1									QE-466	✓ 10	agn	M
7.70															
Reg Hours OT Hours Total Hours Gals Used															
2/22/2006 Totals of 140.00 140.00 209															
8	Thurs	2/23/2006	1	0500	1730	12	168.00		168.00	8.5		QE-432	✓ 22	ig	M
8	Thurs	2/23/2006	1									QE-572	✓ 10	py	M
8	Thurs	2/23/2006	1									QE-522	✓ 90	or	M
8	Thurs	2/23/2006	1									QE-466	✓ 26	agn	M
8	Thurs	2/23/2006	1									QE-929	✓ 17	rb	M
8	Thurs	2/23/2006	1									QE-535	✓ 17	io	M
8	Thurs	2/23/2006	1									QE-647	✓ 8	gy	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
8	Thurs	2/23/2006	1									QE-930	✓ 17	bl	M
8	Thurs	2/23/2006	1									QE-J204	✓ 3	bk	M

8.50

		Reg Hours	OT Hours	Total Hours	Gals Used	
	2/23/2006	Totals of	168.00		168.00	210

8	Friday	2/24/2006	1	0500	1200	14	98.00		98.00	4.6		QE-522	✓ 67	or	M
8	Friday	2/24/2006	1									QE-113	✓ 12	aow	M
8	Friday	2/24/2006	1									QE-569	✓ 20	yl	M
8	Friday	2/24/2006	1									QE-647	✓ 10	gy	M
8	Friday	2/24/2006	1									QE-466	✓ 19	agn	M
8	Friday	2/24/2006	1									QE-J204	✓ 3	bk	M

4.60

		Reg Hours	OT Hours	Total Hours	Gals Used	
	2/24/2006	Totals of	98.00		98.00	131

9	Mond	2/27/2006	1	0500	1430	14	126.00		126.00	6.2		QE-930	✓ 15	bl	M
9	Mond	2/27/2006	1									QE-466	✓ 42	agn	M
9	Mond	2/27/2006	1									QE-647	✓ 22	gy	M
9	Mond	2/27/2006	1									QE-522	✓ 55	or	M
9	Mond	2/27/2006	1									QE-929	✓ 20	rb	M
9	Mond	2/27/2006	1									QE-535	✓ 24	io	M

6.20

		Reg Hours	OT Hours	Total Hours	Gals Used	
	2/27/2006	Totals of	126.00		126.00	178

9	Tues	2/28/2006	1	0500	1430	15	135.00		135.00	6.7		QE-739	✓ 25	bnr	M
9	Tues	2/28/2006	1									QE-522	✓ 45	or	M
9	Tues	2/28/2006	1									QE-535	✓ 22	io	M
9	Tues	2/28/2006	1									QE-466	✓ 60	agn	M

6.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	2/28/2006	Totals of	135.00		135.00	152

9	Wedn	3/1/2006	1	0500	1330	14	112.00		112.00	5.6		QE-466	✓ 86	agn	M
9	Wedn	3/1/2006	1									QE-522	✓ 71	or	M
9	Wedn	3/1/2006	1									QE-951	✓ 15	ncb	M

5.60

		Reg Hours	OT Hours	Total Hours	Gals Used	
	3/1/2006	Totals of	112.00		112.00	172

9	Thurs	3/2/2006	1	0500	1430	15	135.00		135.00	6.1		QE-929	✓ 3	rb	M
---	-------	----------	---	------	------	----	--------	--	--------	-----	--	--------	-----	----	---

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
9	Thurs	3/2/2006	1									QE-522	✓70	or	M
9	Thurs	3/2/2006	1									QE-647	✓26	gy	M
9	Thurs	3/2/2006	1									QE-466	✓55	agn	M

6.10

		Reg Hours	OT Hours	Total Hours	Gals Used	
	3/2/2006	Totals of	135.00		135.00	154

9	Friday	3/3/2006	1	0500	1230	15	105.00		105.00	5.7		QE-466	✓158	agn	M
	Friday	03/03/2006										VS-001		v-agn	V
	Friday	03/03/2006										VS-002		v-or	V

5.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	03/03/2006	Totals of	105.00		105.00	158

10	Mond	3/6/2006	1	0500	1430	15	135.00		135.00	6.9		QE-522	✓95	or	M
10	Mond	3/6/2006	1									QE-466	✓86	agn	M

6.90

		Reg Hours	OT Hours	Total Hours	Gals Used	
	3/6/2006	Totals of	135.00		135.00	181

10	Tues	3/7/2006	1	0500	1430	15	135.00		135.00	6.7		QE-466	✓62	agn	M
10	Tues	3/7/2006	1									QE-713	✓22	fr	M
10	Tues	3/7/2006	1									QE-522	✓79	or	M

6.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	3/7/2006	Totals of	135.00		135.00	163

10	Wedn	3/8/2006	1	0500	1330	15	120.00		120.00	5.8		QE-569	✓27	yl	M
10	Wedn	3/8/2006	1									QE-522	✓62	or	M
10	Wedn	3/8/2006	1									QE-466	✓51	agn	M
10	Wedn	3/8/2006	1									QE-929	✓4	rb	M

5.80

		Reg Hours	OT Hours	Total Hours	Gals Used	
	3/8/2006	Totals of	120.00		120.00	144

10	Thurs	3/9/2006	1	0500	1430	15	135.00		135.00	6.7		QE-522	✓72	or	M
10	Thurs	3/9/2006	1									QE-466	✓39	agn	M
10	Thurs	3/9/2006	1									QE-929	✓8	rb	M
10	Thurs	3/9/2006	1									QE-930	✓8	bl	M
10	Thurs	3/9/2006	1									QE-415	✓6	gn	M
10	Thurs	3/9/2006	1									QE-734	✓20	kr	M
10	Thurs	3/9/2006	1									QE-535	✓15	io	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
10	Thurs	3/9/2006	1									QE-569	17	yl	M

6.70

Reg Hours	OT Hours	Total Hours	Gals Used
3/9/2006	Totals of	135.00	185

10	Friday	3/10/2006	1	0500	1230	15	105.00		105.00	5		QE-569	7	yl	M
10	Friday	3/10/2006	1									VS-001	7	v-agn	V
10	Friday	3/10/2006	1									QE-466	45	agn	M
10	Friday	3/10/2006	1									QE-647	12	gy	M
10	Friday	3/10/2006	1									QE-522	40	or	M
10	Friday	3/10/2006	1									QE-535	5	io	M
10	Friday	3/10/2006	1									QE-566	28	aor	M

5.00

Reg Hours	OT Hours	Total Hours	Gals Used
3/10/2006	Totals of	105.00	144

10	Satur	3/11/2006	1	0500	1230	15	105.00		105.00	4.9		QE-929	45	rb	M
10	Satur	3/11/2006	1									VS-001	48	v-agn	V
10	Satur	3/11/2006	1									QE-522	21	or	M

4.90

Reg Hours	OT Hours	Total Hours	Gals Used
3/11/2006	Totals of	105.00	114

11	Mond	3/13/2006	1	0500	1330	15	120.00		120.00	5.1		VS-001	38	v-agn	V
11	Mond	3/13/2006	1									QE-572	67	py	M
11	Mond	3/13/2006	1									QE-535	10	io	M
11	Mond	3/13/2006	1									QE-522	43	or	M

5.10

Reg Hours	OT Hours	Total Hours	Gals Used
3/13/2006	Totals of	120.00	158

11	Tues	3/14/2006	1	0500	1430	15	135.00		135.00	7.3		QE-929	58	rb	M
11	Tues	3/14/2006	1									VS-001	50	v-agn	V
11	Tues	3/14/2006	1									QE-535	15	io	M
11	Tues	3/14/2006	1									QE-522	20	or	M

7.30

Reg Hours	OT Hours	Total Hours	Gals Used
3/14/2006	Totals of	135.00	143

11	Wedn	3/15/2006	1	0500	1430	15	135.00		135.00	6.3		QE-522	28	or	M
11	Wedn	3/15/2006	1									VS-002	24	v-or	QE-647
11	Wedn	3/15/2006	1									VS-001	46	v-agn	V

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
11	Wedn	3/15/2006	1									QE-432	✓ 45	ig	M
11	Wedn	3/15/2006	1									QE-929	✓ 38	rb	M
6.30															
Reg Hours OT Hours Total Hours Gals Used															
3/15/2006 Totals of 135.00 135.00 181															
11	Thurs	3/16/2006	1	0500	1230	15	105.00		105.00	5.3		QE-572	✓ 108	py	M
11	Thurs	3/16/2006	1									VS-002	✓ 48	v-or	V
5.30															
Reg Hours OT Hours Total Hours Gals Used															
3/16/2006 Totals of 105.00 105.00 156															
11	Friday	3/17/2006	1	0500	1230	15	105.00		105.00	4.9		VS-001	✓ 55	v-agn	V
11	Friday	3/17/2006	1									QE-929	✓ 65	rb	M
11	Friday	3/17/2006	1									VS-002	✓ 8	v-or	V
4.90															
Reg Hours OT Hours Total Hours Gals Used															
3/17/2006 Totals of 105.00 105.00 128															
11	Satur	3/18/2006	1	0500	1430	15	135.00		135.00	7.7		QE-930	✓ 100	bl	M
11	Satur	3/18/2006	1									VS-001	✓ 50	v-agn	V
11	Satur	3/18/2006	1									QE-736	✓ 15	bftdp	M
7.70															
Reg Hours OT Hours Total Hours Gals Used															
3/18/2006 Totals of 135.00 135.00 165															
12	Mond	3/20/2006	1	0500	1430	15	135.00		135.00	7		VS-002	✓ 103	v-or	V
12	Mond	3/20/2006	1									QE-535	✓ 24	io	V
12	Mond	3/20/2006	1									QE-929	✓ 40	rb	M
12	Mond	3/20/2006	1									VS-001	✓ 14	v-agn	V
12	Mond	3/20/2006	1									QE-569	✓ 12	yl	M
7.00															
Reg Hours OT Hours Total Hours Gals Used															
3/20/2006 Totals of 135.00 135.00 193															
12	Tues	3/21/2006	1	0500	1530	14	140.00		140.00	7.8		QE-572	✓ 74	py	M
12	Tues	3/21/2006	1									QE-J204	✓ 24	bk	M
12	Tues	3/21/2006	1									QE-566	✓ 13	aor	M
12	Tues	3/21/2006	1									QE-647	✓ 12	gy	M
12	Tues	3/21/2006	1									VS-002	✓ 5	v-or	V
12	Tues	3/21/2006	1									QE-432	✓ 72	ig	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
7.80															
				Reg Hours		OT Hours		Total Hours		Gals Used					
				3/21/2006		Totals of		140.00		140.00		200			
12	Wedn	3/22/2006	1									VS-001	✓22	v-agn	V
12	Wedn	3/22/2006	1	0500	1200	15	90.00		90.00	4.6		QE-647	✓22	gy	M
12	Wedn	3/22/2006	1									QE-117	✓34	la	M
12	Wedn	3/22/2006	1									QE-535	✓45	lo	M
12	Wedn	3/22/2006	1									QE-569	✓9	yl	M
4.60															
				Reg Hours		OT Hours		Total Hours		Gals Used					
				3/22/2006		Totals of		90.00		90.00		132			
12	Thurs	3/23/2006	1	0500	1530	14	140.00		140.00	7.4		QE-930	✓34	bl	M
12	Thurs	3/23/2006	1									QE-734	✓19	kr	M
12	Thurs	3/23/2006	1									QE-569	✓40	yl	M
12	Thurs	3/23/2006	1									QE-432	✓7	ig	M
12	Thurs	3/23/2006	1									QE-466	✓7	agn	M
12	Thurs	3/23/2006	1									VS-002	✓58	v-or	V
7.40															
				Reg Hours		OT Hours		Total Hours		Gals Used					
				3/23/2006		Totals of		140.00		140.00		165			
12	Friday	3/24/2006	1	0500	1230	14	98.00		98.00	5.2		QE-522	✓55	or	M
12	Friday	3/24/2006	1									QE-J204	✓3	bk	M
12	Friday	3/24/2006	1									QE-117	✓5	la	M
12	Friday	3/24/2006	1									QE-466	✓32	agn	M
12	Friday	3/24/2006	1									QE-9003	✓34	tbl	M
5.20															
				Reg Hours		OT Hours		Total Hours		Gals Used					
				3/24/2006		Totals of		98.00		98.00		129			
12	Satur	3/25/2006	1	0500	1330	15	120.00		120.00	6.3		QE-9003	✓64	tbl	M
12	Satur	3/25/2006	1									VS-002	✓84	v-or	V
12	Satur	3/25/2006	1									QE-522	✓9	or	M
6.30															
				Reg Hours		OT Hours		Total Hours		Gals Used					
				3/25/2006		Totals of		120.00		120.00		157			
12	Sund	3/26/2006	1	0500	1330	15	120.00		120.00			QE-566	✓75	aor	M
12	Sund	3/26/2006	1									QE-572	✓87	py	M
12	Sund	3/26/2006	1									QE-466	✓46	agn	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
Reg Hours OT Hours Total Hours Gals Used															
				3/26/2006	Totals of	120.00			120.00			208			
13	Mond	3/27/2006	1	0500	1530	15	150.00		150.00	8.6		QE-647 ✓41	gy		M
13	Mond	3/27/2006	1									QE-466 ✓44	agn		M
13	Mond	3/27/2006	1									QE-713 ✓17	fr		M
13	Mond	3/27/2006	1									QE-9003 ✓6	tbl		M
13	Mond	3/27/2006	1									QE-664 ✓110	tgy		M
13	Mond	3/27/2006	1									QE-522 ✓10	or		M
13	Mond	3/27/2006	1									QE-572 ✓5	py		M
8.60															
Reg Hours OT Hours Total Hours Gals Used															
				3/27/2006	Totals of	150.00			150.00			233			
13	Tues	3/28/2006	1	0500	1630	15	165.00		165.00	7.4		QE-522 ✓95	or		M
13	Tues	3/28/2006	1									QE-929 ✓35	rb		M
13	Tues	3/28/2006	1									QE-570 ✓10	lor		M
13	Tues	3/28/2006	1									QE-466 ✓58	agn		M
7.40															
Reg Hours OT Hours Total Hours Gals Used															
				3/28/2006	Totals of	165.00			165.00			198			
13	Wedn	3/29/2006	1	0500	1630	15	165.00		165.00	8.2		QE-432 ✓5	ig		M
13	Wedn	3/29/2006	1									QE-535 ✓10	io		M
13	Wedn	3/29/2006	1									QE-466 ✓77	agn		M
13	Wedn	3/29/2006	1									QE-117 ✓12	la		M
13	Wedn	3/29/2006	1									QE-522 ✓30	or		M
13	Wedn	3/29/2006	1									QE-572 ✓81	py		M
8.20															
Reg Hours OT Hours Total Hours Gals Used															
				3/29/2006	Totals of	165.00			165.00			215			
13	Thurs	3/30/2006	1	0500	1730	15	180.00		180.00	9.1		QE-572 ✓75	py		M
13	Thurs	3/30/2006	1									QE-466 ✓33	agn		M
13	Thurs	3/30/2006	1									QE-478 ✓10	lgn		M
13	Thurs	3/30/2006	1									QE-522 ✓79	or		M
13	Thurs	3/30/2006	1									QE-415 ✓5	gn		M
13	Thurs	3/30/2006	1									QE-929 ✓7	rb		M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
9.10															
Reg Hours OT Hours Total Hours Gals Used															
3/30/2006 Totals of 180.00 180.00 209															
13	Friday	3/31/2006	1	0300	1200	15	135.00		135.00	6.8		QE-566 ✓	89	aor	M
13	Friday	3/31/2006	1									QE-466 ✓	50	agn	M
13	Friday	3/31/2006	1									QE-522 ✓	15	or	M
13	Friday	3/31/2006	1									QE-930 ✓	5	bl	M
6.80															
Reg Hours OT Hours Total Hours Gals Used															
3/31/2006 Totals of 135.00 135.00 159															
14	Mond	4/3/2006	1	0500	1430	15	135.00		135.00	7		QE-535 ✓	85	io	M
14	Mond	4/3/2006	1									QE-522 ✓	19	or	M
14	Mond	4/3/2006	1									QE-734 ✓	4	kr	M
14	Mond	4/3/2006	1									QE-929 ✓	36	rb	M
14	Mond	4/3/2006	1									QE-572 ✓	55	py	M
	Mond	4/03/2006										QE-522		or	M
	Mond	4/03/2006										QE-466		agn	M
	Mond	4/03/2006										QE-119		aw	M
	Mond	4/03/2006										QE-713		fr	M
	Mond	4/03/2006										QE-930		bl	M
	Mond	4/03/2006										QE-566		aor	M
	Mond	4/03/2006										QE-432		ig	M
	Mond	4/03/2006										QE-569		yl	M
7.00															
Reg Hours OT Hours Total Hours Gals Used															
4/03/2006 Totals of 135.00 135.00 199															
14	Tues	4/4/2006	1	0500	1330	15	120.00		120.00	6.1		QE-572 ✓	59	py	M
14	Tues	4/4/2006	1									QE-466 ✓	46	agn	M
14	Tues	4/4/2006	1									QE-432 ✓	22	ig	M
14	Tues	4/4/2006	1									QE-535 ✓	13	io	M
14	Tues	4/4/2006	1									QE-929 ✓	22	rb	M
6.10															
Reg Hours OT Hours Total Hours Gals Used															
4/4/2006 Totals of 120.00 120.00 162															
14	Wedn	4/5/2006	1	0500	1530	15	150.00		150.00	7.5		QE-930 ✓	32	bl	M
14	Wedn	4/5/2006	1									QE-522 ✓	32	or	M
14	Wedn	4/5/2006	1									QE-432 ✓	7	ig	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
14	Wedn	4/5/2006	1									QE-929	✓7	rb	M
14	Wedn	4/5/2006	1									QE-466	✓9	agn	M
14	Wedn	4/5/2006	1									QE-119	✓93	aw	M
14	Wedn	4/5/2006	1									QE-J204	✓12	bk	M
14	Wedn	4/5/2006	1									QE-572	✓20	py	M

7.50

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/5/2006			150.00	150.00	212
	Totals of			150.00	150.00	212

14	Thurs	4/6/2006	1									QE-535	✓64	io	M
14	Thurs	4/6/2006	1	0500	1330	15	120.00		120.00	5.7		QE-713	✓58	fr	M
14	Thurs	4/6/2006	1									QE-522	✓34	or	M
14	Thurs	4/6/2006	1									QE-119	✓34	aw	M
14	Thurs	4/6/2006	1									QE-535	✓13	io	M

5.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/6/2006			120.00	120.00	203
	Totals of			120.00	120.00	203

14	Friday	4/7/2006	1	0500	1230	15	105.00		105.00	5.5		QE-432	✓78	ig	M
14	Friday	4/7/2006	1									QE-466	✓19	agn	M
14	Friday	4/7/2006	1									QE-929	✓24	rb	M
14	Friday	4/7/2006	1									QE-713	✓34	fr	M
14	Friday	4/7/2006	1									QE-522	✓15	or	M

5.50

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/7/2006			105.00	105.00	170
	Totals of			105.00	105.00	170

14	Satur	4/8/2006	1	0500	1330	15	120.00		120.00	6		QE-522	✓94	or	M
14	Satur	4/8/2006	1									QE-929	✓15	rb	M
14	Satur	4/8/2006	1									QE-713	✓48	fr	M

6.00

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/8/2006			120.00	120.00	157
	Totals of			120.00	120.00	157

15	Mond	4/10/2006	1	0500	1430	15	135.00		135.00	7		QE-713	✓36	fr	M
15	Mond	4/10/2006	1									QE-466	✓35	agn	M
15	Mond	4/10/2006	1									QE-J204	✓19	bk	M
15	Mond	4/10/2006	1									QE-119	✓86	aw	M

7.00

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/10/2006			135.00	135.00	176
	Totals of			135.00	135.00	176

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
15	Tues	4/11/2006	1	0500	1330	15	120.00		120.00	6		QE-929 ✓	29	rb	M
15	Tues	4/11/2006	1									QE-466 ✓	116	agn	M
15	Tues	4/11/2006	1									QE-441 ✓	24	mcg	M

6.00

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/11/2006	Totals of	120.00		120.00	169

15	Wedn	4/12/2006	1	0500	1330	15	120.00		120.00	6.3		QE-585 ✓	86	for	M
15	Wedn	4/12/2006	1									QE-522 ✓	14	or	M
15	Wedn	4/12/2006	1									QE-466 ✓	47	agn	M

6.30

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/12/2006	Totals of	120.00		120.00	147

15	Thurs	4/13/2006	1	0500	1530	15	150.00		150.00	7.1		QE-441 ✓	5	mcg	M
15	Thurs	4/13/2006	1									QE-117 ✓	34	la	M
15	Thurs	4/13/2006	1									QE-147 ✓	15	dw	M
15	Thurs	4/13/2006	1									QE-930 ✓	12	bl	M
15	Thurs	4/13/2006	1									QE-647 ✓	12	gy	M
15	Thurs	4/13/2006	1									QE-713 ✓	91	fr	M
15	Thurs	4/13/2006	1									QE-466 ✓	50	agn	M

7.10

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/13/2006	Totals of	150.00		150.00	219

Friday 04/14/2006

VS-001 X v-agn V

Friday 04/14/2006

VS-002 X v-or V

15	Friday	4/14/2006	1	0500	1230	15	105.00		105.00	5.5		QE-J204 ✓	12	bk	M
15	Friday	4/14/2006	1									QE-117 ✓	9	la	M
15	Friday	4/14/2006	1									QE-147 ✓	5	dw	M
15	Friday	4/14/2006	1									QE-522 ✓	56	or	M
15	Friday	4/14/2006	1									QE-466 ✓	41	agn	M
15	Friday	4/14/2006	1									QE-930 ✓	15	bl	M
15	Friday	4/14/2006	1									QE-119 ✓	12	aw	M

5.50

		Reg Hours	OT Hours	Total Hours	Gals Used	
	4/14/2006	Totals of	105.00		105.00	150

15	Satur	4/15/2006	1	0500	1430	15	135.00		135.00	6.7		QE-119 ✓	94	aw	M
15	Satur	4/15/2006	1									QE-713 ✓	79	fr	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
----	-----	-----------	-------	------------	-----------	---------	-----------	----------	-------------	-----------	-----------	------	------	-------	--------

6.70

Reg Hours OT Hours Total Hours Gals Used

4/15/2006	Totals of	135.00	135.00	173
-----------	-----------	--------	--------	-----

16	Mond	4/17/2006	1	0500	1430	15	135.00		135.00	6.7		QE-466	✓54	agn	M
16	Mond	4/17/2006	1									QE-713	✓60	fr	M
16	Mond	4/17/2006	1									QE-119	✓55	aw	M
16	Mond	4/17/2006	1									QE-929	✓12	rb	M
16	Mond	4/17/2006	1									QE-522	✓4	or	M

6.70

Reg Hours OT Hours Total Hours Gals Used

4/17/2006	Totals of	135.00	135.00	185
-----------	-----------	--------	--------	-----

16	Tues	4/18/2006	1	0500	1430	15	135.00		135.00	6.6		QE-569	✓41	yl	M
16	Tues	4/18/2006	1									QE-466	✓79	agn	M
16	Tues	4/18/2006	1									QE-522	✓55	or	M
16	Tues	4/18/2006	1									QE-929	✓3	rb	M
16	Tues	4/18/2006	1									QE-432	✓3	ig	M

6.60

Reg Hours OT Hours Total Hours Gals Used

4/18/2006	Totals of	135.00	135.00	181
-----------	-----------	--------	--------	-----

16	Wedn	4/19/2006	1	0500	1630	14	154.00		154.00	8.1		QE-466	✓63	agn	M
16	Wedn	4/19/2006	1									QE-522	✓84	or	M
16	Wedn	4/19/2006	1									QE-647	✓32	gy	M
16	Wedn	4/19/2006	1									QE-964	✓17	rbl	M

8.10

Reg Hours OT Hours Total Hours Gals Used

4/19/2006	Totals of	154.00	154.00	196
-----------	-----------	--------	--------	-----

16	Thurs	4/20/2006	1	0500	1530	14	140.00		140.00	8.5		QE-647	✓34	gy	M
16	Thurs	4/20/2006	1									QE-734	✓5	kr	M
16	Thurs	4/20/2006	1									QE-929	✓5	rb	M
16	Thurs	4/20/2006	1									QE-649	✓3	kwg	M
16	Thurs	4/20/2006	1									QE-466	✓77	agn	M
16	Thurs	4/20/2006	1									QE-522	✓54	or	M
16	Thurs	4/20/2006	1									QE-930	✓24	bl	M
16	Thurs	4/20/2006	1									QE-415	✓3	gn	M

8.50

Reg Hours OT Hours Total Hours Gals Used

4/20/2006	Totals of	140.00	140.00	205
-----------	-----------	--------	--------	-----

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
16	Friday	4/21/2006	1	0500	1430	15	135.00		135.00	6.6		QE-569	✓44	yl	M
16	Friday	4/21/2006	1	0500	1230	15	105.00		105.00	502		QE-929	✓13	rb	M
16	Friday	4/21/2006	1									QE-566	✓7	aor	M
16	Friday	4/21/2006	1									QE-647	✓3	gy	M
16	Friday	4/21/2006	1									QE-522	✓45	or	M
16	Friday	4/21/2006	1									QE-117	✓10	la	M
16	Friday	4/21/2008	1									QE-713	✓4	fr	M
16	Friday	4/21/2006	1									QE-849	✓3	kwg	M
16	Friday	4/21/2006	1									QE-J204	✓2	bk	M

508.60

		Reg Hours	OT Hours	Total Hours	Gals Used
4/21/2006	Totals of	240.00		240.00	131

16	Satur	4/22/2006	1	0500	1430	15	135.00		135.00	6.7					
16	Satur	4/22/2006	1									QE-522	✓22	or	M
16	Satur	4/22/2006	1									QE-432	✓31	ig	M
16	Satur	4/22/2006	1									QE-466	✓74	agn	M
16	Satur	4/22/2006	1									QE-930	✓29	bl	M

6.70

		Reg Hours	OT Hours	Total Hours	Gals Used
4/22/2006	Totals of	135.00		135.00	156

Mond	04/24/2006											QE-119		aw	M
Mond	04/24/2006											QE-147		dw	M
Mond	04/24/2006											QE-535		io	M
Mond	04/24/2006											QE-432		ig	M
Mond	04/24/2006											QE-117		la	M
Mond	04/24/2006											QE-569		yl	M
17	Mond	4/24/2006	1	0500	1430	15	135.00		135.00	7.4		QE-441	✓8	mcg	M
17	Mond	4/24/2006	1									QE-535	✓17	io	M
17	Mond	4/24/2006	1									QE-713	✓30	fr	M
17	Mond	4/24/2006	1									QE-930	✓38	bl	M
17	Mond	4/24/2006	1									QE-522	✓46	or	M
17	Mond	4/24/2006	1									QE-466	✓5	agn	M
17	Mond	4/24/2006	1									QE-119	✓55	aw	M

7.40

		Reg Hours	OT Hours	Total Hours	Gals Used
4/24/2006	Totals of	135.00		135.00	199

17	Tues	4/25/2006	1	0500	1430	15	135.00		135.00	6.9		QE-522	✓110	or	M
----	------	-----------	---	------	------	----	--------	--	--------	-----	--	--------	------	----	---

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor																
17	Tues	4/25/2006	1									QE-466	79	agn	M																
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Reg Hours</th> <th>OT Hours</th> <th>Total Hours</th> <th colspan="2"></th> <th>Gals Used</th> </tr> </thead> <tbody> <tr> <td>6.90</td> <td>4/25/2006</td> <td>Totals of</td> <td>135.00</td> <td></td> <td>135.00</td> <td></td> <td>189</td> </tr> </tbody> </table>																		Reg Hours	OT Hours	Total Hours			Gals Used	6.90	4/25/2006	Totals of	135.00		135.00		189
		Reg Hours	OT Hours	Total Hours			Gals Used																								
6.90	4/25/2006	Totals of	135.00		135.00		189																								
17	Wedn	4/26/2006	1	0500	1530	15	150.00		150.00	7.5		QE-466	64	agn	M																
17	Wedn	4/26/2006	1									QE-415	27	gn	M																
17	Wedn	4/26/2006	1									QE-522	30	or	M																
17	Wedn	4/26/2006	1									QE-432	49	ig	M																
17	Wedn	4/26/2006	1									QE-522	30	or	M																
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Reg Hours</th> <th>OT Hours</th> <th>Total Hours</th> <th colspan="2"></th> <th>Gals Used</th> </tr> </thead> <tbody> <tr> <td>7.50</td> <td>4/26/2006</td> <td>Totals of</td> <td>150.00</td> <td></td> <td>150.00</td> <td></td> <td>200</td> </tr> </tbody> </table>																		Reg Hours	OT Hours	Total Hours			Gals Used	7.50	4/26/2006	Totals of	150.00		150.00		200
		Reg Hours	OT Hours	Total Hours			Gals Used																								
7.50	4/26/2006	Totals of	150.00		150.00		200																								
17	Thurs	4/27/2006	1	0500	1330	15	135.00		135.00	6.3		QE-466	42	agn	M																
17	Thurs	4/27/2006	1									QE-713	10	fr	M																
17	Thurs	4/27/2006	1									QE-647	9	gy	M																
17	Thurs	4/27/2006	1									QE-522	17	or	M																
17	Thurs	4/27/2006	1									QE-930	49	bl	M																
17	Thurs	4/27/2006	1									QE-119	15	aw	M																
17	Thurs	4/27/2006	1									QE-117	5	la	M																
17	Thurs	4/27/2006	1									QE-535	42	io	M																
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Reg Hours</th> <th>OT Hours</th> <th>Total Hours</th> <th colspan="2"></th> <th>Gals Used</th> </tr> </thead> <tbody> <tr> <td>6.30</td> <td>4/27/2006</td> <td>Totals of</td> <td>135.00</td> <td></td> <td>135.00</td> <td></td> <td>189</td> </tr> </tbody> </table>																		Reg Hours	OT Hours	Total Hours			Gals Used	6.30	4/27/2006	Totals of	135.00		135.00		189
		Reg Hours	OT Hours	Total Hours			Gals Used																								
6.30	4/27/2006	Totals of	135.00		135.00		189																								
17	Friday	4/28/2006	1	0500	1230	14	98.00		98.00	6		QE-522	119	or	M																
17	Friday	4/28/2006	1									QE-432	2	ig	M																
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Reg Hours</th> <th>OT Hours</th> <th>Total Hours</th> <th colspan="2"></th> <th>Gals Used</th> </tr> </thead> <tbody> <tr> <td>6.00</td> <td>4/28/2006</td> <td>Totals of</td> <td>98.00</td> <td></td> <td>98.00</td> <td></td> <td>121</td> </tr> </tbody> </table>																		Reg Hours	OT Hours	Total Hours			Gals Used	6.00	4/28/2006	Totals of	98.00		98.00		121
		Reg Hours	OT Hours	Total Hours			Gals Used																								
6.00	4/28/2006	Totals of	98.00		98.00		121																								
17	Satur	4/29/2006	1	0500	1430	15	135.00		135.00	7.8		QE-466	111	agn	M																
17	Satur	4/29/2006	1									QE-522	80	or	M																
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Reg Hours</th> <th>OT Hours</th> <th>Total Hours</th> <th colspan="2"></th> <th>Gals Used</th> </tr> </thead> <tbody> <tr> <td>7.80</td> <td>4/29/2006</td> <td>Totals of</td> <td>135.00</td> <td></td> <td>135.00</td> <td></td> <td>191</td> </tr> </tbody> </table>																		Reg Hours	OT Hours	Total Hours			Gals Used	7.80	4/29/2006	Totals of	135.00		135.00		191
		Reg Hours	OT Hours	Total Hours			Gals Used																								
7.80	4/29/2006	Totals of	135.00		135.00		191																								
18	Mond	5/1/2006	1	0500	1330	13	104.00		104.00	5.8		QE-466	159	agn	M																
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Reg Hours</th> <th>OT Hours</th> <th>Total Hours</th> <th colspan="2"></th> <th>Gals Used</th> </tr> </thead> <tbody> <tr> <td>5.80</td> <td>5/1/2006</td> <td>Totals of</td> <td>104.00</td> <td></td> <td>104.00</td> <td></td> <td>159</td> </tr> </tbody> </table>																		Reg Hours	OT Hours	Total Hours			Gals Used	5.80	5/1/2006	Totals of	104.00		104.00		159
		Reg Hours	OT Hours	Total Hours			Gals Used																								
5.80	5/1/2006	Totals of	104.00		104.00		159																								

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
18	Tues	5/2/2006	1	0500	1430	15	135.00		135.00	7.1		QE-522	✓116	or	M
18	Tues	5/2/2006	1									QE-466	✓98	agn	M
18	Tues	5/2/2006	1									VS-001	0	v-agn	V

7.10

Reg Hours	OT Hours	Total Hours	Gals Used
135.00		135.00	214
5/2/2006	Totals of	135.00	214

18	Wedn	5/3/2006	1	0500	1430	15	135.00		135.00	6.5		QE-522	✓77	or	M
18	Wedn	5/3/2006	1									QE-566	✓22	aor	M
18	Wedn	5/3/2006	1									QE-572	✓29	py	M
18	Wedn	5/3/2006	1									VS-001	✓65	v-agn	V

6.50

Reg Hours	OT Hours	Total Hours	Gals Used
135.00		135.00	193
5/3/2006	Totals of	135.00	193

18	Thurs	5/4/2006	1	0500	1430	15	135.00		135.00	7		QE-119	✓22	aw	M
18	Thurs	5/4/2006	1									QE-J204	✓20	bk	M
18	Thurs	5/4/2006	1									QE-415	✓9	gn	M
18	Thurs	5/4/2006	1									QE-572	✓81	py	M
18	Thurs	5/4/2006	1									QE-522	✓13	or	M
18	Thurs	5/4/2006	1									VS-001	✓29	v-agn	V
18	Thurs	5/4/2006	1									QE-647	✓29	gy	M

7.00

Reg Hours	OT Hours	Total Hours	Gals Used
135.00		135.00	203
5/4/2006	Totals of	135.00	203

18	Friday	5/5/2006	1	0500	1230	15	105.00		105.00	5.8		QE-930	✓95	bl	M
18	Friday	5/5/2006	1									VS-001	✓104	v-agn	V
18	Friday	5/5/2006	1									QE-522	✓79	or	M

5.80

Reg Hours	OT Hours	Total Hours	Gals Used
105.00		105.00	198
5/5/2006	Totals of	105.00	198

18	Satur	5/6/2006	1	0500	1230	14	98.00		98.00	4.6		QE-522	✓72	or	M
18	Satur	5/6/2006	1									VS-001	✓55	v-agn	V

4.60

Reg Hours	OT Hours	Total Hours	Gals Used
98.00		98.00	127
5/6/2006	Totals of	98.00	127

19	Tues	5/9/2006	1	0900	1430	14	70.00		70.00	5.6		QE-929	✓3	rb	M
19	Tues	5/9/2006	1									QE-930	✓5	bl	M
19	Tues	5/9/2006	1									QE-119	✓5	aw	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
19	Tues	5/9/2006	1									QE-119	✓ 5	aw	M
19	Tues	5/9/2006	1									QE-147	✓ 9	dw	M
19	Tues	5/9/2006	1									QE-572	✓ 10	py	M
19	Tues	5/9/2006	1									QE-522	✓ 95	or	M
19	Tues	5/9/2006	1									VS-001	✓ 20	v-agn	V

5.60			Reg Hours	OT Hours	Total Hours	Gals Used	
	5/9/2006	Totals of	70.00			70.00	152

19	Wedn	5/10/2006	1	0500	1330	14	112.00		112.00	5.1		QE-569	✓ 15	yl	M
19	Wedn	5/10/2006	1									VS-001	✓ 61	v-agn	V
19	Wedn	5/10/2006	1									VS-002	✓ 26	v-or	V
19	Wedn	5/10/2006	1									QE-930	✓ 12	bl	M

5.10			Reg Hours	OT Hours	Total Hours	Gals Used	
	5/10/2006	Totals of	112.00			112.00	114

19	Thurs	5/11/2006	1	0500	1330	14	112.00		112.00	5.9		QE-466	✓ 50	agn	M
19	Thurs	5/11/2006	1									QE-432	✓ 3	ig	M
19	Thurs	5/11/2006	1									QE-930	✓ 5	bl	M
19	Thurs	5/11/2006	1									QE-647	✓ 19	gy	M
19	Thurs	5/11/2006	1									QE-415	✓ 5	gn	M
19	Thurs	5/11/2006	1									QE-535	✓ 3	io	M
19	Thurs	5/11/2006	1									QE-147	✓ 17	dw	M
19	Thurs	5/11/2006	1									VS-002	✓ 37	v-or	V

5.90			Reg Hours	OT Hours	Total Hours	Gals Used	
	5/11/2006	Totals of	112.00			112.00	139

19	Friday	5/12/2006	1	0500	1230	14	98.00		98.00	5.2		VS-002	✓ 44	v-or	V
19	Friday	5/12/2006	1									QE-466	✓ 50	agn	M
19	Friday	5/12/2006	1									QE-9003	✓ 3		M

5.20			Reg Hours	OT Hours	Total Hours	Gals Used	
	5/12/2006	Totals of	98.00			98.00	97

19	Satur	5/13/2006	1	0500	0900	11	33.00		33.00	5		QE-466	✓ 31	agn	M
----	-------	-----------	---	------	------	----	-------	--	-------	---	--	--------	------	-----	---

5.00			Reg Hours	OT Hours	Total Hours	Gals Used	
	5/13/2006	Totals of	33.00			33.00	31

20	Mond	5/15/2006	1	0500	0900	15	60.00		60.00	2.5		VS-002	✓ 27	v-or	V
----	------	-----------	---	------	------	----	-------	--	-------	-----	--	--------	------	------	---

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	Color/Time	Code	Gals	Color	Vendor
20	Mond	5/15/2006	1									QE-572	✓19	py	M
20	Mond	5/15/2006	1									QE-466	✓36	agn	M

2.50

		Reg Hours	OT Hours	Total Hours	Gals Used	
	5/15/2006	Totals of	60.00		60.00	82

20	Tues	5/16/2006	1	0500	1330	15	120.00		120.00	6.2		QE-466	✓29	agn	M
20	Tues	5/16/2006	1									QE-535	✓13	io	M
20	Tues	5/16/2006	1									QE-572	✓34	py	M
20	Tues	5/16/2006	1									VS-002	✓60	v-or	M

6.20

		Reg Hours	OT Hours	Total Hours	Gals Used	
	5/16/2006	Totals of	120.00		120.00	136

20	Wedn	5/17/2006	1	0500	1330	15	120.00		120.00	5.5		QE-432	✓10	lg	M
20	Wedn	5/17/2006	1									VS-002	✓36	v-or	M
20	Wedn	5/17/2006	1									QE-466	✓71	agn	M
20	Wedn	5/17/2006	1									QE-929	✓9	rb	M
20	Wedn	5/17/2006	1									QE-572	✓22	py	M

5.50

		Reg Hours	OT Hours	Total Hours	Gals Used	
	5/17/2006	Totals of	120.00		120.00	148

20	Thurs	5/18/2006	1	0500	1430	15	135.00		135.00	6.6		VS-002	✓36	v-or	V
20	Thurs	5/18/2006	1									QE-466	✓58	agn	M
20	Thurs	5/18/2006	1									QE-572	✓36	py	M
20	Thurs	5/18/2006	1									QE-930	✓5	bl	M
20	Thurs	5/18/2006	1									QE-647	✓7	gy	M
20	Thurs	5/18/2006	1									QE-569	✓10	yl	M
20	Thurs	5/18/2006	1									QE-J204	✓5	bk	M

6.60

		Reg Hours	OT Hours	Total Hours	Gals Used	
	5/18/2006	Totals of	135.00		135.00	157

20	Friday	5/19/2006	1	0500	1230	15	105.00		105.00	5.3		VS-002	✓63	v-or	V
20	Friday	5/19/2006	1									QE-647	✓2	gy	M
20	Friday	5/19/2006	1									QE-J204	✓2	bk	M
20	Friday	5/19/2006	1									QE-466	✓10	agn	M
20	Friday	5/19/2006	1									QE-464	✓55	agn	M
20	Friday	5/19/2006	1									QE-441	✓5	mcs	M

WK Day Date Used Shift Start Time Qult Time Persons Reg Hours OT Hours Total Hours Line Time ColorTime Code Gals Color Vendor

5.30

Reg Hours OT Hours Total Hours Gals Used

5/19/2006	Totals of	105.00	105.00	137
-----------	-----------	--------	--------	-----

21	Mond	5/22/2006	1	0500	1330	15	120.00		120.00	7.1	QE-415 ✓	7	gn	M
21	Mond	5/22/2006	1								QE-572 ✓	2	py	M
21	Mond	5/22/2006	1								QE-464 ✓	86	agn	M
21	Mond	5/22/2006	1								QE-522 ✓	38	or	M

7.10

Reg Hours OT Hours Total Hours Gals Used

5/22/2006	Totals of	120.00	120.00	133
-----------	-----------	--------	--------	-----

21	Tues	5/23/2006	1	0500	1430	15	135.00		135.00	6.6	QE-464 ✓	87	agn	M
21	Tues	5/23/2006	1								QE-542 ✓	71	or	M
21	Tues	5/23/2006	1								QE-929 ✓	14	rb	M

6.60

Reg Hours OT Hours Total Hours Gals Used

5/23/2006	Totals of	135.00	135.00	172
-----------	-----------	--------	--------	-----

21	Wedn	5/24/2006	1	0500	1530	15	150.00		150.00	8.3	QE-713 ✓	19	fr	M
21	Wedn	5/24/2006	1								QE-581 ✓	62	smy	M
21	Wedn	5/24/2006	1								QE-647 ✓	3	gy	M
21	Wedn	5/24/2006	1								QE-964 ✓	19	rbl	M
21	Wedn	5/24/2006	1								QE-566 ✓	7	aor	M
21	Wedn	5/24/2006	1								QE-542 ✓	46	or	M
21	Wedn	5/24/2006	1								QE-464 ✓	20	agn	M

8.30

Reg Hours OT Hours Total Hours Gals Used

5/24/2006	Totals of	150.00	150.00	176
-----------	-----------	--------	--------	-----

21	Thurs	5/25/2006	1	0500	1430	15	135.00		135.00	6.9	QE-647	56 ✓	gy	M
21	Thurs	5/25/2006	1								QE-542	25 ✓	or	M
21	Thurs	5/25/2006	1								QE-464	82 ✓	agn	M

6.90

Reg Hours OT Hours Total Hours Gals Used

5/25/2006	Totals of	135.00	135.00	163
-----------	-----------	--------	--------	-----

21	Friday	5/26/2006	1	0500	1230	15	105.00		105.00	6.2	QE-464 ✓	46	agn	M
21	Friday	5/26/2006	1								QE-542 ✓	83	or	M
21	Friday	5/26/2006	1								QE-432 ✓	2	ig	M

WK Day Date Used Shift Start Time Quit Time Persons Reg Hours OT Hours Total Hours Line Time ColorTime Code Gals Color Vendor

6.20

Reg Hours OT Hours Total Hours Gals Used

5/26/2006	Totals of	105.00	105.00	131
-----------	-----------	--------	--------	-----

22	Tues	5/30/2006	1	0500	1530	15	150.00		150.00	7.4	QE-464	✓46	agn	M
22	Tues	5/30/2006	1								QE-542	✓36	or	M
22	Tues	5/30/2006	1								QE-441	✓27	mcg	M
22	Tues	5/30/2006	1								QE-569	✓50	yl	M
22	Tues	5/30/2006	1								QE-930	✓19	bl	M

7.40

Reg Hours OT Hours Total Hours Gals Used

5/30/2006	Totals of	150.00	150.00	178
-----------	-----------	--------	--------	-----

22	Wedn	5/31/2006	1	0500	1530	15	150.00		150.00	7.4	QE-432	✓4	ig	M
22	Wedn	5/31/2006	1								QE-441	✓24	mcg	M
22	Wedn	5/31/2006	1								QE-647	✓9	gy	M
22	Wedn	5/31/2006	1								QE-464	✓42	agn	M
22	Wedn	5/31/2006	1								VS-001	✓15	v-agn	V
22	Wedn	5/31/2006	1								QE-930	✓22	bl	M
22	Wedn	5/31/2006	1								QE-542	✓46	or	M
22	Wedn	5/31/2006	1								VS-002	✓13	v-or	V

To here 7.40

Reg Hours OT Hours Total Hours Gals Used

5/31/2006	Totals of	150.00	150.00	175
-----------	-----------	--------	--------	-----

22	Thurs	6/1/2006	1	0500	1430	15	135.00		135.00	7	QE-930	✓41	bl	M
22	Thurs	6/1/2006	1								VS-001	✓40	v-agn	V
22	Thurs	6/1/2006	1								VS-002	✓42	v-or	V
22	Thurs	6/1/2006	1								QE-572	✓40	py	M

start
4/7

5/26
4/7

7.00

Reg Hours OT Hours Total Hours Gals Used

6/1/2006	Totals of	135.00	135.00	163
----------	-----------	--------	--------	-----

22	Friday	6/2/2006	1	0500	1330	15	120.00		120.00	5.2	QE-119	✓2	aw	M
22	Friday	6/2/2006	1								QE-929	✓5	rb	M
22	Friday	6/2/2006	1								QE-535	✓1	io	M
22	Friday	6/2/2006	1								QE-552	✓89	py	M
22	Friday	6/2/2006	1								QE-542	✓29	or	M
22	Friday	6/2/2006	1								VS-001	✓48	v-agn	V

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
----	-----	-----------	-------	------------	-----------	---------	-----------	----------	-------------	-----------	-----------	------	------	-------	--------

5.20

Reg Hours OT Hours Total Hours Gals Used

6/2/2006	Totals of	120.00	120.00	174
----------	-----------	--------	--------	-----

22	Satur	6/3/2006	1	0500	1330	15	120.00		120.00	6.6		QE-464	96	agn	M
22	Satur	6/3/2006	1									QE-954	78	bl	M

6.60

Reg Hours OT Hours Total Hours Gals Used

6/3/2006	Totals of	120.00	120.00	174
----------	-----------	--------	--------	-----

23	Mond	6/5/2006	1	0500	1430	15	135.00		135.00	5.6		QE-929	7	rb	M
23	Mond	6/5/2006	1									QE-930	3	bl	M
23	Mond	6/5/2006	1									QE-113	13	aow	M
23	Mond	6/5/2006	1									QE-119	17	aw	M
23	Mond	6/5/2006	1									QE-542	45	or	M
23	Mond	6/5/2006	1									QE-552	73	py	M
23	Mond	6/5/2006	1									QE-464	10	agn	M

5.60

Reg Hours OT Hours Total Hours Gals Used

6/5/2006	Totals of	135.00	135.00	168
----------	-----------	--------	--------	-----

23	Tues	6/6/2006	1	0500	1430	14	126.00		126.00	6.6		QE-552	91	py	M
23	Tues	6/6/2006	1									QE-569	14	yl	M
23	Tues	6/6/2006	1									QE-138	20	dw	M
23	Tues	6/6/2006	1									QE-464	52	agn	M

6.60

Reg Hours OT Hours Total Hours Gals Used

6/6/2006	Totals of	126.00	126.00	177
----------	-----------	--------	--------	-----

23	Wedn	6/7/2006	1	0500	1430	14	126.00		126.00	6.8		QE-464	97	agn	M
23	Wedn	6/7/2006	1									QE-915	15	tq	M
23	Wedn	6/7/2006	1									QE-542	83	or	M

6.80

Reg Hours OT Hours Total Hours Gals Used

6/7/2006	Totals of	126.00	126.00	195
----------	-----------	--------	--------	-----

23	Thurs	6/8/2006	1	0500	1430	14	126.00		126.00	6.7		QE-542	34	or	M
23	Thurs	6/8/2006	1									QE-626	75	gy	M
23	Thurs	6/8/2006	1									QE-135	29	aow	M
23	Thurs	6/8/2006	1									QE-552	54	py	M
23	Thurs	6/8/2006	1									QE-432	3	ig	M
23	Thurs	6/8/2006	1									QE-535	2	io	M

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
6.70															
Reg Hours OT Hours Total Hours Gals Used															
6/8/2006 Totals of 126.00 126.00 197															
23	Friday	6/9/2006	1	0500	1320	14	98.00		98.00	4.9		QE-535	✓9	io	M
23	Friday	6/9/2006	1									QE-552	✓96	py	M
23	Friday	6/9/2006	1									QE-542	✓30	or	M
23	Friday	6/9/2006	1									QE-626	✓15	gy	M
4.90															
Reg Hours OT Hours Total Hours Gals Used															
6/9/2006 Totals of 98.00 98.00 150															
23	Satur	6/10/2006	1	0500	1330	15	120.00		120.00	6.3		QE-626	✓74	gy	M
23	Satur	6/10/2006	1									QE-464	✓27	agn	M
23	Satur	6/10/2006	1									VS-001	✓71	v-agn	V
6.30															
Reg Hours OT Hours Total Hours Gals Used															
6/10/2006 Totals of 120.00 120.00 172															
24	Mond	6/12/2006	1	0500	1430	15	135.00		135.00	6.6		QE-552	✓43	py	M
24	Mond	6/12/2006	1									QE-542	✓44	or	M
24	Mond	6/12/2006	1									QE-535	✓13	io	M
24	Mond	6/12/2006	1									VS-001	✓5	v-agn	V
24	Mond	6/12/2006	1									QE-626	✓79	gy	M
6.60															
Reg Hours OT Hours Total Hours Gals Used															
6/12/2006 Totals of 135.00 135.00 184															
24	Tues	6/13/2006	1	0500	1430	15	135.00		135.00	6.6		VS-001	✓82	v-agn	V
24	Tues	6/13/2006	1									QE-464	✓15	agn	M
24	Tues	6/13/2006	1									QE-542	✓10	or	M
24	Tues	6/13/2006	1									QE-954	✓27	bl	M
24	Tues	6/13/2006	1									QE-552	✓36	py	M
6.60															
Reg Hours OT Hours Total Hours Gals Used															
6/13/2006 Totals of 135.00 135.00 170															
24	Wedn	6/14/2006	1	0500	1430	15	135.00		135.00	6.4		QE-464	✓115	agn	M
24	Wedn	6/14/2006	1									VS-002	✓55	v-or	V
6.40															
Reg Hours OT Hours Total Hours Gals Used															
6/14/2006 Totals of 135.00 135.00 170															

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
24	Thurs	6/15/2006	1	0500	1630	15	165.00		165.00	7.7		QE-569	✓17	yl	M
24	Thurs	6/15/2006	1									QE-734	✓40	kr	M
24	Thurs	6/15/2006	1									QE-432	✓24	ig	M
24	Thurs	6/15/2006	1									QE-862	✓43	csb-b	M
24	Thurs	6/15/2006	1									QE-464	✓9	agn	M
24	Thurs	6/15/2006	1									QE-443	✓3	mcg	M
24	Thurs	6/15/2006	1									QE-535	✓10	io	M
24	Thurs	6/15/2006	1									QE-542	✓43	or	M

7.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	6/15/2006	Totals of	165.00		165.00	189

24	Friday	6/16/2006	1	0500	1230	15	15.00		15.00	4.8		QE-542	✓42	or	M
24	Friday	6/16/2006	1									QE-964	✓10	rbl	M
24	Friday	6/16/2006	1									QE-464	✓6	agn	M
24	Friday	6/16/2006	1									QE-626	✓30	gy	M
24	Friday	6/16/2006	1									QE-J204	✓2	bk	M
24	Friday	6/16/2006	1									QE-863	✓60	op	M

4.80

		Reg Hours	OT Hours	Total Hours	Gals Used	
	6/16/2006	Totals of	15.00		15.00	150

24	Satur	6/17/2006	1	0500	1330	14	112.00		112.00	6.1		QE-542	✓147	or	M
24	Satur	6/17/2006	1									QE-535	✓13	io	M

6.10

		Reg Hours	OT Hours	Total Hours	Gals Used	
	6/17/2006	Totals of	112.00		112.00	160

25	Mond	6/19/2006	1	0500	1430	14	126.00		126.00	7.2		QE-552	✓34	py	M
25	Mond	6/19/2006	1									QE-862	✓12	csb-b	M
25	Mond	6/19/2006	1									QE-464	✓190	agn	M

7.20

		Reg Hours	OT Hours	Total Hours	Gals Used	
	6/19/2006	Totals of	126.00		126.00	236

25	Tues	6/20/2006	1	0500	1430	14	126.00		126.00	6.4		QE-117	✓10	la	M
25	Tues	6/20/2006	1									QE-535	✓31	io	M
25	Tues	6/20/2006	1									QE-464	✓77	agn	M
25	Tues	6/20/2006	1									QE-522	✓67	or	M

WK Day Date Used Shift Start Time Quit Time Persons Reg Hours OT Hours Total Hours Line Time ColorTime Code Gals Color Vendor

6.40

Reg Hours OT Hours Total Hours Gals Used

6/20/2006	Totals of	126.00	126.00	185
-----------	-----------	--------	--------	-----

25	Wedn	6/21/2006	1	0500	1530	15	150.00		150.00	6.9	QE-626	69	gy	M
25	Wedn	6/21/2006	1								QE-522	43	or	M
25	Wedn	6/21/2006	1								QE-542	26	or	M
25	Wedn	6/21/2006	1								QE-464	14	agn	M
25	Wedn	6/21/2006	1								QE-119	17	aw	M
25	Wedn	6/21/2006	1								QE-117	27	la	M

6.90

Reg Hours OT Hours Total Hours Gals Used

6/21/2006	Totals of	150.00	150.00	196
-----------	-----------	--------	--------	-----

25	Thurs	6/22/2006	1	0500	1630	14	140.00		140.00	7.3	QE-626	60	gy	M
25	Thurs	6/22/2006	1								QE-464	48	agn	M
25	Thurs	6/22/2006	1								QE-542	47	or	M
25	Thurs	6/22/2006	1								QE-535	22	io	M
25	Thurs	6/22/2006	1								QE-954	5	bl	M
25	Thurs	6/22/2006	1								QE-468	7	aog	M

7.30

Reg Hours OT Hours Total Hours Gals Used

6/22/2006	Totals of	140.00	140.00	189
-----------	-----------	--------	--------	-----

25	Friday	6/23/2006	1	0500	1230	15	105.00		105.00	5.4	QE-464	14	agn	M
25	Friday	6/23/2006	1								QE-929	12	rb	M
25	Friday	6/23/2006	1								QE-J204	10	bk	M
25	Friday	6/23/2006	1								QE-569	35	yl	M
25	Friday	6/23/2006	1								QE-552	30	py	M
25	Friday	6/23/2006	1								QE-545	36	io	M

5.40

Reg Hours OT Hours Total Hours Gals Used

6/23/2006	Totals of	105.00	105.00	137
-----------	-----------	--------	--------	-----

25	Satur	6/24/2006	1	0500	1330	15	120.00		120.00	6.2	QE-545	43	io	M
25	Satur	6/24/2006	1								QE-522	12	or	M
25	Satur	6/24/2006	1								VS-002	55	v-or	V
25	Satur	6/24/2006	1								QE-464	67	agn	M

6.20

Reg Hours OT Hours Total Hours Gals Used

6/24/2006	Totals of	120.00	120.00	177
-----------	-----------	--------	--------	-----

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
26	Mond	6/26/2006	1	0500	1430	15	135.00		135.00	7		QE-464	✓ 60	agn	M
26	Mond	6/26/2006	1									QE-442	✓ 13	ig	M
26	Mond	6/26/2006	1									QE-432	✓ 55	ig	M
26	Mond	6/26/2006	1									QE-734	✓ 15	kr	M
26	Mond	6/26/2006	1									QE-713	✓ 7	fr	M
26	Mond	6/26/2006	1									QE-566	✓ 15	aor	M
26	Mond	6/26/2006	1									QE-954	✓ 30	bl	M

7.00			Reg Hours	OT Hours	Total Hours	Gals Used	
	6/26/2006	Totals of	135.00			135.00	195

26	Tues	6/27/2006	1	0500	1430	14	126.00		126.00	6.4		QE-954	✓ 19	bl	M
26	Tues	6/27/2006	1									QE-544	✓ 53	yl	M
26	Tues	6/27/2006	1									QE-464	✓ 91	agn	M
26	Tues	6/27/2006	1									QE-542	✓ 15	or	M
26	Tues	6/27/2006	1									QE-929	✓ 3	rb	M

6.40			Reg Hours	OT Hours	Total Hours	Gals Used	
	6/27/2006	Totals of	126.00			126.00	181

26	Wedn	6/28/2006	1	0500	1630	14	154.00		154.00	7.6		QE-464	✓ 75	agn	M
26	Wedn	6/28/2006	1									QE-544	✓ 52	yl	M
26	Wedn	6/28/2006	1									QE-552	✓ 17	py	M
26	Wedn	6/28/2006	1									QE-542	✓ 58	or	M

7.60			Reg Hours	OT Hours	Total Hours	Gals Used	
	6/28/2006	Totals of	154.00			154.00	202

26	Thurs	6/29/2006	1	0500	1430	12	108.00		108.00	6.7		QE-522	✓ 120	or	M
26	Thurs	6/29/2006	1									QE-464	✓ 5	agn	M
26	Thurs	6/29/2006	1									QE-647	✓ 13	gy	M
26	Thurs	6/29/2006	1									QE-442	✓ 3	ig	M
26	Thurs	6/29/2006	1									QE-617	✓ 10	pcg	M
26	Thurs	6/29/2006	1									QE-713	✓ 2	fr	M
26	Thurs	6/29/2006	1									QE-566	✓ 10	aor	M
26	Thurs	6/29/2006	1									QE-930	✓ 2	bl	M

6.70			Reg Hours	OT Hours	Total Hours	Gals Used	
	6/29/2006	Totals of	108.00			108.00	165

26	Friday	6/30/2006	1	0500	1230	14	98.00		98.00	5.1		QE-464	✓ 101	agn	M
----	--------	-----------	---	------	------	----	-------	--	-------	-----	--	--------	-------	-----	---

WK	Day	Date Used	Shift	Start Time	Quit Time	Persons	Reg Hours	OT Hours	Total Hours	Line Time	ColorTime	Code	Gals	Color	Vendor
26	Friday	6/30/2006	1									QE-542	✓ 39	or	M
26	Friday	6/30/2006	1									QE-544	✓ 10	yl	M

5.10

		Reg Hours	OT Hours	Total Hours	Gals Used	
	6/30/2006	Totals of	98.00		98.00	150

27	Mond	7/3/2006	1	0500	1430	13	117.00		117.00	6.8		QE-J204	12	bk	M
27	Mond	7/3/2006	1									QE-464	106	agn	M
27	Mond	7/3/2006	1									QE-542	55	or	M

6.80

		Reg Hours	OT Hours	Total Hours	Gals Used	
	7/3/2006	Totals of	117.00		117.00	173

27	Wedn	7/5/2006	1	0500	1430	13	117.00		117.00	6.7		QE-464	184	agn	M
----	------	----------	---	------	------	----	--------	--	--------	-----	--	--------	-----	-----	---

6.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	7/5/2006	Totals of	117.00		117.00	184

27	Thurs	7/6/2006	1	0500	1430	14	126.00		126.00	6.8		QE-542	174	or	M
----	-------	----------	---	------	------	----	--------	--	--------	-----	--	--------	-----	----	---

6.80

		Reg Hours	OT Hours	Total Hours	Gals Used	
	7/6/2006	Totals of	126.00		126.00	174

27	Friday	7/7/2006	1	0500	1230	14	98.00		98.00	4.7		QE-713	10	fr	M
27	Friday	7/7/2006	1									QE-929	10	rb	M
27	Friday	7/7/2006	1									QE-464	63	agn	M
27	Friday	7/7/2006	1									VS-002	39	vs-002	V

4.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	7/7/2006	Totals of	98.00		98.00	122

28	Mond	7/10/2006	1	0600	1430	12	96.00		96.00	5.7		QE-464	53	agn	M
28	Mond	7/10/2006	1									VS-002	70	v-or	V
28	Mond	7/10/2006	1									QE-542	20	or	M
28	Mond	7/10/2006	1									QE-626	19	gy	M

5.70

		Reg Hours	OT Hours	Total Hours	Gals Used	
	7/10/2006	Totals of	96.00		96.00	162

28	Tues	7/11/2006	1	0600	1430	12	95.00		96.00	5.5		QE-415	3	gn	M
28	Tues	7/11/2006	1									QE-432	5	ig	M
28	Tues	7/11/2006	1									QE-542	147	or	M