

Douglas A. Ducey  
Governor

ARIZONA DEPARTMENT  
OF  
ENVIRONMENTAL QUALITY



Misael Cabrera  
Director

VIA E-MAIL

Nov 24, 2021

Kraig Westerbeek  
Align RNG Arizona - Snowflake, LLC  
120 Tredegar Street  
Richmond, VA 23219

Subject: Air Quality Control Permit No. 90062  
Plant Name: Align RNG - Snowflake - Place ID: 216030

Dear Mr. Westerbeek:

The Arizona Department of Environmental Quality has received payment of the fee requested. Enclosed is a permit for the referenced facility. In accordance with Arizona Revised Statutes, §49-430, this permit should be readily available at all times on the premises.

The permit is issued for a period of five years. Please keep us informed of any changes that would affect your air pollution status during the period of this permit.

This decision is an appealable agency action under A.R.S. § 41-1092. You have a right to request a hearing and file an appeal under A.R.S. § 41-1092.03(B). You must file a written Request for Hearing or Notice of Appeal within **30 days** of your receipt of this Notice. A Request for Hearing or Notice of Appeal is filed when it is received by ADEQ's Hearing Administrator as follows:

Hearing Administrator  
Office of Administrative Counsel  
Arizona Department of Environmental Quality  
1110 W. Washington Street  
Phoenix, AZ 85007


The Request for Hearing or Notice of Appeal shall identify the party, the party's address, the agency and the action being appealed and shall contain a concise statement of the reasons for the appeal. Upon proper filing of a Request for Hearing or Notice of Appeal, ADEQ will serve a Notice of Hearing on all parties to the appeal. If you file a timely Request for Hearing or Notice of Appeal you have a right to request an informal settlement conference with ADEQ under A.R.S. § 41-1092.06. This request must be made in writing no later than **20 days** before a scheduled hearing and must be filed with the Hearing Administrator at the above address.

You are advised that a permit is a legally enforceable document. If your facility fails to comply with the provisions contained in its permit, you will be subject to enforcement action and could incur civil fines of up to ten thousand dollars per day under A.R.S. §49-463 and/or be subject to criminal penalties in accordance with A.R.S. §49-464.

Enclosed with your permit you will find an inspection checklist. Within 90 days of the issuance of your permit or 90 days after you begin operations, whichever is later, an air quality compliance inspector will conduct an inspection of your facility.

If you have any questions, please do not hesitate to contact Qinyue (Teresa) Mackey at (602) 771-4109.

Sincerely,



Daniel Czecholinski, Director  
Air Quality Division

Enclosures (4):      Permit No.: 90062  
                              Technical Support Document (TSD)  
                              Permit Certificate  
                              Inspection Checklist

## CLASS II AIR QUALITY PERMIT

**PERMIT No. 90062**

**PERMITTEE:** Align RNG Arizona - Snowflake, LLC  
**FACILITY:** Align RNG Arizona - Snowflake  
**PLACE ID:** 216030  
**DATE ISSUED:** November 24, 2021  
**EXPIRY DATE:** November 23, 2026

---

### SUMMARY

This Class II air quality permit is issued to Align RNG Arizona - Snowflake, LLC, the Permittee, for the construction and operation of a renewable natural gas facility. The facility is located 11 miles north of Snowflake, AZ off Highway 77, Snowflake, Navajo County, Arizona 85937.

The facility's potential to emit (PTE) of sulfur dioxide (SO<sub>2</sub>) is greater than the significant level identified in Arizona Administrative Code (A.A.C.) R18-2-101.131 and below the major threshold identified in A.A.C. R18-2-101.75. Therefore, a class II permit is required for this facility in accordance with A.A.C. R18-2-302.B.2.a. This facility triggers the requirements of A.A.C. R18-334 for Minor New Source Review (NSR) for SO<sub>2</sub>, and has met the requirements of Minor NSR by demonstrating compliance with the National Ambient Air Quality Standards (NAAQS) for the referenced pollutant through a refined air dispersion modeling analysis.

This permit is issued in accordance with Arizona Revised Statutes (ARS) 49-426. It contains requirements from Title 18, Chapter 2 of the A.A.C. and Title 40 of the Code of Federal Regulations. All definitions, terms, and conditions used in this permit conform to those in the Arizona Administrative Code R18-2-101 et. seq. (A.A.C.) and Title 40 of the Code of Federal Regulations (CFR), except as otherwise defined in this permit.

***This page left blank intentionally***



## Table of Contents

|                                                                                              |           |
|----------------------------------------------------------------------------------------------|-----------|
| <b>ATTACHMENT “A”: GENERAL PROVISIONS.....</b>                                               | <b>4</b>  |
| I. PERMIT EXPIRATION AND RENEWAL .....                                                       | 4         |
| II. COMPLIANCE WITH PERMIT CONDITIONS .....                                                  | 4         |
| III. PERMIT REVISION, REOPENING, REVOCATION AND REISSUANCE, OR TERMINATION<br>FOR CAUSE..... | 4         |
| IV. POSTING OF PERMIT .....                                                                  | 5         |
| V. FEE PAYMENT .....                                                                         | 5         |
| VI. EMISSIONS INVENTORY QUESTIONNAIRE .....                                                  | 5         |
| VII. COMPLIANCE CERTIFICATION .....                                                          | 5         |
| VIII. CERTIFICATION OF TRUTH, ACCURACY AND COMPLETENESS .....                                | 6         |
| IX. INSPECTION AND ENTRY .....                                                               | 6         |
| X. PERMIT REVISION PURSUANT TO FEDERAL HAZARDOUS AIR POLLUTANT<br>STANDARD.....              | 7         |
| XI. ACCIDENTAL RELEASE PROGRAM.....                                                          | 7         |
| XII. EXCESS EMISSIONS, PERMIT DEVIATIONS, AND EMERGENCY REPORTING .....                      | 7         |
| XIII. RECORDKEEPING REQUIREMENTS .....                                                       | 13        |
| XIV. DUTY TO PROVIDE INFORMATION.....                                                        | 13        |
| XV. PERMIT AMENDMENT OR REVISION.....                                                        | 14        |
| XVI. FACILITY CHANGE WITHOUT A PERMIT REVISION .....                                         | 14        |
| XVII. TESTING REQUIREMENTS .....                                                             | 17        |
| XVIII. PROPERTY RIGHTS.....                                                                  | 19        |
| XIX. SEVERABILITY CLAUSE .....                                                               | 19        |
| XX. PERMIT SHIELD.....                                                                       | 19        |
| XXI. PROTECTION OF STRATOSPHERIC OZONE .....                                                 | 20        |
| XXII. APPLICABILITY OF NSPS/NESHAP GENERAL PROVISIONS .....                                  | 20        |
| <b>ATTACHMENT “B”: SPECIFIC CONDITIONS .....</b>                                             | <b>21</b> |
| I. RELATIONSHIP OF PERMIT TO APPLICABLE STATE IMPLEMENTATION PLAN .....                      | 21        |
| II. FACILITY-WIDE REQUIREMENTS.....                                                          | 21        |
| III. BIOGAS UPGRADE SYSTEM AND THERMAL OXIDIZER .....                                        | 23        |
| IV. FUGITIVE DUST REQUIREMENTS.....                                                          | 27        |
| V. OTHER PERIODIC ACTIVITIES.....                                                            | 29        |
| <b>ATTACHMENT “C”: EQUIPMENT LIST.....</b>                                                   | <b>33</b> |

**ATTACHMENT "A": GENERAL PROVISIONS**

**I. PERMIT EXPIRATION AND RENEWAL**

- A.** This permit is valid for a period of five (5) years from the date of issuance.  
[ARS § 49-426.F, A.A.C. R18-2-306.A.1]
- B.** The Permittee shall submit an application for renewal of this permit at least six (6) months, but not more than eighteen (18) months, prior to the date of permit expiration.  
[A.A.C. R18-2-304.D.2]

**II. COMPLIANCE WITH PERMIT CONDITIONS**

- A.** The Permittee shall comply with all conditions of this permit including all applicable requirements of the Arizona Revised Statutes (A.R.S.) Title 49, Chapter 3, and the air quality rules under Title 18, Chapter 2 of the Arizona Administrative Code. Any permit noncompliance is grounds for enforcement action; for permit termination, revocation and reissuance, or revision; or for denial of a permit renewal application. In addition, noncompliance with any federally enforceable requirement constitutes a violation of the Clean Air Act.  
[A.A.C. R18-2-306.A.8.a]
- B.** It shall not be a defense for a Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.  
[A.A.C. R18-2-306.A.8.b]

**III. PERMIT REVISION, REOPENING, REVOCATION AND REISSUANCE, OR TERMINATION FOR CAUSE**

- A.** The permit may be revised, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a permit revision, revocation and reissuance, termination, or of a notification of planned changes or anticipated noncompliance does not stay any permit condition.  
[A.A.C. R18-2-306.A.8.c]
- B.** The permit shall be reopened and revised under any of the following circumstances:
1. The Director or the Administrator determines that the permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of the permit; and  
[A.A.C. R18-2-321.A.1.c]
  2. The Director or the Administrator determines that the permit needs to be revised or revoked to assure compliance with the applicable requirements.  
[A.A.C. R18-2-321.A.1.d]
- C.** Proceedings to reopen and issue a permit, including appeal of any final action relating to a permit reopening, shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of the permit for which cause to reopen exists. Such reopening

shall be made as expeditiously as practicable. Permit reopenings shall not result in a resetting of the five-year permit term.

[A.A.C. R18-2-321.A.2]

#### **IV. POSTING OF PERMIT**

- A.** The Permittee shall post this permit or a certificate of permit issuance on location where the equipment is installed in such a manner as to be clearly visible and accessible. All equipment covered by this permit shall be clearly marked with one of the following:

[A.A.C. R18-2-315.A]

1. Current permit number; or
2. Serial number or other equipment ID number that is also listed in the permit to identify that piece of equipment.

- B.** A copy of the complete permit shall be kept on site.

[A.A.C. R18-2-315.B]

#### **V. FEE PAYMENT**

The Permittee shall pay fees to the Director pursuant to ARS § 49-426(E) and A.A.C. R18-2-326.

[A.A.C. R18-2-306.A.9 and -326]

#### **VI. EMISSIONS INVENTORY QUESTIONNAIRE**

- A.** The Permittee shall complete and submit to the Director an emissions inventory questionnaire no later than June 1 every three years beginning June 1, 2021. At the Director's request, the Permittee may be required to complete and submit emissions inventory questionnaires in addition to the triennial emissions inventory questionnaire. The Director shall notify the Permittee in writing of the decision to require additional emissions inventory questionnaires.

[A.A.C. R18-2-327.A.1.b]

- B.** The emissions inventory questionnaire shall be on an electronic or paper form provided by the Director and shall include the information required by A.A.C. R18-2-327.A.3 for the previous calendar year.

[A.A.C. R18-2-327.A.3]

#### **VII. COMPLIANCE CERTIFICATION**

- A.** The Permittee shall submit a compliance certification to the Director annually which describes the compliance status of the source with respect to each permit condition. The certification shall be submitted no later than February 15<sup>th</sup>, and shall report the compliance status of the source during the period between January 1<sup>st</sup> and December 31<sup>st</sup> of the previous year.

[A.A.C. R18-2-309.2.a]

- B.** The compliance certifications shall include the following:

1. Identification of each term or condition of the permit that is the basis of the certification;  
[A.A.C. R18-2-309.2.c.i]
  2. Identification of the methods or other means used by the Permittee for determining the compliance status with each term and condition during the certification period;  
[A.A.C. R18-2-309.2.c.ii]
  3. Status of compliance with the terms and conditions of the permit for the period covered by the certification, including whether compliance during the period was continuous or intermittent. The certifications shall identify each deviation (including any deviations reported pursuant to Condition XII.B of this Attachment) during the period covered by the certification and take it into account for consideration in the compliance certification  
[A.A.C. R18-2-309.2.c.iii]
  4. Other facts the Director may require in determining the compliance status of the source.  
[A.A.C. R18-2-309.2.c.iv]
- C. A progress report on all outstanding compliance schedules shall be submitted every six months beginning six months after permit issuance.  
[A.A.C. R18-2-309.5.d]

## **VIII. CERTIFICATION OF TRUTH, ACCURACY AND COMPLETENESS**

Any document required to be submitted by this permit, including reports, shall contain a certification by a responsible official of truth, accuracy, and completeness. This certification shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

[A.A.C. R18-2-309.3]

## **IX. INSPECTION AND ENTRY**

Upon presentation of proper credentials, the Permittee shall allow the Director or the authorized representative of the Director to:

- A. Enter upon the Permittee's premises where a source is located, emissions-related activity is conducted, or where records are required to be kept under the conditions of the permit;  
[A.A.C. R18-2-309.4.a]
- B. Have access to and copy, at reasonable times, any records that are required to be kept under the conditions of the permit;  
[A.A.C. R18-2-309.4.b]
- C. Inspect, at reasonable times, any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under the permit;  
[A.A.C. R18-2-309.4.c]

D. Sample or monitor, at reasonable times, substances or parameters for the purpose of assuring compliance with the permit or other applicable requirements; and  
[A.A.C. R18-2-309.4.d]

E. Record any inspection by use of written, electronic, magnetic and photographic media.  
[A.A.C. R18-2-309.4.e]

**X. PERMIT REVISION PURSUANT TO FEDERAL HAZARDOUS AIR POLLUTANT STANDARD**

If this source becomes subject to a standard promulgated by the Administrator pursuant to Section 112(d) of the Act, then the Permittee shall, within twelve months of the date on which the standard is promulgated, submit an application for a permit revision demonstrating how the source will comply with the standard.

[A.A.C. R18-2-304.D.3]

**XI. ACCIDENTAL RELEASE PROGRAM**

If this source becomes subject to the provisions of 40 CFR Part 68, then the Permittee shall comply with these provisions according to the timeline specified in 40 CFR Part 68.

[40 CFR Part 68]

**XII. EXCESS EMISSIONS, PERMIT DEVIATIONS, AND EMERGENCY REPORTING**

**A. Excess Emissions Reporting**

[A.A.C. R18-2-310.01.A, B, and C]

1. Excess emissions shall be reported as follows:

a. The Permittee shall report to the Director any emissions in excess of the limits established by this permit. Such report shall be in two parts as specified below:

[A.A.C. R18-2-310.01.A]

(1) Notification by telephone or facsimile within 24 hours of the time when the Permittee first learned of the occurrence of excess emissions including all available information from Condition XII.A.1.b below.

(2) Detailed written notification by submission of an excess emissions report within 72 hours of the notification pursuant to Condition XII.A.1.a(1) above.

b. The report shall contain the following information:

(1) Identity of each stack or other emission point where the excess emissions occurred;

[A.A.C. R18-2-310.01.B.1]

(2) Magnitude of the excess emissions expressed in the units of the applicable emission limitation and the operating data and

calculations used in determining the magnitude of the excess emissions;

[A.A.C. R18-2-310.01.B.2]

- (3) Time and duration, or expected duration, of the excess emissions;  
[A.A.C. R18-2-310.01.B.3]

- (4) Identity of the equipment from which the excess emissions emanated;  
[A.A.C. R18-2-310.01.B.4]

- (5) Nature and cause of the emissions;  
[A.A.C. R18-2-310.01.B.5]

- (6) If the excess emissions were the result of a malfunction, steps taken to remedy the malfunction and the steps taken or planned to prevent the recurrence of such malfunctions;  
[A.A.C. R18-2-310.01.B.6]

- (7) Steps that were or are being taken to limit the excess emissions; and  
[A.A.C. R18-2-310.01.B.7]

- (8) If the excess emissions resulted from start-up or malfunction, the report shall contain a list of the steps taken to comply with the permit procedures governing source operation during periods of startup or malfunction.  
[A.A.C. R18-2-310.01.B.8]

2. In the case of continuous or recurring excess emissions, the notification requirements shall be satisfied if the source provides the required notification after excess emissions are first detected and includes in such notification an estimate of the time the excess emissions will continue. Excess emissions occurring after the estimated time period, or changes in the nature of the emissions as originally reported, shall require additional notification pursuant to Condition XII.A.1 above.  
[A.A.C. R18-2-310.01.C]

**B. Permit Deviations Reporting**

The Permittee shall promptly report deviations from permit requirements, including those attributable to upset conditions as defined in the permit, the probable cause of such deviations, and any corrective actions or preventive measures taken. Where the applicable requirement contains a definition of prompt or otherwise specifies a timeframe for reporting deviations, that definition or timeframe shall govern. Where the applicable requirement does not address the timeframe for reporting deviations, the Permittee shall submit reports of deviations according to the following schedule:

1. Notice that complies with Condition XII.A above is prompt for deviations that constitute excess emissions;  
[A.A.C. R18-2-306.A.5.b.i]

2. Notice that is submitted within two working days of discovery of the deviation is prompt for deviations of permit conditions identified by Condition II.B.2 of Attachment “B”;

[A.A.C. R18-2-306.A.5.b.ii]

3. Except as provided in Conditions XII.B.1 and 2, prompt notification of all other types of deviations shall be annually, concurrent with the annual compliance certifications required in Section VII, and can be submitted via myDEQ, the Arizona Department of Environmental Quality’s online portal.

[A.A.C. R18-2-306.A.5.b.ii]

**C. Emergency Provision**

1. An “emergency” means any situation arising from sudden and reasonably unforeseeable events beyond the control of the source, including acts of God, that require immediate corrective action to restore normal operation, and that causes the source to exceed a technology-based emission limitation under the permit, due to unavoidable increases in emissions attributable to the emergency. An emergency shall not include noncompliance to the extent caused by improperly designed equipment, lack of preventative maintenance, careless or improper operation, or operator error.

[A.A.C. R18-2-306.E.1]

2. An emergency constitutes an affirmative defense to an action brought for noncompliance with technology-based emission limitations if Condition XII.C.3 below is met.

[A.A.C. R18-2-306.E.2]

3. The affirmative defense of emergency shall be demonstrated through properly signed, contemporaneous operating logs, or other relevant evidence that:

[A.A.C. R18-2-306.E.3]

- a. An emergency occurred and that the Permittee can identify the cause(s) of the emergency;

[A.A.C. R18-2-306.E.3.a]

- b. The permitted facility was being properly operated at the time of the emergency;

[A.A.C. R18-2-306.E.3.b]

- c. During the period of the emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emissions standards or other requirements in the permit; and

[A.A.C. R18-2-306.E.3.c]

- d. The Permittee submitted notice of the emergency to the Director by certified mail, facsimile, or hand delivery within two working days of the time when emission limitations were exceeded due to the emergency. This notice shall contain a description of the emergency, any steps taken to mitigate emissions, and corrective action taken.

[A.A.C. R18-2-306.E.3.d]

4. In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.

[A.A.C. R18-2-306.E.4]

5. This provision is in addition to any emergency or upset provision contained in any applicable requirement.

[A.A.C. R18-2-306.E.5]

**D. Affirmative Defenses for Excess Emissions Due to Malfunctions, Startup, and Shutdown**

1. Applicability

A.A.C. R18-2-310 establishes affirmative defenses for certain emissions in excess of an emission standard or limitation and applies to all emission standards or limitations except for standards or limitations:

- a. Promulgated pursuant to Sections 111 or 112 of the Act;  
[A.A.C. R18-2-310.A.1]
- b. Promulgated pursuant to Titles IV or VI of the Clean Air Act;  
[A.A.C. R18-2-310.A.2]
- c. Contained in any Prevention of Significant Deterioration (PSD) or New Source Review (NSR) permit issued by the U.S. EPA;  
[A.A.C. R18-2-310.A.3]
- d. Contained in A.A.C. R18-2-715.F; or  
[A.A.C. R18-2-310.A.4]
- e. Included in a permit to meet the requirements of A.A.C. R18-2-406.A.5.  
[A.A.C. R18-2-310.A.5]

2. Affirmative Defense for Malfunctions

Emissions in excess of an applicable emission limitation due to malfunction shall constitute a violation. When emissions in excess of an applicable emission limitation are due to a malfunction, the Permittee has an affirmative defense to a civil or administrative enforcement proceeding based on that violation, other than a judicial action seeking injunctive relief, if the Permittee has complied with the reporting requirements of A.A.C. R18-2-310.01 and has demonstrated all of the following:

[A.A.C. R18-2-310.B]

- a. The excess emissions resulted from a sudden and unavoidable breakdown of process equipment or air pollution control equipment beyond the reasonable control of the Permittee;  
[A.A.C. R18-2-310.B.1]
- b. The air pollution control equipment, process equipment, or processes were at all times maintained and operated in a manner consistent with good practice for minimizing emissions;

[A.A.C. R18-2-310.B.2]



- c. If repairs were required, the repairs were made in an expeditious fashion when the applicable emission limitations were being exceeded. Off-shift labor and overtime were utilized where practicable to ensure that the repairs were made as expeditiously as possible. If off-shift labor and overtime were not utilized, the Permittee satisfactorily demonstrated that the measures were impracticable;  
[A.A.C. R18-2-310.B.3]
- d. The amount and duration of the excess emissions (including any bypass operation) were minimized to the maximum extent practicable during periods of such emissions;  
[A.A.C. R18-2-310.B.4]
- e. All reasonable steps were taken to minimize the impact of the excess emissions on ambient air quality;  
[A.A.C. R18-2-310.B.5]
- f. The excess emissions were not part of a recurring pattern indicative of inadequate design, operation, or maintenance;  
[A.A.C. R18-2-310.B.6]
- g. During the period of excess emissions there were no exceedances of the relevant ambient air quality standards established in Title 18, Chapter 2, Article 2 of the Arizona Administrative Code that could be attributed to the emitting source;  
[A.A.C. R18-2-310.B.7]
- h. The excess emissions did not stem from any activity or event that could have been foreseen and avoided, or planned, and could not have been avoided by better operations and maintenance practices;  
[A.A.C. R18-2-310.B.8]
- i. All emissions monitoring systems were kept in operation if at all practicable; and  
[A.A.C. R18-2-310.B.9]
- j. The Permittee's actions in response to the excess emissions were documented by contemporaneous records.  
[A.A.C. R18-2-310.B.10]

3. Affirmative Defense for Startup and Shutdown

- a. Except as provided in Condition XII.D.3 below, and unless otherwise provided for in the applicable requirement, emissions in excess of an applicable emission limitation due to startup and shutdown shall constitute a violation. When emissions in excess of an applicable emission limitation are due to startup and shutdown, the Permittee has an affirmative defense to a civil or administrative enforcement proceeding based on that violation, other than a judicial action seeking injunctive relief, if the Permittee has complied with the reporting requirements of A.A.C. R18-2-310.01 and has demonstrated all of the following:

[A.A.C. R18-2-310.C.1]

- (1) The excess emissions could not have been prevented through careful and prudent planning and design;  
[A.A.C. R18-2-310.C.1.a]
- (2) If the excess emissions were the result of a bypass of control equipment, the bypass was unavoidable to prevent loss of life, personal injury, or severe damage to air pollution control equipment, production equipment, or other property;  
[A.A.C. R18-2-310.C.1.b]
- (3) The air pollution control equipment, process equipment, or processes were at all times maintained and operated in a manner consistent with good practice for minimizing emissions;  
[A.A.C. R18-2-310.C.1.c]
- (4) The amount and duration of the excess emissions (including any bypass operation) were minimized to the maximum extent practicable during periods of such emissions;  
[A.A.C. R18-2-310.C.1.d]
- (5) All reasonable steps were taken to minimize the impact of the excess emissions on ambient air quality;  
[A.A.C. R18-2-310.C.1.e]
- (6) During the period of excess emissions there were no exceedances of the relevant ambient air quality standards established in Title 18, Chapter 2, Article 2 of the Arizona Administrative Code that could be attributed to the emitting source;  
[A.A.C. R18-2-310.C.1.f]
- (7) All emissions monitoring systems were kept in operation if at all practicable; and  
[A.A.C. R18-2-310.C.1.g]
- (8) Contemporaneous records documented the Permittee's actions in response to the excess emissions.  
[A.A.C. R18-2-310.C.1.h]

- b. If excess emissions occur due to a malfunction during routine startup and shutdown, then those instances shall be treated as other malfunctions subject to Condition XII.D.2 above.

[A.A.C. R18-2-310.C.2]

4. Affirmative Defense for Malfunctions During Scheduled Maintenance

If excess emissions occur due to a malfunction during scheduled maintenance, then those instances will be treated as other malfunctions subject to Condition XII.D.2 above.

[A.A.C. R18-2-310.D]

5. Demonstration of Reasonable and Practicable Measures

For an affirmative defense under Condition XII.D.2 or XII.D.3, the Permittee shall demonstrate, through submission of the data and information required by this Condition XII.D and Condition XII.A.1 above, that all reasonable and practicable measures within the Permittee's control were implemented to prevent the occurrence of the excess emissions.

[A.A.C. R18-2-310.E]

**XIII. RECORDKEEPING REQUIREMENTS**

**A.** The Permittee shall keep records of all required monitoring information including, but not limited to, the following:

1. The date, place as defined in the permit, and time of sampling or measurements;  
[A.A.C. R18-2-306.A.4.a.i]
2. The date(s) any analyses were performed;  
[A.A.C. R18-2-306.A.4.a.ii]
3. The name of the company or entity that performed the analyses;  
[A.A.C. R18-2-306.A.4.a.iii]
4. A description of the analytical techniques or methods used;  
[A.A.C. R18-2-306.A.4.a.iv]
5. The results of analyses; and  
[A.A.C. R18-2-306.A.4.a.v]
6. The operating conditions as existing at the time of sampling or measurement.  
[A.A.C. R18-2-306.A.4.a.vi]

**B.** The Permittee shall retain records of all required monitoring data and support information for a period of at least five (5) years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings or other data recordings for continuous monitoring instrumentation, and copies of all reports required by the permit.  
[A.A.C. R18-2-306.A.4.b]

**XIV. DUTY TO PROVIDE INFORMATION**

**A.** The Permittee shall furnish to the Director, within a reasonable time, any information that the Director may request in writing to determine whether cause exists for revising, revoking and reissuing, or terminating the permit, or to determine compliance with the permit. Upon request, the Permittee shall also furnish to the Director copies of records required to be kept by the permit. For information claimed to be confidential, the Permittee shall furnish an additional copy of such records directly to the Administrator along with a claim of confidentiality.

[A.A.C. R18-2-304.G and -306.A.8.e]

- B.** If the Permittee has failed to submit any relevant facts or has submitted incorrect information in the permit application, the Permittee shall, upon becoming aware of such failure or incorrect submittal, promptly submit such supplementary facts or corrected information.

[A.A.C. R18-2-304.H]

**XV. PERMIT AMENDMENT OR REVISION**

The Permittee shall apply for a permit amendment or revision for changes to the facility which does not qualify for a facility change without revision under Section XVII below, as follows:

- A.** Facility Changes that Require a Permit Revision;  
[A.A.C. R18-2-317.01]
- B.** Administrative Permit Amendment;  
[A.A.C. R18-2-318]
- C.** Minor Permit Revision; and  
[A.A.C. R18-2-319]
- D.** Significant Permit Revision.  
[A.A.C. R18-2-320]
- E.** The applicability and requirements for such action are defined in the above referenced regulations.

**XVI. FACILITY CHANGE WITHOUT A PERMIT REVISION**

- A.** Except for a physical change or change in the method of operation at a Class II source requiring a permit revision under A.A.C. R18-2-317.01, or a change subject to logging or notice requirements in Conditions XVI.B and XVI.C, a change at a Class II source shall not be subject to revision, notice, or logging requirements under this Section.  
[A.A.C. R18-2-317.02.A]
- B.** Except as otherwise provided in the conditions applicable to an emissions cap created under A.A.C. R18-2-306.02, the following changes may be made if the source keeps on site records of the changes according to Appendix 3 of the Arizona Administrative Code:  
[A.A.C. R18-2-317.02.B]
1. Implementing an alternative operating scenario, including raw materials changes;
  2. Changing process equipment, operating procedures, or making any other physical change if the permit requires the change to be logged;
  3. Engaging in any new insignificant activity listed in A.A.C. R18-2-101.68 but not listed in the permit;
  4. Replacing an item of air pollution control equipment listed in the permit with an identical (same model, different serial number) item. The Director may require verification of efficiency of the new equipment by performance tests; and

5. A change that results in a decrease in actual emissions if the source wants to claim credit for the decrease in determining whether the source has a net emissions increase for any purpose. The logged information shall include a description of the change that will produce the decrease in actual emissions. A decrease that has not been logged is creditable only if the decrease is quantifiable, enforceable, and otherwise qualifies as a creditable decrease.

- C.** Except as provided in the conditions applicable to an emissions cap created under A.A.C. R18-2-306.02, the following changes may be made if the source provides written notice to the Department in advance of the change as provided below:

[A.A.C. R18-2-317.02.C]

1. Replacing an item of air pollution control equipment listed in the permit with one that is not identical but that is substantially similar and has the same or better pollutant removal efficiency: 7 days. The Director may require verification of efficiency of the new equipment by performance tests;
2. A physical change or change in the method of operation that increases actual emissions more than 10% of the major source threshold for any conventional pollutant but does not require a permit revision: 7 days;
3. Replacing an item of air pollution control equipment listed in the permit with one that is not substantially similar but that has the same or better efficiency: 30 days. The Director may require verification of efficiency of the new equipment by performance tests;
4. A change that would trigger an applicable requirement that already exists in the permit: 30 days unless otherwise required by the applicable requirement;
5. A change that amounts to reconstruction of the source or an affected facility: 7 days. For the purposes of this subsection, reconstruction of a source or an affected facility shall be presumed if the fixed capital cost of the new components exceeds 50% of the fixed capital cost of a comparable entirely new source or affected facility and the changes to the components have occurred over the 12 consecutive months beginning with commencement of construction; and
6. A change that will result in the emissions of a new regulated air pollutant above an applicable regulatory threshold but that does not trigger a new applicable requirement for that source category: 30 days. For purposes of this requirement, an applicable regulatory threshold for a conventional air pollutant shall be 10% of the applicable major source threshold for that pollutant.

- D.** For each change under Condition XVI.C, the written notice shall be by certified mail or hand delivery and shall be received by the Director the minimum amount of time in advance of the change. Notifications of changes associated with emergency conditions, such as malfunctions necessitating the replacement of equipment, may be provided with less than required notice, but must be provided as far in advance of the change, or if advance notification is not practicable, as soon after the change as possible. The written notice shall include:

[A.A.C. R18-2-317.02.D]

1. When the proposed change will occur;
  2. A description of the change;
  3. Any change in emissions of regulated air pollutants; and
  4. Any permit term or condition that is no longer applicable as a result of the change.
- E.** A source may implement any change in Condition XVI.C without the required notice by applying for a minor permit revision under A.A.C. R18-2-319.  
[A.A.C. R18-2-317.02.E]
- F.** The permit shield described in A.A.C. R18-2-325 shall not apply to any change made under this Section, other than implementation of an alternate operating scenario under Condition XVI.B.1.  
[A.A.C. R18-2-317.02.F]
- G.** Notwithstanding any other part of this Section, the Director may require a permit to be revised for any change that, when considered together with any other changes submitted by the same source under this Section over the term of the permit, constitutes a change under subsection A.A.C. R18-2-317.01.A.  
[A.A.C. R18-2-317.02.G]
- H.** If a source change is described under both Conditions XVI.B and C, the source shall comply with Condition XVI.C. If a source change is described under both Condition XVI.C and A.A.C. R18-2-317.01.B, the source shall comply with A.A.C. R18-2-317.01.B.  
[A.A.C. R18-2-317.02.H]
- I.** A copy of all logs required under Condition XVI.B shall be filed with the Director within 30 days after each anniversary of the permit issuance date. If no changes were made at the source requiring logging, a statement to that effect shall be filed instead.  
[A.A.C. R18-2-317.02.I]
- J.** Logging Requirements  
[Arizona Administrative Code, Appendix 3]
1. Each log entry required by a change under Condition XVI.B shall include at least the following information:
    - a. A description of the change, including:
      - (1) A description of any process change;
      - (2) A description of any equipment change, including both old and new equipment descriptions, model numbers, and serial numbers, or any other unique equipment ID number; and
      - (3) A description of any process material change.
    - b. The date and time that the change occurred.

- c. The provision of A.A.C. R18-2-317.02.B that authorizes the change to be made with logging.
  - d. The date the entry was made and the first and last name of the person making the entry.
2. Logs shall be kept for five (5) years from the date created. Logging shall be performed in indelible ink in a bound log book with sequentially number pages, or in any other form, including electronic format, approved by the Director.

## **XVII. TESTING REQUIREMENTS**

- A.** The Permittee shall conduct performance tests as specified in the permit and at such other times as may be required by the Director.

[A.A.C. R18-2-312.A]

- B.** Operational Conditions during Performance Testing

Performance tests shall be conducted under such conditions as the Director shall specify to the plant operator based on representative performance of the source. The Permittee shall make available to the Director such records as may be necessary to determine the conditions of the performance tests. Operations during periods of start-up, shutdown, and malfunction (as defined in A.A.C. R18-2-101) shall not constitute representative conditions of performance tests unless otherwise specified in the applicable standard.

[A.A.C. R18-2-312.C]

- C.** Performance Tests shall be conducted and data reduced in accordance with the test methods and procedures contained in the Arizona Testing Manual unless modified by the Director pursuant to A.A.C. R18-2-312.B.

[A.A.C. R18-2-312.B]

- D.** Test Plan

At least 14 working days prior to performing a test, the Permittee shall submit a test plan to the Director, which must include the following, in addition to all other applicable requirements, as identified in the Arizona Testing Manual:

[A.A.C. R18-2-312.B]

- 1. Test duration;
- 2. Test location(s);
- 3. Test method(s); and
- 4. Source operation and other parameters that may affect test results.

- E.** Stack Sampling Facilities



The Permittee shall provide, or cause to be provided, performance testing facilities as follows:

[A.A.C. R18-2-312.E]

1. Sampling ports adequate for test methods applicable to the facility;
2. Safe sampling platform(s);
3. Safe access to sampling platform(s); and
4. Utilities for sampling and testing equipment.

**F. Interpretation of Final Results**

Each performance test shall consist of three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic mean of the results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs is required to be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances beyond the Permittee's control, compliance may, upon the Director's approval, be determined using the arithmetic mean of the results of the other two runs. If the Director or the Director's designee is present, tests may only be stopped with the Director's or such designee's approval. If the Director or the Director's designee is not present, tests may only be stopped for good cause. Good cause includes: forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances beyond the Permittee's control. Termination of any test without good cause after the first run is commenced shall constitute a failure of the test. Supporting documentation, which demonstrates good cause, must be submitted.

[A.A.C. R18-2-306.A.3.c and A.A.C. R18-2-312.F]

**G. Report of Final Test Results**

A written report of the results of performance tests conducted pursuant to 40 CFR 63, shall be submitted to the Director within 60 days after the test is performed. A written report of the results of all other performance tests shall be submitted within 4 weeks after the test is performed, or as otherwise provided in the Arizona Testing Manual. All performance testing reports shall be submitted in accordance with the Arizona Testing Manual and A.A.C. R18-2-312.A.

[A.A.C. R18-2-312.A and B]

**H. Extension of Performance Test Deadline**

For performance testing required under Condition XVII.A above, the Permittee may request an extension to a performance test deadline due to a force majeure event as follows:

[A.A.C. R18-2-312.J]

1. If a force majeure event is about to occur, occurs, or has occurred for which the Permittee intends to assert a claim of force majeure, the Permittee shall notify the



Director in writing as soon as practicable following the date the Permittee first knew, or through due diligence should have known that the event may cause or caused a delay in testing beyond the regulatory deadline. The notification must occur before the performance test deadline unless the initial force majeure or a subsequent force majeure event delays the notice, and in such cases, the notification shall be given as soon as practicable.

[A.A.C. R18-2-312.J.1]

2. The Permittee shall provide to the Director a written description of the force majeure event and a rationale for attributing the delay in testing beyond the regulatory deadline to the force majeure; describe the measures taken or to be taken to minimize the delay; and identify a date by which the Permittee proposes to conduct the performance test. The performance test shall be conducted as soon as practicable after the force majeure event occurs.

[A.A.C. R18-2-312.J.2]

3. The decision as to whether or not to grant an extension to the performance test deadline is solely within the discretion of the Director. The Director shall notify the Permittee in writing of approval or disapproval of the request for an extension as soon as practicable.

[A.A.C. R18-2-312.J.3]

4. Until an extension of the performance test deadline has been approved by the Director under Conditions XVII.H.1, 2, and 3 above, the Permittee remains subject to the requirements of Section XVII.

[A.A.C. R18-2-312.J.4]

5. For purposes of this Section XVII, a “force majeure event” means an event that will be or has been caused by circumstances beyond the control of the Permittee, its contractors, or any entity controlled by the Permittee that prevents it from complying with the regulatory requirement to conduct performance tests within the specified timeframe despite the Permittee's best efforts to fulfill the obligation. Examples of such events are acts of nature, acts of war or terrorism, or equipment failure or safety hazard beyond the control of the Permittee.

[A.A.C. R18-2-312.J.5]

## **XVIII. PROPERTY RIGHTS**

This permit does not convey any property rights of any sort, or any exclusive privilege.

[A.A.C. R18-2-306.A.8.d]

## **XIX. SEVERABILITY CLAUSE**

The provisions of this permit are severable. In the event of a challenge to any portion of this permit, or if any portion of this permit is held invalid, the remaining permit conditions remain valid and in force.

[A.A.C. R18-2-306.A.7]

## **XX. PERMIT SHIELD**

Compliance with the conditions of this permit shall be deemed compliance with all applicable requirements identified in the portions of this permit subtitled "Permit Shield". The permit shield shall not apply to minor revisions pursuant to Condition XV.C of this Attachment and any facility changes without a permit revision pursuant to Section XVI of this Attachment.

[A.A.C. R18-2-317.F, - 320, and -325]

## **XXI. PROTECTION OF STRATOSPHERIC OZONE**

If this source becomes subject to the provisions of 40 CFR Part 82, then the Permittee shall comply with these provisions accordingly.

[40 CFR Part 82]

## **XXII. APPLICABILITY OF NSPS/NESHAP GENERAL PROVISIONS**

For all equipment subject to a New Source Performance Standard or a National Emission Standard for Hazardous Air Pollutants, the Permittee shall comply with all applicable requirements contained in Subpart A of Title 40, Chapter 60 and Chapter 63 of the Code of Federal Regulation.

[40 CFR Part 60 Subpart A and Part 63 Subpart A]

**ATTACHMENT "B": SPECIFIC CONDITIONS**

**I. RELATIONSHIP OF PERMIT TO APPLICABLE STATE IMPLEMENTATION PLAN**

This permit is issued pursuant to the provisions of the Arizona Revised Statutes (ARS) and constitutes an installation permit for the purpose of the applicable State Implementation Plan.

[ARS § 49-404.c and -426]

**II. FACILITY-WIDE REQUIREMENTS**

**A. Opacity**

**1. Instantaneous Surveys and Six-Minute Observations**

**a. Instantaneous Surveys**

Any instantaneous survey required by this permit shall be determined by either option listed in Conditions II.A.1.a(1) and (2):

[A.A.C. R18-2-311.b]

**(1) Alternative Method ALT-082 (Digital Camera Operating Technique)**

**(a)** The Permittee, or Permittee representative, shall be certified in the use of Alternative Method ALT-082.

**(b)** The results of all instantaneous surveys and six-minute observations shall be obtained within 30 minutes.

**(2) EPA Reference Method 9 Certified Observer.**

[A.A.C. R18-2-306.A.3.c]

**b. Six-Minute Observations**

Any six-minute observation required by this permit shall be determined by either option listed in Conditions II.A.1.b(1) and (2):

[A.A.C. R18-2-311.b]

**(1) Alternative Method ALT-082 (Digital Camera Operating Technique)**

**(a)** The Permittee, or Permittee representative, shall be certified in the use of Alternative Method ALT-082.

**(b)** The results of all instantaneous surveys and six-minute observations shall be obtained within 30 minutes.

**(2) EPA Reference Method 9.**

**c.** The Permittee shall have on site or on call a person certified in EPA Reference Method 9 unless all six-minute Method 9 observations required

by this permit are conducted as a six-minute Alternative Method ALT-082 (Digital Camera Operating Technique) and all instantaneous visual surveys required by this permit are conducted as an instantaneous ALT-082 camera survey. Any six-minute Method 9 observation required by this permit can be conducted as a six-minute Alternative Method ALT-082 and any instantaneous visual survey required by this permit can be conducted as an instantaneous ALT-082 camera survey.

[A.A.C. R18-2-306.A.3.c]

2. Monitoring, Recordkeeping, and Reporting Requirements

[A.A.C. R18-2-306.A.3.c]

- a. At the frequency specified in the following sections of this permit, the Permittee shall conduct an instantaneous survey of visible emissions from both process stack sources, when in operation, and fugitive dust sources.
- b. If the visible emissions on an instantaneous basis appears less than or equal to the applicable opacity standard, then the Permittee shall keep a record of the name of the observer, the date on which the instantaneous survey was made, and the results of the instantaneous survey.
- c. If the visible emissions on an instantaneous basis appears greater than the applicable opacity standard, then the Permittee shall immediately conduct a six-minute observation of the visible emissions.
  - (1) If the six-minute observation of the visible emissions is less than or equal to the applicable opacity standard, then the Permittee shall record the name of the observer, the date on which the six-minute observation was made, and the results of the six-minute observation.
  - (2) If the six-minute observation of the visible emissions is greater than the applicable opacity standard, then the Permittee shall do the following:
    - (a) Adjust or repair the controls or equipment to reduce opacity to less than or equal to the opacity standard;
    - (b) Record the name of the observer, the date on which the six-minute observation was made, the results of the six-minute observation, and all corrective action taken; and
    - (c) Report the event as an excess emission for opacity in accordance with Condition XII.A of Attachment "A".
    - (d) Conduct another six-minute observation to document the effectiveness of the adjustments or repairs completed.

**B.** Reporting Requirements

1. The Permittee shall submit summary reports of all monitoring activities required in Attachment “B” along with the compliance certification required by Section **Error! Reference source not found.** of Attachment “A”.  
[A.A.C. R18-2-306.A.5]
2. Deviations from the following Attachment “B” permit conditions shall be promptly reported in accordance with Condition XII.B.2 of Attachment “A”:  
[A.A.C. R18-2-306.A.5.b]
  - a. Condition III.D.6, III.E.1, III.E.6, III.E.7, III.F.1, and III.F.2.
  - b. Condition IV.B.3.b

### III. BIOGAS UPGRADE SYSTEM AND THERMAL OXIDIZER

#### A. Applicability

This Section is applicable to the Biogas Upgrade System (GUS) and Thermal Oxidizer identified in Attachment “C” of this permit.

#### B. Particulate Matter and Opacity

##### 1. Emission Limitation

- a. The Permittee shall not cause or allow to be discharged into the atmosphere in any one hour from the process source particulate matter in total quantities in excess of the amount calculated by the following equation:

[A.A.C. R18-2-730.A.1.a]

$$E = 4.10 P^{0.67}$$

where:

$E$  = the maximum allowable particulate emissions rate in pounds-mass per hour.

$P$  = the process weight rate in tons-mass per hour.

The total process weight from all similar units employing a similar type process shall be used in determining the maximum allowable emission of particulate matter. Actual values shall be calculated from the applicable equations and rounded off to two decimal places.

[A.A.C. R18-2-730.B and C]

##### b. Opacity

The opacity of any equipment or operation shall not be greater than 20% as determined by EPA Reference Method 9 or Alternative Method-082.

[A.A.C. R18-2-702.B.3]

C. Sulfur Dioxide

1. The Permittee shall not cause or permit the emission of sulfur dioxide at rates greater than 600 parts per million from the thermal oxidizer.  
[A.A.C. R18-2-730.A.2]
2. The Permittee shall not allow the SO<sub>2</sub> emissions from the thermal oxidizer to exceed 80 tons per year, calculated with the thermal oxidizer H<sub>2</sub>S destruction efficiency from the most recent performance test results based on a 12-month rolling total.

[A.A.C. R18-2-306.A.2, -306.01, and -331.A.3.a]

[Material Permit Conditions are indicated with underline and italics]

D. Operating Limitations and Requirements

1. The Permittee shall not emit gaseous or odorous materials from equipment, operations or premises under the Permittee's control in such quantities or concentrations as to cause air pollution.  
[A.A.C. R18-2-730.D]
2. Materials including solvents or other volatile compounds, paints, acids, alkalies, pesticides, fertilizers and manure shall be processed, stored, used and transported in such a manner and by such means that they will not evaporate, leak, escape or be otherwise discharged into the ambient air so as to cause or contribute to air pollution. Where means are available to reduce effectively the contribution to air pollution from evaporation, leakage or discharge, the installation and use of such control methods, devices, or equipment shall be mandatory.  
[A.A.C. R18-2-730.F]
3. Where a stack, vent or other outlet is at such a level that fumes, gas mist, odor, smoke, vapor or any combination thereof constituting air pollution is discharged to adjoining property, the Director may require the installation of abatement equipment or the alteration of such stack, vent, or other outlet by the owner or operator thereof to a degree that will adequately dilute, reduce or eliminate the discharge of air pollution to adjoining property.  
[A.A.C. R18-2-730.G]
4. The Permittee shall not allow hydrogen sulfide (H<sub>2</sub>S) to be emitted from any location in such manner and amount that the concentration of such emissions into the ambient air at any occupied place beyond the premises on which the source is located exceeds 0.03 parts per million by volume for any averaging period of 30 minutes or more.  
[A.A.C. R18-2-730.H]
5. At all times during normal operations of the system, the Permittee shall route the biogas from all the anaerobic digesters (covered lagoons) to the biogas upgrade system (GUS).

[A.A.C. R18-2-306.A.2, 331.A.3.a and 730.E.2]

[Material Permit Condition is indicated by underline and italics]

6. At all times, the Permittee shall route the tail gas from the GUS to the propane-fired thermal oxidizer.  
[A.A.C. R18-2-306.A.2, 331.A.3.e and 730.E.2]  
[Material Permit Condition is indicated by underline and italics]
7. At all times, the Permittee shall maintain the thermal oxidizer at a destruction efficiency of H<sub>2</sub>S no lower than 98%.  
[A.A.C. R18-2-306.01, -306.A.2, and -331.A.3.a]  
[Material permit conditions are indicated by underline and italics]
8. The Permittee shall, to the extent practicable, when the associated equipment is in operation, including periods of start-up, shutdown, and malfunction, operate the GUS and the thermal oxidizer in a manner consistent with good air pollution control practice.  
[A.A.C. R18-2-306.A.2 and 331.A.3.e]  
[Material permit conditions are indicated by underline and italics]
9. The Permittee shall operate and maintain the GUS and the thermal oxidizer in accordance with the manufacturers' specifications to ensure the destruction efficiency specified in Condition III.D.7 is met. All equipment shall be operated and maintained in accordance with vendor-supplied operations and maintenance instructions. If vendor-supplied operations and maintenance instructions are not available, the Permittee shall prepare an Operation and Maintenance Plan, which provides adequate information to properly operate and maintain the equipment. The Permittee shall operate the equipment in accordance with the Operation and Maintenance Plan.  
[A.A.C. R18-2-306.A.2]
10. The Permittee shall install, maintain and operate a temperature thermocouple to monitor the operating temperature of the thermal oxidizer.  
[A.A.C. R18-2-306.01 and -331.A.3.d & e]  
[Material permit conditions are indicated by underline and italics]

**E. Monitoring, Recordkeeping and Reporting Requirements**

1. Each quarter, the Permittee shall conduct a survey of visible emissions emanating from the thermal oxidizer in accordance with Condition II.A to demonstrate compliance with Condition III.B.1.b when in operation.  
[A.A.C. R18-2-306.A.3.c]
2. The Permittee shall monitor the GUS and the thermal oxidizer to ensure that it is operated and maintained in conformance with its design.  
[A.A.C. R18-2-306.A.3.c]
3. The Permittee shall maintain, on-site, records of the manufacturer supplied operations and maintenance instructions or Operation and Maintenance Plan for minimizing emissions for all equipment.  
[A.A.C. R18-2-306.A.4]
4. The Permittee shall maintain, on-site, records of any maintenance conducted on the GUS and thermal oxidizer.  
[A.A.C. R18-2-306.A.4]

5. The Permittee shall calibrate and operate the thermal oxidizer combustion chamber temperature thermocouple and indicator as per the manufacturer's operations and maintenance instructions or Operation and Maintenance Plan.  
[A.A.C. R 18-2-306.A.2 and -331.A.3.c]  
[Material Permit Condition identified by italics and underline]
6. The Permittee shall record the operating temperature of the thermal oxidizer combustion chamber every fifteen minutes on a temperature chart or on an electronic data logger. For each hour the thermal oxidizer is in operation to control H<sub>2</sub>S emissions, the Permittee shall record four readings. The average operating temperature shall be calculated as a 3-hour rolling average.  
[A.A.C. R 18-2-306.A.3.c]
7. The Permittee shall take corrective action as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions, following the discovery of any abnormal operation of the thermal oxidizer, or if the combustion chamber operating temperature falls out of the manufacturer recommended operating temperature range 1400 – 1600°F.  
[A.A.C. R18-2-306.A.3.c]
8. All records, analyses, and reports, shall be retained for a minimum of five years from the date of generation and shall be readily available to ADEQ upon request. The most recent two years of data shall be kept on-site.  
[A.A.C. R18-2-306.A.4]

**F. Testing Requirements**

1. Initial performance test

Within 60 days of achieving the maximum production rate, but no later than 180 days after initial startup, the Permittee shall conduct an initial performance test to demonstrate initial compliance with the SO<sub>2</sub> emission limit specified in Condition III.C.1 and the thermal oxidizer H<sub>2</sub>S destruction efficiency limit specified in Condition III.D.7. The operating temperature of the thermal oxidizer shall also be measured during the test to demonstrate compliance with the manufacturer recommended operating temperature range 1400 – 1600°F. The Permittee shall report the performance test results to the Director according to Condition XVII in Attachment “A”.

[A.A.C. R18-2-312 and A.A.C. R18-2-306.A.3.c]

2. Subsequent performance test

During the last year of the permit term, the Permittee shall conduct a subsequent performance test to demonstrate continued compliance with the SO<sub>2</sub> emission limit specified in Condition III.C.1 and the thermal oxidizer H<sub>2</sub>S destruction efficiency limit specified in Condition III.D.7. The operating temperature of the thermal oxidizer shall also be measured during the test to demonstrate compliance with the manufacturer recommended operating temperature range 1400 – 1600°F. The Permittee shall report the performance test results to the Director according to Condition XVII in Attachment “A”.

[A.A.C. R18-2-312 and A.A.C. R18-2-306.A.3.c]



3. The H<sub>2</sub>S in the upstream and downstream of the thermal oxidizer shall be determined in accordance with EPA Reference Method 15. Alternate procedures or methods may be approved in advance by the Director as part of the site-specific test plan as specified in Condition XVII.D of Attachment "A".

[A.A.C. R18-2-312]

4. The H<sub>2</sub>S destruction efficiency of the thermal oxidizer shall be determined by:

$$\text{Destruction Efficiency} = \frac{[\text{upstream } H_2S \left(\frac{lb}{hr}\right) - \text{downstream } H_2S \left(\frac{lb}{hr}\right)]}{\text{upstream } H_2S \left(\frac{lb}{hr}\right)}$$

[A.A.C. R18-2-312]

**G. Permit Shield**

Compliance with the conditions of this Part shall be deemed compliance with A.A.C. R18-2-730.A, B, C, D, E, F, H, I, and G and -312.

[A.A.C. R18-2-325]

**IV. FUGITIVE DUST REQUIREMENTS**

**A. Applicability**

Section IV applies to any non-point source of fugitive dust in the facility.

**B. Particulate Matter and Opacity**

Open Areas, Roadways & Streets, Storage Piles, and Material Handling

**1. Emission Limitations/Standards**

- a. Opacity of emissions from any fugitive dust non-point source shall not be greater than 40%.

[A.A.C. R18-2-614]

- b. The Permittee shall employ the following reasonable precautions to prevent excessive amounts of particulate matter from becoming airborne:

- (1) Keep dust and other types of air contaminants to a minimum in an open area where construction operations, repair operations, demolition activities, clearing operations, leveling operations, or any earth moving or excavating activities are taking place, by good modern practices such as using an approved dust suppressant or adhesive soil stabilizer, paving, covering, landscaping, continuous wetting, detouring, barring access, or other acceptable means;

[A.A.C. R18-2-604.A]

- (2) Keep dust to a minimum from driveways, parking areas, and vacant lots where motor vehicular activity occurs by using an

approved dust suppressant, or adhesive soil stabilizer, or by paving, or by barring access to the property, or by other acceptable means;

[A.A.C. R18-2-604.B]

- (3) Keep dust and other particulates to a minimum by employing dust suppressants, temporary paving, detouring, wetting down or by other reasonable means when a roadway or alley is used, repaired, constructed, or reconstructed;

[A.A.C. R18-2-605.A]

- (4) Take reasonable precautions, such as wetting, applying dust suppressants, or covering the load when transporting material likely to give rise to airborne dust. Earth or other material that is deposited by trucking or earth moving equipment shall be removed from paved streets by the person responsible for such deposits;

[A.A.C. R18-2-605.B]

- (5) Take reasonable precautions, such as the use of spray bars, wetting agents, dust suppressants, covering the load, and hoods when crushing, screening, handling, transporting or conveying of materials or other operations likely to result in significant amounts of airborne dust;

[A.A.C. R18-2-606]

- (6) Take reasonable precautions such as chemical stabilization, wetting, or covering when organic or inorganic dust producing material is being stacked, piled, or otherwise stored;

[A.A.C. R18-2-607.A]

- (7) Operate stacking and reclaiming machinery utilized at storage piles at all times with a minimum fall of material, or with the use of spray bars and wetting agents;

[A.A.C. R18-2-607.B]

- (8) Any other method as proposed by the Permittee and approved by the Director.

[A.A.C. R18-2-306.A.3.c]

## 2. Air Pollution Control Requirements

### Unpaved Road and Storage Piles

*Water, or an equivalent control, shall be used to control visible emissions from unpaved roads and storage piles.*

[A.A.C. R18-2-306.A.2 and -331.A.3.d]

[Material Permit Condition is indicated by underline and italics]

## 3. Monitoring and Recordkeeping Requirements

- a. The Permittee shall maintain records of the dates on which any of the activities listed in Condition IV.B.1.b above were performed and the control measures that were adopted.

[A.A.C. R18-2-306.A.3.c]

- b. Opacity Monitoring Requirements

Each month, the Permittee shall monitor visible emissions from fugitive sources in accordance with Condition II.A.

[A.A.C. R18-2-306.A.3.c]

**C. Permit Shield**

Compliance with Section IV shall be deemed compliance with A.A.C. R18-2-604, -605, -606, 607, -608, -614, and -804.B.

[A.A.C. R18-2-325]

**V. OTHER PERIODIC ACTIVITIES**

**A. Abrasive Blasting**

**1. Particulate Matter and Opacity**

- a. Emission Limitations/Standards

The Permittee shall not cause or allow sandblasting or other abrasive blasting without minimizing dust emissions to the atmosphere through the use of good modern practices. Good modern practices include:

[A.A.C. R18-2-726]

- (1) Wet blasting;
- (2) Effective enclosures with necessary dust collecting equipment; or
- (3) Any other method approved by the Director.

- b. Opacity

The Permittee shall not cause, allow or permit visible emissions from sandblasting or other abrasive blasting operations in excess of 20% opacity.

[A.A.C. R18-2-702.B.3]

**2. Monitoring and Recordkeeping Requirement**

Each time an abrasive blasting project is conducted, the Permittee shall make a record of the following:

[A.A.C. R18-2-306.A.3.c]

- a. The date the project was conducted;

- b. The duration of the project; and
- c. Type of control measures employed.

3. Permit Shield

Compliance with Condition V.A.1.a shall be deemed compliance with A.A.C. R18-2-702.B.3 and -726.

[A.A.C.R18-2-325]

**B. Use of Paints**

1. Volatile Organic Compounds

a. Emission Limitations/Standards

While performing spray painting operations, the Permittee shall comply with the following requirements:

- (1) The Permittee shall not conduct or cause to be conducted any spray painting operation without minimizing organic solvent emissions. Such operations, other than architectural coating and spot painting, shall be conducted in an enclosed area equipped with controls containing no less than 96 percent of the overspray.

[A.A.C.R18-2-727.A]

- (2) The Permittee or their designated contractor shall not either:

- (a) Employ, apply, evaporate, or dry any architectural coating containing photochemically reactive solvents for industrial or commercial purposes; or
- (b) Thin or dilute any architectural coating with a photochemically reactive solvent.

[A.A.C.R18-2-727.B]

- (3) For the purposes of Condition V.B.1.a(1), a photochemically reactive solvent shall be any solvent with an aggregate of more than 20 percent of its total volume composed of the chemical compounds classified in Condition V.B.1.a(2), or which exceeds any of the following percentage composition limitations, referred to the total volume of solvent:

[A.A.C.R18-2-727.C]

- (a) A combination of the following types of compounds having an olefinic or cyclo-olefinic type of unsaturation-hydrocarbons, alcohols, aldehydes, esters, ethers, or ketones: 5 percent.

- (b) A combination of aromatic compounds with eight or more carbon atoms to the molecule except ethylbenzene: 8 percent.
- (c) A combination of ethylbenzene, ketones having branched hydrocarbon structures, trichloroethylene or toluene: 20 percent.
- (4) Whenever any organic solvent or any constituent of an organic solvent may be classified from its chemical structure into more than one of the groups of organic compounds described in Condition V.B.1.a(2), it shall be considered to be a member of the group having the least allowable percent of the total volume of solvents.

[A.A.C.R18-2-727.D]

b. Monitoring and Recordkeeping Requirements

- (1) Each time a spray painting project is conducted, the Permittee shall make a record of the following:
  - (a) The date the project was conducted;
  - (b) The duration of the project;
  - (c) Type of control measures employed;
  - (d) Safety Data Sheets (SDS) for all paints and solvents used in the project; and
  - (e) The amount of paint consumed during the project.
- (2) Architectural coating and spot painting projects shall be exempt from the recordkeeping requirements of Condition V.B.1.b(1).

[A.A.C. R18-2-306.A.3.c]

c. Permit Shield

Compliance with Condition V.B.1.a shall be deemed compliance with A.A.C.R18-2-727.

[A.A.C.R18-2-325]

2. Opacity

a. Emission Limitation/Standard

The Permittee shall not cause, allow or permit visible emissions from painting operations in excess of 20% opacity.

[A.A.C. R18-2-702.B.3]

b. Permit Shield

Compliance with Condition V.B.2.a shall be deemed compliance with A.A.C.R18-2-702.B.3.

[A.A.C. R18-2-325]

**C. Demolition/Renovation - Hazardous Air Pollutants**

**1. Emission Limitation/Standard**

The Permittee shall comply with all of the requirements of 40 CFR 61 Subpart M (National Emissions Standards for Hazardous Air Pollutants - Asbestos).

[A.A.C. R18-2-1101.A.12]

**2. Monitoring and Recordkeeping Requirement**

The Permittee shall keep all required records in a file. The required records shall include the “NESHAP Notification for Renovation and Demolition Activities” form and all supporting documents.

[A.A.C. R18-2-306.A.3.c]

**3. Permit Shield**

Compliance with the Condition V.C.1 shall be deemed compliance with A.A.C. R18-2-1101.A.12.

[A.A.C. R18-2-325]

ATTACHMENT “C”: EQUIPMENT LIST

| EQUIPMENT TYPE                      | MAX.<br>CAPACITY | MAKE                                   | MODEL         | SERIAL<br>NUMBER | INSTALLATION/<br>MFG. DATE | EQUIPMENT<br>ID NUMBER | A.A.C. / NSPS /<br>NESHAP |
|-------------------------------------|------------------|----------------------------------------|---------------|------------------|----------------------------|------------------------|---------------------------|
| Thermal Oxidizer<br>(Propane Fired) | 5-7 MMBtu/hr     | MRW                                    | MRW<br>3.5×49 | TBD              | TBD                        | TO-3001                | A.A.C. R18-2-<br>730      |
| Biogas Upgrade System<br>(GUS)      | 1473 scfm        | Roeslein<br>Alternative<br>Energy, LLC | TBD           | TBD              | TBD                        | TBD                    | A.A.C. R18-2-<br>730      |



**TECHNICAL REVIEW AND EVALUATION  
OF APPLICATION FOR  
AIR QUALITY PERMIT No. 90062**

## **I. INTRODUCTION**

This Class II new permit is for the construction and operation of a renewable natural gas facility for Align RNG Arizona - Snowflake, LLC.

### **A. Company Information**

Facility Name: Align RNG Arizona - Snowflake

Mailing Address: 120 Tredegar Street,  
Richmond, VA 23219

Facility Location: 11 miles north of Snowflake, AZ off Highway 77,  
Snowflake, Navajo County, Arizona 85937

### **B. Attainment Classification**

This facility is located in Navajo County which is classified as attainment or unclassified for all criteria pollutants.

## **II. BACKGROUND**

Align RNG Arizona - Snowflake, LLC (Align) is proposing to construct and operate a renewable natural gas (RNG) facility consisting of anaerobic digesters, a gas upgrade system, and a truck loading station (proposed Align project). The proposed Align project will be located on an existing hog farm located in Snowflake, Arizona (PFFJ).

The existing hog farm (PFFJ), which includes an adjacent feed mill, is owned by Smithfield Foods, Inc. (Smithfield) and is currently operating under Permit No. 65643. Align, which is a joint venture between Smithfield and Dominion Energy, will own and operate the proposed Align project. A Memorandum on behalf of Align was submitted to ADEQ evaluating the three criteria listed under Arizona Administrative Code (A.A.C.) R18-101.14 to determine if the proposed Align project and PFFJ should be considered a single stationary source. The analysis concluded that the facility met each of the criteria listed under state rule to be considered a single stationary source. However, Align is proposing that the co-located project activities be covered by two separate air quality permits. Align stated in the memo that the primary function of the new proposed Align project and PFFJ are independent of the other and the permitting requirements for each operation are not connected to and will be unaffected by the proposed Align operation. As a result, the operators at each respective site would have little to no contact with the other. In addition, these sites are operated by two separate companies with different Responsible Officials, who cannot certify compliance for the other.

ADEQ reviewed the memo analyzing the source determination for the proposed Align project and PFFJ and affirmed that the operations should be considered a single stationary source under state rule for permit applicability determinations. Regarding Align's request to have the co-located



project activities covered by two separate air quality permits, the United States Environmental Protection Agency (EPA) has determined that permitting authorities may issue multiple permits to a stationary source if each facility's compliance obligations are clear, and all applicable requirements are included in the respective air quality permits. Given that the operations will be conducted by separate companies that have different Responsible Officials, ADEQ approved to permit the proposed Align project and PFFJ under two separate air quality permits, and also requested that the current and any future permitting, or air dispersion modeling, must consider emission sources from both operations.

### III. PROCESS DESCRIPTION

#### A. Process Description

Align is proposing to produce salable, pipeline-quality renewable natural gas (RNG) from swine-generated raw biogas at the existing Smithfield hog farm (PFFJ) located in Snowflake, Arizona. The raw biogas will be produced from anaerobically digesting the swine manure (feedstock) in new anaerobic digesters (covered lagoons). The raw biogas will be collected and conveyed by low-pressure pipelines from the digesters to a biogas upgrade system (GUS) where it will be processed into a high quality RNG. After the GUS, the RNG will be conveyed to a truck loading station where it will be loaded onto trucks for transfer to an interconnection site (Injection Site), approximately 35 miles (via road) from PFFJ, where the RNG will be injected into an existing natural gas pipeline for distribution to end users. Align's proposed operations will generally consist of four new digesters, a GUS, and a truck loading station all located in designated areas on the property.

##### 1. Anaerobic Digesters

The four new anaerobic digesters will process the manure from PFFJ to produce and collect raw biogas to supply the GUS. Under normal operations, the only emissions from the digesters will be fugitive emissions of hydrogen sulfide ( $\text{H}_2\text{S}$ ) and volatile organic compounds (VOC) associated with potential leaks from the impermeable covers and digester systems. The digesters will also be equipped with a pressure relief vent for safety that will be manually actuated only during emergency situations such as in the vent of pressure buildup.

##### 2. Gas Upgrade System (GUS)

The GUS is an integrated processing system designed to process the raw biogas, by removing impurities, in order to upgrade it to pipeline quality gas. The maximum capacity of the system is nominally rated to process 1,473 standard cubic feet per minute (SCFM) of raw biogas, which would produce approximately 850 SCFM of RNG (approximately 58% of the raw biogas inlet feed rate). The GUS will include a biogas compression system, membrane upgrade technology, tail gas thermal oxidizer, and product gas  $\text{H}_2\text{S}$  polishing beds. The GUS uses membrane technology to process the raw biogas into high quality RNG. The membrane technology separates unwanted carbon dioxide ( $\text{CO}_2$ ),  $\text{H}_2\text{S}$ , oxygen ( $\text{O}_2$ ), water ( $\text{H}_2\text{O}$ ), and other impurities in the raw biogas from the desired product (methane) based on each compound's permeability through three stages of membranes. This separation is carried out by pressurizing the biogas against the

membranes, which separates methane from the undesired compounds (tail gas – primarily CO<sub>2</sub> with lesser amounts of methane and trace quantities of H<sub>2</sub>S and other impurities). Product gas exiting the last stage of membranes will flow through an H<sub>2</sub>S polishing bed, adsorbing trace amounts of H<sub>2</sub>S remaining in the product gas to meet pipeline quality specifications. From the H<sub>2</sub>S polishing bed the product gas will be transported to the truck loading station. The tail gas from the various membrane stages of the GUS will be sent to a thermal oxidizer to oxidize any remaining methane and H<sub>2</sub>S before being released to the atmosphere. The primary potential emissions from the GUS will consist of point source emissions from the thermal oxidizer. There is also the potential for fugitive H<sub>2</sub>S and VOC emissions from equipment leaks.

### 3. Truck Loading Station

At the truck loading station, the RNG will be loaded onto tanker trucks for transport offsite to the pipeline injection point. The truck loading station will be equipped with an electric powered compressor with a variable frequency drive (VFD), a compressed natural gas (CNG) dryer, and a trailer connection hose post with operator push button interface. Potential emissions from the truck loading station will be fugitive VOC emissions consisting of escaped gas from the nozzle during loading events and other fugitive emissions from equipment leaks.

## B. Control Devices

The tail gas from the various membrane stages of the GUS will be sent to a propane fired thermal oxidizer to oxidize any remaining methane and H<sub>2</sub>S before being released to the atmosphere. The propane fired thermal oxidizer has a H<sub>2</sub>S destruction efficiency of 98% guaranteed by the manufacturer.

## C. Process Flow Diagram

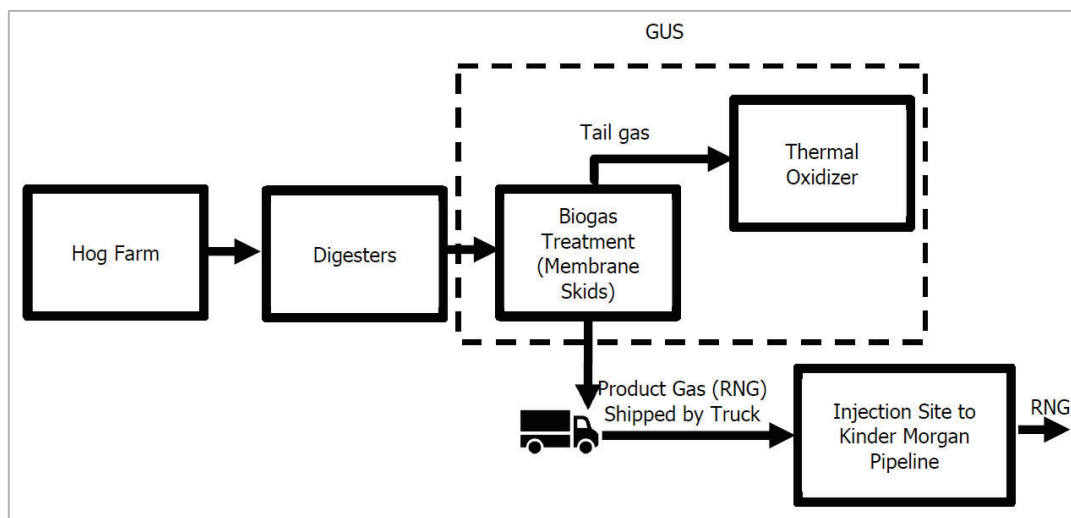


Figure 1. Align Process Flow Diagram

#### IV. LEARNING SITE EVALUATION

In accordance with ADEQ's Environmental Permits and Approvals near Learning Sites Policy, the Department is required to conduct an evaluation to determine if any nearby learning sites would be adversely impacted by the facility. Learning sites consist of all existing public schools, charter schools and private schools the K-12 level, and all planned sites for schools approved by the Arizona School Facilities Board. The learning sites policy was established to ensure that the protection of children at learning sites is considered before a permit approval is issued by ADEQ.

The Department did not identify any learning sites within two miles of the facility.

#### V. EMISSIONS

##### A. Emissions from the Proposed Align Project Only

The total generated biogas from all four anaerobic digesters will be 385,965,729 scf/yr and will all be routed to the GUS. The product gas from the GUS is approximately 58% in volume of the biogas sent to GUS, and the tail gas from the GUS is approximately 42% in volume of biogas sent to GUS. Methane content in the product gas is expected to be no lower than 98%. The tail gas from the GUS will be sent to a propane fired thermal oxidizer before being released to the atmosphere. The non-fugitive emissions of the proposed Align project are from the thermal oxidizer which includes the combustion of the tail gas and supplemental propane.

The potential-to-emit (PTE) only includes non-fugitive emissions due to that this facility is not a source listed in A.A.C. R18-2-101.23 (non-categorical source). The PTE is calculated based on U.S. EPA's Compilation of Air Pollution Emission Factors (AP-42) Section 1.4, Section 1.5, and Section 13.5, the vendor and manufacturer's specifications, and design parameters from the facility. The facility has a PTE more than the significant threshold of SO<sub>2</sub>. The facility's PTE is provided in Table below:

**Table 1: Potential to Emit (tpy) for Proposed Align Project Only**

| Pollutant         | Emissions | Permitting Exemption Threshold | Significant Thresholds | Minor NSR Triggered?                          |
|-------------------|-----------|--------------------------------|------------------------|-----------------------------------------------|
| NO <sub>x</sub>   | 6.4       | 20                             | 40                     | No                                            |
| PM <sub>10</sub>  | 0.2       | 7.5                            | 15                     | No                                            |
| PM <sub>2.5</sub> | 0.2       | 5                              | 10                     | Yes*<br>(40 tpy of SO <sub>2</sub> emissions) |
| CO                | 2.9       | 50                             | 100                    | No                                            |
| SO <sub>2</sub>   | 77.3      | 20                             | 40                     | Yes                                           |
| VOC               | 0.2       | 20                             | 40                     | No                                            |

| Pollutant        | Emissions | Permitting Exemption Threshold | Significant Thresholds        | Minor NSR Triggered? |
|------------------|-----------|--------------------------------|-------------------------------|----------------------|
| HAPs             | 0.03      | N/A                            | 10 (single)/<br>25 (combined) | N/A                  |
| H <sub>2</sub> S | 0.8       | N/A                            | 10                            | N/A                  |

\* SO<sub>2</sub> is a precursor to PM<sub>2.5</sub>.

**B. Emissions from the Proposed Align Project and PFFJ**

Since neither the proposed Align project nor PFFJ is a categorical source listed in A.A.C. R18-2-101.23, only non-fugitive emissions are included in the PTE from both sources. The PTE for the proposed Align project and PFFJ is provided in Table 2.

**Table 2: Potential to Emit (tpy) for the Proposed Align Project and PFFJ**

| Pollutant         | Proposed Align Project | PFFJ | Proposed Align Project and PFFJ | Title V Thresholds | Major NSR Thresholds |
|-------------------|------------------------|------|---------------------------------|--------------------|----------------------|
| NO <sub>x</sub>   | 6.4                    | 80.2 | 86.6                            | 100                | 250                  |
| PM <sub>10</sub>  | 0.2                    | 9.0  | 9.2                             | 100                | 250                  |
| PM <sub>2.5</sub> | 0.2                    | 9.0  | 9.2                             | 100                | 250                  |
| CO                | 2.9                    | 28.1 | 31.1                            | 100                | 250                  |
| SO <sub>2</sub>   | 77.3                   | 8.8  | 86.0                            | 100                | 250                  |
| VOC               | 0.2                    | 10.6 | 10.8                            | 100                | 250                  |
| H <sub>2</sub> S  | 0.8                    | 0    | 0.8                             | 100                | 250                  |
| HAPs              | 0.03                   | 0.18 | 0.21                            | 25                 | N/A                  |

**VI. TITLE V PROGRAM AND MAJOR NEW SOURCE REVIEW**

A facility is subject to Title V program if this facility has a PTE equal to or greater than 100 tpy of any air pollutant subject to regulation. Major new source review is required if a facility has a PTE equal to or greater than 250 tpy of any regulated NSR pollutant if it is a non-categorical source. For both programs, fugitive emissions are not considered if the facility is a non-categorical source. As shown in Table 2, the PTE from the proposed Align project or the total PTE from the proposed Align project and PFFJ is both below the Title V thresholds and major new source review thresholds. Therefore, the proposed Align project is not subject to Title V or major new source review program; or if the proposed Align project and PFFJ together is considered to be a single source, this source does not trigger Title V or major new source review.

For future permitting actions or air dispersion modeling, the emissions from both sources shall be considered for major source, major new source review (NSR) and PSD applicability.

**VII. MINOR NEW SOURCE REVIEW (NSR)**

Minor new source review is required if the emissions of a new source have the potential to emit any NSR air pollutant at an amount equal to or greater than the permitting exemption threshold in Table above. For the proposed Align project, the potential to emit for SO<sub>2</sub> is greater than the permitting exemption threshold. Thus, this facility is subject to minor NSR requirements.

The facility has the option to either implement reasonably available control technology (RACT) or conduct screen modeling to satisfy the requirements of minor NSR. This facility elected to undergo screen modeling to demonstrate compliance with minor NSR Requirements. A detailed discussion of the screen modeling analysis can be found in Section XII below.

## VIII. VOLUNTARILY ACCEPTED EMISSION LIMITATIONS AND STANDARDS

The permit contains the following voluntary emission limitation and standard:

### A. SO<sub>2</sub> Emission Limitation

The facility has accepted a voluntary SO<sub>2</sub> emission limitation of 80 tons per year from the thermal oxidizer to avoid the total emissions from the proposed Align project and PFFJ from triggering major source applicability. This operation limit was incorporated into this installation Permit No. 90062.

## IX. APPLICABLE REGULATIONSS

Table 1 identifies applicable regulations and verification as to why that standard applies. The table also contains a discussion of any regulations the emission unit is exempt from.

**Table 1: Applicable Regulations**

| Unit & year | Control Device                 | Rule                                                                                                                                                                                      | Discussion                                                                                                                                                                                                                                                                                                  |
|-------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GUS         | Propane Fired Thermal Oxidizer | A.A.C. R18-2-730: Standards of Performance for Unclassified Sources                                                                                                                       | The GUS is subject to Unclassified Sources requirements A.A.C. R18-2-730.                                                                                                                                                                                                                                   |
|             |                                | 40 CFR Part 60 Subpart OOOOa: Standards of Performance for Crude Oil and Natural Gas Facilities for Which Construction, Modification or Reconstruction Commenced after September 18, 2015 | This is not applicable because the proposed Align project receives biogas produced from the anaerobic digestion of hog manures and process the biogas to form renewable natural gas, but does not obtain natural gas from a well per 40 CFR §60.5430a definition for natural gas production and processing. |

| Unit & year                      | Control Device                                                        | Rule                                                                                                                                  | Discussion                                                                                                                                                                                                                                                                                         |
|----------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  |                                                                       | 40 CFR 63 Subpart HH: National Emission Standards for Hazardous Air Pollutants from Oil and Natural Gas Production Facilities         | This is not applicable because the proposed Align project is an area HAP source and does not have a triethylene glycol (TEG) dehydration unit per 40 CFR §63.760.(b)(2).                                                                                                                           |
|                                  |                                                                       | 40 CFR 63 Subpart HHH: National Emissions Standards for Hazardous Air Pollutants from Natural Gas Transmission and Storage Facilities | This is not applicable because the proposed Align project is not a major HAP source and not a natural gas transmission and storage facility and does not transport or store natural gas prior to entering the pipeline to a local distribution company or to a final end user per 40 CFR §63.1270. |
| Fugitive dust sources            | Water Trucks, Dust Suppressants                                       | A.A.C. R18-2 Article 6<br>A.A.C. R18-2-702                                                                                            | These standards are applicable to all fugitive dust sources at the facility.                                                                                                                                                                                                                       |
| Abrasive Blasting                | Wet blasting;<br>Dust collecting equipment;<br>Other approved methods | A.A.C. R-18-2-702<br>A.A.C. R-18-2-726                                                                                                | These standards are applicable to any abrasive blasting operation.                                                                                                                                                                                                                                 |
| Spray Painting                   | Enclosures                                                            | A.A.C. R18-2-702<br>A.A.C. R-18-2-727                                                                                                 | These standards are applicable to any spray painting operation.                                                                                                                                                                                                                                    |
| Demolition/renovation Operations | N/A                                                                   | A.A.C. R18-2-1101.A.8                                                                                                                 | This standard is applicable to any asbestos related demolition or renovation operations.                                                                                                                                                                                                           |

**X. MONITORING, RECORDKEEPING, AND REPORTING REQUIREMENTS**

Table contains an inclusive but not an exhaustive list of the monitoring, recordkeeping and reporting requirements prescribed by the air quality permit. The table below is intended to provide insight to the public for how the Permittee is required to demonstrate compliance with the emission limits in the permit.

**Table 4: Permit No. 90062**

| Emission Unit          | Pollutant        | Emission Limit                          | Monitoring Requirements                                                                                                                                                                                                                                                                                  | Recordkeeping Requirements                                                                                                                                                                                                 | Reporting Requirements           |
|------------------------|------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| GUS (Thermal Oxidizer) | Opacity          | 20%                                     | Conduct quarterly visible emissions survey                                                                                                                                                                                                                                                               | Maintain on-site records of the manufacturer supplied operations and maintenance instructions or Operation and Maintenance Plan for minimizing emissions for all equipment. Record thermal oxidizer operating temperature. | Report performance test results. |
|                        | SO <sub>2</sub>  | 600 ppm, 80 TPY (from thermal oxidizer) | Monitor the GUS and the thermal oxidizer to ensure that it is operated and maintained in conformance with its design.<br>Operate and maintain the GUS and the thermal oxidizer in accordance with the manufacturers' specifications to ensure the 98% destruction efficiency of H <sub>2</sub> S is met. |                                                                                                                                                                                                                            |                                  |
|                        | NO <sub>x</sub>  | 500 ppm (as NO <sub>2</sub> )           | Monitor the GUS and the thermal oxidizer to ensure that it is operated and maintained in conformance with its design.                                                                                                                                                                                    |                                                                                                                                                                                                                            |                                  |
|                        | H <sub>2</sub> S | 0.03 ppm                                | Operate and maintain the GUS and the thermal oxidizer in accordance with its design.                                                                                                                                                                                                                     |                                                                                                                                                                                                                            |                                  |
|                        | PM               | 40% Opacity                             | Operate and maintain the GUS and the thermal oxidizer in accordance with its design.                                                                                                                                                                                                                     |                                                                                                                                                                                                                            |                                  |

| Emission Unit     | Pollutant | Emission Limit                              | Monitoring Requirements                                                                                                                                                                                                                                                                                                                                                                                                                            | Recordkeeping Requirements                                                                                                                                                                                  | Reporting Requirements |
|-------------------|-----------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
|                   |           |                                             | <p>with the manufacturers' specifications to ensure the 98% destruction efficiency of H<sub>2</sub>S is met. A Method 9 observer is required to conduct a monthly survey of visible emissions.</p> <p>Monitor thermal oxidizer operating temperature.</p> <p>Conduct initial and subsequent performance test on the SO<sub>2</sub> emission limit and H<sub>2</sub>S destruction efficiency and operating temperature of the thermal oxidizer.</p> |                                                                                                                                                                                                             |                        |
| Fugitive Dust     | PM        | 20% Opacity                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Record of the dates and types of dust control measures employed, and if applicable, the results of any Method 9 observations, and any corrective action taken to lower the opacity of any excess emissions. |                        |
| Abrasive Blasting | VOC       | 20% Opacity<br>Control 96% of the overspray |                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Record the date, duration and pollution control measures of any abrasive blasting project.                                                                                                                  |                        |




| Emission Unit             | Pollutant | Emission Limit | Monitoring Requirements | Recordkeeping Requirements                                                                                                                                                                | Reporting Requirements |
|---------------------------|-----------|----------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Spray Painting            | VOC       |                |                         | Maintain records of the date, duration, quantity of paint used, any applicable MSDS, and pollution control measures of any spray painting project.                                        |                        |
| Demolition/<br>Renovation | Asbestos  |                |                         | Maintain records of all asbestos related demolition or renovation projects including the “NESHAP Notification for Renovation and Demolition Activities” form and all supporting documents |                        |

## XI. ENVIRONMENTAL JUSTICE ANALYSIS

EPA defines Environmental Justice (EJ) to include the fair treatment and meaningful involvement of all people regardless of race, color, national origin, or income with respect to the development, implementation, and enforcement of environmental laws, regulations, and policies. The goal of completing an EJ assessment in permitting is to provide an opportunity for overburdened populations or communities to allow for meaningful participation in the permitting process. Overburdened is used to describe the minority, low-income, tribal and indigenous populations or communities that potentially experience disproportionate environmental harms and risks due to exposures or cumulative impacts or greater vulnerability to environmental hazards.

EPA developed EJSCREEN, a publicly available tool that uses nationally consistent data to produce maps and reports detailing environmental and demographic indicators that can be used to evaluate EJ concerns. EPA selected an 80<sup>th</sup> percentile threshold for this action to evaluate the potential for EJ concerns in a community, meaning that if the area of interest exceeds the 80<sup>th</sup> percentile for one or more of the EJ indexes, the EPA considers that area to have a high potential for EJ concerns. ADEQ mapped the location of the proposed Align project and reviewed a five-mile radius around the facility for potential environmental justice concerns (see Figure 2).

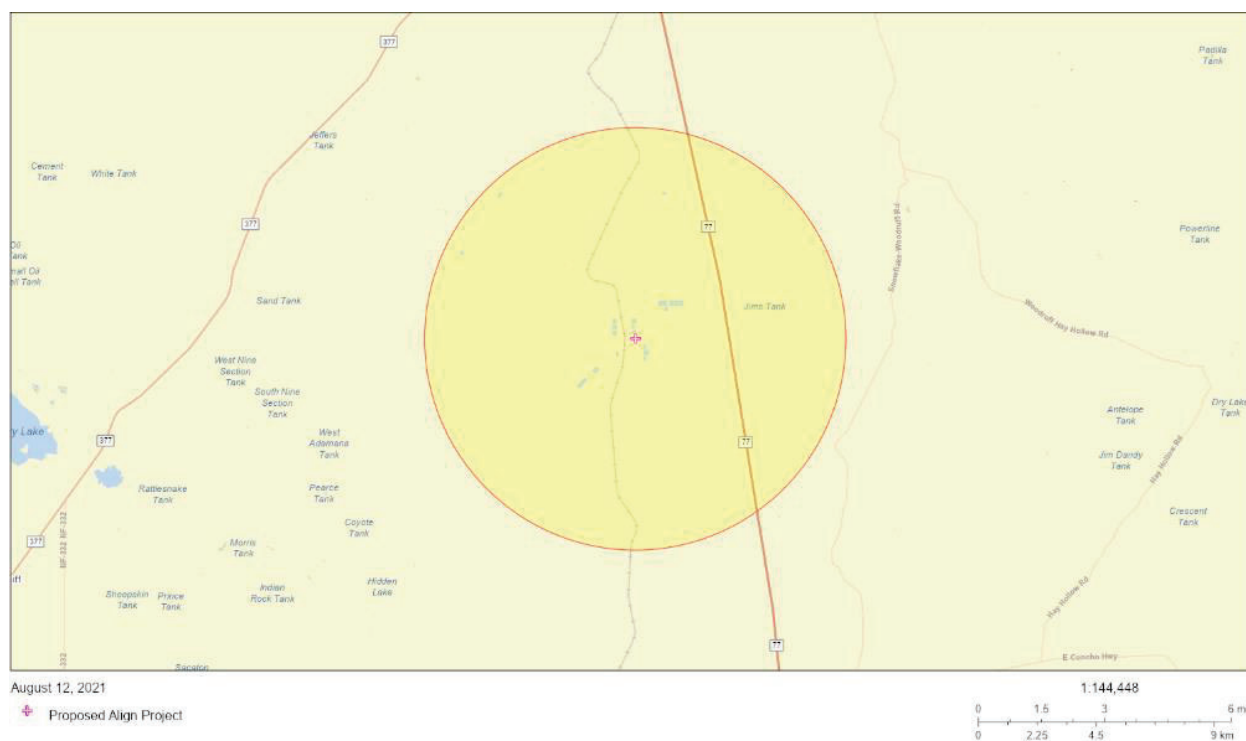

**Figure 2. A Five-mile Radius around the Proposed Align Project for Potential Environmental Justice Concerns**

### A. Demographics

ADEQ relied on data from the EPA EJ Screen tool to assess the demographics of the communities near the initial location for this proposed facility. The EJSCREEN report shows that the Demographic Indicator for Demographic Index, People of Color Population, Low Income Population, Linguistically Isolated Population, Population with Less than High School Education, and Population over 64 Years of Age, are all below the 80<sup>th</sup>

percentile threshold. The Demographic Indicator for Population under 5 Years of Age is over the 80<sup>th</sup> percentile threshold. Air quality dispersion modeling was conducted to ensure that the total emissions from the proposed Align project and PFFJ do not contribute to any exceedances of the National Ambient Air Quality Standards (NAAQS). Additionally, ADEQ posts a notice in two newspapers of general circulation within the surrounding community, as well as publishes the notice electronically to ensure that the community has ample opportunity to provide comments on the draft documents prior to a final permitting decision.

**B. Air Quality**

Air quality dispersion modeling was conducted to determine if the total emissions from the proposed Align project and PFFJ will contribute to a NAAQS or Arizona Ambient Air Quality Guidelines (AAAQG) exceedance. A complete review of the air quality analysis can be found in Section XII below. Based on the modeling analysis results, ADEQ has determined that the issuance of the Air Quality Permit for the proposed Align project will not interfere with attainment and maintenance of the NAAQS, and will not have an adverse impact on the community.

**C. Conclusion**

ADEQ concludes that the protections afforded by Arizona Revised Statutes (A.R.S.) § 49-426, which is imposed through the permit, ensure that the public health and environment in Arizona are protected and that the public notice and comment opportunities afforded to the community on this new permit application satisfy the public participation component of the EPA EJ Guidance. The dispersion modeling conducted further concludes that the proposed Align project demonstrates compliance with the NAAQS and that the emissions from the facility will not result in any significant environmental or public health impacts.

## **XII. AMBIENT AIR IMPACT ANALYSIS**

This section summarizes the ADEQ's findings regarding the ambient assessment submitted by Align in support of its air quality Class II permit application for the construction and operation of a renewable upgrading natural gas facility near Snowflake, Arizona. As previously discussed, the proposed Align project will trigger the minor NSR review for SO<sub>2</sub>. Under the minor NSR program, the Permittee must address minor NSR requirements by conducting a National Ambient Air Quality Standards (NAAQS) modeling exercise or a Reasonable Available Control Technology (RACT) analysis. Align elected to perform regulatory dispersion modeling to demonstrate that the proposed project's emissions will not interfere with attainment and maintenance of NAAQS for SO<sub>2</sub>. Since SO<sub>2</sub> emissions may also contribute to the secondary formation of PM<sub>2.5</sub>, Align performed an additional analysis to address the impacts on secondary PM<sub>2.5</sub> from the proposed project's precursor (SO<sub>2</sub> and NO<sub>x</sub>) emissions.

ADEQ reviewed the ambient air impact analysis following the EPA's Guideline on Air Quality Models (40 CFR Part 51 Appendix W)<sup>1</sup> and ADEQ's Modeling Guidelines for Arizona Air Permits

---

<sup>1</sup> [https://www.epa.gov/sites/production/files/2020-09/documents/appw\\_17.pdf](https://www.epa.gov/sites/production/files/2020-09/documents/appw_17.pdf)

(hereafter “ADEQ Guidelines”).<sup>2</sup> It was concluded that the issuance of the Air Quality Permit for the proposed Align project will not interfere with attainment and maintenance of the NAAQS, and will not have an adverse impact on the community.

**A. Model Selection**

Align used the American Meteorological Society/Environmental Protection Agency Regulatory Model (AERMOD) model for the ambient impact analysis. AERMOD is the EPA-preferred regulatory model for estimating impacts at receptors located in simple terrain and complex terrain (within 50 km of a source) due to emissions from industrial sources. AERMOD consists of three major components: AERMAP, used to process terrain data and develop elevations for receptors; AERMET, used to process the meteorological data; and AERMOD, used to estimate the ambient pollutant concentrations. Align used the latest version of AERMOD (Version 21112) for the modeling analysis.

**B. Emission Sources**

The dispersion modeling considers all SO<sub>2</sub> emissions sources from both the proposed Align project and the existing hog farm PFFJ. The SO<sub>2</sub> emission source from the proposed Align project is a thermal oxidizer (owned and operated by Align) where the tail gas containing H<sub>2</sub>S will be combusted. PFFJ has propane-fired heaters and diesel-fired engines (owned and operated by Smithfield). The thermal oxidizer is the primary emission source, accounting for approximately 90% of the total emissions over the two facilities.

The thermal oxidizer and the diesel-fired engines were modeled as point sources. The maximum hourly emission rates for point sources were modeled. The propane building heaters used at PFFJ are vented inside the buildings. Therefore, these heaters were modeled as area sources. Because the heaters operate seven (7) months out of the year, the short-term emission rates based on annual emissions were adjusted accordingly.

**C. Meteorological Data**

**1. Meteorological Data Selection**

For regulatory dispersion modeling analyses, 5 years of National Weather Service (NWS) station meteorological data, or at least 1 year of site-specific meteorological data, or at least 3 years of prognostic meteorological data should be used.

Align utilized 5 years of the meteorological data collected at the Winslow-Lindbergh Regional Airport (Winslow Airport) for the dispersion modeling analysis. Align provided justification on the representativeness of the meteorological data following the four criteria as listed in 40 CFR Part 51 Appendix W Section 8.4.1.b: (i) spatial proximity of the meteorological monitoring site to the facility; (ii) complexity of the topography of the area; (iii) exposure of the meteorological sensors; and (iv) period of time during which the

---

<sup>2</sup> [https://static.azdeq.gov/aqd/modeling\\_guidance\\_2019.pdf](https://static.azdeq.gov/aqd/modeling_guidance_2019.pdf)

data are collected. Upon review, ADEQ concurred with Align that the meteorological data collected from the Winslow Airport generally characterize the transport and dispersion conditions in the project area.

## **2. Meteorological Data Processing**

ADEQ provided Align the pre-processed meteorological files for the period of 2015 to 2019. ADEQ used the AERMET meteorological preprocessor (Version 19191) to process the five-years of surface data collected from Winslow Airport along with concurrent upper air radiosonde data obtained from the Albuquerque NWS radiosonde station. ADEQ also used the EPA's AERSURFACE tool (Version 20060) to calculate surface characteristic parameters (albedo, Bowen ration and surface roughness) required by AERMET.

During the permit review period, ADEQ processed the most recent five-years of meteorological data (2016-2020) using the most recent version of AERMET (Version 21112). ADEQ reran the model with the updated meteorological dataset and found that the effects of the updated meteorological dataset on the modeled results were marginal.

### **D. Ambient Air Boundary and Receptor Network**

Align used the facility fence line as the ambient air boundary for modeling purposes. Following ADEQ Guidelines, Align set up a receptor network to determine areas of maximum predicted concentrations. Align used the AERMAP terrain processor (Version AERMAP - Version 18081) to process the National Elevation Data (NED) NED 1/3 arc second data files to generate the receptor elevations and hill heights.

### **E. Land Use Classification**

The rural/urban classification of an area is determined by either the dominance of a specific land use or by population data in the study area. The land-use procedure specifies that the land-use within a three-kilometer radius of the source should be determined using the typing scheme developed by Auer.<sup>3</sup> Align determined the proposed project site area as "Rural" based on the land use method. Therefore, Align utilized the default, rural dispersion coefficient for the modeling analysis.

### **F. Building Downwash Effects**

Align evaluated building downwash effects based on building and stack location and dimensions, and the EPA's Building Profile Input Program Plume Rise Model Enhancements (BPIP-PRME).

### **G. Background Concentration**

---

<sup>3</sup> Auer, A.H. 1978. Correlation of Land Use and Cover with Meteorological Anomalies, *Journal of Applied Meteorology*, 17:636-643.

The background concentrations account for sources of air pollution other than those explicitly modeled. Typically, background concentrations should be determined based on the air quality data collected in the vicinity of the proposed project site. There are no monitors located in the vicinity of the project site.

Because this air dispersion modeling analysis has already modeled the proposed Align project emission sources as well as nearby sources (such as engines and heaters with PFFJ), the background concentrations only need to consider the impacts from some relatively distant sources. ADEQ identified that the Cholla power plant may contribute to the background of the project site. Upon reviewing the 1-hour SO<sub>2</sub> Data Requirements Rule (DRR) modeling for Cholla, ADEQ recommended a background of 20 µg/m<sup>3</sup> (7.6 ppb) for the project site.

#### H. SO<sub>2</sub> Modeling Results

Table 5 summarizes the modeled results for SO<sub>2</sub>. Representative background concentrations were added to modeled impacts and the total concentrations were then compared to the NAAQS. As shown in Table 5, emissions from the proposed Align project will not cause or contribute to a violation of the NAAQS for SO<sub>2</sub> under the operational limits/conditions as proposed in the draft permit.

**Table 5: Modeled Results for SO<sub>2</sub>**

| Averaging Period | Modeled Concentration (µg/m <sup>3</sup> ) | Background Concentration (µg/m <sup>3</sup> ) | Maximum Ambient Concentration (µg/m <sup>3</sup> ) | NAAQS (µg/m <sup>3</sup> ) |
|------------------|--------------------------------------------|-----------------------------------------------|----------------------------------------------------|----------------------------|
| 1-hour           | 119.50                                     | 20                                            | 139.50                                             | 196*                       |
| 3-hours          | 115.75                                     | 20                                            | 135.75                                             | 1,300**                    |

\* Primary standard - provide public health protection.

\*\* Secondary standard - provide public welfare protection.

#### I. Impacts on Secondary PM<sub>2.5</sub>

Per Appendix W Section 5.3.2 and Section 5.4.2 of 40 CFR Part 51, the EPA recommends a two-tiered demonstration approach for addressing single-source impacts on Secondary PM<sub>2.5</sub>. The first tier involves use of technically credible relationships between precursor emissions and a source's impacts. The second tier involves application of more sophisticated case-specific chemical transport models (e.g., photochemical grid models). In general, the case for using a full quantitative chemical transport model is rare.

One of the first-tier demonstration tools is Model Emissions Rates for Precursors (MERPs). The MERPs can be described as an emission rate of a precursor that is expected to result in a change in ambient air that would be less than a specific air quality concentration threshold such as a significant impact level (SIL). If the emission rates of precursors for a

proposed source are less than MERPs, it is concluded that the precursor emissions will not cause or contribute to a violation of PM<sub>2.5</sub> NAAQS.

Based on the SILs for PM<sub>2.5</sub> NAAQS, the EPA investigated single source impacts on secondary PM<sub>2.5</sub> from some hypothetical sources and provided most conservative illustrative MERP values for SO<sub>2</sub> and NO<sub>x</sub>. The Coconino MERPs location is the closest representative location for this site. Table 6 lists the most conservative illustrative MERPs in Coconino County.<sup>4</sup>

**Table 6: Most Conservative Illustrative MERP Values**

| County   | Emissions (tpy) | Stack Height(m) | Most Conservative Illustrative MERP Values (tpy) |                                         |                                          |                                         |
|----------|-----------------|-----------------|--------------------------------------------------|-----------------------------------------|------------------------------------------|-----------------------------------------|
|          |                 |                 | Annual PM <sub>2.5</sub> SO <sub>2</sub>         | Daily PM <sub>2.5</sub> SO <sub>2</sub> | Annual PM <sub>2.5</sub> NO <sub>x</sub> | Daily PM <sub>2.5</sub> NO <sub>x</sub> |
| Coconino | 500, 1000       | 10, 90          | 32,077                                           | 21,050                                  | 299,905                                  | 32,498                                  |

The potential to emit (PTE) for SO<sub>2</sub> and NO<sub>x</sub> due to the proposed Align project are 77.3 tpy and 6.4 tpy, respectively, which are significantly lower than the most conservative illustrative MERPs as presented in Table 6. Additionally, the proposed Align project only emits 0.2 tpy of primary PM<sub>2.5</sub>. Therefore, it is concluded that the proposed Align project will not interfere with the attainment and maintenance of the NAAQS for PM<sub>2.5</sub>.

### XIII. LIST OF ABBREVIATIONS

|                  |                                                 |
|------------------|-------------------------------------------------|
| AAB              | Ambient Air Boundary                            |
| A.A.C.           | Arizona Administrative Code                     |
| AAAQG            | Arizona Ambient Air Quality Guidelines          |
| ADEQ             | Arizona Department of Environmental Quality     |
| AERMAP           | Terrain data preprocessor for AERMOD            |
| AERMET           | AERMOD Meteorological Preprocessor              |
| AERMOD           | AMS/EPA Regulatory Model                        |
| AERSURFACE       | Surface characteristics preprocessor for AERMOD |
| AMS              | American Meteorological Society                 |
| A.R.S.           | Arizona Revised Statutes                        |
| CFR              | Code of Federal Regulations                     |
| CNG              | Compressed Natural Gas                          |
| CO               | Carbon Monoxide                                 |
| CO <sub>2</sub>  | Carbon Dioxide                                  |
| DRR              | Data Requirements Rule                          |
| EPA              | Environmental Protection Agency                 |
| EJ               | Environmental Justice                           |
| GUS              | Gas Upgrade System                              |
| HAP              | Hazardous Air Pollutant                         |
| H <sub>2</sub> O | Water                                           |
| H <sub>2</sub> S | Hydrogen Sulfide                                |

<sup>4</sup> <https://www.epa.gov/scram/merps-view-qlik>

|                   |                                                                       |
|-------------------|-----------------------------------------------------------------------|
| MERP              | Model Emissions Rates for Precursors                                  |
| NAAQS             | National Ambient Air Quality Standard                                 |
| NED               | National Elevation Dataset                                            |
| NESHAP            | National Emission Standards for Hazardous Air Pollutants              |
| NO <sub>x</sub>   | Nitrogen Oxides                                                       |
| NO <sub>2</sub>   | Nitrogen Dioxide                                                      |
| NSPS              | New Source Performance Standards                                      |
| NSR               | New Source Review                                                     |
| O <sub>2</sub>    | Oxygen                                                                |
| PM                | Particulate Matter                                                    |
| PM <sub>10</sub>  | Particulate Matter no larger than 10 µm nominal aerodynamic diameter  |
| PM <sub>2.5</sub> | Particulate Matter no larger than 2.5 µm nominal aerodynamic diameter |
| PRIME             | Plume Rise Model Enhancements                                         |
| PSD               | Prevention of Significant Deterioration                               |
| PTE               | Potential to Emit                                                     |
| RACT              | Reasonable Available Control Technology                               |
| RNG               | Renewable Natural Gas                                                 |
| SCFM              | Standard Cubic Feet per Minute                                        |
| scf/yr            | Standard Cubic Feet per year                                          |
| SIA               | Significant Impact Area                                               |
| SIL               | Significant Impact Level                                              |
| SO <sub>2</sub>   | Sulfur Dioxide Significant Impact Levels                              |
| TPY (tpy)         | Tons per Year                                                         |
| VFD               | Variable Frequency Drive                                              |
| VOC               | Volatile Organic Compound                                             |
| yr                | Year                                                                  |




# Arizona Administrative CODE

18 A.A.C. 9 Supp. 19-3

[www.azsos.gov](http://www.azsos.gov)

This Chapter contains rule Sections that were filed to be codified in the *Arizona Administrative Code* between the dates of July 1, 2019 through September 30, 2019

## Title 18

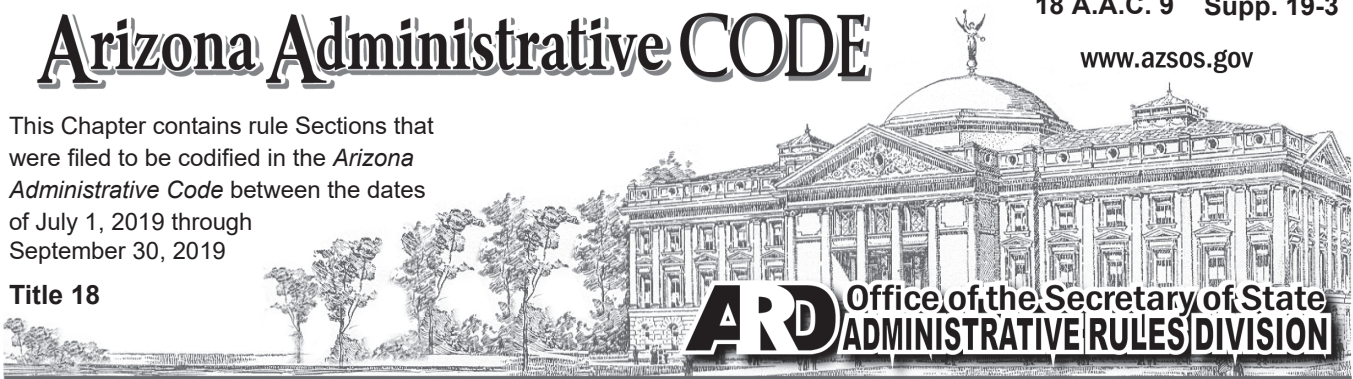

## TITLE 18. ENVIRONMENTAL QUALITY

### CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

The table of contents on the first page contains quick links to the referenced page numbers in this Chapter. Refer to the notes at the end of a Section to learn about the history of a rule as it was published in the *Arizona Administrative Register*.

Sections, Parts, Exhibits, Tables or Appendices codified in this supplement. The list provided contains quick links to the updated rules.

[R18-9-101.](#)   [Definitions ..... 5](#)   [R18-9-103.](#)   [Class Exemptions ..... 7](#)

#### Questions about these rules? Contact:

Name: David Dunaway  
Address: Department of Environmental Quality  
1110 W. Washington St.  
Phoenix, AZ 85007  
Telephone: (602) 771-6176  
E-mail: [dunaway.david@azdeq.gov](mailto:dunaway.david@azdeq.gov)  
Website: <http://www.azdeq.gov/draft-and-proposed-rule-water-quality-division>

#### The release of this Chapter in Supp. 19-3 replaces Supp. 17-4, 1-132 pages

Please note that the Chapter you are about to replace may have rules still in effect after the publication date of this supplement. Therefore, all superseded material should be retained in a separate binder and archived for future reference.

## PREFACE

Under Arizona law, the Department of State, Office of the Secretary of State (Office), accepts state agency rule filings and is the publisher of Arizona rules. The Office of the Secretary of State does not interpret or enforce rules in the *Administrative Code*. Questions about rules should be directed to the state agency responsible for the promulgation of the rule.

Scott Cancelosi, Director  
ADMINISTRATIVE RULES DIVISION

---

### RULES

The definition for a rule is provided for under A.R.S. § 41-1001. “‘Rule’ means an agency statement of general applicability that implements, interprets, or prescribes law or policy, or describes the procedures or practice requirements of an agency.”

### THE ADMINISTRATIVE CODE

The *Arizona Administrative Code* is where the official rules of the state of Arizona are published. The *Code* is the official codification of rules that govern state agencies, boards, and commissions.

The *Code* is separated by subject into titles. Titles are divided into chapters. A chapter includes state agency rules. Rules in chapters are divided into Articles, then Sections. The “R” stands for “rule” with a sequential numbering and lettering outline separated into subsections.

Rules are codified quarterly in the *Code*. Supplement release dates are printed on the footers of each chapter.

First Quarter: January 1 - March 31

Second Quarter: April 1 - June 30

Third Quarter: July 1 - September 30

Fourth Quarter: October 1 - December 31

For example, the first supplement for the first quarter of 2019 is cited as Supp. 19-1.

Please note: The Office publishes by chapter, not by individual rule section. Therefore there might be only a few sections codified in each chapter released in a supplement. Historical notes at the end of a section provide an effective date and information when a rule was last updated.

### AUTHENTICATION OF PDF CODE CHAPTERS

The Office began to authenticate chapters of the *Administrative Code* in Supp. 18-1 to comply with A.R.S. § 41-1012(B) and A.R.S. § 5302(1), (2)(d) through (e), and (3)(d) through (e).

A certification verifies the authenticity of each *Code* chapter posted as it is released by the Office of the Secretary of State. The authenticated pdf of the *Code* includes an integrity mark with a certificate ID. Users should check the validity of the signature, especially if the pdf has been downloaded. If the digital signature is invalid it means the document’s content has been compromised.

### HOW TO USE THE CODE

Rules may be in effect before a supplement is released by the Office. Therefore, the user should refer to issues of the *Arizona Administrative Register* for recent updates to rule Sections.

### ARIZONA REVISED STATUTE REFERENCES

The Arizona Revised Statutes (A.R.S.) are available online at the Legislature’s website, [www.azleg.gov](http://www.azleg.gov). An agency’s authority

note to make rules is often included at the beginning of a chapter. Other Arizona statutes may be referenced in rule under the A.R.S. acronym.

### SESSION LAW REFERENCES

Arizona Session Law references in a chapter can be found at the Secretary of State’s website, under Services-> Legislative Filings.

### EXEMPTIONS FROM THE APA

It is not uncommon for an agency to be exempt from the steps outlined in the rulemaking process as specified in the Arizona Administrative Procedures Act, also known as the APA (Arizona Revised Statutes, Title 41, Chapter 6, Articles 1 through 10). Other agencies may be given an exemption to certain provisions of the Act.

An agency’s exemption is written in law by the Arizona State Legislature or under a referendum or initiative passed into law by Arizona voters.

When an agency files an exempt rulemaking package with our Office it specifies the law exemption in what is called the preamble of rulemaking. The preamble is published in the *Register* online at [www.azsos.gov/rules](http://www.azsos.gov/rules), click on the *Administrative Register* link.

Editor’s notes at the beginning of a chapter provide information about rulemaking sections made by exempt rulemaking. Exempt rulemaking notes are also included in the historical note at the end of a rulemaking Section.

The Office makes a distinction to certain exemptions because some rules are made without receiving input from stakeholders or the public. Other exemptions may require an agency to propose exempt rules at a public hearing.

### EXEMPTIONS AND PAPER COLOR

At one time the office published exempt rules on either blue or green paper. Blue meant the authority of the exemption was given by the Legislature; green meant the authority was determined by a court order. In 2001 the Office discontinued publishing rules using these paper colors.

### PERSONAL USE/COMMERCIAL USE

This chapter is posted as a public courtesy online, and is for private use only. Those who wish to use the contents for resale or profit should contact the Office about Commercial Use fees. For information on commercial use fees review A.R.S. § 39-121.03 and 1 A.A.C. 1, R1-1-113.

*Rhonda Paschal, managing rules editor, assisted with the editing of this chapter.*



Administrative Rules Division  
The Arizona Secretary of State electronically publishes each A.A.C. Chapter with a digital certificate. The certificate-based signature displays the date and time the document was signed and can be validated in Adobe Acrobat Reader.

**TITLE 18. ENVIRONMENTAL QUALITY****CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL****ARTICLE 1. AQUIFER PROTECTION PERMITS - GENERAL PROVISIONS**

|             |                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------|
| Section     |                                                                                                     |
| R18-9-101.  | Definitions ..... 5                                                                                 |
| R18-9-102.  | Facilities to which Articles 1, 2, and 3 Do Not Apply ..... 7                                       |
| R18-9-103.  | Class Exemptions ..... 7                                                                            |
| R18-9-104.  | Transition from Notices of Disposal and Groundwater Quality Protection Permitted Facilities ..... 7 |
| R18-9-105.  | Permit Continuance ..... 7                                                                          |
| R18-9-106.  | Determination of Applicability ..... 8                                                              |
| R18-9-107.  | Consolidation of Aquifer Protection Permits ..... 8                                                 |
| R18-9-108.  | Public Notice ..... 8                                                                               |
| R18-9-109.  | Public Participation ..... 9                                                                        |
| R18-9-110.  | Inspections, Violations, and Enforcement ..... 9                                                    |
| R18-9-111.  | Repealed ..... 9                                                                                    |
| R18-9-112.  | Repealed ..... 9                                                                                    |
| R18-9-113.  | Repealed ..... 9                                                                                    |
| R18-9-114.  | Repealed ..... 9                                                                                    |
| R18-9-115.  | Repealed ..... 9                                                                                    |
| R18-9-116.  | Repealed ..... 9                                                                                    |
| R18-9-117.  | Repealed ..... 9                                                                                    |
| R18-9-118.  | Repealed ..... 9                                                                                    |
| R18-9-119.  | Repealed ..... 9                                                                                    |
| R18-9-120.  | Repealed ..... 10                                                                                   |
| R18-9-121.  | Repealed ..... 10                                                                                   |
| R18-9-122.  | Repealed ..... 10                                                                                   |
| R18-9-123.  | Repealed ..... 10                                                                                   |
| R18-9-124.  | Repealed ..... 10                                                                                   |
| R18-9-125.  | Repealed ..... 10                                                                                   |
| R18-9-126.  | Repealed ..... 10                                                                                   |
| R18-9-127.  | Repealed ..... 10                                                                                   |
| R18-9-128.  | Repealed ..... 10                                                                                   |
| R18-9-129.  | Repealed ..... 10                                                                                   |
| R18-9-130.  | Repealed ..... 10                                                                                   |
| Appendix I. | Repealed ..... 10                                                                                   |

**ARTICLE 2. AQUIFER PROTECTION PERMITS - INDIVIDUAL PERMITS****PART A. APPLICATION AND GENERAL PROVISIONS**

|             |                                                                |
|-------------|----------------------------------------------------------------|
| Section     |                                                                |
| R18-9-A201. | Individual Permit Application ..... 10                         |
| R18-9-A202. | Technical Requirements ..... 11                                |
| R18-9-A203. | Financial Requirements ..... 12                                |
| R18-9-A204. | Contingency Plan ..... 15                                      |
| R18-9-A205. | Alert Levels, Discharge Limitations, and AQLs ..... 16         |
| R18-9-A206. | Monitoring Requirements ..... 16                               |
| R18-9-A207. | Reporting Requirements ..... 16                                |
| R18-9-A208. | Compliance Schedule ..... 16                                   |
| R18-9-A209. | Temporary Cessation, Closure, Post-closure ..... 17            |
| R18-9-A210. | Temporary Individual Permit ..... 18                           |
| R18-9-A211. | Permit Amendments ..... 18                                     |
| R18-9-A212. | Permit Transfer ..... 19                                       |
| R18-9-A213. | Permit Suspension, Revocation, Denial, or Termination ..... 20 |
| R18-9-A214. | Requested Coverage Under a General Permit ... 20               |

**PART B. BADCT FOR SEWAGE TREATMENT FACILITIES**

|             |                                                                        |
|-------------|------------------------------------------------------------------------|
| Section     |                                                                        |
| R18-9-B201. | General Considerations and Prohibitions .....20                        |
| R18-9-B202. | Design Report .....21                                                  |
| R18-9-B203. | Engineering Plans and Specifications .....22                           |
| R18-9-B204. | Treatment Performance Requirements for a New Facility .....22          |
| R18-9-B205. | Treatment Performance Requirements for an Existing Facility .....23    |
| R18-9-B206. | Treatment Performance Requirements for Expansion of a Facility .....23 |

**ARTICLE 3. AQUIFER PROTECTION PERMITS - GENERAL PERMITS****PART A. GENERAL PROVISIONS**

|             |                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------|
| Section     |                                                                                                         |
| R18-9-A301. | Discharging Under a General Permit .....24                                                              |
| R18-9-A302. | Point of Compliance .....26                                                                             |
| R18-9-A303. | Renewal of a Discharge Authorization .....26                                                            |
| R18-9-A304. | Notice of Transfer .....26                                                                              |
| R18-9-A305. | Facility Expansion .....26                                                                              |
| R18-9-A306. | Closure .....27                                                                                         |
| R18-9-A307. | Revocation of Coverage Under a General Permit .....27                                                   |
| R18-9-A308. | Violations and Enforcement For On-site Wastewater Treatment Facilities .....28                          |
| R18-9-A309. | General Provisions for On-site Wastewater Treatment Facilities .....28                                  |
| R18-9-A310. | Site Investigation for Type 4 On-site Wastewater Treatment Facilities .....31                           |
| R18-9-A311. | Facility Selection for Type 4 On-site Wastewater Treatment Facilities .....34                           |
| R18-9-A312. | Facility Design for Type 4 On-site Wastewater Treatment Facilities .....35                              |
| R18-9-A313. | Facility Installation, Operation, and Maintenance for On-site Wastewater Treatment Facilities .....41   |
| R18-9-A314. | Septic Tank Design, Manufacturing, and Installation for On-site Wastewater Treatment Facilities .....41 |
| R18-9-A315. | Interceptor Design, Manufacturing, and Installation for On-site Wastewater Treatment Facilities .....43 |
| R18-9-A316. | Transfer of Ownership Inspection for On-site Wastewater Treatment Facilities .....44                    |
| R18-9-A317. | Nitrogen Management Area .....44                                                                        |

**PART B. TYPE 1 GENERAL PERMITS**

|             |                               |
|-------------|-------------------------------|
| Section     |                               |
| R18-9-B301. | Type 1 General Permit .....45 |

**PART C. TYPE 2 GENERAL PERMITS**

|             |                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------|
| Section     |                                                                                                                        |
| R18-9-C301. | 2.01 General Permit: Drywells That Drain Areas Where Hazardous Substances Are Used, Stored, Loaded, or Treated .....47 |
| R18-9-C302. | 2.02 General Permit: Intermediate Stockpiles at Mining Sites .....49                                                   |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|             |                                                                                                                                  |    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------|----|
| R18-9-C303. | 2.03 General Permit: Hydrologic Tracer Studies                                                                                   | 49 |
| R18-9-C304. | 2.04 General Permit: Drywells that Drain Areas at Motor Fuel Dispensing Facilities Where Motor Fuels are Used, Stored, or Loaded | 50 |
| R18-9-C305. | 2.05 General Permit: Capacity, Management, Operation, and Maintenance of a Sewage Collection System                              | 53 |
| R18-9-C306. | 2.06 General Permit: Fish Hatchery Discharge to a Perennial Surface Water                                                        | 54 |

## PART D. TYPE 3 GENERAL PERMITS

|             |                                                                                       |    |
|-------------|---------------------------------------------------------------------------------------|----|
| Section     |                                                                                       |    |
| R18-9-D301. | 3.01 General Permit: Lined Impoundments                                               | 54 |
| R18-9-D302. | 3.02 General Permit: Process Water Discharges from Water Treatment Facilities         | 56 |
| R18-9-D303. | 3.03 General Permit: Vehicle and Equipment Washes                                     | 57 |
| R18-9-D304. | 3.04 General Permit: Non-Stormwater Impoundments at Mining Sites                      | 58 |
| R18-9-D305. | 3.05 General Permit: Disposal Wetlands                                                | 59 |
| R18-9-D306. | 3.06 General Permit: Constructed Wetlands to Treat Acid Rock Drainage at Mining Sites | 60 |
| R18-9-D307. | 3.07 General Permit: Tertiary Treatment Wetlands                                      | 61 |

## PART E. TYPE 4 GENERAL PERMITS

|             |                                                                                                                                               |    |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----|
| Section     |                                                                                                                                               |    |
| R18-9-E301. | 4.01 General Permit: Sewage Collection Systems                                                                                                | 62 |
| R18-9-E302. | 4.02 General Permit: Septic Tank with Disposal by Trench, Bed, Chamber Technology, or Seepage Pit, Less Than 3000 Gallons Per Day Design Flow | 67 |
| R18-9-E303. | 4.03 General Permit: Composting Toilet, Less Than 3000 Gallons Per Day Design Flow                                                            | 69 |
| R18-9-E304. | 4.04 General Permit: Pressure Distribution System, Less Than 3000 Gallons Per Day Design Flow                                                 | 71 |
| R18-9-E305. | 4.05 General Permit: Gravelless Trench, Less Than 3000 Gallons Per Day Design Flow                                                            | 72 |
| R18-9-E306. | 4.06 General Permit: Natural Seal Evapotranspiration Bed, Less Than 3000 Gallons Per Day Design Flow                                          | 73 |
| R18-9-E307. | 4.07 General Permit: Lined Evapotranspiration Bed, Less Than 3000 Gallons Per Day Design Flow                                                 | 74 |
| R18-9-E308. | 4.08 General Permit: Wisconsin Mound, Less Than 3000 Gallons Per Day Design Flow                                                              | 75 |
| R18-9-E309. | 4.09 General Permit: Engineered Pad System, Less Than 3000 Gallons Per Day Design Flow                                                        | 77 |
| R18-9-E310. | 4.10 General Permit: Intermittent Sand Filter, Less Than 3000 Gallons Per Day Design Flow                                                     | 77 |
| R18-9-E311. | 4.11 General Permit: Peat Filter, Less Than 3000 Gallons Per Day Design Flow                                                                  | 78 |
| R18-9-E312. | 4.12 General Permit: Textile Filter, Less Than 3000 Gallons Per Day Design Flow                                                               | 80 |
| R18-9-E313. | 4.13 General Permit: Denitrifying System Using Separated Wastewater Streams, Less Than 3000 Gallons Per Day Design Flow                       | 80 |
| R18-9-E314. | 4.14 General Permit: Sewage Vault, Less Than 3000 Gallons Per Day Design Flow                                                                 | 81 |
| R18-9-E315. | 4.15 General Permit: Aerobic System Less Than 3000 Gallons Per Day Design Flow                                                                | 81 |
| R18-9-E316. | 4.16 General Permit: Nitrate-Reactive Media Filter, Less Than 3000 Gallons Per Day Design Flow                                                | 82 |
| R18-9-E317. | 4.17 General Permit: Cap System, Less Than 3000 Gallons Per Day Design Flow                                                                   | 83 |

|             |                                                                                                      |    |
|-------------|------------------------------------------------------------------------------------------------------|----|
| R18-9-E318. | 4.18 General Permit: Constructed Wetland, Less Than 3000 Gallons Per Day Design Flow                 | 84 |
| R18-9-E319. | 4.19 General Permit: Sand-Lined Trench, Less Than 3000 Gallons Per Day Design Flow                   | 84 |
| R18-9-E320. | 4.20 General Permit: Disinfection Devices, Less Than 3000 Gallons Per Day Design Flow                | 85 |
| R18-9-E321. | 4.21 General Permit: Surface Disposal, Less Than 3000 Gallons Per Day Design Flow                    | 86 |
| R18-9-E322. | 4.22 General Permit: Subsurface Drip Irrigation Disposal, Less Than 3000 Gallons Per Day Design Flow | 86 |
| R18-9-E323. | 4.23 General Permit: 3000 to less than 24,000 Gallons Per Day Design Flow                            | 88 |
| Table 1.    | Unit Design Flows                                                                                    | 89 |

## ARTICLE 4. NITROGEN MANAGEMENT GENERAL PERMITS

|            |                                                                             |    |
|------------|-----------------------------------------------------------------------------|----|
| Section    |                                                                             |    |
| R18-9-401. | Definitions                                                                 | 91 |
| R18-9-402. | Nitrogen Management General Permits: Nitrogen Fertilizers                   | 92 |
| R18-9-403. | Nitrogen Management General Permits: Concentrated Animal Feeding Operations | 92 |
| R18-9-404. | Revocation of Coverage under a Nitrogen Management General Permit           | 93 |

## ARTICLE 5. GRAZING BEST MANAGEMENT PRACTICES

*Article 5, consisting of Section R18-9-501, made by final rulemaking at 7 A.A.R. 1768, effective April 5, 2001 (Supp. 01-2).*

|            |                                              |    |
|------------|----------------------------------------------|----|
| Section    |                                              |    |
| R18-9-501. | Surface Water Quality General Grazing Permit | 93 |

## ARTICLE 6. REPEALED

*Article 6, consisting of Sections R18-9-601 through R18-9-603, repealed by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).*

*Article 6, consisting of Sections R18-9-601 through R18-9-603, adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1).*

|            |          |    |
|------------|----------|----|
| Section    |          |    |
| R18-9-601. | Repealed | 94 |
| R18-9-602. | Repealed | 94 |
| R18-9-603. | Repealed | 94 |

## ARTICLE 7. USE OF RECYCLED WATER

*Article 4 consisting of Sections R9-20-401 through R9-20-407 renumbered as Article 7, Sections R18-9-701 through R18-9-707 (Supp. 87-3).*

*Article 4 consisting of Sections R9-20-401 through R9-20-407 adopted effective May 24, 1985.*

*Former Article 4 consisting of Sections R9-20-401 through R9-20-408 repealed effective May 24, 1985.*

|            |            |    |
|------------|------------|----|
| Section    |            |    |
| R18-9-701. | Renumbered | 94 |
| R18-9-702. | Renumbered | 94 |
| R18-9-703. | Renumbered | 94 |
| R18-9-704. | Renumbered | 94 |
| R18-9-705. | Renumbered | 94 |
| R18-9-706. | Renumbered | 94 |
| R18-9-707. | Renumbered | 94 |
| R18-9-708. | Renumbered | 94 |
| R18-9-709. | Renumbered | 94 |
| R18-9-710. | Renumbered | 95 |
| R18-9-711. | Renumbered | 95 |



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|            |                  |    |
|------------|------------------|----|
| R18-9-712. | Renumbered ..... | 95 |
| R18-9-713. | Renumbered ..... | 95 |
| R18-9-714. | Renumbered ..... | 95 |
| R18-9-715. | Renumbered ..... | 95 |
| R18-9-716. | Renumbered ..... | 95 |
| R18-9-717. | Renumbered ..... | 95 |
| R18-9-718. | Renumbered ..... | 95 |
| R18-9-719. | Renumbered ..... | 95 |
| R18-9-720. | Repealed .....   | 95 |

## PART A. GENERAL PROVISIONS

|             |                                                                    |    |
|-------------|--------------------------------------------------------------------|----|
| Section     |                                                                    |    |
| R18-9-A701. | Definitions .....                                                  | 95 |
| R18-9-A702. | Applicability and Standards for Recycled Water ...                 | 96 |
| R18-9-A703. | Recycled Water Individual Permit Application .....                 | 96 |
| R18-9-A704. | Recycled Water General Permit .....                                | 97 |
| R18-9-A705. | Recycled Water Permit Term, Information Changes, and Renewal ..... | 98 |
| R18-9-A706. | Recycled Water Permit Revocation .....                             | 98 |
| R18-9-A707. | Recycled Water Permit Transition .....                             | 98 |

## PART B. RECLAIMED WATER

|             |                                                                                            |     |
|-------------|--------------------------------------------------------------------------------------------|-----|
| Section     |                                                                                            |     |
| R18-9-B701. | Transition of Aquifer Protection Permits and Permits for the Reuse of Reclaimed Wastewater | 98  |
| R18-9-B702. | General Requirements for Reclaimed Water .....                                             | 99  |
| Table 1.    | Signage and Notification Requirements for Direct Reuse Sites .....                         | 100 |
| R18-9-B703. | General Provisions for Recycled Water Individual Permit for Reclaimed Water .....          | 100 |
| R18-9-B704. | Type 2 Recycled Water General Permit for Direct Reuse of Class A+ Reclaimed Water .....    | 101 |
| R18-9-B705. | Type 2 Recycled Water General Permit for Direct Reuse of Class A Reclaimed Water .....     | 101 |
| R18-9-B706. | Type 2 Recycled Water General Permit for Direct Reuse of Class B+ Reclaimed Water .....    | 102 |
| R18-9-B707. | Type 2 Recycled Water General Permit for Direct Reuse of Class B Reclaimed Water .....     | 102 |
| R18-9-B708. | Type 2 Recycled Water General Permit for Direct Reuse of Class C Reclaimed Water .....     | 102 |
| R18-9-B709. | Type 3 Recycled Water General Permit for a Reclaimed Water Blending Facility .....         | 102 |
| R18-9-B710. | Type 3 Recycled Water General Permit for a Reclaimed Water Agent .....                     | 103 |

## PART C. RECYCLED INDUSTRIAL WASTEWATER

|             |                                                                                 |     |
|-------------|---------------------------------------------------------------------------------|-----|
| Section     |                                                                                 |     |
| R18-9-C701. | Recycled Water Individual Permit for Industrial Wastewater That Is Reused ..... | 103 |

## PART D. GRAY WATER

|             |                                                           |     |
|-------------|-----------------------------------------------------------|-----|
| Section     |                                                           |     |
| R18-9-D701. | Type 1 Recycled Water General Permit for Gray Water ..... | 103 |
| R18-9-D702. | Type 3 Recycled Water General Permit for Gray Water ..... | 104 |

## PART E. PURIFIED WATER FOR POTABLE USE

|             |                                                                                           |     |
|-------------|-------------------------------------------------------------------------------------------|-----|
| Section     |                                                                                           |     |
| R18-9-E701. | Recycled Water Individual Permit for an Advanced Reclaimed Water Treatment Facility ..... | 104 |

## ARTICLE 8. REPEALED

*Article 8, consisting of Sections R18-9-801 through R18-9-819, repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).*

*Article 3 consisting of Sections R9-8-311 through R9-8-361 renumbered as Article 8, Sections R18-9-801 through R18-9-819 (Supp. 87-3).*

## Section

|            |                |     |
|------------|----------------|-----|
| R18-9-801. | Repealed ..... | 105 |
| R18-9-802. | Repealed ..... | 105 |
| R18-9-803. | Repealed ..... | 105 |
| R18-9-804. | Repealed ..... | 105 |
| R18-9-805. | Repealed ..... | 105 |
| R18-9-806. | Repealed ..... | 105 |
| R18-9-807. | Repealed ..... | 105 |
| R18-9-808. | Repealed ..... | 105 |
| R18-9-809. | Repealed ..... | 106 |
| R18-9-810. | Repealed ..... | 106 |
| R18-9-811. | Repealed ..... | 106 |
| R18-9-812. | Repealed ..... | 106 |
| R18-9-813. | Repealed ..... | 106 |
| R18-9-814. | Repealed ..... | 106 |
| R18-9-815. | Repealed ..... | 106 |
| R18-9-816. | Repealed ..... | 106 |
| R18-9-817. | Repealed ..... | 106 |
| R18-9-818. | Repealed ..... | 106 |
| R18-9-819. | Repealed ..... | 106 |

## ARTICLE 9. ARIZONA POLLUTANT DISCHARGE ELIMINATION SYSTEM

*Editor's Note: The recodification at 7 A.A.R. 2522 described below erroneously moved Sections into 18 A.A.C. 9, Article 9. Those Sections were actually recodified to 18 A.A.C. 9, Article 10. See the Historical Notes for more information (Supp. 01-4).*

*Article 9, consisting of Sections R18-9-901 through R18-9-914 and Appendix A, recodified from 18 A.A.C. 13, Article 15 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2).*

## PART A. GENERAL REQUIREMENTS

|             |                                                                                  |     |
|-------------|----------------------------------------------------------------------------------|-----|
| Section     |                                                                                  |     |
| R18-9-A901. | Definitions .....                                                                | 106 |
| R18-9-A902. | AZPDES Permit Transition, Applicability, and Exclusions .....                    | 109 |
| R18-9-A903. | Prohibitions .....                                                               | 111 |
| R18-9-A904. | Effect of a Permit .....                                                         | 112 |
| R18-9-A905. | AZPDES Program Standards .....                                                   | 112 |
| R18-9-A906. | General Pretreatment Regulations for Existing and New Sources of Pollution ..... | 112 |
| R18-9-A907. | Public Notice .....                                                              | 113 |
| R18-9-A908. | Public Participation, EPA Review, EPA Hearing .....                              | 113 |
| R18-9-A909. | Petitions .....                                                                  | 115 |

## PART B. INDIVIDUAL PERMITS

|             |                                                                                      |     |
|-------------|--------------------------------------------------------------------------------------|-----|
| Section     |                                                                                      |     |
| R18-9-B901. | Individual Permit Application .....                                                  | 115 |
| R18-9-B902. | Requested Coverage Under a General Permit ..                                         | 115 |
| R18-9-B903. | Individual Permit Issuance or Denial .....                                           | 115 |
| R18-9-B904. | Individual Permit Duration, Reissuance, and Continuation .....                       | 116 |
| R18-9-B905. | Individual Permit Transfer .....                                                     | 116 |
| R18-9-B906. | Modification, Revocation and Reissuance, and Termination of Individual Permits ..... | 116 |
| R18-9-B907. | Individual Permit Variances .....                                                    | 117 |

## PART C. GENERAL PERMITS

|             |                                                                  |     |
|-------------|------------------------------------------------------------------|-----|
| Section     |                                                                  |     |
| R18-9-C901. | General Permit Issuance .....                                    | 118 |
| R18-9-C902. | Required and Requested Coverage Under an Individual Permit ..... | 118 |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     |                                                         |                                                                           |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-----|---------------------------------------------------------|---------------------------------------------------------------------------|-----|
| R18-9-C903.                                                                                                                                                                                                                                                                                                                             | General Permit Duration, Reissuance, and Continuation .....     | 119 | R18-9-1002.                                             | Applicability and Prohibitions .....                                      | 123 |
| R18-9-C904.                                                                                                                                                                                                                                                                                                                             | Change of Ownership or Operator Under a General Permit .....    | 119 | R18-9-1003.                                             | General Requirements .....                                                | 124 |
| R18-9-C905.                                                                                                                                                                                                                                                                                                                             | General Permit Modification and Revocation and Reissuance ..... | 119 | R18-9-1004.                                             | Applicator Registration, Bulk Biosolids .....                             | 124 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1005.                                             | Pollutant Concentrations .....                                            | 125 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | Table 1. Ceiling Concentrations .....                   | 125                                                                       |     |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | Table 2. Monthly Average Pollutant Concentrations ..... | 125                                                                       |     |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | Table 3. Annual Pollutant Loading Rates .....           | 125                                                                       |     |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | Table 4. Cumulative Pollutant Loading Rates .....       | 126                                                                       |     |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1006.                                             | Class A and Class B Pathogen Reduction Requirements .....                 | 126 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1007.                                             | Management Practices and General Requirements .....                       | 127 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1008.                                             | Management Practices, Application of Biosolids to Reclamation Sites ..... | 128 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1009.                                             | Site Restrictions .....                                                   | 128 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1010.                                             | Vector Attraction Reduction .....                                         | 129 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1011.                                             | Transportation .....                                                      | 130 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1012.                                             | Self-monitoring .....                                                     | 130 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | Table 5. Frequency of Self-monitoring .....             | 130                                                                       |     |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1013.                                             | Recordkeeping .....                                                       | 130 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1014.                                             | Reporting .....                                                           | 131 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | R18-9-1015.                                             | Inspection .....                                                          | 132 |
|                                                                                                                                                                                                                                                                                                                                         |                                                                 |     | Appendix A.                                             | Procedures to Determine Annual Biosolids Application Rates .....          | 132 |
| <p><b>PART D. ANIMAL FEEDING OPERATIONS AND CONCENTRATED ANIMAL FEEDING OPERATIONS</b></p> <p>Section</p>                                                                                                                                                                                                                               |                                                                 |     |                                                         |                                                                           |     |
| R18-9-D901.                                                                                                                                                                                                                                                                                                                             | CAFO Designations .....                                         | 120 |                                                         |                                                                           |     |
| R18-9-D902.                                                                                                                                                                                                                                                                                                                             | AZPDES Permit Coverage Requirements .....                       | 120 |                                                         |                                                                           |     |
| R18-9-D903.                                                                                                                                                                                                                                                                                                                             | No Potential To Discharge Determinations for Large CAFOs .....  | 120 |                                                         |                                                                           |     |
| R18-9-D904.                                                                                                                                                                                                                                                                                                                             | AZPDES Permit Coverage Deadlines .....                          | 121 |                                                         |                                                                           |     |
| R18-9-D905.                                                                                                                                                                                                                                                                                                                             | Closure Requirements .....                                      | 121 |                                                         |                                                                           |     |
| <p><b>ARTICLE 10. ARIZONA POLLUTANT DISCHARGE ELIMINATION SYSTEM - DISPOSAL, USE, AND TRANSPORTATION OF BIOSOLIDS</b></p> <p><i>Article 10, consisting of Sections R18-9-1001 through R18-9-1014 and Appendix A, recodified from 18 A.A.C. 13, Article 15 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2).</i></p> <p>Section</p> |                                                                 |     |                                                         |                                                                           |     |
| R18-9-1001.                                                                                                                                                                                                                                                                                                                             | Definitions .....                                               | 122 |                                                         |                                                                           |     |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

**ARTICLE 1. AQUIFER PROTECTION PERMITS - GENERAL PROVISIONS****R18-9-101. Definitions**

In addition to the definitions established in A.R.S. § 49-201, the following terms apply to Articles 1, 2, 3, and 4 of this Chapter:

1. "Aggregate" means a clean graded hard rock, volcanic rock, or gravel of uniform size, between 3/4 inch and 2 1/2 inches in diameter, offering 30 percent or more void space, washed or prepared to be free of fine materials that will impair absorption surface performance, and has a hardness value of three or greater on the Moh's Scale of Hardness (can scratch a copper penny).
2. "Alert level" means a value or criterion established in an individual permit that serves as an early warning indicating a potential violation of a permit condition related to BADCT or the discharge of a pollutant to groundwater.
3. "AQL" means an aquifer quality limit and is a permit limitation set for aquifer water quality measured at the point of compliance that either represents an Aquifer Water Quality Standard or, if an Aquifer Water Quality Standard for a pollutant is exceeded in an aquifer at the time of permit issuance, represents the ambient water quality for that pollutant.
4. "Aquifer Protection Permit" means an individual permit or a general permit issued under A.R.S. §§ 49203, 49241 through 49-252, and Articles 1, 2, and 3 of this Chapter.
5. "Aquifer Water Quality Standard" means a standard established under A.R.S. §§ 49221 and 49223.
6. "AZPDES" means the Arizona Pollutant Discharge Elimination System, which is the state program for issuing, modifying, revoking, reissuing, terminating, monitoring, and enforcing permits, and imposing and enforcing pretreatment and biosolids requirements under A.R.S. Title 49, Chapter 2, Article 3.1 and 18 A.A.C. 9, Articles 9 and 10.
7. "BADCT" means the best available demonstrated control technology, process, operating method, or other alternative to achieve the greatest degree of discharge reduction determined for a facility by the Director under A.R.S. § 49243.
8. "Bedroom" means, for the purpose of determining design flow for an on-site wastewater treatment facility for a dwelling, any room that has:
  - a. A floor space of at least 70 square feet in area, excluding closets;
  - b. A ceiling height of at least 7 feet;
  - c. Electrical service and ventilation;
  - d. A closet or an area where a closet could be constructed;
  - e. At least one window capable of being opened and used for emergency egress; and
  - f. A method of entry and exit to the room that allows the room to be considered distinct from other rooms in the dwelling and to afford a level of privacy customarily expected for such a room.
9. "Book net worth" means the net difference between total assets and total liabilities.
10. "Chamber technology" means a method for dispersing treated wastewater into soil from an on-site wastewater treatment facility by one or more manufactured leaching chambers with an open bottom and louvered, load-bearing sidewalls that substitute for an aggregate-filled trench described in R18-9-E302.
11. "CCR" means coal combustion residuals which include fly ash, bottom ash, boiler slag, and flue gas desulfurization materials generated from burning coal for the purpose of generating electricity by electric utilities and independent power producers.
12. "CCR landfill" means an area of land or an excavation that receives CCR and which is not a municipal solid waste landfill, a surface impoundment, an underground injection well, a salt dome formation, a salt bed formation, an underground or surface coal mine, or a cave. A CCR landfill also includes sand and gravel pits and quarries that receive CCR, CCR piles, and any practice that does not meet the definition of beneficial use of CCR.
13. "CCR surface impoundment" means a natural topographic depression, man-made excavation, or diked area, which is designed to hold an accumulation of CCR and liquids, and the unit treats, stores, or disposes of CCR.
14. "CCR unit" means any CCR landfill which receives CCR, any CCR surface impoundment designed to hold an accumulation of CCR and liquids, and the unit treats, stores or disposes of CCR. CCR unit includes a lateral expansion of a CCR unit, or a combination of more than one of these units that receives CCR.
15. "CMOM Plan" means a Capacity, Management, Operations, and Maintenance Plan, which is a written plan that describes the activities a permittee will engage in and actions a permittee will take to ensure that the capacity of the sewage collection system, when unobstructed, is sufficient to convey the peak wet weather flow through each reach of sewer, and provides for the management, operation, and maintenance of the permittee's sewage collection system.
16. "Design capacity" means the volume of a containment feature at a discharging facility that accommodates all permitted flows and meets all Aquifer Protection Permit conditions, including allowances for appropriate peaking and safety factors to ensure sustained, reliable operation.
17. "Design flow" means the daily flow rate a facility is designed to accommodate on a sustained basis while satisfying all Aquifer Protection Permit discharge limitations and treatment and operational requirements. The design flow either incorporates or is used with appropriate peaking and safety factors to ensure sustained, reliable operation.
18. "Direct reuse site" means an area where reclaimed water is applied or impounded.
19. "Disposal works" means the system for disposing treated wastewater generated by the treatment works of a sewage treatment facility or on-site wastewater treatment facility, by surface or subsurface methods. Disposal works do not include systems for activities regulated under 18 A.A.C. 9, Article 7.
20. "Drywell" means a well which is a bored, drilled or driven shaft or hole whose depth is greater than its width and is designed and constructed specifically for the disposal of storm water. Drywells do not include class 1, class 2, class 3 or class 4 injection wells as defined by the Federal Underground Injection Control Program (P.L. 93-523, part C), as amended. A.R.S. § 49-331(3)
21. "Dwelling" means any building, structure, or improvement intended for residential use or related activity, including a house, an apartment unit, a condominium unit, a townhouse, or a mobile or manufactured home that has been constructed or will be constructed on real property.
22. "Final permit determination" means a written notification to the applicant of the Director's final decision whether to issue or deny an Individual Aquifer Protection Permit.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

23. "Groundwater Quality Protection Permit" means a permit issued by the Arizona Department of Health Services or the Department before September 27, 1989 that regulates the discharge of pollutants that may affect groundwater.
24. "Homeowner's association" means a nonprofit corporation or unincorporated association of owners created pursuant to a declaration to own and operate portions of a planned community and which has the power under the declaration to assess association members to pay the costs and expenses incurred in the performance of the association's obligations under the declaration.
25. "Injection well" means a well that receives a discharge through pressure injection or gravity flow.
26. "Intermediate stockpile" means in-process material not intended for long-term storage that is in transit from one process to another at a mining site. Intermediate stockpile does not include metallic ore concentrate stockpiles or feedstocks not originating at the mining site.
27. "Land treatment facility" means an operation designed to treat and improve the quality of waste, wastewater, or both, by placement wholly or in part on the land surface to perform part or all of the treatment. A land treatment facility includes a facility that performs biosolids drying, processing, or composting, but not land application performed in compliance with 18 A.A.C. 9, Article 10.
28. "Mining site" means a site assigned one or more of the following primary Standard Industrial Classification Codes: 10, 12, 14, 32, and 33, and includes noncontiguous properties owned or operated by the same person and connected by a right-of-way controlled by that person to which the public is not allowed access.
29. "Nitrogen Management Area" means an area designated by the Director for which the Director prescribes measures on an area-wide basis to control sources of nitrogen, including cumulative discharges from on-site wastewater treatment facilities, that threaten to cause or have caused an exceedance of the Aquifer Water Quality Standard for nitrate.
30. "Notice of Disposal" means a document submitted to the Arizona Department of Health Services or the Department before September 27, 1989, giving notification of a pollutant discharge that may affect groundwater.
31. "On-site wastewater treatment facility" means a conventional septic tank system or alternative system installed at a site to treat and dispose of wastewater, predominantly of human origin, generated at that site. An on-site wastewater treatment facility does not include a pre-fabricated, manufactured treatment works that typically uses an activated sludge unit process and has a design flow of 3000 gallons per day or more.
32. "Operational life" means the designed or planned period during which a facility remains operational while being subject to permit conditions, including closure requirements. Operational life does not include post-closure activities.
33. "*Person*" means an individual, employee, officer, managing body, trust, firm, joint stock company, consortium, public or private corporation, including a government corporation, partnership, association or state, a political subdivision of this state, a commission, the United States government or any federal facility, interstate body or other entity. A.R.S. § 49-201(26). For the purposes of permitting a sewage treatment facility under Article 2 of this Chapter, person does not include a homeowner's association.
34. "Pilot project" means a short-term, limited-scale test designed to gain information regarding site conditions, project feasibility, or application of a new technology.
35. "Process solution" means a pregnant leach solution, barren solution, raffinate, or other solution uniquely associated with the mining or metals recovery process.
36. "Residential soil remediation level" means the applicable predetermined standard established in 18 A.A.C. 7, Article 2, Appendix A.
37. "Seasonal high water table" means the free surface representing the highest point of groundwater rise within an aquifer due to seasonal water table changes over the course of a year.
38. "Setback" means a minimum horizontal distance maintained between a feature of a discharging facility and a potential point of impact.
39. "Sewage" means untreated wastes from toilets, baths, sinks, lavatories, laundries, other plumbing fixtures, and waste pumped from septic tanks in places of human habitation, employment, or recreation. Sewage does not include gray water as defined in R18-9-701(4), if the gray water is reused according to 18 A.A.C. 9, Article 7.
40. "Sewage collection system" means a system of pipelines, conduits, manholes, pumping stations, force mains, and all other structures, devices, and appurtenances that collect, contain, and convey sewage from its sources to the entry of a sewage treatment facility or on-site wastewater treatment facility serving sources other than a single-family dwelling.
41. "Sewage treatment facility" means a plant or system for sewage treatment and disposal, except for an on-site wastewater treatment facility, that consists of treatment works, disposal works and appurtenant pipelines, conduits, pumping stations, and related subsystems and devices. A sewage treatment facility does not include components of the sewage collection system or the reclaimed water distribution system.
42. "Surface impoundment" means a pit, pond, or lagoon with a surface dimension equal to or greater than its depth, and used for the storage, holding, settling, treatment, or discharge of liquid pollutants or pollutants containing free liquids.
43. "Tracer" means a substance, such as a dye or other chemical, used to change the characteristic of water or some other fluid to detect movement.
44. "Tracer study" means a test conducted using a tracer to measure the flow velocity, hydraulic conductivity, flow direction, hydrodynamic dispersion, partitioning coefficient, or other property of a hydrologic system.
45. "Treatment works" means a plant, device, unit process, or other works, regardless of ownership, used for treating, stabilizing, or holding municipal or domestic sewage in a sewage treatment facility or on-site wastewater treatment facility.
46. "Typical sewage" means sewage conveyed to an on-site wastewater treatment facility in which the total suspended solids (TSS) content does not exceed 430 mg/l, the five-day biochemical oxygen demand (BOD<sub>5</sub>) does not exceed 380 mg/l, the total nitrogen does not exceed 53 mg/l, and the content of oil and grease does not exceed 75 mg/l.
47. "*Underground storage facility*" means a constructed underground storage facility or a managed underground storage facility. A.R.S. § 45-802.01(21).
48. "Waters of the United States" means:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. All waters that are currently used, were used in the past, or may be susceptible to use in interstate or foreign commerce, including all waters that are subject to the ebb and flow of the tide;
- b. All interstate waters, including interstate wetlands;
- c. All other waters such as intrastate lakes, rivers, streams (including intermittent streams), mudflats, sandflats, wetlands, sloughs, prairie potholes, wet meadows, playa lakes, or natural ponds the use, degradation, or destruction of which would affect or could affect interstate or foreign commerce including any waters:
  - i. That are or could be used by interstate or foreign travelers for recreational or other purposes;
  - ii. From which fish or shellfish are or could be taken and sold in interstate or foreign commerce; or
  - iii. That are used or could be used for industrial purposes by industries in interstate commerce;
- d. All impoundments of waters defined as waters of the United States under this definition;
- e. Tributaries of waters identified in subsections (a) through (d);
- f. The territorial sea; and
- g. Wetlands adjacent to waters (other than waters that are themselves wetlands) identified in subsections (a) through (f).

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Amended by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3). Amended by final expedited rulemaking at 25 A.A.R. 3060, effective immediately September 23, 2019, pursuant to A.R.S. § 41-1027(H) (Supp. 19-3).

**R18-9-102. Facilities to which Articles 1, 2, and 3 Do Not Apply**

Articles 1, 2, and 3 do not apply to:

1. A drywell used solely to receive storm runoff and located so that no use, storage, loading, or treating of hazardous substances occurs in the drainage area;
2. A direct pesticide application in the commercial production of plants and animals subject to the Federal Insecticide, Fungicide, and Rodenticide Act (P.L. 92-516; 86 Stat. 975; 7 United States Code 135 et seq., as amended), or A.R.S. §§ 49-301 through 49-309 and applicable rules, or A.R.S. Title 3, Chapter 2, Article 6 and applicable rules.

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Amended by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-103. Class Exemptions**

Class exemptions. In addition to the classes or categories of facilities listed in A.R.S. § 49250(B), the following classes or categories of facilities are exempt from the Aquifer Protection Permit requirements in Articles 1, 2, and 3 of this Chapter:

1. Facilities that treat, store, or dispose of hazardous waste and have been issued a permit or have interim status, under the Resource Conservation and Recovery Act (P.L. 94580; 90 Stat. 2796; 42 U.S.C. 6901 et seq., as amended), or have been issued a permit according to the

- hazardous waste management rules adopted under 18 A.A.C. 8, Article 2;
2. Underground storage tanks that contain a regulated substance as defined in A.R.S. § 49-1001;
3. Facilities for the disposal of solid waste, as defined in A.R.S. § 49-701.01, that are located in unincorporated areas and receive solid waste from four or fewer households;
4. Land application of biosolids in compliance with 18 A.A.C. 9, Articles 9 and 10; and
5. CCR Units that were in existence as of January 1, 2019, and which are governed by 40 C.F.R. Part 257, Subpart D. This exemption for CCR Units shall only extend until such time as both of the following are met, as applicable to a given CCR Unit:
  - a. Regulations are approved by the U.S. Environmental Protection Agency, in accordance with 42 U.S.C. § 6945(d)(1), for the issuance of permits governing CCR Units, and
  - b. The Director issues a permit to a given CCR Unit, which incorporates terms at least as protective as 40 C.F.R. Part 257, Subpart D.

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Subsection 4 citation corrected to reflect recodification at 7 A.A.R. 2522 (Supp. 03-1). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3). Amended by final expedited rulemaking at 25 A.A.R. 3060, effective immediately September 23, 2019, pursuant to A.R.S. § 41-1027(H) (Supp. 19-3).

**R18-9-104. Transition from Notices of Disposal and Groundwater Quality Protection Permitted Facilities**

A person who owns, operates, or operated a facility on or after January 1, 1986 for which a Notice of Disposal was filed or a Groundwater Quality Protection Permit was issued shall, within 90 days from the date on the Director's notification, submit an application for an Aquifer Protection Permit or a closure plan as specified under A.R.S. § 49-252. The person shall obtain a permit for continued operation, closure of the facility, or clean closure approval. Failure to submit an application or closure plan as required terminates continuance of the Notice of Disposal or Groundwater Quality Protection Permit.

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Amended by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-105. Permit Continuance****A. Continuance.**

1. Groundwater Quality Protection Permits.
  - a. Subject to R18-9-104 and other provisions of this Section, a Groundwater Quality Protection Permit issued before September 27, 1989 is valid according to the terms of the permit until replaced by an Aquifer Protection Permit issued by the Department.
  - b. A person who owns or operates a facility to which a Groundwater Quality Protection Permit was issued is in compliance with Articles 1, 2, and 3 of this Chapter and A.R.S. Title 49, Chapter 2, Article 3, if the facility:

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- i. Meets the conditions of the Groundwater Quality Protection Permit; and
  - ii. Is not causing or contributing to the violation of any Aquifer Water Quality Standard at a point of compliance, determined by the criteria in A.R.S. § 49-244.
2. Notice of Disposal. A person who owns or operates a facility for which a Notice of Disposal was filed before September 27, 1989 complies with Articles 1, 2, and 3 of this Chapter and A.R.S. Title 49, Chapter 2, Article 3 if the facility is not causing or contributing to the violation of an Aquifer Water Quality Standard at a point of compliance, determined by the criteria in A.R.S. § 49-244.
3. Aquifer Protection Permit application submittal. A person who did not file a Notice of Disposal and does not possess a Groundwater Quality Protection Permit or an Aquifer Protection Permit for an existing facility, but submitted the information required in applicable rules before December 27, 1989, is in compliance with Articles 1, 2, and 3 of this Chapter only if the person submitted an Aquifer Protection Permit application to the Department before January 1, 2001.
- B. Applicability.** Subsection (A) applies until the Director:
- 1. Issues an Aquifer Protection Permit for the facility,
  - 2. Denies an Aquifer Protection Permit for the facility,
  - 3. Issues a letter of clean closure approval for the facility under A.R.S. § 49-252, or
  - 4. Determines that the person failed to submit an application under R18-9-104.

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3).  
 Amended effective November 12, 1996 (Supp. 96-4). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).  
 Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-106. Determination of Applicability**

- A.** A person who engages or who intends to engage in an operation or an activity that may result in a discharge regulated under Articles 1, 2, and 3 of this Chapter may submit a request, on a form provided by the Department, that the Department determine the applicability of A.R.S. §§ 49-241 through 49-252 and Articles 1, 2, and 3 of this Chapter to the operation or activity.
- B.** A person requesting a determination of applicability shall provide the following information and the applicable fee under 18 A.A.C. 14:
- 1. The name and location of the operation or activity;
  - 2. The name of any person who is engaging or who proposes to engage in the operation or activity;
  - 3. A description of the operation or activity;
  - 4. A description of the volume, chemical composition, and characteristics of materials stored, handled, used, or disposed of in the operation or activity; and
  - 5. Any other information required by the Director to make the determination of applicability.
- C.** Within 45 days after receipt of a request for a determination of applicability, the Director shall notify in writing the person making the request that the operation or activity:
- 1. Is not subject to the requirements of A.R.S. §§ 49-241 through 49-252 and Articles 1, 2, and 3 of this Chapter because the operation or facility does not discharge as described under A.R.S. § 49-241;
  - 2. Is not subject to the requirements of A.R.S. §§ 49-241 through 49-252 and Articles 1, 2, and 3 of this Chapter

because the operation or activity is exempted by A.R.S. § 49-250 or R18-9-103;

- 3. Is eligible for a general permit under A.R.S. §§ 49-245.01, 49-245.02 or 49-247 or Article 3 of this Chapter, specifying the particular general permit that would apply if the person meets the conditions of the permit; or
  - 4. Is subject to the permit requirements of A.R.S. §§ 49-241 through 49-252 and Articles 1, 2, and 3 of this Chapter.
- D.** If, after issuing a determination of applicability under this Section, the Director concludes that the determination or the information relied upon for a determination is inaccurate, the Director may modify or withdraw its determination upon written notice to the person who requested the determination of applicability.
- E.** If the Director determines that an operation or activity is subject to the requirements of A.R.S. §§ 49-241 through 49-252, the person who owns or operates the discharging facility shall, within 90 days from receiving the Director's written notification, submit an application for an Aquifer Protection Permit or a closure plan.

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3).  
 Amended by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-107. Consolidation of Aquifer Protection Permits**

- A.** The Director may consolidate any number of individual permits or the coverage for any facility authorized to discharge under a general permit into a single individual permit, if:
- 1. The facilities are part of the same project or operation and are located in a contiguous geographic area, or
  - 2. The facilities are part of an area under the jurisdiction of a single political subdivision.
- B.** All applicable individual permit requirements established in Articles 1 and 2 of this Chapter apply to the consolidation of Aquifer Protection Permits.

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).  
 Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-108. Public Notice**

- A.** Individual permits.
- 1. The Department shall provide the entities specified in subsection (A)(2), with monthly written notification, by regular mail or electronically, of the following:
    - a. Individual permit applications,
    - b. Temporary permit applications,
    - c. Preliminary and final decisions by the Director whether to issue or deny an individual or temporary permit,
    - d. Closure plans received under R18-9-A209(B),
    - e. Significant permit amendments and "other" permit amendments,
    - f. Permit revocations, and
    - g. Clean closure approvals.
  - 2. Entities.
    - a. Each county department of health, environmental services department, or comparable department;
    - b. A federal, state, local agency, or council of government, that may be affected by the permit action; and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- c. A person who requested, in writing, notification of the activities described in subsection (A).
- 3. The Department may post the information referenced in subsections (A)(1) and (2) on the Department web site: [www.azdeq.gov](http://www.azdeq.gov).

**B. General permits. Public notice requirements do not apply.**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-109. Public Participation**

**A. Notice of Preliminary Decision.**

- 1. The Department shall publish a Notice of Preliminary Decision regarding the issuance or denial of a significant permit amendment or a final permit determination in one or more newspapers of general circulation where the facility is located.
- 2. The Department shall accept written comments from the public before a significant permit amendment or a final permit determination is made.
- 3. The written public comment period begins on the publication date of the Notice of Preliminary Decision and extends for 30 calendar days.

**B. Public hearing.**

- 1. The Department shall provide notice and conduct a public hearing to address a Notice of Preliminary Decision regarding a significant permit amendment or final permit determination if:
  - a. Significant public interest in a public hearing exists, or
  - b. Significant issues or information has been brought to the attention of the Department that has not been considered previously in the permitting process.
- 2. If, after publication of the Notice of Preliminary Decision, the Department determines that a public hearing is necessary, the Department shall schedule a public hearing and publish the Notice of Preliminary Decision at least once, in one or more newspapers of general circulation where the facility is located.
- 3. The Department shall accept written public comment until the close of the hearing record as specified by the person presiding at the public hearing.

**C. The Department shall respond in writing to all comments submitted during the formal public comment period.**

**D. At the same time the Department notifies a permittee of a significant permit amendment or an applicant of the final permit determination, the Department shall send, through regular mail or electronically, a notice of the amendment or determination and the summary of response to comments to any person who submitted comments or attended a public hearing on the significant permit amendment or final permit determination.**

**E. General permits. Public participation requirements do not apply.**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-110. Inspections, Violations, and Enforcement**

**A. The Department shall conduct an inspection of a permitted facility as specified under A.R.S. § 41-1009.**

**B. Except as provided in R18-9-A308, a person who owns or operates a facility contrary to a provision of Articles 1, 2, and 3 of this Chapter, violates a condition of an Aquifer Protection Permit, or violates a condition of a Groundwater Quality Protection Permit continued under R18-9-105(A)(1) is subject to the enforcement actions established under A.R.S. Title 49, Chapter 2, Article 4.**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-111. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-112. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-113. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-114. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-115. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-116. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-117. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-118. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-119. Repealed**

**Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

tive January 1, 2001 (Supp. 00-4).

**R18-9-120. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3).  
Repealed effective July 14, 1998 (Supp. 98-3).

**R18-9-121. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-122. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-123. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3).  
Repealed effective November 15, 1996 (Supp. 96-4).

**R18-9-124. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-125. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-126. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-127. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-128. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3).  
Repealed effective November 12, 1996 (Supp. 96-4).

**R18-9-129. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-130. Repealed****Historical Note**

Adopted effective September 27, 1989 (Supp. 89-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**Appendix I. Repealed****Historical Note**

Appendix I repealed by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**ARTICLE 2. AQUIFER PROTECTION PERMITS - INDIVIDUAL PERMITS****PART A. APPLICATION AND GENERAL PROVISIONS****R18-9-A201. Individual Permit Application**

- A.** An individual permit application covers one or more of the following categories:
  1. Drywell,
  2. Industrial,
  3. Mining,
  4. Wastewater,
  5. Solid waste disposal, or
  6. Land treatment facility.
- B.** An applicant for an individual permit shall provide the Department with:
  1. The following information on an application form:
    - a. The name and mailing address of the applicant;
    - b. The name and mailing address of the owner of the facility;
    - c. The name and mailing address of the operator of the facility;
    - d. The legal description, including latitude and longitude, of the location of the facility;
    - e. The expected operational life of the facility; and
    - f. The permit number for any other federal or state environmental permit issued to the applicant for that facility or site.
  2. A copy of the certificate of disclosure required by A.R.S. § 49-109;
  3. Evidence that the facility complies with applicable municipal or county zoning ordinances, codes, and regulations;
  4. Two copies of the technical information required in R18-9-A202(A);
  5. Cost estimates for facility construction, operation, maintenance, closure, and post-closure as follows.
    - a. The applicant shall ensure that the cost estimates are derived by an engineer, controller, or accountant using competitive bids, construction plan take-offs, specifications, operating history for similar facilities, or other appropriate sources, as applicable.
    - b. The following cost estimates that are representative of regional fair market costs:
      - i. The cost of closure estimate under R18-9-A209(B)(2), consistent with the closure plan or strategy submitted under R18-9-A202(A)(10);
      - ii. The estimated cost of post-closure monitoring and maintenance under R18-9-A209(C), consistent with the post-closure plan or strategy submitted under R18-9-A202(A)(10); and
      - iii. For a sewage treatment facility or utility subject to Title 40 of the Arizona Revised Statutes, the operation and maintenance costs of those elements of the facility used to make the demonstration under A.R.S. § 49-243(B);
  6. For a sewage treatment facility:
    - a. Documentation that the sewage treatment facility or expansion conforms with the Certified Areawide Water Quality Management Plan and the Facility Plan, and
    - b. The additional information required in R18-9-B202 and R18-9-B203;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

7. Certification in writing that the information submitted in the application is true and accurate to the best of the applicant's knowledge; and
  8. The applicable fee established in 18 A.A.C. 14.
  - C. Special provision for an underground storage facility as defined in A.R.S. § 45-802.01(21). A person applying for an individual permit for an underground storage facility shall submit the information described in R18-9-A201 through R18-9-A203, except for the BADCT information specified in R18-9-A202(A)(5).
    1. Upon receipt of the application, the Department shall process the application in coordination with the underground storage facility permit process administered by the Department of Water Resources.
    2. The Department shall advise the Department of Water Resources of each permit application received.
  - D. Pre-application conference. Upon request of the applicant, the Department shall schedule and hold a pre-application conference with the applicant to discuss any requirements in Articles 1 and 2 of this Chapter.
  - E. Draft permit. The Department shall provide the applicant with a draft of the individual permit before publication of the Notice of Preliminary Decision specified in R18-9-109.
  - F. Permit duration. Except for a temporary permit, an individual permit is valid for the operational life of the facility and any period during which the facility is subject to a post-closure plan under R18-9-A209(C).
  - G. Permit issuance or denial.
    1. The Director shall issue an individual permit, based upon the information obtained by or made available to the Department, if the Director determines that the applicant will comply with A.R.S. §§ 49-241 through 49-252 and Articles 1 and 2 of this Chapter.
    2. The Director shall provide the applicant with written notification of the final decision to issue or deny the permit within the overall licensing time-frame requirements under 18 A.A.C. 1, Article 5, Table 10 and the following:
      - a. The applicant's right to appeal the final permit determination, including the number of days the applicant has to file a protest and the name and telephone number of the Department contact person who can answer questions regarding the appeals process;
      - b. If the permit is denied under R18-9-A213(B), the reason for the denial with reference to the statute or rule on which the denial is based; and
      - c. The applicant's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.
2. A facility site plan showing all known property lines, structures, water wells, injection wells, drywells and their uses, topography, and the location of points of discharge. The facility site plan shall include all known borings. If the Department determines that borings are numerous, the applicant shall satisfy this requirement with a narrative description of the number and location of the borings;
  3. The facility design documents indicating proposed or as-built design details and proposed or as-built configuration of basins, ponds, waste storage areas, drainage diversion features, or other engineered elements of the facility affecting discharge. When formal as-built plan submittals are not available, the applicant shall provide documentation sufficient to allow evaluation of those elements of the facility affecting discharge, following the demonstration requirements of A.R.S. § 49-243(B). An applicant seeking an Aquifer Protection Permit for a sewage treatment facility satisfies the requirements of this subsection by submitting the documents required in R18-9-B202 and R18-9-B203;
  4. A summary of the known past facility discharge activities and the proposed facility discharge activities indicating all of the following:
    - a. The chemical, biological, and physical characteristics of the discharge;
    - b. The rate, volume, and frequency of the discharge for each facility; and
    - c. The location of the discharge and a map outlining the pollutant management area described in A.R.S. § 49-244(1);
  5. A description of the BADCT employed in the facility, including:
    - a. A statement of the technology, processes, operating methods, or other alternatives proposed to meet the requirements of A.R.S. § 49-243(B), (G), or (P), as applicable. The statement shall describe:
      - i. The alternative discharge control measures considered,
      - ii. The technical and economic advantages and disadvantages of each alternative, and
      - iii. The justification for selection or rejection of each alternative;
    - b. An evaluation of each alternative discharge control technology relative to the amount of discharge reduction achievable, site-specific hydrologic and geologic characteristics, other environmental impacts, and water conservation or augmentation;
    - c. For a new facility, an industry-wide evaluation of the economic impact of implementation of each alternative discharge control technology;
    - d. For an existing facility, a statement reflecting the consideration of factors listed in A.R.S. § 49-243(B)(1)(a) through (h);
    - e. A sewage treatment facility meeting the BADCT requirements under Article 2, Part B of this Chapter satisfies the requirements under subsections (A)(5)(a) through (d).
  6. Proposed points of compliance for the facility based on A.R.S. § 49-244. An applicant shall demonstrate that:
    - a. The facility will not cause or contribute to a violation of an Aquifer Water Quality Standard at the proposed point of compliance; or
    - b. If an Aquifer Water Quality Standard for a pollutant is exceeded in an aquifer at the time of permit issuance, no additional degradation of the aquifer rela-

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A202. Technical Requirements**

- A. Except as specified in R18-9-A201(C)(1), an applicant shall, as required under R18-9-A201(B)(4), submit the following technical information as attachments to the individual permit application:
  1. A topographic map, or other appropriate map approved by the Department, of the facility location and contiguous land area showing the known use of adjacent properties, all known water well locations found within one-half mile of the facility, and a description of well construction details and well uses, if available;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

tive to that pollutant and determined at the proposed point of compliance will occur as a result of the discharge from the proposed facility. In this case, the applicant shall submit an Ambient Groundwater Monitoring Report that includes:

- i. Data from eight or more rounds of ambient groundwater samples collected to represent groundwater quality at the proposed points of compliance, and
  - ii. An AQL proposal for each pollutant that exceeds an Aquifer Water Quality Standard;
7. A contingency plan that meets the requirements of R18-9-A204;
  8. A hydrogeologic study that defines the discharge impact area for the expected duration of the facility. The Department may allow the applicant to submit an abbreviated hydrogeologic study or, if warranted, no hydrogeologic study, based upon the quantity and characteristics of the pollutants discharged, the methods of disposal, and the site conditions. The applicant may include information from a previous study of the affected area to meet a requirement of the hydrogeologic study, if the previous study accurately represents current hydrogeologic conditions.
    - a. The hydrogeologic study shall demonstrate:
      - i. That the facility will not cause or contribute to a violation of an Aquifer Water Quality Standard at the applicable point of compliance; or
      - ii. If an Aquifer Water Quality Standard for a pollutant is exceeded in an aquifer at the time of permit issuance, that no additional degradation of the aquifer relative to that pollutant and determined at the applicable point of compliance will occur as a result of the discharge from the proposed facility;
    - b. Based on the quantity and characteristics of pollutants discharged, methods of disposal, and site conditions, the Department may require the applicant to provide:
      - i. A description of the surface and subsurface geology, including a description of all borings;
      - ii. The location of any perennial, intermittent, or ephemeral surface water bodies;
      - iii. The characteristics of the aquifer and geologic units with limited permeability, including depth, hydraulic conductivity, and transmissivity;
      - iv. The rate, volume, and direction of surface water and groundwater flow, including hydrographs, if available, and equipotential maps;
      - v. The precise location or estimate of the location of the 100-year flood plain and an assessment of the 100-year flood surface flow and potential impacts on the facility;
      - vi. Documentation of the existing quality of the water in the aquifers underlying the site, including, where available, the method of analysis, quality assurance, and quality control procedures associated with the documentation;
      - vii. Documentation of the extent and degree of any known soil contamination at the site;
      - viii. An assessment of the potential of the discharge to cause the leaching of pollutants from surface soils or vadose materials;
      - ix. For an underground water storage facility, an assessment of the potential of the discharge to

cause the leaching of pollutants from surface soils or vadose materials or cause the migration of contaminated groundwater;

- x. Any changes in the water quality expected because of the discharge;
  - xi. A description of any expected changes in the elevation or flow directions of the groundwater expected to be caused by the facility;
  - xii. A map of the facility's discharge impact area; or
  - xiii. The criteria and methodologies used to determine the discharge impact area.
9. A detailed proposal indicating the alert levels, discharge limitations, monitoring requirements, compliance schedules, and temporary cessation or plans that the applicant will use to satisfy the requirements of A.R.S. Title 49, Chapter 2, Article 3, and Articles 1 and 2 of this Chapter;
  10. Closure and post-closure strategies or plans; and
  11. Any other relevant information required by the Department to determine whether to issue a permit.
- B.** An applicant shall demonstrate the ability to maintain the technical capability necessary to carry out the terms of the individual permit, including a demonstration that a certified operator will operate the facility if a certified operator is required under 18 A.A.C. 5. The applicant shall make the demonstration by submitting the following information for each person principally responsible for designing, constructing, or operating the facility:
1. Pertinent licenses or certifications held by the person;
  2. Professional training relevant to the design, construction, or operation of the facility; and
  3. Work experience relevant to the design, construction, or operation of the facility.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A203. Financial Requirements**

- A.** Definitions.
1. "Book net worth" means the net difference between total assets and total liabilities.
  2. "Face amount" means the total amount the insurer is obligated to pay under the policy.
  3. "Net working capital" means current assets minus current liabilities.
  4. "Substantial business relationship" means a pattern of recent or ongoing business transactions to the extent that a guaranty contract issued incident to that relationship is valid and enforceable.
  5. "Tangible net worth" means an owner or operator's book net worth, plus subordinated debts, less goodwill, patent rights, royalties, and assets and receivables due from affiliates or shareholders.
- B.** Financial demonstration. A person applying for an individual permit shall demonstrate financial capability to construct, operate, close, and ensure proper post-closure care of the facility in compliance with A.R.S. Title 49, Chapter 2, Article 3; Articles 1 and 2 of this Chapter; and the conditions of the individual permit. The applicant shall:
1. Submit a letter signed by the chief financial officer stating that the applicant is financially capable of meeting the costs described in R18-9-A201(B)(5);
  2. For a state or federal agency, county, city, town, or other local governmental entity, submit a statement specifying

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- the details of the financial arrangements used to meet the estimated closure and post-closure costs submitted under R18-9-A201(B)(5), including any other details that demonstrate how the applicant is financially capable of meeting the costs described in R18-9-A201(B)(5);
3. For other than a state or federal agency, county, city, town, or other local governmental entity, submit the information required for at least one of the financial assurance mechanisms listed in subsection (C) that covers the closure and post-closure costs submitted under R18-9-A201(B)(5), including:
    - a. The selected financial mechanism or mechanisms;
    - b. The amount covered by each financial mechanism;
    - c. The institution or company that is responsible for each financial mechanism used in the demonstration; and
    - d. Any other details that demonstrate how the applicant is financially capable of meeting the costs described in R18-9-A201(B)(5); and
  4. For a facility subject to R18-9-A201(B)(5)(b)(iii) and not owned by a state or federal agency, county, city, town, or other local governmental entity, submit evidence of financial arrangements to cover the operation and maintenance costs described in R18-9-A201(B)(5).
- C. Financial assurance mechanisms. The applicant may use any of the following mechanisms to cover the financial assurance obligation under R18-9-A201(B)(5):
1. Financial test for self-assurance. If an applicant uses a financial test for self-assurance, the applicant shall not consolidate the financial statement with a parent or sibling company. The applicant shall make the demonstration in either subsection (C)(1)(a) or (b) and submit the information required in subsection (C)(1)(c):
    - a. The applicant may demonstrate:
      - i. One of the following:
        - (1) A ratio of total liabilities to net worth less than 2.0 and a ratio of current assets to current liabilities greater than 1.5;
        - (2) A ratio of total liabilities to net worth less than 2.0 and a ratio of the sum of net annual income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; or
        - (3) A ratio of the sum of net annual income plus depreciation, depletion, and amortization to total liabilities greater than 0.1 and a ratio of current assets to current liabilities greater than 1.5;
      - ii. The net working capital and tangible net worth of the applicant each are at least six times the closure cost estimate; and
      - iii. The applicant has assets in the U.S. of at least 90 percent of total assets or six times the closure and post-closure cost estimate; or
    - b. The applicant may demonstrate:
      - i. The applicant's senior unsecured debt has a current investment-grade rating as issued by Moody's Investor Service, Inc.; Standard and Poor's Corporation; or Fitch Ratings;
      - ii. The tangible net worth of the applicant is at least six times the closure cost estimate; and
      - iii. The applicant has assets in the U.S. of at least 90 percent of total assets or six times the closure and post-closure cost estimate; and
    - c. The applicant shall submit:
      - i. A letter signed by the applicant's chief financial officer that identifies the criterion specified in subsection (C)(1)(a) or (b) and used by the applicant to satisfy the financial assurance requirements of this Section, an explanation of how the applicant meets the criterion, and certification of the letter's accuracy; and
      - ii. A statement from an independent certified public accountant verifying that the demonstration submitted under subsection (C)(1)(c)(i) is accurate based on a review of the applicant's financial statements for the latest completed fiscal year or more recent financial data and no adjustment to the financial statement is necessary.
  2. Performance surety bond. The applicant may use a performance surety bond if the following conditions are met:
    - a. The company providing the performance bond is listed as an acceptable surety on federal bonds in Circular 570 of the U.S. Department of the Treasury;
    - b. The bond provides for performance of all the covered items listed in R18-9-A201(B)(5) by the surety, or by payment into a standby trust fund of an amount equal to the penal amount if the permittee fails to perform the required activities;
    - c. The penal amount of the bond is at least equal to the amount of the cost estimate developed in R18-9-A201(B)(5) if the bond is the only method used to satisfy the requirements of this Section or a pro-rata amount if used with another financial assurance mechanism;
    - d. The surety bond names the Arizona Department of Environmental Quality as beneficiary;
    - e. The original surety bond is submitted to the Director;
    - f. Under the terms of the bond, the surety is liable on the bond obligation when the permittee fails to perform as guaranteed by the bond; and
    - g. The surety payments under the terms of the bond are deposited directly into the Standby Trust Fund.
  3. Certificate of deposit. The applicant may use a certificate of deposit if the following conditions are met:
    - a. The applicant submits to the Director one or more certificates of deposit made payable to or assigned to the Department to cover the applicant's financial assurance obligation or a pro-rata amount if used with another financial assurance mechanism;
    - b. The certificate of deposit is insured by the Federal Deposit Insurance Corporation and is automatically renewable;
    - c. The bank assigns the certificate of deposit to the Arizona Department of Environmental Quality;
    - d. Only the Department has access to the certificate of deposit; and
    - e. Interest accrues to the permittee during the period the applicant gives the certificate as financial assurance, unless the interest is required to satisfy the requirements in R18-9-A201(B)(5).
  4. Trust fund. The applicant may use a trust fund if the following conditions are met:
    - a. The trust fund names the Arizona Department of Environmental Quality as beneficiary; and
    - b. The trust is initially funded in an amount at least equal to:
      - i. The cost estimate of the closure plan or strategy submitted under R18-9-A201(B)(5),



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- ii. The amount specified in a compliance schedule approved in the permit, or
  - iii. A pro-rata amount if used with another financial assurance mechanism.
- 5. Letter of credit. The applicant may use a letter of credit if the following conditions are met:
  - a. The financial institution issuing the letter is regulated and examined by a federal or state agency;
  - b. The letter of credit is irrevocable and issued for at least one year in an amount equal to the cost estimate submitted under R18-9-A201(B)(5) or a pro-rata amount if used with another financial assurance mechanism. The letter of credit provides that the expiration date is automatically extended for a period of at least one year unless the issuing institution has canceled the letter of credit by sending notice of cancellation by certified mail to the permittee and to the Director 90 days in advance of cancellation or expiration. The permittee shall provide alternate financial assurance within 60 days of receiving the notice of expiration or cancellation;
  - c. The financial institution names the Arizona Department of Environmental Quality as beneficiary for the letter of credit; and
  - d. The letter is prepared by the financial institution and identifies the letter of credit issue date, expiration date, dollar sum of the credit, the name and address of the Department as the beneficiary, and the name and address of the applicant as the permittee.
- 6. Insurance policy. The applicant may use an insurance policy if the following conditions are met:
  - a. The insurance is effective before signature of the permit or substitution of insurance for other extant financial assurance instruments posted with the Director;
  - b. The insurer is authorized to transact the business of insurance in the state and has an AM BEST Rating of at least a B+ or the equivalent;
  - c. The permittee submits a copy of the insurance policy to the Department;
  - d. The insurance policy guarantees that funds are available to pay costs as submitted under R18-9-A201(B)(5) without a deductible. The policy also guarantees that once cleanup steps begin that the insurer will pay out funds to the Director or other entity designated by the Director up to an amount equal to the face amount of the policy;
  - e. The policy guarantees that while closure and post-closure activities are conducted the insurer will pay out funds to the Director or other entity designated by the Director up to an amount equal to the face amount of the policy;
  - f. The insurance policy is issued for a face amount at least equal to the current cost estimate submitted to the Director for performance of all items listed in R18-9-A201(B)(5) or a pro-rata amount if used with another financial assurance mechanism. Actual payments by the insurer will not change the face amount, although the insurer's future liability is reduced by the amount of the payments, during the policy period;
  - g. The insurance policy names the Arizona Department of Environmental Quality as additional insured;
  - h. The policy contains a provision allowing assignment of the policy to a successor permittee. The transfer of the policy is conditional upon consent of the insurer and the Department; and
- i. The insurance policy provides that the insurer does not cancel, terminate, or fail to renew the policy except for failure to pay the premium. The automatic renewal of the policy, at a minimum, provides the insured with a renewal option at the face amount of the expiring policy. If the permittee fails to pay the premium, the insurer may cancel the policy by sending notice of cancellation by certified mail to the permittee and to the Director 90 days in advance of the cancellation. If the insurer cancels the policy, the permittee shall provide alternate financial assurance within 60 days of receiving the notice of cancellation.
- 7. Cash deposit. The applicant may use a cash deposit if the cash is deposited with the Department to cover the financial assurance obligation under R18-9-A201(B)(5).
- 8. Guarantees.
  - a. The applicant may use guarantees to cover the financial assurance obligation under R18-9-A201(B)(5) if the following conditions are met:
    - i. The applicant submits to the Department an affidavit certifying that the guarantee arrangement is valid under all applicable federal and state laws. If the applicant is a corporation, the applicant shall include a certified copy of the corporate resolution authorizing the corporation to enter into an agreement to guarantee the permittee's financial assurance obligation;
    - ii. The applicant submits to the Department documentation that explains the substantial business relationship between the guarantor and the permittee;
    - iii. The applicant demonstrates that the guarantor meets conditions of the financial mechanism listed in subsection (C)(1). For purposes of applying the criteria in subsection (C)(1) to a guarantor, substitute "guarantor" for the term "applicant" as used in subsection (C)(1);
    - iv. The guarantee is governed by and complies with state law;
    - v. The guarantee continues in full force until released by the Director or replaced by another financial assurance mechanism listed under subsection (C);
    - vi. The guarantee provides that, if the permittee fails to perform closure or post-closure care of a facility covered by the guarantee, the guarantor shall perform or pay a third party to perform closure or post-closure care, as required by the permit, or establish a fully funded trust fund as specified under subsection (C)(4) in the name of the owner or operator; and
    - vii. The guarantor names the Arizona Department of Environmental Quality as beneficiary of the guarantee.
  - b. Guarantee reporting. The guarantor shall notify or submit a report to the Department within 30 days of:
    - i. An increase in financial responsibility during the fiscal year that affects the guarantor's ability to meet the financial demonstration;
    - ii. Receiving an adverse auditor's notice, opinion, or qualification; or

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- iii. Receiving a Department notification requesting an update of the guarantor's financial condition.
- 9. An applicant may use a financial assurance mechanism not listed in subsection (C)(1) through (8) if approved by the Director.
- D. Loss of coverage. If the Director believes that a permittee will lose financial capability under subsection (C), the permittee shall, within 30 days from the date of receipt of the Director's request, submit evidence that the financial demonstration under subsection (B) is being met or provide an alternative financial assurance mechanism.
- E. Financial assurance mechanism substitution. A permittee may substitute one financial assurance mechanism for another if the substitution is approved by the Director through an amendment under subsection (F).
- F. Permit amendment. The permittee shall apply for an amendment to the individual permit if the permittee changes a financial assurance mechanism or if the permittee's revision of the closure strategy results in an increase in the estimated cost under R18-9-A201(B)(5). If a permittee seeks to amend a permit under R18-9-A211(B), the permittee shall submit a financial capability demonstration for all facilities covered by the amended individual permit with the permit amendment request.
- G. Previous financial demonstration. If an applicant shows that the financial assurance demonstration required under this Section is covered within a financial demonstration already made to a governmental agency and the Department has access to that information, the applicant is not required to resubmit the information. The applicant shall certify that the current financial condition is equal to or better than the condition reflected in the financial demonstration provided to the other governmental agency. This provision does not apply to a demonstration required under subsection (F).
- H. Recordkeeping. A permittee shall maintain the financial capability for the duration of the permit and report as specified in the permit.
- 5. Evaluation of the effectiveness of discharge control technology at the facility that may include technology upgrades;
- 6. Evaluation of pretreatment for sewage treatment facilities;
- 7. Preparation of a hydrogeologic study to assess the extent of soil, surface water, or aquifer impact;
- 8. Corrective action that includes any of the following measures:
  - a. Control of the source of an unauthorized discharge,
  - b. Soil cleanup,
  - c. Cleanup of affected surface waters,
  - d. Cleanup of affected parts of the aquifer, or
  - e. Mitigation measures to limit the impact of pollutants on existing uses of the aquifer.
- C. A permittee shall not take a corrective action proposed under subsection (B)(8) unless the action is approved by the Department.
  - 1. Emergency response provisions and corrective actions specifically identified in the contingency plan submitted with a permit application are subject to approval by the Department during the application review process.
  - 2. The permittee may propose to the Department a corrective action other than those already identified in the contingency plan if a discharge results in any of the conditions identified in subsection (A).
  - 3. The Department shall approve the proposed corrective action if the corrective action provides a plan and expedient time-frame to return the facility to compliance with the facility's permit conditions, A.R.S. Title 49, Chapter 2, and Articles 1 and 2 of this Chapter.
  - 4. The Director may incorporate corrective actions into an Aquifer Protection Permit.
- D. A contingency plan shall contain emergency response provisions to address an imminent and substantial endangerment to public health or the environment including:
  - 1. Twenty-four hour emergency response measures;
  - 2. The name of an emergency response coordinator responsible for implementing the contingency plan;
  - 3. Immediate notification to the Department regarding any emergency response measure taken;
  - 4. A list of people to contact, including names, addresses, and telephone numbers if an imminent and substantial endangerment to public health or the environment arises; and
  - 5. A general description of the procedures, personnel, and equipment proposed to mitigate unauthorized discharges.
- E. A permittee may amend a contingency plan required by the Federal Water Pollution Control Act (P.L. 92-500; 86 Stat. 816; 33 U.S.C. 1251, et seq., as amended), or the Resource Conservation and Recovery Act of 1976 (P.L. 94-580; 90 Stat. 2796; 42 U.S.C. 6901 et seq., as amended), to meet the requirements of this Section and submit it to the Department for approval instead of a separate aquifer protection contingency plan.
- F. A permittee shall maintain at least one copy of the contingency plan required by the individual permit at the location where day-to-day decisions regarding the operation of the facility are made. A permittee shall advise all employees responsible for the operation of the facility of the location of the contingency plan.
- G. A permittee shall promptly revise the contingency plan upon any change to the information contained in the plan.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A204. Contingency Plan**

- A. An individual permit shall specify a contingency plan that defines the actions to be taken if a discharge results in any of the following:
  - 1. A violation of an Aquifer Water Quality Standard or an AQL,
  - 2. A violation of a discharge limitation,
  - 3. A violation of any other permit condition,
  - 4. An alert level is exceeded, or
  - 5. An imminent and substantial endangerment to the public health or the environment.
- B. The contingency plan may include one or more of the following actions if a discharge results in any of the conditions described in subsection (A):
  - 1. Verification sampling;
  - 2. Notification to downstream or downgradient users who may be directly affected by the discharge;
  - 3. Further monitoring that may include increased frequency, additional constituents, or additional monitoring locations;
  - 4. Inspection, testing, operation, or maintenance of discharge control features at the facility;

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A205. Alert Levels, Discharge Limitations, and AQLs****A. Alert levels.**

1. If the Department prescribes an alert level in an individual permit, the Department shall base the alert level on the site-specific conditions described by the applicant in the application submitted under R18-9-A201(A)(2) or other information available to the Department.
2. The Department may specify an alert level based on a pollutant that indicates the potential appearance of another pollutant.
3. The Department may specify the measurement of an alert level at a location appropriate for the discharge activity, considering the physical, chemical, and biological characteristics of the discharge, the particular treatment process, and the site-specific conditions.

**B. Discharge limitations.** If the Department prescribes discharge limitations in an individual permit, the Department shall base the discharge limitations on the considerations described in A.R.S. § 49-243.**C. AQLs.** The Department may prescribe an AQL in an individual permit to ensure that the facility continues to meet the criteria under A.R.S. § 49-243(B)(2) or (3).

1. If the concentration of a pollutant in the aquifer does not exceed the Aquifer Water Quality Standard, the Department shall set the AQL at the Aquifer Water Quality Standard.
2. If the concentration of a pollutant in the aquifer exceeds the Aquifer Water Quality Standard, the Department shall set the AQL higher than the Aquifer Water Quality Standard.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A206. Monitoring Requirements****A. Monitoring.**

1. The Department shall determine whether monitoring is required to assure compliance with Aquifer Protection Permit conditions and with the applicable Aquifer Water Quality Standards established under A.R.S. §§ 49-221, 49-223, 49-241 through 49-244, and 49-250 through 49-252.
2. If monitoring is required, the Director shall specify to the permittee:
  - a. The type and method of monitoring;
  - b. The frequency of monitoring;
  - c. Any requirements for the installation, use, or maintenance of monitoring equipment; and
  - d. The intervals at which the permittee reports the monitoring results to the Department.

**B. Recordkeeping.**

1. A permittee shall make a monitoring record for each sample taken as required by the individual permit consisting of all of the following:
  - a. The date, time, and exact place of a sampling and the name of each individual who performed the sampling;
  - b. The procedures used to collect the sample;
  - c. The date sample analysis was completed;
  - d. The name of each individual or laboratory performing the analysis;

- e. The analytical techniques or methods used to perform the sampling and analysis;
  - f. The chain of custody records; and
  - g. Any field notes relating to the information described in subsections (B)(1)(a) through (f).
2. A permittee shall make a monitoring record for each measurement made, as required by the individual permit, consisting of all of the following:
    - a. The date, time, and exact place of the measurement and the name of each individual who performed the measurement;
    - b. The procedures used to make the measurement; and
    - c. Any field notes relating to the information described in subsections (B)(2)(a) and (b).
  3. A permittee shall maintain monitoring records for at least 10 years after the date of the sample or measurement, unless the Department specifies a shorter time period in the permit.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A207. Reporting Requirements**

- A. A permittee shall notify the Department within five days after becoming aware of a violation of a permit condition or that an alert level was exceeded. The permittee shall inform the Department whether the contingency plan described in R18-9-A204 was implemented.
- B. In addition to the requirements in subsection (A), a permittee shall submit a written report to the Department within 30 days after the permittee becomes aware of a violation of a permit condition. The report shall contain:
  1. A description of the violation and its cause;
  2. The period of violation, including exact date and time, if known, and the anticipated time period the violation is expected to continue;
  3. Any action taken or planned to mitigate the effects of the violation or to eliminate or prevent recurrence of the violation;
  4. Any monitoring activity or other information that indicates that a pollutant is expected to cause a violation of an Aquifer Water Quality Standard; and
  5. Any malfunction or failure of a pollution control device or other equipment or process.
- C. A permittee shall notify the Department within five days after the occurrence of any of the following:
  1. The permittee's filing of bankruptcy, or
  2. The entry of any order or judgment not issued by the Director against the permittee for the enforcement of any federal or state environmental protection statute or rule.
- D. The Director shall specify the format for submitting results from monitoring conducted under R18-9-A206.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A208. Compliance Schedule**

- A. A permittee shall follow the compliance schedule established in the individual permit.
  1. If a compliance schedule provides that an action is required more than one year after the date of permit issu-

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

ance, the schedule shall establish interim requirements and dates for their achievement.

2. If the time necessary for completion of an interim requirement is more than one year and is not readily divisible into stages for completion, the permit shall contain interim dates for submission of reports on progress toward completion of the interim requirements and shall indicate a projected completion date.
  3. Unless otherwise specified in the permit, within 30 days after the applicable date specified in a compliance schedule, a permittee shall submit to the Department a report documenting that the required action was taken within the time specified.
  4. After reviewing the compliance schedule activity the Director may amend the Aquifer Protection Permit, based on changed circumstances relating to the required action.
- B.** The Department shall consider all of the following factors when setting the compliance schedule requirements:
1. The character and impact of the discharge,
  2. The nature of construction or activity required by the permit,
  3. The number of persons affected or potentially affected by the discharge,
  4. The current state of treatment technology, and
  5. The age of the facility.
- C.** For a new facility, the Department shall not defer to a compliance schedule any requirement necessary to satisfy the criteria under A.R.S. § 49-243(B).

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A209. Temporary Cessation, Closure, Post-closure****A. Temporary cessation.**

1. A permittee shall notify the Department before a cessation of operations at the facility of at least 60 days duration.
2. The permittee shall implement any condition specified in the individual permit for the temporary cessation.
3. If the permit does not specify any temporary cessation condition, the permittee shall, prior to implementation, submit the proposed temporary cessation plan for Department approval.

**B. Closure.**

1. Before providing notice under subsection (B)(2), a person may request that the Director review a site investigation plan for a facility under subsection (B)(3)(a) or the results of a site investigation at a facility to determine compliance with this subsection and A.R.S. § 49-252.
2. A person shall notify the Department of the person's intent to cease operations without resuming an activity for which the facility was designed or operated.
3. The person shall submit a closure plan for Director approval within 90 days following the notification of intent to cease operations with the applicable fee established in 18 A.A.C. 14. A complete closure plan shall include:
  - a. A site investigation plan that includes a summary of relevant site studies already conducted and a proposed scope of work for any additional site investigation necessary to identify:
    - i. The lateral and vertical extent of contamination in soils and groundwater, using applicable standards;

- ii. The approximate quantity and chemical, biological, and physical characteristics of each waste, contaminated water, or contaminated soil proposed for removal from the facility;
  - iii. The approximate quantity and chemical, biological, and physical characteristics of each waste, contaminated water, or contaminated soil that will remain at the facility; and
  - iv. Information regarding site conditions related to pollutant fate and transport that may influence the scope of sampling necessary to characterize the site for closure;
- b.** A summary describing the results of a site investigation and any other information used to identify:
- i. The lateral and vertical extent of soil and groundwater contamination, using applicable standards, and the analytical results that support the determination;
  - ii. The approximate quantity and chemical, biological, and physical characteristics of each material scheduled for removal;
  - iii. The destination of the materials and documentation that the destination is approved to accept the materials;
  - iv. The approximate quantity and chemical, biological, and physical characteristics of each material that remains at the facility; and
  - v. Any other relevant information the Department determines is necessary;
- c.** A closure design that identifies:
- i. The method used, if any, to treat any material remaining at the facility;
  - ii. The method used to control the discharge of pollutants from the facility;
  - iii. Any limitation on future land or water uses created as a result of the facility's operations or closure activities and a Declaration of Environmental Use Restriction according to A.R.S. § 49-152, if necessary; and
  - iv. The methods used to secure the facility;
- d.** An estimate of the cost of closure;
- e.** A schedule for implementation of the closure plan and submission of a post-closure plan if clean closure is not achieved; and
- f.** For an implemented closure plan, a summary report of the results of site investigation performed during closure activities, including confirmation and verification sampling.
4. Within 60 days of receipt of a complete closure plan, the Department shall determine whether the closure plan achieves clean closure.
    - a. If the implemented complete closure plan achieves clean closure, the Director shall:
      - i. If the facility is not covered by an Aquifer Protection Permit, send the person a letter of approval; or
      - ii. If the facility is covered by an Aquifer Protection Permit, send the person a Permit Release Notice issued under subsection (C)(2)(c).
    - b. If the implemented complete closure plan did not achieve clean closure, the person shall submit a post-closure plan under subsection (C) and the following documents within 90 days from the date on the Department's notice or as specified under A.R.S. § 49-252(E):
      - i. An application for an individual permit, or



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- ii. A request to amend a current individual permit to address closure activities and post-closure monitoring and maintenance at the facility.
- C. Post-closure. A person shall describe post-closure monitoring and maintenance activities in an application for a permit or an amendment to an individual permit and submit it to the Department for approval.
  - 1. The application shall include:
    - a. The duration of post-closure care;
    - b. The monitoring procedures proposed by the permittee, including monitoring frequency, type, and location;
    - c. A description of the operating and maintenance procedures proposed for maintaining aquifer quality protection devices, such as liners, treatment systems, pump-back systems, surface water and stormwater management systems, and monitoring wells;
    - d. A schedule and description of physical inspections proposed at the facility following closure;
    - e. An estimate of the cost of post-closure maintenance and monitoring;
    - f. A description of limitations on future land or water uses, or both, at the facility site as a result of facility operations; and
    - g. The applicable fee established in 18 A.A.C. 14.
  - 2. The Director shall include the post-closure plan submitted under subsection (C)(1) in the individual permit or permit amendment.
    - a. The permittee shall provide the Department written notice that a closure plan or a post-closure plan was fully implemented within 30 calendar days of implementation of the plan. The notice shall include a summary report confirming the closure design and describing the results of sampling performed during closure activities and post-closure activities, if any, to demonstrate the level of cleanup achieved.
    - b. The Director may, upon receipt of the notice, inspect the facility to ensure that the closure plan has been fully implemented.
    - c. The Director shall issue a Permit Release Notice if the permittee satisfies all closure and post-closure requirements.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A210. Temporary Individual Permit**

- A. A person may apply for a temporary individual permit for either of the following:
  - 1. A pilot project to develop data for an Aquifer Protection Permit application for the full-scale project, or
  - 2. A facility with a discharge lasting no more than six months.
- B. The applicant shall submit a preliminary application containing the information required in R18-9-A201(B)(1).
- C. The Department shall, based on the preliminary application and in consultation with the applicant, determine and provide the applicant notice of any additional information in R18-9-A201(B) that is necessary to complete the application.
- D. Public participation.
  - 1. If the Director issues a temporary individual permit, the Director shall postpone the public participation requirements under R18-9-109.

- 2. The Director shall not postpone notification of the opportunity for public participation for more than 30 days from the date on the temporary individual permit.
- 3. The Director may amend or revoke the temporary individual permit after consideration of public comments.
- 4. The Director shall not issue a public notice or hold a public hearing if a temporary individual permit is renewed without change.
- 5. The Director shall follow the public participation requirements under R18-9-109 when making a significant amendment to a temporary individual permit.
- E. A temporary individual permit expires after one year unless it is renewed. The Director may renew a temporary individual permit no more than one time.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A211. Permit Amendments**

- A. The Director may amend an individual permit based upon a request or upon the Director's initiative.
  - 1. A permittee shall submit a request for permit amendment in writing on a form provided by the Department with the applicable fee established in 18 A.A.C. 14, explaining the facts and reasons justifying the request.
  - 2. The Department shall process amendment requests following the licensing time-frames established under 18 A.A.C. 1, Article 5, Table 10.
  - 3. An amended permit supersedes the previous permit upon the effective date of the amendment.
- B. Significant permit amendment. The Director shall make a significant amendment to an individual permit if:
  - 1. Part or all of an existing facility becomes a new facility under A.R.S. § 49-201;
  - 2. A physical change in a permitted facility or a change in its method of operation results in:
    - a. An increase of 10 percent or more in the permitted volume of pollutants discharged, except a sewage treatment facility;
    - b. An increase in design flow of a sewage treatment facility as follows:

| Permitted Design Flow                                                                          | Increase in Design Flow |
|------------------------------------------------------------------------------------------------|-------------------------|
| 500,000 gallons per day or less                                                                | 10%                     |
| Greater than 500,000 gallons per day but less than or equal to five million gallons per day    | 6%                      |
| Greater than five million gallons per day but less than or equal to 50 million gallons per day | 4%                      |
| Greater than 50 million gallons per day                                                        | 2%                      |

- c. Discharge of an additional pollutant not allowed by a facility's original individual permit. The Director may consider the addition of a pollutant with a chemical composition substantially similar to a pollutant the permit currently allows by making an "other" amendment to the individual permit as prescribed in subsection (D);

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- d. For any pollutant not addressed in a facility's individual permit, any increase that brings the level of the pollutant to within 80 percent or more of a numeric Aquifer Water Quality Standard at the point of compliance; or
- e. An increase in the concentration in the discharge of a pollutant listed under A.R.S. § 49-243(I);
- 3. Based upon available information, the facility can no longer demonstrate that its discharge will comply with A.R.S. § 49-243(B)(2) or (3);
- 4. The permittee requests and the Department agrees to less stringent monitoring that reduces the frequency in monitoring or reporting or reduces the number of pollutants monitored, and the permittee demonstrates that the changes will not affect the permittee's ability to remain in compliance with Articles 1 and 2 of this Chapter;
- 5. It is necessary to change the designation of a point of compliance;
- 6. It is necessary to update BADCT for a facility that was issued an individual permit and was not constructed within five years of permit issuance;
- 7. The permittee requests and the Department agrees to less stringent discharge limitations when the permittee demonstrates that the changes will not affect the permittee's ability to remain in compliance with Articles 1 and 2 of this Chapter;
- 8. It is necessary to make an addition to or a substantial change in closure requirements or to provide for post-closure maintenance and monitoring; or
- 9. Material and substantial alterations or additions to a permitted facility, including a change in disposal method, justify a change in permit conditions.
- C. Minor permit amendment. The Director shall make a minor amendment to an individual permit to:
  - 1. Correct a typographical error;
  - 2. Change nontechnical administrative information, excluding a permit transfer;
  - 3. Correct minor technical errors, such as errors in calculation, locational information, citations of law, and citations of construction specifications;
  - 4. Increase the frequency of monitoring or reporting, or to revise a laboratory method;
  - 5. Make a discharge limitation more stringent;
  - 6. Make a change in a recordkeeping retention requirement; or
  - 7. Insert calculated alert levels, AQLs, or other permit limits into a permit based on monitoring subsequent to permit issuance, if a requirement to establish the levels or limits and the method for calculation of the levels or limits was established in the original permit.
- D. "Other" permit amendment.
  - 1. The Director may make an "other" amendment to an individual permit if the amendment is not a significant or minor permit amendment prescribed in this Section, based on an evaluation of the information relevant to the amendment.
  - 2. Examples of an "other" amendment to an individual permit include:
    - a. A change in a construction requirement, treatment method, or operational practice, if the alteration complies with the requirements of Articles 1 and 2 of this Chapter and provides equal or better performance;
    - b. A change in an interim or final compliance date in a compliance schedule, if the Director determines just cause exists for changing the date;
    - c. A change in the permittee's financial assurance mechanism under R18-9-A203(C);
    - d. A permit transfer under R18-9-A212;
    - e. The replacement of monitoring equipment, including a well, if the replacement results in equal or greater monitoring effectiveness;
    - f. Any increase in the volume of pollutants discharged that is less than that described in subsection (B)(2)(a) or (b);
    - g. An adjustment of the permit to conform to rule or statutory provisions;
    - h. A calculation of an alert level, AQL, or other permit limit based on monitoring subsequent to permit issuance;
    - i. An addition of a point of compliance monitor well;
    - j. A combination of two or more permits at the same site as specified under R18-9-107;
    - k. An adjustment or incorporation of monitoring requirements to ensure Reclaimed Water Quality Standards developed under 18 A.A.C. 11, Article 3 are met; or
    - l. A change in a contingency plan resulting in equal or more efficient responsiveness.
- E. The public notice and public participation requirements of R18-9-108 and R18-9-109 apply to a significant amendment. The public notice requirements apply to an "other" amendment. A minor amendment does not require a public notice or public participation.
- F. The Director shall not amend or reissue a permit to allow use of a discharge control technology that provides a lesser degree of pollutant discharge reduction than the BADCT established in the individual Aquifer Protection Permit previously issued for a facility, unless:
  - 1. The industrial classification of the facility has changed so that a new assessment of BADCT is appropriate,
  - 2. The pollutant load has decreased or the pollutant composition has changed significantly to warrant a new assessment of the BADCT,
  - 3. The Director approves a corrective or contingency action that necessitates a change in the treatment technology, or
  - 4. The approved discharge control technology is not operating properly due to circumstances beyond the control of the owner or operator.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A212. Permit Transfer**

- A. The person subject to the continuance requirements under R18-9-105(A)(1), (2), or (3) shall notify the Department by certified mail within 15 days following a change of ownership. The notice shall include:
  - 1. The name of the person transferring the facility;
  - 2. The name of the new owner or operator;
  - 3. The name and location of the facility;
  - 4. The written agreement between the person transferring the facility and the new owner or operator indicating a specific date for transfer of all permit responsibility, coverage, and liability;
  - 5. A signed declaration by the new owner or operator that the new owner or operator has reviewed the permit and agrees to the terms of the permit, including fee obligations under A.R.S. § 49-242; and
  - 6. The applicable fee established in 18 A.A.C. 14.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- B.** A permittee may request that the Department transfer an individual permit to a new owner or operator.
1. The new owner or operator shall:
    - a. Notify the Department by certified mail within 15 days after the change of ownership and include a written agreement between the previous and new owner indicating a specific date for transfer of all permit responsibility, coverage, and liability;
    - b. Submit the applicable fee established in 18 A.A.C. 14;
    - c. Demonstrate the technical and financial capability necessary to fully carry out the terms of the permit according to R18-9-A202 and R18-9-A203;
    - d. Submit a signed statement that the new owner or operator has reviewed the permit and agrees to the terms of the permit; and
    - e. Provide the Department with a copy of the Certificate of Disclosure if required by A.R.S. § 49-109.
  2. If the Director amends the individual permit for the transfer, the new permittee is responsible for all conditions of the permit.
- C.** A permittee shall comply with all permit conditions until the Director transfers the permit, regardless of whether the permittee has sold or disposed of the facility.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A213. Permit Suspension, Revocation, Denial, or Termination**

- A.** The Director may, after notice and opportunity for hearing, suspend or revoke an individual permit or a continuance under R18-9-105(A)(1), (2), or (3) for any of the following:
1. A permittee failed to comply with any applicable provision of A.R.S. Title 49, Chapter 2, Article 3; Articles 1 and 2 of this Chapter; or any permit condition;
  2. A permittee misrepresented or omitted a fact, information, or data related to an Aquifer Protection Permit application or permit condition;
  3. The Director determines that a permitted activity is causing or will cause a violation of an Aquifer Water Quality Standard at a point of compliance;
  4. A permitted discharge is causing or will cause imminent and substantial endangerment to public health or the environment;
  5. A permittee failed to maintain the financial capability under R18-9-A203(B); or
  6. A permittee failed to construct a facility within five years of permit issuance and:
    - a. It is necessary to update BADCT for the facility, and
    - b. The Department has not issued an amended permit under R18-9-A211(B)(6).
- B.** The Director may deny an individual permit if the Director determines upon completion of the application process that the applicant has:
1. Failed or refused to correct a deficiency in the permit application;
  2. Failed to demonstrate that the facility and the operation will comply with the requirements of A.R.S. §§ 49-241 through 49-252 and Articles 1 and 2 of this Chapter. The Director shall base this determination on:
    - a. The information submitted in the Aquifer Protection Permit application,

- b. Any information submitted to the Department following a public hearing, or
  - c. Any relevant information that is developed or acquired by the Department; or
3. Provided false or misleading information.
- C.** The Director shall terminate an individual permit if each facility covered under the individual permit:
1. Has closed and the Director issued a Permit Release Notice under R18-9-A209(C)(2)(c) or R18-9-A209(B)(3)(a)(ii) for the closed facility, or
  2. Is covered under another Aquifer Protection Permit.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A214. Requested Coverage Under a General Permit**

- A.** If a person who applied for or was issued an individual permit qualifies to operate a facility under a general permit established in Article 3 of this Chapter, the person may request that the individual permit be terminated and replaced by the general permit. The person shall submit the Notice of Intent to Discharge under R18-9-A301(B) with the appropriate fee established in 18 A.A.C. 14.
- B.** The individual permit is valid and enforceable with respect to a discharge from each facility until the Director determines that the discharge from each facility is covered under a general permit.
- C.** The owner or operator operating under a general permit shall comply with all applicable general permit requirements in Article 3 of this Chapter.

**Historical Note**

New Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**PART B. BADCT FOR SEWAGE TREATMENT FACILITIES****R18-9-B201. General Considerations and Prohibitions**

- A.** Applicability. The requirements in this Article apply to all sewage treatment facilities, including expansions of existing sewage treatment facilities, that treat wastewater containing sewage, unless the discharge is authorized by a general permit under Article 3 of this Chapter.
- B.** The Director may specify alert levels, discharge limitations, design specifications, and operation and maintenance requirements in the permit that are based upon information provided by the applicant and that meet the requirements under A.R.S. § 49-243(B)(1).
- C.** The permittee shall ensure that a sewage treatment facility is operated by a person certified under 18 A.A.C. 5, Article 1, for the grade of the facility.
- D.** Operation and maintenance.
1. The owner or operator shall maintain, at the sewage treatment facility, an operation and maintenance manual for the facility and shall update the manual as needed.
  2. The owner or operator shall use the operation and maintenance manual to guide facility operations to ensure compliance with the terms of the Aquifer Protection Permit and to prevent any environmental nuisance described under A.R.S. § 49-141(A).
  3. The Director may specify adherence to any operation or maintenance requirement as an Aquifer Protection Permit condition to ensure that the terms of the Aquifer Protection Permit are met.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

4. The owner or operator shall make the operation and maintenance manual available to the Department upon request.
- E. A person shall not create or maintain a connection between any part of a sewage treatment facility and a potable water supply so that sewage or wastewater contaminates a potable or public water supply.
- F. A person shall not bypass or release sewage or partially treated sewage that has not completed the treatment process from a sewage treatment facility.
- G. Reclaimed water dispensed to a direct reuse site from a sewage treatment facility is regulated under Reclaimed Water Quality Standards in 18 A.A.C. 11, Article 3.
- H. The preparation, transport, or land application of any biosolids generated by a sewage treatment facility is regulated under 18 A.A.C. 9, Article 10.
- I. The owner or operator of a sewage treatment facility that is a new facility or undergoing a major modification shall provide setbacks established in the following table. Setbacks are measured from the treatment and disposal components within the sewage treatment facility to the nearest property line of an adjacent dwelling, workplace, or private property. If an owner or operator cannot meet a setback for a facility undergoing a major modification that incorporates full noise, odor, and aesthetic controls, the owner or operator shall not further encroach into setback distances existing before the major modification except as allowed in subsection (I)(2).

| Sewage Treatment Facility<br>Design Flow<br>(gallons per day) | No Noise,<br>Odor, or<br>Aesthetic<br>Controls<br>(feet) | Full Noise,<br>Odor, and<br>Aesthetic<br>Controls<br>(feet) |
|---------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------|
| 3000 to less than 24,000                                      | 250                                                      | 25                                                          |
| 24,000 to less than 100,000                                   | 350                                                      | 50                                                          |
| 100,000 to less than 500,000                                  | 500                                                      | 100                                                         |
| 500,000 to less than 1,000,000                                | 750                                                      | 250                                                         |
| 1,000,000 or greater                                          | 1000                                                     | 350                                                         |

1. Full noise, odor, and aesthetic controls means that:
- Noise due to the sewage treatment facility does not exceed 50 decibels at the facility property boundary on the A network of a sound level meter or a level established in a local noise ordinance,
  - All odor-producing components of the sewage treatment facility are fully enclosed,
  - Odor scrubbers or other odor-control devices are installed on all vents, and
  - Fencing aesthetically matched to the area surrounding the facility.
2. The owner or operator of a sewage treatment facility undergoing a major modification may decrease setbacks if:
- Allowed by local ordinance; or
  - Setback waivers are obtained from affected property owners in which the property owner acknowledges awareness of the established setbacks, basic design of the sewage treatment facility, and the potential for noise and odor.
- J. The owner or operator of a sewage treatment facility shall not operate the facility so that it emits an offensive odor on a persistent basis beyond the setback distances specified in subsection (I).

235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-B202. Design Report**

- A. A person applying for an individual permit shall submit a design report signed, dated, and sealed by an Arizona-registered professional engineer. The design report shall include the following information:
- Wastewater characterization, including quantity, quality, seasonality, and impact of increased flows as the facility reaches design flow;
  - The proposed method of disposal, including solids management;
  - A description of the treatment unit processes and containment structures, including diagrams and calculations that demonstrate that the design meets BADCT requirements and will achieve treatment levels specified in R18-9-B204 through R18-9-B206, as applicable, for all flow conditions indicated in subsection (A)(9). If soil aquifer treatment or other aspects of site conditions are used to meet BADCT requirements, the applicant shall document performance of the site in the design report or the hydro-geologic report;
  - A description of planned normal operation;
  - A description of key maintenance activities and a description of contingency and emergency operation for the facility;
  - A description of construction management controls;
  - A description of the facility startup plan, including pre-operational testing, expected treated wastewater characteristics and monitoring requirements during startup, expected time-frame for meeting performance requirements specified in R18-9-B204, and any other special startup condition that may merit consideration in the individual permit;
  - A site diagram depicting compliance with the setback requirements established in R18-9-B201(I) for the facility at design flow, and for each phase if the applicant proposes expansion of the facility in phases;
  - The following flow information in gallons per day for the proposed sewage treatment facility. If the application proposes expansion of the facility in phases, the following flow information for each phase:
    - The design flow of the sewage treatment facility. The design flow is the average daily flow over a calendar year calculated as the sum of all influent flows to the facility based on Table 1, Unit Design Flows, unless a different basis for determining influent flows is approved by the Department;
    - The maximum day. The maximum day is the greatest daily total flow that occurs over a 24-hour period within an annual cycle of flow variations;
    - The maximum month. The maximum month is the average daily flow of the month with the greatest total flow within the annual cycle of flow variations;
    - The peak hour. The peak hour is the greatest total flow during one hour, expressed in gallons per day, within the annual cycle of flow variations;
    - The minimum day. The minimum day is the least daily total flow that occurs over a 24-hour period within the annual cycle of flow variations;
    - The minimum month. The minimum month is the average daily flow of the month with the least total flow within the annual cycle of flow variations; and

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- g. The minimum hour. The minimum hour is the least total flow during one hour, expressed in gallons per day, within the annual cycle of flow variations; and
- 10. Specifications for pipe, standby power source, and water and sewer line separation.
- B. The Department may inspect an applicant's facility without notice to ensure that construction conforms to the design report.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-B203. Engineering Plans and Specifications**

- A. A person applying for an individual permit for a sewage treatment facility with a design flow under one million gallons per day, shall submit engineering plans and specifications to the Department. The Director may waive this requirement if the Director previously approved engineering plans and specifications submitted by the same owner or operator for a sewage treatment facility with a design flow of more than one million gallons per day.
- B. A person applying for an individual permit for a sewage treatment facility with a design flow of one million gallons per day or greater shall submit engineering plans and specifications if, upon review of the design report required in R18-9-B202, the Department finds that:
  - 1. The design report fails to provide sufficient detail to determine adequacy of the proposed sewage treatment facility design;
  - 2. The described design is innovative and does not reflect treatment technologies generally accepted within the industry;
  - 3. The Department's calculations of removal efficiencies based on the design report show that the treatment facility cannot achieve treatment performance requirements;
  - 4. The design report does not demonstrate:
    - a. Protection from physical damage due to a 100-year flood,
    - b. Ability to continuously operate during a 25-year flood, or
    - c. Provision for a standby power source;
  - 5. The design report shows inconsistency in sizing or compatibility between two or more unit process components of the sewage treatment facility;
  - 6. The designer of the facility has:
    - a. Designed a sewage treatment facility of at least a similar size on less than three previous occasions,
    - b. Designed a sewage treatment facility that has been the subject of a Director enforcement action due to the facility design, or
    - c. Been found by the Board of Technical Registration to have violated a provision in A.R.S. Title 32, Chapter 1;
  - 7. The permittee seeks to expand its sewage treatment facility and the Department believes that the facility will require upgrades to the design not described and evaluated in the design report to meet the treatment performance requirements; or
  - 8. The construction does not conform to the design report if the sewage treatment facility has already been constructed.
- C. The Department shall review engineering plans and specifications upon request by an applicant seeking a permit for a sewage treatment facility, regardless of its flow.

- D. The Department may inspect an applicant's facility without notice to ensure that construction generally conforms to engineering plans and specifications, as applicable.
- E. Before discharging under a permit, the permittee shall submit an Engineer's Certificate of Completion signed, dated, and sealed by an Arizona-registered professional engineer in a format approved by the Department, that confirms that the facility is constructed according to the Department-approved design report or plans and specifications, as applicable.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-B204. Treatment Performance Requirements for a New Facility**

- A. Definition. "Week" means a seven-day period starting on Sunday and ending on the following Saturday.
- B. An owner or operator of a new sewage treatment facility shall ensure that the facility meets the following performance requirements upon release of the treated wastewater at the outfall:
  - 1. Secondary treatment levels.
    - a. Five-day biochemical oxygen demand (BOD<sub>5</sub>) less than 30 mg/l (30-day average) and 45 mg/l (seven-day average), or carbonaceous biochemical oxygen demand (CBOD<sub>5</sub>) less than 25 mg/l (30-day average) or 40 mg/l (seven-day average);
    - b. Total suspended solids (TSS) less than 30 mg/l (30-day average) and 45 mg/l (seven-day average);
    - c. pH maintained between 6.0 and 9.0 standard units; and
    - d. A removal efficiency of 85 percent for BOD<sub>5</sub>, CBOD<sub>5</sub>, and TSS;
  - 2. Secondary treatment by waste stabilization ponds is not considered BADCT unless an applicant demonstrates to the Department that site-specific hydrologic and geologic characteristics and other environmental factors are sufficient to justify secondary treatment by waste stabilization ponds;
  - 3. Total nitrogen in the treated wastewater is less than 10 mg/l (five-month rolling geometric mean). If an applicant demonstrates, using appropriate monitoring that soil aquifer treatment will produce a total nitrogen concentration less than 10 mg/l in wastewater that percolates to groundwater, the Department may approve soil aquifer treatment for removal of total nitrogen as an alternative to meeting the performance requirement of 10 mg/l at the outfall;
  - 4. Pathogen removal.
    - a. For a sewage treatment facility with a design flow of less than 250,000 gallons per day at a site where the depth to the seasonally high groundwater table is greater than 20 feet and there is no karstic or fractured bedrock at the surface:
      - i. The concentration of fecal coliform organisms in four of the wastewater samples collected during the week is less than 200 cfu/100 ml or the concentration of *E. coli* bacteria in four of the wastewater samples collected during the week is less than 126 cfu/100 ml, based on a sampling frequency of seven daily samples per week;
      - ii. The single sample maximum concentration of fecal coliform organisms in a wastewater sam-

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- ple is not greater than 800 cfu/100 ml or the single sample maximum concentration of *E. coli* bacteria in a wastewater sample is not greater than 504 cfu/100 ml; and
- iii. An owner or operator of a facility may request a reduction in the monitoring frequency required in subsection (B)(4)(a)(i) if equipment is installed to continuously monitor an alternative indicator parameter and the owner or operator demonstrates that the continuous monitoring will ensure reliable production of wastewater that meets the numeric concentration levels in subsections (B)(4)(a)(i) and (ii) at the discharge point;
- b. For any other sewage treatment facility:
    - i. No fecal coliform organisms or no *E. coli* bacteria are detected in four of the wastewater samples collected during the week, based on a sampling frequency of seven daily samples per week;
    - ii. The single sample maximum concentration of fecal coliform organisms in a wastewater sample is not greater than 23 cfu/100 ml or the single sample maximum concentration of *E. coli* is not greater than 15 cfu/100 ml;
    - iii. An owner or operator may request a reduction in the monitoring frequency required in subsection (B)(4)(b)(i) if equipment is installed to continuously monitor an alternative indicator parameter and the owner or operator demonstrates that the continuous monitoring will ensure reliable production of wastewater that meets the numeric concentration levels in subsections (B)(4)(b)(i) or (ii) at the discharge point;
  - c. An owner or operator may use unit treatment processes, such as chlorination-dechlorination, ultraviolet, and ozone to achieve the pathogen removal performance requirements specified in subsections (B)(4)(a) and (b);
  - d. The Department may approve soil aquifer treatment for the removal of fecal coliform or *E. coli* bacteria as an alternative to meeting the performance requirement in subsection (B)(4)(a) or (b), if the soil aquifer treatment process will produce a fecal coliform or *E. coli* bacteria concentration less than that required under subsection (B)(4)(a) or (b), in wastewater that percolates to groundwater;
5. Unless governed by A.R.S. § 49-243(I), the performance requirement for each constituent regulated under R18-11-406(B) through (E) is the numeric Aquifer Water Quality Standard;
  6. The performance requirement for a constituent regulated under A.R.S. § 49-243(I) is removal to the greatest extent practical regardless of cost.
    - a. An operator shall minimize trihalomethane compounds generated as disinfection byproducts using chlorination, dechlorination, ultraviolet, or ozone as the disinfection system or using a technology demonstrated to have equivalent or better performance for removing or preventing trihalomethane compounds.
    - b. For other pollutants regulated by A.R.S. § 49-243(I), an operator shall use one of the following methods to achieve industrial pretreatment:
      - i. Regulate industrial sources of influent to the sewage treatment facility by setting limits on pollutant concentrations, monitoring for pollutants, and enforcing the limits to reduce, eliminate, or alter the nature of a pollutant before release into a sewage collection system;
      - ii. Meet the pretreatment requirements of A.R.S. § 49-255.02; or
      - iii. For sewage treatment facilities without significant industrial input, conduct periodic monitoring to detect industrial discharge; and
  7. A maximum seepage rate less than 550 gallons per day per acre for all containment structures within the treatment works. A sewage treatment facility that consists solely of containment structures with no other form of discharge complies with Article 2 Part B by operating below the maximum 550 gallon per day per acre seepage rate.
- C. The Director shall incorporate treated wastewater discharge limitations and associated monitoring specified in this Section into the individual permit to ensure compliance with the BADCT requirements.
  - D. An applicant shall formally request in writing and justify an alternative that allows less stringent performance than that established in this Section, based on the criteria specified in A.R.S. § 49-243(B)(1).
  - E. If the request specified in subsection (D) involves treatment or disposal works that are a demonstration, experimental, or pilot project, the Director may issue an individual permit that places greater reliance on monitoring to ensure operational capability.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-B205. Treatment Performance Requirements for an Existing Facility**

For a sewage treatment facility that is an existing facility defined in A.R.S. § 49-201(16), the BADCT shall conform with the following:

1. The designer shall identify one or more design improvements that brings the facility closer to or within the treatment performance requirements specified in R18-9-B204, considering the factors listed in A.R.S. § 49-243(B)(1)(a) and (B)(1)(c) through (h);
2. The designer may eliminate from consideration alternatives identified in subsection (1) that are more expensive than the number of gallons of design flow times \$1.00 per gallon; and
3. The designer shall select a design that incorporates one or more of the considered alternatives by giving preference to measures that will provide the greatest improvement toward meeting the treatment performance requirements specified in R18-9-B204.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-B206. Treatment Performance Requirements for Expansion of a Facility**

For an expansion of a sewage treatment facility, the BADCT shall conform with the following:

1. New facility BADCT requirements in R18-9-B204 apply to the following expansions:

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. An increase in design flow by an amount equal to or greater than the increases specified in R18-9-A211(B)(2)(b); or
  - b. The person files a Notice of Intent to Discharge under subsection (B);
  - c. The person satisfies any deficiency requests from the Department regarding the administrative completeness review and substantive review, including any deficiency relating to the construction of the facility;
  - d. The person receives a written Discharge Authorization from the Director before the facility discharges; and
  - e. The person submits the applicable fee established in 18 A.A.C. 14 or according to A.R.S. §§ 49-107 and 49-112.
2. BADCT requirements for existing facilities established in R18-9-B205 apply to an expansion not covered under subsection (1).

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended to correct a manifest typographical error in subsection (1) (Supp. 01-1). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**ARTICLE 3. AQUIFER PROTECTION PERMITS - GENERAL PERMITS****PART A. GENERAL PROVISIONS****R18-9-A301. Discharging Under a General Permit****A. Discharging requirements.**

1. Type 1 General Permit. A person may discharge under a Type 1 General Permit without submitting a Notice of Intent to Discharge if the discharge is authorized by and meets:
    - a. The applicable requirements of Article 3, Part A of this Chapter; and
    - b. The specific terms of the Type 1 General Permit established in Article 3, Part B of this Chapter.
  2. Type 2 General Permit. A person may discharge under a Type 2 General Permit if:
    - a. The discharge is authorized by and meets the applicable requirements of Article 3, Part A of this Chapter and the specific terms of the Type 2 General Permit established in Article 3, Part C of this Chapter;
    - b. The person files a Notice of Intent to Discharge under subsection (B); and
    - c. The person submits the applicable fee established in 18 A.A.C. 14.
  3. Type 3 General Permit. A person may discharge under a Type 3 General Permit if:
    - a. The discharge is authorized by and meets the applicable requirements of Article 3, Part A of this Chapter and the specific terms of the Type 3 General Permit established in Article 3, Part D of this Chapter;
    - b. The person files a Notice of Intent to Discharge under subsection (B);
    - c. The person satisfies any deficiency requests from the Department regarding the administrative completeness review and substantive review and receives a written Discharge Authorization from the Director; and
    - d. The person submits the applicable fee established in 18 A.A.C. 14.
  4. Type 4 General Permit. A person may discharge under a Type 4 General Permit if:
    - a. The discharge is authorized by and meets the applicable requirements of Article 3, Part A of this Chapter and the specific terms of the Type 4 General Permit established in Article 3, Part E of this Chapter;
1. A person seeking a Discharge Authorization under a general permit under subsections (A)(2), (3), or (4) shall submit, by certified mail, in person, or by another method approved by the Department, a Notice of Intent to Discharge on a form provided by the Department.
  2. The Notice of Intent to Discharge shall include:
    - a. The name, address, and telephone number of the applicant;
    - b. The name, address, and telephone number of a contact person familiar with the operation of the facility;
    - c. The name, position, address, and telephone number of the owner or operator of the facility who has overall responsibility for compliance with the permit;
    - d. The legal description of the discharge areas, including the latitude and longitude coordinates;
    - e. A narrative description of the facility or project, including expected dates of operation, rate, and volume of discharge;
    - f. The additional requirements, if any, specified in the general permit for which the authorization is being sought;
    - g. A listing of any other federal or state environmental permits issued for or needed by the facility, including any individual permit, Groundwater Quality Protection Permit, or Notice of Disposal that may have previously authorized the discharge; and
    - h. A signature on the Notice of Intent to Discharge certifying that the applicant agrees to comply with all applicable requirements of this Article, including specific terms of the general permit.
  3. Receipt of a completed Notice of Intent to Discharge by the Department begins the administrative completeness review for a Type 3 or Type 4 General Permit.

**C. Type 3 General Permit authorization review.**

1. Inspection. The Department may inspect the facility to determine that the applicable terms of the general permit have been met.
2. Discharge Authorization issuance.
  - a. If the Department determines, based on its review and an inspection, if conducted, that the facility conforms to the requirements of the general permit and the applicable requirements of this Article, the Director shall issue a Discharge Authorization.
  - b. The Discharge Authorization authorizes the person to discharge under terms of the general permit and applicable requirements of this Article.
3. Discharge Authorization denial. If the Department determines, based on its review and an inspection, if conducted, that the facility does not conform to the requirements of the general permit or other applicable requirements of this Article, the Director shall notify the person of the decision not to issue the Discharge Authorization.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

zation and the person shall not discharge under the general permit. The notification shall inform the person of:

- a. The reason for the denial with reference to the statute or rule on which the denial is based;
- b. The person's right to appeal the denial, including the number of days the applicant has to file a protest challenging the denial and the name and telephone number of the Department contact person who can answer questions regarding the appeals process; and
- c. The person's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.

**D. Type 4 General Permit review.**

1. Pre-construction phase and facility construction. A person shall not begin facility construction until the Director issues a Construction Authorization.
  - a. Inspection. The Department may inspect the facility site before construction to determine that the applicable terms of the general permit will be met.
  - b. Review. If the Department determines, based on an inspection or its review of design plans, specifications, or other required documents that the facility does not conform to the requirements of the general permit or other applicable requirements of this Article, the Department shall make a written request for additional information to determine whether the facility will meet the requirements of the general permit.
  - c. Construction Authorization. If the Department determines, based on the review described in subsection (D)(1)(b) and any additional information submitted in response to a written request, that the facility design conforms with the requirements of the general permit and other applicable requirements of this Article, the Director shall issue a Construction Authorization to the person seeking to discharge. A Construction Authorization for an on-site wastewater treatment facility shall contain:
    - i. The design flow of the facility,
    - ii. The characteristics of the wastewater sources contributing to the facility,
    - iii. The general permits that apply, and
    - iv. A list of the documents that are the basis for the authorization.
  - d. Construction Authorization denial. If the Department determines, based on the review described in subsection (D)(1)(b) and any additional information submitted in response to a written request, that the facility design does not conform to the requirements of the general permit or other applicable requirements of this Article, the Director shall notify the person of the decision not to issue a Construction Authorization. The notification shall include the information listed in subsections (D)(2)(d).
  - e. Construction.
    - i. A person shall complete construction within two years of receiving a Construction Authorization.
    - ii. Construction shall conform with the plans and documents approved by the Department in the Construction Authorization. A change in location, configuration, dimension, depth, material, or installation procedure does not require approval by the Department if the change continues to conform with the specific standard in

this Article used as the basis for the original design.

- iii. The person shall record all changes made during construction, including any changes approved under R18-9-A312(G) on the site plan as specified in R18-9-A309(C)(1) or on documents as specified in R18-9-A309(C)(2) or R18-9-E301(E), as applicable.
- f. Completion of construction.
  - i. After completing construction of the facility, the person seeking to discharge shall submit any applicable documents specified in R18-9-A309(C) with the Request for Discharge Authorization form for an on-site wastewater treatment facility and the Engineer's Certificate of Completion specified in R18-9-E301(E) for a sewage collection system. Receipt of the documents by the Department initiates the post-construction review phase.
  - ii. If the Department does not receive the documentation specified in subsection (D)(1)(f)(i) by the end of the two-year construction period, the Notice of Intent to Discharge expires, and the person shall not continue construction or discharge.
  - iii. If the Notice of Intent to Discharge expires, the person shall submit a new Notice of Intent to Discharge under subsection (B) and the applicable fee under subsection (A)(4)(e) to begin or continue construction.
2. Post-construction phase.
  - a. Inspection. The Department may inspect the facility before issuing a Discharge Authorization to determine whether:
    - i. The construction conforms with the design authorized by the Department under subsection (D)(1)(c) and any changes recorded on the site plan as specified in R18-9-A309(C)(1) or other documents as specified in R18-9-A309(C)(2), or R18-9-E301(E), as applicable; and
    - ii. Terms of the general permit and applicable terms of this Article are met.
  - b. Deficiencies. If the Department identifies deficiencies based on an inspection of the constructed facility or during the review of documents submitted with the request for the Discharge Authorization, the Director shall provide a written explanation of the deficiencies to the person.
  - c. Discharge Authorization issuance.
    - i. Upon satisfactory completion of construction and documents required under R18-9-A309(C)(1) R18-9-A309(C)(2), or R18-9-E301(E), as applicable, the Director shall issue a Discharge Authorization.
    - ii. The Discharge Authorization allows a person to discharge under terms of the general permit and applicable requirements of this Article and the stated terms of the Construction Authorization.
  - d. Discharge Authorization denial. If, after receiving evidence of correction submitted by the person seeking to discharge, the Department determines that the deficiencies are not satisfactorily corrected, the Director shall notify the person seeking to discharge of the Director's decision not to issue the Discharge Authorization and the person shall not discharge

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

under the general permit. The notification shall inform the person of:

- i. The reason for the denial with reference to the statute or rule on which the denial is based;
- ii. The person's right to appeal the denial, including the number of days the applicant has to file a protest challenging the denial and the name and telephone number of the Department contact person who can answer questions regarding the appeals process; and
- iii. The person's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A302. Point of Compliance**

The point of compliance is the point at which compliance with Aquifer Water Quality Standards is determined.

1. Except as provided in this Section or as stated in a specific general permit, the applicable point of compliance at a facility operating under a general permit is a vertical plane downgradient of the facility that extends through the uppermost aquifers underlying that facility.
2. The point of compliance is the limit of the pollutant management area.
  - a. The pollutant management area is the horizontal plane of the area on which pollutants are or will be placed.
  - b. If a facility operating under a general permit is located within a larger pollutant management area established under an individual permit issued to the same person, the point of compliance is the applicable point of compliance established in the individual permit.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-A303. Renewal of a Discharge Authorization**

- A. Unless a Discharge Authorization under a general permit is transferred, revoked, or expired, a person may discharge under the general permit for the authorization period as specified by the permit type, including any closure activities required by a specific general permit.
- B. An authorization to discharge under a Type 1 or Type 4 General Permit is valid for the operational life of the facility.
- C. A permittee authorized under a Type 2 or Type 3 General Permit shall submit an application for renewal on a form provided by the Department with the applicable fee established in 18 A.A.C. 14 at least 30 days before the end of the renewal period.
  1. The following are the renewal periods for Type 2 and Type 3 General Permit Discharge Authorizations:
    - a. 2.01 General Permit, five years;
    - b. 2.02 General Permit, seven years;
    - c. 2.03 General Permit, two years;
    - d. 2.04 General Permit, five years;
    - e. 2.05 General Permit, five years;
    - f. 2.06 General Permit, five years; and
    - g. Type 3 General Permits, five years.

2. The renewal period for coverage under a Type 2 General Permit begins on the date the Department receives the Notice of Intent to Discharge.
3. The renewal period for coverage under a Type 3 General Permit begins on the date the Director issues the written Discharge Authorization.

- D. If the Discharge Authorization is not renewed within the renewal period specified in subsection (B)(1), the Discharge Authorization expires.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A304. Notice of Transfer**

- A. Transfer of authorization under a Type 1 General Permit.
  1. A permittee transferring ownership of a facility covered by a Type 1.01 through 1.08, or 1.10 through 1.12 General Permit is not required to notify the Department of the transfer.
  2. A permittee transferring ownership of an on-site wastewater treatment facility operating under a Type 1.09 General Permit shall follow the requirements under R18-9-A316.
  3. A permittee transferring ownership of a sewage treatment facility operating under a Type 1.09 General Permit shall submit a Notice of Transfer to the Department by certified mail within 15 days after the date that ownership changes.
- B. Transfer of authorization under a Type 2, 3, or 4.01 General Permit.
  1. If a change of ownership occurs for a facility covered by a Type 2, 3, or 4.01 General Permit facility, the permittee shall provide a Notice of Transfer to the Department or to the health or environmental agency delegated by the Director to administer Type 4.01 General Permits, by certified mail within 15 days after the date that ownership changes. The Notice of Transfer, on a form approved by the Department, shall include:
    - a. Any information that has changed from the original Notice of Intent to Discharge,
    - b. Any other transfer requirements specified for the general permit, and
    - c. The applicable fee established in 18 A.A.C. 14.
  2. The Department may require a permittee covered by a Type 2, 3, or Type 4.01 General Permit to submit a new Notice of Intent to Discharge and to obtain a new authorization under R18-9-A301(A)(2), (3) and (4), as applicable, if the volume or characteristics of the discharge have changed from the original application.
- C. Transfer of a Type 4.02 through 4.23 General Permit. A permittee transferring ownership of an on-site wastewater treatment facility operating under one or more Type 4.02 through 4.23 General Permits shall follow the requirements under R18-9-A316.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A305. Facility Expansion**

- A. A permittee may expand a facility covered by a Type 2 General Permit if, before the expansion, the permittee provides the Department with the following information by certified mail:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

1. An updated Notice of Intent to Discharge,
  2. A certification signed by the facility owner stating that the expansion continues to meet all the conditions of the applicable general permit, and
  3. The applicable fee established under 18 A.A.C. 14.
- B.** A permittee may expand a facility covered by a Type 3 or Type 4 General Permit if the permittee submits a new Notice of Intent to Discharge and the Department issues a new Discharge Authorization.
1. The person submitting the Notice of Intent to Discharge for the expansion may reference the previous Notice of Intent to Discharge if the previous information is identical, but shall provide full and detailed information for any changed items.
  2. The Notice of Intent to Discharge shall include:
    - a. Any applicable fee established under 18 A.A.C. 14, and
    - b. A certification signed by the facility owner stating that the expansion continues to meet all of the requirements relating to the applicable general permit.
  3. Upon receiving the Notice of Intent to Discharge, the Department shall follow the applicable review and authorization procedures described in R18-9-A301(A)(3) or (4).

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A306. Closure**

- A.** To satisfy the requirements under A.R.S. § 49-252, a permittee shall close a facility authorized to discharge under a general permit as follows:
1. If the discharge is authorized under a Type 1.01 through 1.08, 1.10, 1.11, 2.05, 2.06, or 4.01 General Permit, closure notification is unnecessary and clean closure is met when:
    - a. The permittee removes material that may contribute to a continued discharge; and
    - b. The permittee eliminates, to the greatest degree practical, any reasonable probability of further discharge from the facility and of exceeding any Aquifer Water Quality Standard at the applicable point of compliance;
  2. For a discharge authorized under a Type 2.02, 3.02, 3.05 through 3.07, or 4.23 General Permit, the facility meets clean closure requirements if the permittee provides notice and submits sufficient information for the Department to determine that:
    - a. Any material that may contribute to a continued discharge is removed;
    - b. The permittee has eliminated to the greatest degree practicable any reasonable probability of further discharge from the facility and of exceeding any Aquifer Water Quality Standard at the applicable point of compliance; and
    - c. Closure requirements, if any, established in the general permit are met;
  3. If the discharge is authorized under a Type 1.12, 2.01, 2.03, 2.04, 3.01, 3.03, or 3.04 General Permit, the permittee shall comply with the closure requirements in the general permit;
  4. If the discharge is from an on-site wastewater treatment facility authorized under a Type 1.09 or 4.02 through 4.22 General Permit, the permittee shall comply with the closure requirements in R18-9-A309(D); and
  5. If the discharge is from a sewage treatment facility authorized under a Type 1.09 General Permit, the permittee shall comply with the closure requirements under subsection (A)(1).
- B.** For a facility operating under a general permit and located at a site where an individual area-wide permit has been issued, a permittee may defer some or all closure activities required by this subsection if the Director approves the deferral in writing. The permittee shall complete closure activities no later than the date that closure activities identified in the individual area-wide permit are performed.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A307. Revocation of Coverage Under a General Permit**

- A.** After notice and opportunity for a hearing, the Director may revoke coverage under a general permit and require the permittee to obtain an individual permit for any of the following:
1. The permittee fails to comply with the terms of the general permit as described in this Article, or
  2. The discharge activity conducted under the terms of the general permit causes or contributes to the violation of an Aquifer Water Quality Standard at the applicable point of compliance.
- B.** The Director may revoke coverage under a general permit for any or all facilities within a specific geographic area, if, due to geologic or hydrologic conditions, the cumulative discharge of the facilities has violated or will violate an Aquifer Water Quality Standard established under A.R.S. §§ 49-221 and 49-223. Unless the public health or safety is jeopardized, the Director may allow continuation of a discharge until the Department:
1. Issues a single individual permit,
  2. Authorizes a discharge under another general permit, or
  3. Consolidates the discharges authorized under the general permits by following R18-9-107.
- C.** If an individual permit is issued to replace general permit coverage, the coverage under the general permit allowing the discharge is automatically revoked upon issuance of the individual permit and notification under subsection (E) is not required.
- D.** If the Director revokes coverage under a general permit, the facility shall not discharge unless allowed under subsection (B) or under an individual permit.
- E.** If coverage under the general permit is revoked under subsections (A) or (B), the Director shall notify the permittee by certified mail of the decision. The notification shall include:
1. A brief statement of the reason for the decision;
  2. The effective revocation date of the general permit coverage;
  3. A statement of whether the discharge shall cease or whether the discharge may continue under the terms of revocation in subsection (B);
  4. Whether the Director requires a person to obtain an individual permit, and if so:
    - a. An individual permit application form, and
    - b. Identification of a deadline between 90 and 180 days after receipt of the notification for filing the application;
  5. The applicant's right to appeal the revocation, the number of days the applicant has to file an appeal, and the name

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

and telephone number of the Department contact person who can answer questions regarding the appeals process; and

6. The applicant's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A308. Violations and Enforcement For On-site Wastewater Treatment Facilities**

- A. A person who owns or operates an on-site wastewater treatment facility contrary to the provisions of a Type 4 General Permit is subject to the enforcement actions under A.R.S. § 49-261;
- B. A person who violates this Article or a specific term of a general permit for an on-site wastewater treatment facility is subject to enforcement actions under A.R.S. § 49-261.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4).

**R18-9-A309. General Provisions for On-site Wastewater Treatment Facilities****A. General requirements and prohibitions.**

1. No person shall discharge sewage or wastewater that contains sewage from an on-site wastewater treatment facility except under an Aquifer Protection Permit issued by the Director.
2. A person shall not install, allow to be installed, or maintain a connection between any part of an on-site wastewater treatment facility and a drinking water system or supply so that sewage or wastewater contaminates the drinking water.
3. A person shall not bypass or release sewage or partially treated sewage that has not completed the treatment process from an on-site wastewater treatment facility.
4. A person shall not use a cesspool for sewage disposal.
5. A person constructing a new on-site wastewater treatment facility or replacing the treatment works or disposal works of an existing on-site wastewater treatment facility shall connect to a sewage collection system if:
  - a. One of the following applies:
    - i. A provision of a Nitrogen Management Area designation under R18-9-A317(C) requires connection;
    - ii. A county, municipal, or sanitary district ordinance requires connection; or
    - iii. The on-site wastewater treatment facility is located within an area identified for connection to a sewage collection system by a Certified Area-wide Water Quality Management Plan adopted under 18 A.A.C. 5 or a master plan adopted by a majority of the elected officials of a board or council for a county, municipality, or sanitary district; or
  - b. A sewer service line extension is available at the property boundary and both of the following apply:
    - i. The service connection fee is not more than \$6000 for a dwelling or \$10 times the daily design flow in gallons for a source other than a dwelling, and

- ii. The cost of constructing the building sewer from the wastewater source to the service connection is not more than \$3000 for a dwelling or \$5 times the daily design flow in gallons for a source other than a dwelling.

6. The Department shall prohibit installation of an on-site wastewater treatment facility if the installation will create an unsanitary condition or environmental nuisance or cause or contribute to a violation of an Aquifer Water Quality Standard.
7. A person shall operate the permitted on-site wastewater treatment facility so that:
  - a. Flows to the facility consist of typical sewage and do not include any motor oil, gasoline, paint, varnish, solvent, pesticide, fertilizer, or other material not generally associated with toilet flushing, food preparation, laundry, or personal hygiene;
  - b. Flows to the facility from commercial operations do not contain hazardous wastes as defined under A.R.S. § 49-921(5) or hazardous substances;
  - c. If the sewage contains a component of nonresidential flow such as food preparation, laundry service, or other source, the sewage is adequately pretreated by an interceptor that complies with R18-9-A315 or another device authorized by a general permit or approved by the Department under R18-9-A312(G);
  - d. Except as provided in subsection (A)(7)(c), a sewage flow that does not meet the numerical levels for typical sewage is adequately pretreated to meet the numerical levels before entry into an on-site wastewater treatment facility authorized by this Article;
  - e. Flow to the facility does not exceed the design flow specified in the Discharge Authorization;
  - f. The facility does not create an unsanitary condition or environmental nuisance, or cause or contribute to a violation of either a Aquifer Water Quality Standard or a Surface Water Quality Standard; and
  - g. Activities at the site do not adversely affect the operation of the facility.
8. A person shall control the discharge of total nitrogen from an on-site wastewater treatment facility as follows:
  - a. For an on-site wastewater treatment facility operating under the 1.09 General Permit or proposed for construction in a Notice of Intent to Discharge under a Type 4 General Permit and the facility is located within a Nitrogen Management Area, the provisions of R18-9-A317(D) apply;
  - b. For an on-site wastewater treatment facility proposed for construction in a Notice of Intent to Discharge under R18-9-E323, the provisions of R18-9-E323(A)(4) apply;
  - c. For a subdivision proposed under 18 A.A.C. 5, Article 4, for which on-site wastewater treatment facilities are used for sewage disposal, the permittee shall demonstrate in the geological report required in R18-5-408(E)(1) that total nitrogen loading from the on-site wastewater treatment facilities to groundwater is controlled by providing one of the following:
    - i. For a subdivision platted for a single family dwelling on each lot, calculations that demonstrate that the number of lots within the subdivision does not exceed the number of acres contained within the boundaries of the subdivision;
    - ii. For a subdivision platted for dwellings that do not meet the criteria specified in subsection

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- (A)(8)(c)(i), calculations that demonstrate that the nitrogen loading over the total area of the subdivision is not more than 0.088 pounds (39.9 grams) of total nitrogen per day per acre calculated at a horizontal plane immediately beneath the active treatment of the disposal fields, based on a total nitrogen contribution to raw sewage of 0.0333 pounds (15.0 grams) of total nitrogen per day per person; or
- iii. An analysis by another means of demonstration showing that the nitrogen loading to the aquifer due to on-site wastewater treatment facilities within the subdivision does not cause or contribute to a violation of the Aquifer Water Quality Standard for nitrate at the applicable point of compliance.
9. Repairs.
    - a. A Notice of Intent to Discharge is not required for routine work that maintains a facility.
    - b. The following work is not considered routine work and a Notice of Intent to Discharge is required:
      - i. Converting a facility from operation only under gravity to one requiring a pump or other powered equipment for treatment or disposal;
      - ii. Modifying or replacing a facility operating under the 1.09 General Permit with a different type of treatment or disposal technology;
      - iii. Changing the treatment works or disposal works of a facility authorized under one or more Type 4 General Permits to a technology covered by any other Type 4 General Permit;
      - iv. Extending the disposal works more than 10 feet beyond the footprint of the original disposal works;
      - v. Reconstructing any part of the disposal works in soil that is inadequate for the treated wastewater flow or strength;
      - vi. Expanding the footprint of the facility into or within setback buffers established in R18-9-A312(C);
      - vii. Reconstructing the disposal works so that it does not meet the vertical separation requirements specified in R18-9-A312(E);
      - viii. Modifying a treatment works or disposal works to accommodate a daily design flow or waste load greater than the daily design flow or waste load applicable to the original facility; or
      - ix. Replacing the treatment works.
    - c. Components used in a repair shall meet the design, installation, and operational requirements of this Article.
    - d. A permittee shall comply with any local ordinance that provides independent permitting requirements for repair work.
    - e. A person shall not modify the facility so as to create an unsanitary condition or environmental nuisance or cause or contribute to an exceedance of a water quality standard.
  10. Cumulative flows. When there is more than one on-site wastewater treatment facility on a property or on a site under common ownership or subject to a larger plan of sale or development, the Director shall determine whether an individual permit is required or whether the applicant qualifies for coverage to discharge under a general permit based on the sum of the design flows from the proposed installation and existing on-site wastewater treatment facilities on the property or site.
    - a. If the sum of the design flows is less than 3000 gallons per day, the Department will process the application under R18-9-E302 through R18-9-E322, as applicable.
    - b. If the sum of the design flows is equal to or more than 3000 gallons per day but less than 24,000 gallons per day, the Department will process the application under R18-9-E323.
    - c. If the sum of the design flows is equal to or more than 24,000 gallons per day, the project does not qualify for coverage under a Type 4 General Permit and the applicant shall submit an application for an individual permit under Article 2 of this Chapter.
  - B. Notice of Intent to Discharge under a Type 4 General Permit. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit the following information in a format approved by the Department:
    1. A site investigation report that summarizes the results of the site investigation conducted under R18-9-A310(B), including:
      - a. Results from any soil evaluation, percolation test, or seepage pit performance test;
      - b. Any surface limiting condition identified in R18-9-A310(C)(2); and
      - c. Any subsurface limiting condition identified in R18-9-A310(D)(2);
    2. A site plan that includes:
      - a. The parcel and lot number, if applicable, the property address or other appropriate legal description, the property size in acres, and the boundaries of the property;
      - b. A plan of the site drawn to scale, dimensioned, and with a north arrow that shows:
        - i. Proposed and existing on-site wastewater treatment facilities; dwellings and other buildings; driveways, swimming pools, tennis courts, wells, ponds, and any other paved, concrete, or water feature; down slopes and cut banks with a slope greater than 15 percent; retaining walls; and any other constructed feature that affects proper location, design, construction, or operation of the facility;
        - ii. Any feature less than 200 feet from the on-site wastewater treatment facility excavation and reserve area that constrains the location of the on-site wastewater treatment facility because of setback limitations specified in R18-9-A312(C);
        - iii. Topography, delineated with an appropriate contour interval, showing original and post-installation grades;
        - iv. Location and identification of the treatment and disposal works and wastewater pipelines, the reserve disposal area, and location and identification of all sites of percolation testing and soil evaluation performed under R18-9-A310; and
        - v. Location of any public sewer if 400 feet or less from the property line;
    3. The design flow of the on-site wastewater treatment facility expressed in gallons per day based on Table 1, Unit Design Flows, the expected strength of the wastewater if the strength exceeds the levels for typical sewage, and:
      - a. For a single family dwelling, a list of the number of bedrooms and plumbing fixtures and corresponding

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- unit flows used to calculate the design flow of the facility; and
- b. For a dwelling other than for a single family, a list of each wastewater source and corresponding unit flows used to calculate the design flow of the facility;
  4. A list of materials, components, and equipment for constructing the on-site wastewater treatment facility;
  5. Drawings, reports, and other information that are clear, reproducible, and in a size and format specified by the Department; and
  6. For a facility that includes treatment or disposal works permitted under R18-9-E303 through R18-9-E323:
    - a. Construction quality drawings that show the following:
      - i. Systems, subsystems, and key components, including manufacturer's name, model number, and associated construction notes and inspection milestones, as applicable;
      - ii. A title block, including facility owner, revision date, space for addition of the Department's application number, and page numbers;
      - iii. A plan and profile with the elevations of wastewater pipelines, and treatment and disposal components, including calculations justifying the absorption area, to allow Department verification of hydraulic and performance characteristics;
      - iv. Cross sections showing wastewater pipelines, construction details and elevations of treatment and disposal components, original and finished grades of the land surface, seasonal high water table if less than 10 feet below the bottom of a disposal works or 60 feet below the bottom of a seepage pit, and a soil elevation evaluation to allow Department verification of installation design and performance; and
      - v. Drainage pattern, drainage controls, and erosion protection, as applicable, for the facility; and
    - b. A draft operation and maintenance manual for the on-site wastewater treatment facility consisting of the tasks and schedules for operating and maintaining performance over a 20-year operational life;
- C. Additional requirements for a Discharge Authorization under a Type 4 General Permit.
1. If the entire on-site wastewater treatment facility, including treatment works and disposal works, will be permitted under R18-9-E302, the Director shall issue the Discharge Authorization if:
    - a. The site plan accurately reflects the final location and configuration of the components of the treatment and disposal works, and
    - b. The applicant certifies on the Request for Discharge Authorization form that the septic tank passed the watertightness test required by R18-9-A314(5)(d).
  2. If the on-site wastewater treatment facility is proposed under R18-9-E303 through R18-9-E323, either separately or in any combination with each other or with R18-9-E302, the Director shall issue the Discharge Authorization if the following documents are submitted to the Department:
    - a. As-built plans showing changes from construction quality drawings submitted under subsection (B)(6)(a);
    - b. A final list of equipment and materials showing changes from the list submitted under subsection (B)(4);
    - c. A final operation and maintenance manual for the on-site wastewater treatment facility consisting of the tasks and schedules for operating and maintaining performance over a 20-year operational life;
    - d. A certification that a service contract for ensuring that the facility is operated and maintained to meet the performance and other requirements of the applicable general permits exists for at least one year following the beginning of the operation of the on-site wastewater treatment facility, including the name of the service provider, if the on-site wastewater treatment facility is permitted under:
      - i. R18-9-E304;
      - ii. R18-9-E308 through R18-9-E315;
      - iii. R18-9-E316, if the facility includes a pump; or
      - iv. R18-9-E318 through R18-9-E322;
    - e. Other documents, if required by the separate general permits in 18 A.A.C. 9, Article 3, Part E;
    - f. A Certificate of Completion signed by the person responsible for assuring that installation of the facility conforms to the design approved under the Construction Authorization under R18-9-A301(D)(1)(c);
    - g. The name of the installation contractor and the Registrar of Contractor's license number issued to the installation contractor; and
    - h. A certification that any septic tank installed as a component of the on-site wastewater treatment facility passed the watertightness test required by R18-9-A314(5)(d).
  3. The Director shall specify in the Discharge Authorization:
    - a. The permitted design flow of the facility,
    - b. The characteristics of the wastewater sources contributing to the facility, and
    - c. A list of the documents submitted to and reviewed by the Department satisfying subsection (C)(2).
- D. Closure requirements. A person who permanently discontinues use of an on-site wastewater treatment facility or a cesspool, or is ordered by the Director to close an abandoned facility shall:
1. Remove all sewage from the facility and dispose of the sewage in a lawful manner;
  2. Disconnect and remove electrical and mechanical components;
  3. Remove or collapse the top of any tank or containment structure.
    - a. Punch a hole in the bottom of the tank or containment structure if the bottom is below the seasonal high groundwater table;
    - b. Fill the tank or containment structure or any cavity resulting from its removal with earth, sand, gravel, concrete, or other approved material; and
    - c. Regrade the surface to provide drainage away from the closed area;
  4. Cut and plug both ends of the abandoned sewer drain pipe between the building and the on-site wastewater treatment facility not more than 5 feet outside the building foundation if practical, or cut and plug as close to each end as possible; and
  5. Notify the Department within 30 days of closure.
- E. Proprietary and other reviewed products.
1. The Department shall maintain a list of proprietary and other reviewed products that may be used for on-site



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

wastewater treatment facilities to comply with the requirements of this Article. The list shall include appropriate information on the applicability and limitations of each product.

2. The list of proprietary and other reviewed products may include manufactured systems, subsystems, or components within the treatment works and disposal works if the products significantly contribute to the treatment performance of the system or provide the means to overcome site limitations. The Department will not list septic tanks, effluent filters or components that do not significantly affect treatment performance or provide the means to overcome site limitations.
  3. A person may request that the Department add a product to the list of proprietary and other reviewed products. The request may include a proposed reference design for review. The Department shall ensure that performance values in the list reflect the treatment performance for defined wastewater characteristics. The Department shall assess fees under 18 A.A.C. 14 for product review.
- F. Recordkeeping. A permittee authorized to discharge under one or more Type 4 General Permits shall maintain the Discharge Authorization and associated documents for the life of the facility.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A310. Site Investigation for Type 4 On-site Wastewater Treatment Facilities**

- A. Definition. For purposes of this Section, "clean water" means water free of colloidal material or additives that could affect chemical or physical properties if the water is used for percolation or seepage pit performance testing.
- B. Site investigation. An applicant shall ensure that an investigator qualified under subsection (H) conducts a site investigation consisting of a surface characterization under subsection (C) and a subsurface characterization under subsection (D). The applicant shall submit the results in a format prescribed by the Department. The site investigation shall provide sufficient data to:
1. Select appropriate primary and reserve disposal areas for an on-site wastewater treatment facility considering all surface and subsurface limiting conditions in subsections (C)(2) and (D)(2); and
  2. Effectively design and install the selected facility to serve the anticipated development at the site, whether or not limiting conditions exist.
- C. Surface characterization.
1. Surface characterization method. The investigator shall characterize the surface of the site where an on-site wastewater treatment facility is proposed for installation using one of the following methods:
    - a. The "Standard Practice for Surface Site Characterization for On-site Septic Systems, D5879-95 (2003)," published by the American Society for Testing and Materials. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959;
    - b. Another method of surface characterization that can, with accuracy and reliability, identify and delineate the surface limiting conditions specified in subsection (C)(2).
  2. Surface limiting conditions. The investigator shall determine whether, and if so, where any of the following surface limiting conditions exist:
    - a. The surface slope is greater than 15 percent at the intended location of the on-site wastewater treatment facility;
    - b. Minimum setback distances are not within the limits specified in R18-9-A312(C);
    - c. Surface drainage characteristics at the intended location of the on-site wastewater treatment facility will adversely affect the ability of the facility to function properly;
    - d. A 100-year flood hazard zone, as indicated on the applicable flood insurance rate map, is located within the property on which the on-site wastewater treatment facility will be installed;
    - e. An outcropping of rock that cannot be excavated exists in the intended location of the on-site wastewater treatment facility or will impair the function of soil receiving the discharge; and
    - f. Fill material deposits exist in the intended location of the on-site wastewater treatment facility.
- D. Subsurface characterization.
1. Subsurface characterization method. The investigator shall characterize the subsurface of the site where an on-site wastewater treatment facility is proposed for installation using one or more of the following methods:
    - a. The following ASTM standard practices, which are incorporated by reference and do not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959:
      - i. "Standard Practice for Subsurface Site Characterization of Test Pits for On-site Septic Systems, D5921-96(2003)e1 (2003)," published by the American Society for Testing and Materials; and
      - ii. "Standard Practice for Soil Investigation and Sampling by Auger Borings, D1452-80 (2000)," published by the American Society for Testing and Materials;
    - b. Percolation testing as specified in subsection (F);
    - c. Seepage pit performance testing as specified in subsection (G); or
    - d. Another method of subsurface characterization, approved by the Department, that ensures compliance with water quality standards through proper system location, selection, design, installation, and operation.
  2. Subsurface limiting conditions. The investigator shall determine whether any of the following limiting conditions exist in the primary and reserve areas of the on-site wastewater treatment facility within a minimum of 12 feet of the land surface or to an impervious soil or rock layer if encountered at a shallower depth:

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. The soil absorption rate determined under R18-9-A312(D)(2) is:
    - i. More than 1.20 gallons per day per square foot, or
    - ii. Less than 0.20 gallons per day per square foot;
  - b. The vertical separation distance from the bottom of the lowest point of the disposal works to the seasonal high water table is less than the minimum vertical separation specified in R18-9-A312(E)(1);
  - c. Seasonal saturation occurs within surface soils that could affect the performance of the on-site wastewater treatment facility;
  - d. One of the following subsurface conditions that may cause or contribute to the surfacing of wastewater:
    - i. An impervious soil or rock layer,
    - ii. A zone of saturation that substantially limits downward percolation from the disposal works,
    - iii. Soil with more than 50 percent rock fragments;
  - e. One of the following subsurface conditions that promotes accelerated downward movement of insufficiently treated wastewater:
    - i. Fractures or joints in rock that are open, continuous, or interconnected;
    - ii. Karst voids or channels; or
    - iii. Highly permeable materials such as deposits of cobbles or boulders; or
  - f. A subsurface condition that may convey wastewater to a water of the state and cause or contribute to an exceedance of a water quality standard established in 18 A.A.C. 11, Articles 1 and 4.
3. Applicability of subsurface characterization methods. The investigator shall:
    - a. For a seepage pit constructed under R18-9-E302, test seepage pit performance using the procedure specified in subsection (G);
    - b. For an on-site wastewater treatment facility other than a seepage pit, characterize soil by using one or more of the ASTM methods specified in subsection (D)(1)(a) if any of the following site conditions exists:
      - i. The natural surface slope at the intended location of the on-site wastewater treatment facility is greater than 15 percent;
      - ii. Bedrock or similar consolidated rock formation that cannot be excavated with a shovel outcrops on the property or occurs less than 12 feet below the land surface;
      - iii. The native soil at the surface or encountered in a boring, trench, or hole consists of more than 35 percent rock fragments;
      - iv. The seasonal high water table occurs within 12 feet of the natural land surface as encountered in trenches or borings, or evidenced by well records or hydrologic reports;
      - v. Seasonal saturation at the natural land surface occurs as indicated by soil mottling, vegetation adapted to near-surface saturated soils, or springs, seeps, or surface water near enough to the intended location of the on-site wastewater treatment facility to have a connection with potential seasonal saturation at the land surface; or
      - vi. A percolation test yields results outside the limits specified in subsection (D)(2)(a) and (b).
    - c. Percolation testing. The investigator may perform percolation testing as specified in subsection (F):
      - i. To augment another method of subsurface characterization if useful to locate or design an on-site wastewater treatment facility, or
      - ii. As the sole method of subsurface characterization if a subsurface characterization by an ASTM method is not required under subsection (D)(3)(b).
  - E. If an ASTM method is used for subsurface characterization, the investigator shall conduct subsurface characterization tests at the site to provide adequate, credible, and representative information to ensure proper location, selection, design, and installation of the on-site wastewater treatment facility. The investigator shall:
    1. Select at least two test locations in the primary area and one test location in the reserve area to conduct the tests;
    2. Perform the characterization at each test location at appropriate depths to:
      - a. Establish the wastewater absorption capacity of the soil under R18-9-A312(D), and
      - b. Aid in determining that a sufficient zone of unsaturated flow is provided below the disposal works to achieve necessary wastewater treatment; and
    3. Submit with the site investigation report:
      - a. A log of soil formations for each test location with information on soil type, texture, and classification; percentage of rock; structure; consistence; and mottles;
      - b. A determination of depth to groundwater below the land surface by test trenches or borings, published groundwater data, subdivision reports, or relevant well data; and
      - c. A determination of the water absorption characteristics of the soil, under R18-9-A312(D)(2)(b), sufficient to allow location and design of the on-site wastewater treatment facility.
  - F. Percolation testing method for subsurface characterization.
    1. Planning and preparation. The investigator shall:
      - a. Select at least two locations in the primary area and at least one location in the reserve area for percolation testing, to provide adequate and credible information to ensure proper location, selection, design, and installation of a properly working on-site wastewater treatment facility;
      - b. Perform percolation testing at each location at intervals in the soil profile sufficient to:
        - i. Establish the wastewater absorption capability of the soil under R18-9-A312(D), and
        - ii. Aid in determining that a sufficient zone of unsaturated flow is provided below the disposal works to achieve necessary wastewater treatment. The investigator shall perform percolation tests at multiple depths if there is an indication of an obvious change in soil characteristics that affect the location, selection, design, installation, or disposal performance of the on-site wastewater treatment facility;
      - c. Excavate percolation test holes in undisturbed soil at least 12 inches deep with dimensions of 12 inches by 12 inches, if square, or a diameter of 15 inches, if round. The investigator shall not alter the structure of the soil during the excavation;
      - d. Place percolation test holes away from site or soil features that yield unrepresentative or misleading data pertaining to the location, selection, design, installation, or performance of the on-site wastewater treatment facility;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- e. Scarify smeared soil surfaces within the percolation test holes and remove any loosened materials from the bottom of the hole; and
  - f. Use buckets with holes in the sides to support the sidewalls of the percolation test hole, if necessary. The investigator shall fill any voids between the walls of the hole and the bucket with pea gravel to reduce the impact of the enlarged hole.
2. Presoaking procedure. The investigator shall:
    - a. Fill the percolation test hole with clean water to a depth of 12 inches above the bottom of the hole;
    - b. Observe the decline of the water level in the hole and record time in minutes for the water to completely drain away;
    - c. Repeat the steps specified in subsection (F)(2)(a) and (b) if the water drains away in less than 60 minutes.
      - i. If the water drains away the second time in less than 60 minutes, the investigator shall repeat the steps specified in subsections (F)(2)(a) and (b).
      - ii. If the water drains away a third time in less than 60 minutes, the investigator shall perform the percolation test by following subsection (F)(3); and
    - d. Add clean water to the hole after 60 minutes and maintain the water at a minimum depth of 9 inches for at least four more hours if it takes 60 minutes or longer for the water to drain away. The investigator shall protect the hole from precipitation and runoff, and perform the percolation test specified in subsection (F)(3) between 16 and 24 hours after presoaking.
  3. Conducting the test. The investigator shall:
    - a. Conduct the percolation test before soil hydraulic conditions established by the presoaking procedure substantially change. The investigator shall remove loose materials in the percolation test hole to ensure that the specified dimensions of the hole are maintained and the infiltration surfaces are undisturbed native soil;
    - b. Fill the test hole to a depth of six inches above the bottom with clean water;
    - c. Observe the decline of the water level in the test hole and record the time in minutes for the water level to fall exactly 1 inch from a fixed reference point. The investigator shall:
      - i. Immediately refill the hole with clean water to a depth of 6 inches above the bottom, and determine and record the time in minutes for the water level to fall exactly 1 inch,
      - ii. Refill the hole again with clean water to a depth of 6 inches above the bottom and determine and record the time in minutes for the water to fall exactly 1 inch, and
      - iii. Ensure that the method for measuring water level depth is accurate and does not significantly affect the percolation rate of the test hole;
    - d. If the percolation rate stabilizes for three consecutive measurements by varying no more than 10 percent, use the highest percolation rate value of the three measurements. If three consecutive measurements indicate that the percolation rate results are not stabilizing or the percolation rate is between 60 and 120 minutes per inch, the investigator shall use an alternate method based on a graphical solution of the test data to approximate the stabilized percolation rate;
  - e. Record the percolation rate results in minutes per inch; and
  - f. Submit the following information with the site investigation report:
    - i. A log of the soil formations encountered for all percolation tests including information on texture, structure, consistence, percentage of rock fragments, and mottles, if present;
    - ii. Whether and which test hole was reinforced with a bucket;
    - iii. The locations, depths, and bottom elevations of the percolation test holes on the site investigation map;
    - iv. A determination of depth to groundwater below the land surface by test trenches or borings, published groundwater data, subdivision reports, or relevant well data; and
    - v. A determination of the water absorption characteristics of the soil, under R18-9-A312(D)(2)(a), sufficient to allow location and design of the on-site wastewater treatment facility.
- G. Seepage pit performance testing method for subsurface characterization. The investigator shall test seepage pits described in R18-9-E302 as follows:
    1. Planning and Preparation. The investigator shall:
      - a. Identify the disposal areas at the site and drill a test hole at least 18 inches in diameter to the depth of the proposed seepage pit, at least 30 feet deep, and
      - b. Scarify soil surfaces within the test hole and remove loosened materials from the bottom of the hole.
    2. Presoaking procedure. The investigator shall:
      - a. Fill the bottom 6 inches of the test hole with gravel, if necessary, to prevent scouring;
      - b. Fill the test hole with clean water up to 3 feet below the land surface;
      - c. Observe the decline of the water level in the hole and determine the time in hours and minutes for the water to completely drain away;
      - d. Repeat the procedure if the water drains away in less than four hours; If the water drains away the second time in less than four hours, the investigator shall conduct the seepage pit performance test by following subsection (G)(3);
      - e. Add water to the hole and maintain the water at a depth that leaves at least the top 3 feet of hole exposed to air for at least four more hours if the water drains away in four or more hours; and
      - f. Not remove the water from the hole before the seepage pit performance test if there is standing water in the hole after at least 16 hours of presoaking.
    3. Conducting the test. The investigator shall:
      - a. Fill the test hole with clean water up to 3 feet below land surface;
      - b. Observe the decline of the water level in the hole and determine and record the vertical distance to the water level from a fixed reference point every 10 minutes. The investigator shall ensure that the method for measuring water level depth is accurate and does not significantly affect the rate of fall of the water level in the test hole;
      - c. Measure the decline of the water level continually until three consecutive 10-minute measurements

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

indicate that the infiltration rates are within 10 percent. If measurements indicate that infiltration is not approaching a steady rate or if the rate is close to a numerical limit specified in R18-9-A312(E)(1), the investigator shall use, an alternate method based on a graphical solution of the test data to approximate the final stabilized infiltration rate;

- d. Percolation test rate. Calculate the stabilized infiltration rate for a seepage pit determined by the test hole procedure specified in subsection (G)(1)(a) using the formula  $P = (15 / DS) \times IS$  to determine an equivalent percolation test rate. Once "P" is determined, the investigator shall use R18-9-A312(D)(2)(a) to establish the design SAR for wastewater treated under R18-9-E302 and to calculate the required minimum sidewall area for the seepage pit using the equation specified in R18-9-E302(C)(5)(k).
    - i. "P" is the percolation test rate (minutes per inch) tabulated in the first column of the table in R18-9-A312(D)(2)(a),
    - ii. "DS" is the diameter of the seepage pit test hole in inches, and
    - iii. "IS" is the seepage pit stabilized infiltration rate (minutes per inch) determined by the procedure specified in R18-9-A310(F)(3)(c);
  - e. Submit the following information with the site investigation report:
    - i. The results of the seepage pit performance testing including data, calculations, and findings on a form provided by the Department;
    - ii. The log of the test hole indicating lithologic characteristics and points of change;
    - iii. The location of the test hole on the site investigation map;
    - iv. A determination of depth to groundwater below the land surface by borings, published groundwater data, subdivision reports, or relevant well data.
  - f. Fill the test hole so that groundwater quality and public safety are not compromised if the seepage pit is drilled elsewhere or if a seepage pit cannot be sited at the location because of unfavorable test results.
- H. Qualifications.** An investigator shall not perform a site investigation under this Section unless the investigator has knowledge and competence in the subject area and is licensed in good standing or otherwise qualified in one of the following categories:
1. Arizona-registered professional engineer,
  2. Arizona-registered geologist,
  3. Arizona-registered sanitarian,
  4. A certificate of training from a course recognized by the Department as sufficiently covering the information specified in this Section, or
  5. Qualifies under another category designated in writing by the Department.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A311. Facility Selection for Type 4 On-site Wastewater Treatment Facilities**

- A.** A person shall select, design, and install an on-site wastewater treatment facility that is appropriate for the site's geographic

location, setback limitations, slope, topography, drainage and soil characteristics, wastewater infiltration capability, depth to the seasonal high water table, and any surface or subsurface limiting condition.

1. A person may use on-site treatment and disposal technologies covered by a Type 4 General Permit alone or in combination with another Type 4 General Permit to overcome site limitations.
  2. An applicant may submit a single Notice of Intent to Discharge for an on-site wastewater treatment facility consisting of components or technologies covered by multiple general permits if the information submittal requirements of all the general permits are met.
  3. The Director shall issue a single Construction Authorization under R18-9-A301(D)(1) and a single Discharge Authorization under R18-9-A301(D)(2) for an on-site wastewater treatment facility that consists of components or technologies covered by multiple general permits.
- B.** A person may install a septic tank and disposal works system described in R18-9-E302 as the sole method of wastewater treatment and disposal at a site if the site investigation conducted under R18-9-A310 indicates that no limiting condition identified under R18-9-A310(C) or R18-9-A310(D) exists at the site.
1. A person may install a seepage pit only in valley-fill sediments in a basin-and-range alluvial basin and only if the seepage pit performance test results meet the criteria specified in R18-9-A312(E).
  2. The person shall specify in the Notice of Intent to Discharge that no limiting conditions described in R18-9-A310(C) and (D) were identified at the site.
- C.** If any surface or subsurface limiting condition is identified in the site investigation report, an applicant may propose installation of a septic tank and disposal works system described in R18-9-E302 only if:
1. The applicant submits information under R18-9-A312(G) that describes:
    - a. How the design of the septic tank and disposal works system specified in R18-9-E302 was modified to overcome limiting conditions;
    - b. How the modified design meets the criteria of R18-9-A312(G)(3); and
    - c. A site-specific SAR under R18-9-A312(D)(2)(a) or (b), as applicable; and
  2. None of the following surface or subsurface limiting conditions are identified at the site:
    - a. An outcropping of rock that cannot be excavated or will impair the function of soil receiving the discharge exists in the intended location of the on-site wastewater treatment facility, as described in R18-9-A310(C)(2)(e);
    - b. The vertical separation distance from the bottom of the lowest point of the disposal works to the seasonal high water table is less than the minimum vertical separation distance, as described in R18-9-A310(D)(2)(c); or
    - c. A subsurface condition that promotes accelerated downward movement of insufficiently treated wastewater as described in R18-9-A310(D)(2)(e).
- D.** If a site can accommodate a septic tank and disposal works system described in R18-9-E302, the applicant shall not install a treatment works or disposal works described in R18-9-E303 through R18-9-E322 unless the applicant submits a statement to the Department with the Notice of Intent to Discharge acknowledging the following:

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

1. The applicant is aware that although a septic tank and disposal works system described in R18-9-E302 is appropriate for the site, the applicant desires to install a treatment works or disposal works authorized under R18-9-E303 through R18-9-E322; and
2. The applicant is aware that a treatment works or disposal works authorized under R18-9-E303 through R18-9-E322 may result in higher capital, operation, and maintenance costs than a septic tank and disposal works system described in R18-9-E302.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A312. Facility Design for Type 4 On-site Wastewater Treatment Facilities**

- A.** General design requirements. An applicant shall ensure that the person designing an on-site wastewater treatment facility:
1. Signs the design documents submitted as part of the Notice of Intent to Discharge to obtain a Construction Authorization, including plans, specifications, drawings, reports, and calculations; and
  2. Locates and designs the on-site wastewater treatment facility project using good design judgment and relies on appropriate design methods and calculations.
- B.** Design considerations and flow determination. An applicant shall ensure that the person designing the on-site wastewater treatment facility shall:
1. Design the facility to satisfy a 20-year operational life;
  2. Design the facility based on the provisions of one or more of the general permits in R18-9-E302 through R18-9-E322 for facilities with a design flow of less than 3000 gallons per day, and R18-9-E323 for facilities with a design flow of 3000 gallons per day to less than 24,000 gallons per day;
  3. Design the facility based on the facility's design flow and wastewater characteristics as specified in R18-9-A309(B)(3);
  4. For on-site wastewater treatment facilities permitted under R18-9-E303 through R18-9-E323, apply the following design requirements, as applicable:
    - a. Include the power source and power components in construction drawings if electricity or another type of power is necessary for facility operation;

- b. If a hydraulic analysis is required under subsection (E), perform the analysis based on the location and dimensions of the bottom and sidewall surfaces of the disposal works that are identified in the design documentation;
- c. Design components, piping, ports, seals, and appurtenances to withstand installation loads, internal and external operational loads, and buoyant forces. Design ports for resistance against movement, and cap or cover openings for protection from damage and entry by rodents, mosquitoes, flies, or other organisms capable of transporting a disease-causing organism;
- d. Design tanks, liners, ports, seals, piping to and within the facility, and appurtenances for watertightness under all operational conditions;
- e. Provide adequate storage capacity above high operating level to:
  - i. Accommodate a 24-hour power or pump outage, and
  - ii. Contain wastewater that is incompletely treated or cannot be released by the disposal works to the native soil;
- f. If a fixed media process is used, provide in the construction drawings the media material, installation specification, media configuration, and wastewater loading rate of the media at the daily design flow;
- g. Provide a fail-safe wastewater control or operational process, if required by the general permit to prevent discharge of inadequately treated wastewater; and
- h. Reference design. If using a reference design on file with the Department, indicate the reference design within the information submitted with the Notice of Intent to Discharge.

- C.** Setbacks. The following setbacks apply unless the Department:
1. Specifies alternative setbacks under Article 3, Part E of this Chapter;
  2. Approves a different setback under the procedure specified in subsection (G); or
  3. Establishes a more stringent setback on a site- or area-specific basis to ensure compliance with water quality standards.

| Features Requiring Setbacks                                                                                                      | Setback For An On-Site Wastewater Treatment Facility, Including Reserve Area (In Feet) | Special Provisions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Building                                                                                                                      | 10                                                                                     | Includes porches, decks, and steps (covered or uncovered), breezeways, roofed patios, carports, covered walks, and similar structures and appurtenances.                                                                                                                                                                                                                                                                                                                                               |
| 2. Property line shared with any adjoining lot or parcel not served by a common drinking water system* or an existing water well | 50                                                                                     | A person may reduce the setback to a minimum of 5 feet from the property line if: <ol style="list-style-type: none"> <li>a. The owners of any affected undeveloped adjacent properties agree, as evidenced by an appropriately recorded document, to limit the location of any new well on their property to at least 100 feet from the proposed treatment works and primary and reserve disposal works; and</li> <li>b. The arrangements and documentation are approved by the Department.</li> </ol> |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|                                                                                                                                                      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3. All other property lines                                                                                                                          | 5   | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 4. Public or private water supply well                                                                                                               | 100 | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5. Perennial or intermittent stream                                                                                                                  | 100 | Measured horizontally from the high water line of the peak streamflow from a 10-year, 24-hour rainfall event.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 6. Lake, reservoir, or canal                                                                                                                         | 100 | Measured horizontally from the high water line from a 10-year, 24-hour rainfall event at the lake or reservoir.                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 7. Drinking water intake from a surface water source (includes an open water body, downslope spring or a well tapping streamside saturated alluvium) | 200 | Measured horizontally from the on-site wastewater treatment facility to the structure or mechanism for withdrawing raw water such as a pipe inlet, grate, pump, intake or diversion box, spring box, well, or similar structure.                                                                                                                                                                                                                                                                                                              |
| 8. Wash or drainage easement with a drainage area of more than 20 acres                                                                              | 50  | Measured horizontally from the nearest edge of the defined natural channel bank or drainage easement boundary. A person may reduce the setback to 25 feet if natural or constructed erosion protection is approved by the appropriate flood plain administrator.                                                                                                                                                                                                                                                                              |
| 9. Water main or branch water line                                                                                                                   | 10  | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 10. Domestic service water line                                                                                                                      | 5   | Measured horizontally between the water line and the wastewater pipe, except that the following are allowed:<br>a. A water line may cross above a wastewater pipe if the crossing angle is between 45 and 90 degrees and the vertical separation distance is 1 foot or more.<br>b. A water line may parallel a wastewater pipe with a horizontal separation distance of 1 foot to 5 feet if the bottom of the water line is 1 foot or more above the top of the wastewater pipe and is in a separate trench or on a bench in the same trench. |
| 11. Downslopes or cut banks greater than 15 percent, culverts, and ditches from:                                                                     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| a. Treatment works components                                                                                                                        | 10  | Measured horizontally from the bottom of the treatment works component to the closest point of daylighting on the surface.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| b. Trench, bed, chamber technology, or gravel-less trench with:                                                                                      |     | Measured horizontally from the bottom of the lowest point of the disposal pipe or drip lines, as applicable, to the closest point of daylighting on the surface.                                                                                                                                                                                                                                                                                                                                                                              |
| i. No limiting subsurface condition specified in R18-9-A310(D)(2),                                                                                   | 20  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ii. A limiting subsurface condition.                                                                                                                 | 50  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| c. Subsurface drip lines.                                                                                                                            | 3   | Measured horizontally from the bottom of the lowest point of the disposal pipe or drip lines, as applicable, to the closest point of daylighting on the surface.                                                                                                                                                                                                                                                                                                                                                                              |
| 12. Driveway                                                                                                                                         | 5   | Measured horizontally to the nearest edge of an on-site wastewater treatment facility excavation. A person may place a properly reinforced and protected wastewater treatment facility, except for disposal works, at any location relative to a driveway if access openings, risers, and covers carry the design load and are protected from inflow.                                                                                                                                                                                         |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|                                                                                                                                                                                                                                        |     |                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------------------|
| 13. Swimming pool excavation                                                                                                                                                                                                           | 5   | Except if soil loading or stability concerns indicate the need for a greater separation distance. |
| 14. Easement (except drainage easement)                                                                                                                                                                                                | 5   | None                                                                                              |
| 15. Earth fissures                                                                                                                                                                                                                     | 100 | None                                                                                              |
| * A "common drinking water system" means a system that currently serves or is under legal obligation to serve the property and may include a drinking water utility, a well-sharing agreement, or other viable water supply agreement. |     |                                                                                                   |

**D. Soil absorption rate (SAR) and disposal works sizing.**

1. An applicant shall determine the soil absorption area by dividing the design flow by the applicable soil absorption rate. If soil characterization and percolation test methods yield different SAR values or if multiple applications of the same approach yield different values, the designer of the disposal works shall use the lowest SAR value unless a higher SAR value is proposed and justified to the Department's satisfaction in the Notice of Intent to Discharge.
2. The SAR used to calculate disposal works size for systems described in R18-9-E302 is as follows:
  - a. The SAR by percolation testing as described in R18-9-A310(F) is determined as follows:

| Percolation Rate from Percolation Test (minutes per inch) | SAR, Trench, Chamber, and Pit (gal/day/ft <sup>2</sup> ) | SAR, Bed (gal/day/ft <sup>2</sup> ) |
|-----------------------------------------------------------|----------------------------------------------------------|-------------------------------------|
| Less than 1.00                                            | A site-specific SAR is required                          | A site-specific SAR is required     |
| 1.00 to less than 3.00                                    | 1.20                                                     | 0.93                                |
| 3.00                                                      | 1.10                                                     | 0.73                                |
| 4.00                                                      | 1.00                                                     | 0.67                                |
| 5.00                                                      | 0.90                                                     | 0.60                                |
| 7.00                                                      | 0.75                                                     | 0.50                                |

|                  |                                 |                                 |
|------------------|---------------------------------|---------------------------------|
| 10.0             | 0.63                            | 0.42                            |
| 15.0             | 0.50                            | 0.33                            |
| 20.0             | 0.44                            | 0.29                            |
| 25.0             | 0.40                            | 0.27                            |
| 30.0             | 0.36                            | 0.24                            |
| 35.0             | 0.33                            | 0.22                            |
| 40.0             | 0.31                            | 0.21                            |
| 45.0             | 0.29                            | 0.20                            |
| 50.0             | 0.28                            | 0.19                            |
| 55.0             | 0.27                            | 0.18                            |
| 55.0+ to 60.0    | 0.25                            | 0.17                            |
| 60.0+ to 120     | 0.20                            | 0.13                            |
| Greater than 120 | A site-specific SAR is required | A site-specific SAR is required |

- b. The SAR using the soil evaluation method described in R18-9-A310(E) is determined by answering the questions in the following table. The questions are read in sequence starting with "A." The first "yes" answer determines the SAR.

| Sequence of Soil Characteristics Questions                                                                                | SAR, Trench, Chamber, and Pit gal/day/ft <sup>2</sup> | SAR, Bed gal/day/ft <sup>2</sup> |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------------------|
| A. Is the horizon gravelly coarse sand or coarser?                                                                        | A site-specific SAR is required                       | A site-specific SAR is required  |
| B. Is the structure of the horizon moderate or strongly platy?                                                            | A site-specific SAR is required                       | A site-specific SAR is required  |
| C. Is the texture of the horizon sandy clay loam, clay loam, silty clay loam, or finer and the soil structure weak platy? | A site-specific SAR is required                       | A site-specific SAR is required  |
| D. Is the moist consistency stronger than firm or any cemented class?                                                     | A site-specific SAR is required                       | A site-specific SAR is required  |
| E. Is the texture sandy clay, clay, or silty clay of high clay content and the structure massive or weak?                 | A site-specific SAR is required                       | A site-specific SAR is required  |
| F. Is the texture sandy clay loam, clay loam, silty clay loam, or silty loam and the structure massive?                   | A site-specific SAR is required                       | A site-specific SAR is required  |
| G. Is the texture of the horizon loam or sandy loam and the structure massive?                                            | 0.20                                                  | 0.13                             |
| H. Is the texture sandy clay, clay, or silty clay of low clay content and the structure moderate or strong?               | 0.20                                                  | 0.13                             |
| I. Is the texture sandy clay loam, clay loam, or silty clay loam and the structure weak?                                  | 0.20                                                  | 0.13                             |



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|                                                                                                        |      |                                 |
|--------------------------------------------------------------------------------------------------------|------|---------------------------------|
| J. Is the texture sandy clay loam, clay loam, or silty clay loam and the structure moderate or strong? | 0.40 | 0.27                            |
| K. Is the texture sandy loam, loam, or silty loam and the structure weak?                              | 0.40 | 0.27                            |
| L. Is the texture sandy loam, loam, or silt loam and the structure moderate or strong?                 | 0.60 | 0.40                            |
| M. Is the texture fine sand, very fine sand, loamy fine sand, or loamy very fine sand?                 | 0.40 | 0.27                            |
| N. Is the texture loamy sand or sand?                                                                  | 0.80 | 0.53                            |
| O. Is the texture coarse sand?                                                                         | 1.20 | A site-specific SAR is required |

3. For an on-site wastewater treatment facility described in a general permit other than R18-9-E302, the SAR is dependent on the ability of the facility to reduce the level of TSS and BOD<sub>5</sub> and is calculated using the following formula:

$$SAR_a \left[ \left( \frac{11.39}{\sqrt[3]{TSS + BOD_5}} - 1.87 \right) SAR^{1.13} + 1 \right] SAR$$

- "SAR<sub>a</sub>" is the adjusted soil absorption rate for disposal works design in gallons per day per square foot,
  - "TSS" is the total suspended solids in wastewater delivered to the disposal works in milligrams per liter,
  - "BOD<sub>5</sub>" is the five-day biochemical oxygen demand of wastewater delivered to the disposal works in milligrams per liter, and
  - "SAR" is the soil absorption rate for septic tank effluent determined by the subsurface characterization method described in R18-9-A310.
4. An applicant shall ensure that the facility is designed so that the area of the intended installation is large enough to allow for construction of the facility and for future

replacement or repair and is at least as large as the following:

- For a dwelling, a primary area for the disposal works sized according to subsection (D)(1) and a reserve area of 100 percent of the primary area, excluding the footprint of the treatment works. A reserve area is not required for a lot in a subdivision approved before 1974 if the lot conforms to its original approved configuration;
  - For other than a dwelling, a primary area for the disposal works sized according to subsection (D)(1) and a reserve area of 100 percent of the primary area, excluding the footprint of the treatment works.
5. An applicant shall ensure that the subsurface disposal works is designed to achieve the design flow established in R18-9-A309(B)(3) through proper hydraulic function, including conditions of seasonally cold and wet weather.
- E. Vertical separation distances.
- Minimum vertical separation to the seasonal high water table for a disposal works described in R18-9-E302 receiving septic tank effluent. For a disposal works described in R18-9-E302 receiving septic tank effluent, the minimum vertical separation distance between the lowest point in the disposal works and the seasonal high water table is dependent on the soil absorption rate and is determined as follows:

| Soil Absorption Rate<br>(gallons per day per square foot) |                |                | Minimum Vertical Separation Between The<br>Bottom Of The Disposal Works And The<br>Seasonal High Water Table<br>(feet) |             |
|-----------------------------------------------------------|----------------|----------------|------------------------------------------------------------------------------------------------------------------------|-------------|
| Trench and Chamber                                        | Bed            | Seepage Pit    | Trench, Chamber, and Bed                                                                                               | Seepage Pit |
| 1.20+                                                     | 0.93+          | 1.20+          | Not allowed for septic tank effluent                                                                                   | Not Allowed |
| 0.63+ to 1.20                                             | 0.42 to 0.93   | 0.63+ to 1.20  | 10                                                                                                                     | 60          |
| 0.20 to 0.63                                              | 0.13 to 0.42   | 0.36 to 0.63   | 5                                                                                                                      | 60          |
| Less than 0.20                                            | Less than 0.13 | Less than 0.36 | Not allowed for septic tank effluent                                                                                   | Not Allowed |

- Minimum vertical separation to the seasonal high water table for treatment and disposal works described in R18-9-E303 through R18-9-E322. If the minimum vertical separation distance to the seasonal high water table for a disposal works receiving septic tank effluent specified in subsection (E)(1) is not met, the applicant shall comply with the following:
  - Employ one or more technologies described in R18-9-E303 through R18-9-E322 to achieve a reduced concentration of harmful microorganisms, expressed as total coliform in colony forming units per 100 milliliters (cfu/100 ml) delivered to native soil at the bottom of the disposal works. The applicant shall use the following table to select works that achieve a reduced total coliform concentration corresponding



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

to the available vertical separation distance between the bottom of the disposal works and the seasonal high water table:

| Available Vertical Separation Distance Between the Bottom of The Disposal Works and the Seasonal High Water Table (feet) |                         | Maximum Allowable Total Coliform Concentration, 95th Percentile, Delivered to Natural Soil by the Disposal Works (Log <sub>10</sub> of coliform concentration in cfu per 100 milliliters) |
|--------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| For SAR*, 0.20 to 0.63                                                                                                   | For SAR*, 0.63+ to 1.20 |                                                                                                                                                                                           |
| 5                                                                                                                        | 10                      | 8**                                                                                                                                                                                       |
| 4                                                                                                                        | 8                       | 7                                                                                                                                                                                         |
| 3.5                                                                                                                      | 7                       | 6                                                                                                                                                                                         |
| 3                                                                                                                        | 6                       | 5                                                                                                                                                                                         |
| 2.5                                                                                                                      | 5                       | 4                                                                                                                                                                                         |
| 2                                                                                                                        | 4                       | 3                                                                                                                                                                                         |
| 1.5                                                                                                                      | 3                       | 2                                                                                                                                                                                         |
| 1                                                                                                                        | 2                       | 1                                                                                                                                                                                         |
| 0                                                                                                                        | 0                       | 0***                                                                                                                                                                                      |

\* Soil absorption rate from percolation testing or soil characterization, in gallons per square foot per day.

\*\* Nominal value for a standard septic tank and disposal field (10<sup>8</sup> colony forming units per 100 ml).

\*\*\* Nominally free of coliform bacteria.

- b. Include a hydraulic analysis with the Notice Of Intent To Discharge, based on the dimensions of the absorption surfaces specified in R18-9-A312(B)(4)(b), showing that the soil is sufficiently permeable to conduct wastewater downward and laterally without surfacing for the site conditions at the disposal works.
3. Vertical separation from a subsurface limiting condition described in R18-9-A310(D)(2)(d) that may cause or contribute to surfacing of wastewater. If a subsurface limiting condition described in R18-9-A310(D)(2)(d) exists at the location of the disposal works, the applicant shall ensure that the design for the on-site wastewater treatment facility meets one of the following:
  - a. A zone of acceptable native soil with the following characteristics exists between the bottom of the disposal works and the top of the subsurface limiting condition:
    - i. The zone of soil is at least 4 feet thick, and
    - ii. The zone of soil is sufficiently permeable to conduct wastewater released from the disposal works vertically downward and laterally without causing surfacing of the wastewater as documented by a hydraulic analysis submitted with the Notice of Intent to Discharge that is based on the dimensions of the absorption surfaces specified in R18-9-A312(B)(4)(b);
  - b. The subsurface limiting condition is thin enough to allow placement of a disposal works into acceptable native soil beneath the subsurface limiting condition if the following criteria are met:
    - i. The bottom of the subsurface limiting condition is not deeper than 10 feet below the land surface, and

- ii. The vertical separation distance from the bottom of the disposal works to the seasonal high water table complies with subsection (E)(1) or (2), as applicable; or
- c. If the disposal works is placed above the subsurface limiting condition and the depth to the subsurface limiting condition is less than 4 feet below the bottom of the disposal works, the design for the on-site wastewater treatment facility shall comply with all of the following:
  - i. Employ one or more technologies described in R18-9-E303 through R18-9-E322 to achieve a reduced concentration of harmful microorganisms, expressed as total coliform in colony forming units per 100 milliliters (cfu/100 ml), delivered to acceptable native soil at the bottom of the disposal works, as follows:

| Available Vertical Separation Distance from the Bottom of the Disposal Works to the Subsurface Limiting Condition (feet) | Maximum Allowable Total Coliform Concentration, 95th Percentile, Delivered to Acceptable Native Soil by the Disposal Works (Log <sub>10</sub> of coliform concentration in cfu per 100 milliliters) |
|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3.5                                                                                                                      | 7                                                                                                                                                                                                   |
| 3                                                                                                                        | 6                                                                                                                                                                                                   |
| 2.5                                                                                                                      | 5                                                                                                                                                                                                   |
| 2                                                                                                                        | 4                                                                                                                                                                                                   |
| 1.5                                                                                                                      | 0*                                                                                                                                                                                                  |
| 1                                                                                                                        | 0*                                                                                                                                                                                                  |
| 0.5                                                                                                                      | 0*                                                                                                                                                                                                  |
| 0                                                                                                                        | 0*                                                                                                                                                                                                  |

\* Nominally free of coliform bacteria.

- ii. If the SAR of the native soil into which the disposal works is placed is not more than 0.63 gallons per day per square foot, include a hydraulic analysis with the Notice of Intent to Discharge, based on the location and dimensions of the absorption surfaces specified in R18-9-A312(B)(4)(b), showing that the soil is sufficiently permeable to conduct wastewater vertically downward and laterally without surfacing for the site conditions at the disposal works; and
- iii. If a disinfection device under R18-9-E320 is proposed but is not used with surface disposal of wastewater under R18-9-E321 or "Category A" drip irrigation disposal under R18-9-E322, provide a justification with the Notice of Intent to Discharge stating why the selected type of disposal works is favored over disposal under R18-9-E321 or R18-9-E322.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

4. Vertical separation from a subsurface limiting condition described in R18-9-A310(D)(2)(e) that promotes accelerated downward movement of insufficiently treated wastewater. If a subsurface limiting condition described in R18-9-A310(D)(2)(e) exists at the location of the proposed disposal works, the applicant shall ensure that the design for the on-site wastewater treatment facility meets one of the following:
  - a. A zone of naturally occurring soil with the following characteristics exists between the bottom of the disposal works and the top of the subsurface limiting condition:
    - i. The zone of soil is at least 2 feet thick, and
    - ii. The SAR of the soil is not less than 0.20 gallons per day per square foot nor more than 1.20 gallons per day per square foot; or
  - b. The on-site wastewater treatment facility employs one or more technologies described in R18-9-E303 through R18-9-E322 that produces treated wastewater that meets a total coliform concentration of 1,000,000 ( $\text{Log}_{10}$ ) colony forming units per 100 milliliters, 95th percentile.
- F. Materials and manufactured system components.
  1. Materials. An applicant shall use aggregate if no specification for disposal works material is provided in this Article.
  2. Manufactured components. If manufactured components are used, an applicant shall design, install, and operate the on-site wastewater treatment facility following the manufacturer's specifications. The applicant shall ensure that:
    - a. Treatment and containment components, mechanical equipment, instrumentation, and controls have monitoring, inspection, access and cleanout ports or covers, as appropriate, for monitoring and service;
    - b. Treatment and containment components, pipe, fittings, pumps, and related components and controls are durable, watertight, structurally sound, and capable of withstanding stress from installation and operational service; and
    - c. Distribution lines for disposal works are constructed of clay tile laid with open joints, perforated clay pipe, perforated high density polyethylene pipe, perforated ABS pipe, or perforated PVC pipe if the pipe is suitable for wastewater disposal use and sufficient openings are available for distribution of the wastewater into the trench or bed area.
  3. Electronic components. When electronic components are used, the applicant shall ensure that:
    - a. Instructions and a wiring diagram are mounted on the inside of a control panel cover;
    - b. The control panel is equipped with a multimode operation switch, red alarm light, buzzer, and reset button;
    - c. The multimode operation switch operates in the automatic position for normal system operation; and
    - d. An anomalous condition is indicated by a glowing alarm light and sounding buzzer. The continued glowing of the alarm light after pressing the reset button shall signal the need for maintenance or repair of the system at the earliest practical opportunity.
  4. If a conflict exists between this Article and the manufacturer's specifications, the requirements of this Article apply. Except for the requirements in subsection (D) and (E), which always apply, if the conflict voids a manufacturer's warranty, the applicant may submit a request under subsection (G) justifying use of the manufacturer's specifications.
- G. Alternative design, setback, installation, or operational features. When an applicant submits a Notice of Intent to Discharge, the applicant may request that the Department review and approve a feature of improved or alternative technology, design, setback, installation, or operation that differs from a general permit requirement in this Article.
  1. The applicant shall make the request for an improved or alternative feature of technology, design, setback, installation, or operation on a form provided by the Department and include:
    - a. A description of the requested change;
    - b. A citation to the applicable feature or technology, design, setback, installation, or operational requirement for which the change is being requested; and
    - c. Justification for the requested change, including any necessary supporting documentation.
  2. The applicant shall submit the appropriate fee specified under 18 A.A.C. 14 for each requested change. For purposes of calculating the fee, a requested change that is applied multiple times in a similar manner throughout the facility is considered a single request if submitted for concurrent review.
  3. The applicant shall provide sufficient information for the Department to determine that the change achieves equal or better performance compared with the general permit requirement, or addresses site or system conditions more satisfactorily than the requirements of this Article.
  4. The Department shall review and may approve the request for change.
  5. The Department shall deny the request for the change if the change will adversely affect other permittees or cause or contribute to a violation of an Aquifer Water Quality Standard.
  6. The Department shall deny the request for the change if the change:
    - a. Fails to achieve equal or better performance compared to the general permit requirement;
    - b. Fails to address site or system conditions more satisfactorily than the general permit requirement;
    - c. Is insufficiently justified based on the information provided in the submittal;
    - d. Requires excessive review time, research, or specialized expertise by the Department to act on the request; or
    - e. For any other justifiable cause.
  7. The Department may approve a reduced setback for a facility authorized to discharge under one or more of the general permits in R18-9-E303 through R18-9-E322, either separately or in combination with a septic tank system authorized under R18-9-E302, if the applicant demonstrates that:
    - a. The treatment performance is significantly better than that provided under R18-9-E302(B),
    - b. The wastewater loading rate is reduced, or
    - c. Surface or subsurface characteristics ensure that reduced setbacks are protective of human health or water quality.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended to correct a manifest typographical error in subsection (E)(1) (Supp. 01-1). Amended by final rulemaking at 11

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A313. Facility Installation, Operation, and Maintenance for On-site Wastewater Treatment Facilities**

A. Facility installation. In addition to installation requirements in the general permit, the applicant shall ensure that the following tasks are performed, as applicable:

1. The facility is installed as described in design documents submitted with the Notice of Intent to Discharge;
2. Components are installed on a firm foundation that supports the components and operating loads;
3. The site is prepared to protect native soil beneath the soil absorption area and in adjacent areas from compaction, prevent smeared absorption surfaces, minimize disturbances from grubbing, and otherwise preclude damage to the disposal area that would impair performance;
4. Components are protected from damage at the construction site and installed in conformance with the manufacturer's instructions if consistent with this Article;
5. Treatment media are placed to achieve uniform density, prevent differential settling, produce a level inlet surface unless otherwise specified by the manufacturer, and avoid introduction of construction contaminants;
6. Backfill is placed to prevent damage to geotextile, liners, tanks, and other components;
7. Soil cover is shaped to shed rainfall away from the backfill areas and prevent ponding of runoff; and
8. Anti-buoyancy measures are implemented during construction if temporary saturated backfill conditions are anticipated during construction.

B. Operation and maintenance. In addition to operation and maintenance requirements in the general permit or specified in the operation and maintenance manual, the permittee shall ensure that the following tasks are performed, as applicable:

1. Pump accumulated residues, inspect and clean wastewater treatment and distribution components, and manage residues to protect human health and the environment;
2. Clean, backwash, or replace effluent filters according to the manufacturer's instructions, and manage residues to protect human health and the environment;
3. Inspect and clean the effluent baffle screen and pump tank, and properly dispose of cleaning residue;
4. Clean the dosing tank effluent screen, pump switches, and floats, and properly dispose of cleaning residue;
5. Flush lateral lines and return flush water to the pretreatment headworks;
6. Inspect, remove and replace, if necessary, and properly dispose of filter media;
7. Rod pressurized wastewater delivery lines and secondary distribution lines (for dosing systems), and return cleaning water to the pretreatment headworks;
8. Inspect and clean pump inlets and controls and return cleaning water to the pretreatment headworks;
9. Implement corrective measures if anomalous ponding, dryness, noise, odor, or differential settling is observed;
10. Inspect and monitor inspection and access ports, as applicable, to verify that operation is within expected limits for:
  - a. Influent wastewater quality;
  - b. The pressurized dosing system;
  - c. The aggregate infiltration bed and mound system;
  - d. Wastewater delivery and the engineered pad;
  - e. The pressurized delivery system, filter, underdrain, and native soil absorption system;
  - f. Saturation condition status in peat and other media; and
  - g. Treatment system components;

11. Inspect tanks, liners, ports, seals, piping, and appurtenances for watertightness under all operational conditions;
12. Manage vegetation in areas that contain components subject to physical impairment or damage due to root invasion or animals;
13. Maintain drainage, berms, protective barriers, cover materials, and other features; and
14. Maintain the usefulness of the reserve area to allow for repair or replacement of the on-site wastewater treatment facility.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A314. Septic Tank Design, Manufacturing, and Installation for On-site Wastewater Treatment Facilities**

A person shall not install a septic tank in an on-site wastewater treatment facility unless the tank meets the following requirements:

1. The tank is:
  - a. Designed to produce a clarified effluent and provide adequate space for sludge and scum accumulations;
  - b. Watertight and constructed of solid durable materials not subject to excessive corrosion or decay;
  - c. Manufactured with at least two compartments unless two separate structures are placed in series. The tank is designed so that:
    - i. The inlet compartment of any septic tank not placed in series is nominally 67 percent to 75 percent of the total required capacity of the tank;
    - ii. Septic tanks placed in series are considered a unit and meet the same criteria as a single tank;
    - iii. The liquid depth of the septic tank is at least 42 inches, and
    - iv. A septic tank of 1000 gallon capacity is at least 8 feet long and the tank length of septic tanks of greater capacity is at least 2 times but not more than 3 times the width;
  - d. Manufactured with at least two access openings to the tank interior, each at least 20 inches in diameter. The tank is designed so that:
    - i. One access opening is located over the inlet end of the tank and one access opening is located over the outlet end;
    - ii. Whenever a first compartment exceeds 12 feet in length, another access opening is provided over the baffle wall; and
    - iii. Access openings and risers are constructed to ensure accessibility within 6 inches below finished grade;
  - e. Manufactured so that the sewage inlet and wastewater outlet openings are not smaller than the connecting sewer pipe. The tank is designed so that:
    - i. The vertical leg of round inlet and outlet fittings is at least 4 inches but not smaller than the connecting sewer pipe, and
    - ii. A baffle fitting has the equivalent cross-sectional area of the connecting sewer pipe and not less than a 4 inch horizontal dimension if measured at the inlet and outlet pipe inverts;
  - f. Manufactured so that the inlet and outlet pipe or baffle extends 4 inches above and at least 12 inches below the water surface when the tank is installed

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- according to the manufacturer's instructions consistent with this Chapter. The invert of the inlet pipe is at least 2 inches above the invert of the outlet pipe;
- g. Manufactured so that the inlet and outlet fittings or baffles and compartment partitions have a free vent area equal to the required cross-sectional area of the connected sewer pipe to provide free ventilation above the water surface from the disposal works or seepage pit through the septic tank, house sewer, and stack to the outer air;
  - h. Manufactured so that the open space extends at least 9 inches above the liquid level and the cover of the septic tank is at least 2 inches above the top of the inlet fitting vent opening;
  - i. Manufactured so that partitions or baffles between compartments are of solid durable material (wooden baffles are prohibited) and extend at least 4 inches above the liquid level. The open area of the baffle shall be between one and 2 times the open area of the inlet pipe or horizontal slot and located at the midpoint of the liquid level of the baffle. If a horizontal slot is used, the slot shall be no more than 6 inches in height;
  - j. Structurally designed to withstand all anticipated earth or other loads. The tank is designed so that:
    - i. All septic tank covers are capable of supporting an earth load of 300 pounds per square foot; and
    - ii. If the top of the tank is greater than 2 feet below finish grade, the septic tank and cover are capable of supporting an additional load of 150 pounds per square foot for each additional foot of cover;
  - k. Manufactured or installed so that the influent and effluent ends of the tank are clearly and permanently marked on the outside of the tank with the words "INLET" or "IN," and "OUTLET" or "OUT," above or to the right or left of the corresponding openings; and
  - l. Clearly and permanently marked with the manufacturer's name or registered trademark, or both, the month and year of manufacture, the maximum recommended depth of earth cover in feet, and the design liquid capacity of the tank. The tank is manufactured to protect the markings from corrosion so that they remain permanent and readable for the operational life of the tank.
2. Materials used to construct or manufacture septic tanks.
    - a. A septic tank cast-in-place at the site of use shall be protected from corrosion by coating the tank with a bituminous coating, by constructing the tank using a concrete mix that incorporates 15 percent to 18 percent fly ash, or by any other Department-approved means. The tank is designed so that:
      - i. The coating extends at least 4 inches below the wastewater line and covers all of the internal area above that point; and
      - ii. A septic tank cast-in-place complies with the "Building Code Requirements for Structural Concrete and Commentary ACI 318-02/318R-02 (2002)," and the "Code Requirements for Environmental Engineering Concrete Structures and Commentary, ACI 350/350R-01 (2001)," published by the American Concrete Institute. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington Street, Phoenix, AZ 85007 or may be obtained from American Concrete Institute, P.O. Box 9094, Farmington Hills, MI 48333-9094.
    - b. A steel septic tank shall have a minimum wall thickness of No. 12 U.S. gauge steel and be protected from corrosion, internally and externally, by a bituminous coating or other Department-approved means.
    - c. A prefabricated concrete septic tank shall meet the "Standard Specification for Precast Concrete Septic Tanks, C1227-03," published by the American Society for Testing and Materials. This information is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington Street, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International West.
    - d. A septic tank manufactured using fiberglass or polyethylene shall meet the "Material and Property Standards for Prefabricated Septic Tanks, IAPMO PS 1-2004," published by the International Association of Plumbing and Mechanical Officials. This information is incorporated by reference, does not include any later amendments or editions of the incorporated material, and may be viewed at the Arizona Department of Environmental Quality, 1110 W. Washington Street, Phoenix, AZ 85007 or obtained from International Association of Plumbing & Mechanical Officials, 20001 E. Walnut Drive, South Walnut, CA 91789-2825.
  3. Conformance with design, materials, and manufacturing requirements.
    - a. If any conflict exists between this Article and the information incorporated by reference in subsection (2), the requirements of this Article apply.
    - b. The Department may approve use of alternative construction materials under R18-9-A312(G). Tanks constructed of wood, block, or bare steel are prohibited.
    - c. The Department may inspect septic tanks at the site of manufacturing to verify compliance with subsections (1) and (2).
    - d. The septic tank sale documentation includes:
      - i. A certificate attesting that the septic tank conforms with the design, materials, and manufacturing requirements in subsections (1) and (2); and
      - ii. Instructions for handling and installing the septic tank.
  4. The septic tank's daily design flow is determined as follows:
    - a. For a single family dwelling:
      - i. The design liquid capacity of the septic tank and the septic tank's daily design flow are determined based on the number of bedrooms and fixture count as follows:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

| Criteria for Septic Tank Size and Design Flow |               |                                          |                       |
|-----------------------------------------------|---------------|------------------------------------------|-----------------------|
| Number of Bedrooms                            | Fixture Count | Minimum Design Liquid Capacity (gallons) | Design Flow (gal/day) |
| 1                                             | 7 or less     | 1000                                     | 150                   |
|                                               | More than 7   | 1000                                     | 300                   |
| 2                                             | 14 or less    | 1000                                     | 300                   |
|                                               | More than 14  | 1000                                     | 450                   |
| 3                                             | 21 or less    | 1000                                     | 450                   |
|                                               | More than 21  | 1250                                     | 600                   |
| 4                                             | 28 or less    | 1250                                     | 600                   |
|                                               | More than 28  | 1500                                     | 750                   |
| 5                                             | 35 or less    | 1500                                     | 750                   |
|                                               | More than 35  | 2000                                     | 900                   |
| 6                                             | 42 or less    | 2000                                     | 900                   |
|                                               | More than 42  | 2500                                     | 1050                  |
| 7                                             | 49 or less    | 2500                                     | 1050                  |
|                                               | More than 49  | 3000                                     | 1200                  |
| 8                                             | 56 or less    | 3000                                     | 1200                  |
|                                               | More than 56  | 3000                                     | 1350                  |

ii. Fixture count is determined as follows:

| Residential Fixture Type           | Fixture Units | Residential Fixture Type                  | Fixture Units |
|------------------------------------|---------------|-------------------------------------------|---------------|
| Bathtub                            | 2             | Sink, bar                                 | 1             |
| Bidet                              | 2             | Sink, kitchen (including dishwasher)      | 2             |
| Clothes washer                     | 2             | Sink, service                             | 3             |
| Dishwasher (Separate from kitchen) | 2             | Utility tub or sink                       | 2             |
| Lavatory, single                   | 1             | Water closet, 1.6 gallons per flush (gpf) | 3             |
| Lavatory, double in master bedroom | 1             | Water closet, >1.6 to 3.2 gpf             | 4             |
| Shower, single stall               | 2             | Water closet, greater than 3.2 gpf        | 6             |

- b. For other than a single family dwelling, the design liquid capacity of a septic tank in gallons is 2.1 times the daily design flow into the tank as determined from Table 1, Unit Design Flows. If the wastewater strength exceeds that of typical sewage, additional tank volume is required.
- c. A person may place two septic tanks in series to meet the septic tank design liquid capacity require-

ments if the capacity of the first tank is at least 67 percent of the total required tank capacity and the capacity of the second tank is at least 33 percent of the total required tank capacity.

5. The following requirements regarding new or replacement septic tank installation apply:
- Permanent surface markers for locating the septic tank access openings are provided for maintenance;
  - A septic tank installed under concrete or pavement has the required access openings extended to grade;
  - A septic tank effluent filter is installed on the septic tank. The filter shall:
    - Prevent the passage of solids larger than 1/8 inch in diameter while under two feet of hydrostatic head; and
    - Be constructed of materials that are resistant to corrosion and erosion, sized to accommodate hydraulic and organic loading, and removable for cleaning and maintenance; and
  - The septic tank is tested for watertightness after installation by the water test described in subsections (5)(d)(i) and (5)(d)(ii) and repaired or replaced, if necessary.
    - The septic tank is filled with clean water, as specified in R18-9-A310(A), to the invert of the outlet and the water left standing in the tank for 24 hours and:
      - After 24 hours, the tank is refilled to the invert, if necessary;
      - The initial water level and time is recorded; and
      - After one hour, water level and time is recorded.
    - The tank passes the water test if the water level does not drop over the one-hour period. Any visible leak of flowing water is considered a failure. A damp or wet spot that is not flowing is not considered a failure.

#### Historical Note

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

#### R18-9-A315. Interceptor Design, Manufacturing, and Installation for On-site Wastewater Treatment Facilities

- A. Interceptor requirement. An applicant shall ensure that an interceptor as required by R18-9-A309(A)(7)(c) or necessary due to excessive amounts of grease, garbage, sand, or other wastes in the sewage is installed between the sewage source and the on-site wastewater treatment facility.
- B. Interceptor design. An applicant shall ensure that:
- An interceptor has not less than two compartments with fittings designed for grease retention and capable of removing excessive amounts of grease, garbage, sand, or other wastes. Applicable structural and materials requirements prescribed in R18-9-A314 apply;
  - Interceptors are located as close to the source as possible and are accessible for servicing. The applicant shall ensure that access openings for servicing are at grade level and gas-tight;
  - The interceptor size for grease and garbage from non-residential kitchens is calculated using by the following equation: Interceptor Size (in gallons) =  $M \times F \times T \times S$ .
    - "M" is the number of meals per peak hour;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- b. "F" is the waste flow rate from Table 1, Unit Design Flows.
  - c. "T" is the estimated retention time:
    - i. Commercial kitchen waste, dishwasher or disposal: 2.5 hours; or
    - ii. Single service kitchen with utensil wash disposal: 1.5 hours;
  - d. "S" is the estimated storage factor:
    - i. Fully equipped commercial kitchen, 8-hour operation: 1.0;
    - ii. Fully equipped commercial kitchen, 16-hour operation: 2.0;
    - iii. Fully equipped commercial kitchen, 24-hour operation: 3.0; or
    - iv. Single service kitchen, 1.5;
  - 4. The interceptor size for silt and grease from laundries and laundromats is calculated using the following equation: Interceptor Size (in gallons) =  $M \times C \times F \times T \times S$ .
    - a. "M" is the number of machines;
    - b. "C" is the machine cycles per hour (assume 2);
    - c. "F" is the waste flow rate from Table 1, Unit Design Flows;
    - d. "T" is the estimated retention time (assume 2); and
    - e. "S" is the estimated storage factor (assume 1.5 that allows for rock filter).
  - C. The applicant may calculate the size of an interceptor using different factor values than those given in subsections (B)(3) and (4) based on the values justified by the applicant in the Notice of Intent to Discharge submitted to the Department for the on-site wastewater treatment facility.
  - D. The Department may require installation of a sampling box if the volume or characteristics of the waste will impair the performance of the on-site wastewater treatment facility.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A316. Transfer of Ownership Inspection for On-site Wastewater Treatment Facilities**

- A. Conforming with this Section satisfies the Notice of Transfer requirements under R18-9-A304.
  - B. Within six months before the date of property transfer, the person who is transferring a property served by an on-site wastewater treatment facility shall retain an inspector to perform a transfer of ownership inspection of the on-site wastewater treatment facility who meets the following qualifications:
    - 1. Possesses working knowledge of the type of facility and the inspection process;
    - 2. Holds a certificate of training from a course recognized by the Department as sufficiently covering the information specified in this Section by July 1, 2006; and
    - 3. Holds a license in one of the following categories:
      - a. An Arizona-registered engineer;
      - b. An Arizona-registered sanitarian;
      - c. An owner of a vehicle with a human excreta collection and transport license issued under 18 A.A.C. 13, Article 11 or an employee of the owner of the vehicle;
    - d. A contractor licensed by the Registrar of Contractors in one of the following categories:
      - i. Residential license B-4 or C-41;
      - ii. Commercial license A, A-12, or L-41; or
      - iii. Dual license KA or K-41;
  - e. A wastewater treatment plant operator certified under 18 A.A.C. 5, Article 1; or
  - f. A person qualifying under another category designated by the Department.
  - C. The inspector shall complete a Report of Inspection on a form approved by the Department, sign it, and provide it to the person transferring the property. The Report of Inspection shall:
    - 1. Address the physical and operational condition of the on-site wastewater treatment facility and describe observed deficiencies and repairs completed, if any;
    - 2. Indicate that each septic tank or other wastewater treatment container on the property was pumped or otherwise serviced to remove, to the maximum extent possible, solid, floating, and liquid waste accumulations, or that pumping or servicing was not performed for one of the following reasons:
      - a. A Discharge Authorization for the on-site wastewater treatment facility was issued and the facility was put into service within 12 months before the transfer of ownership inspection,
      - b. Pumping or servicing was not necessary at the time of the inspection based on the manufacturer's written operation and maintenance instructions, or
      - c. No accumulation of floating or settled waste was present in the septic tank or wastewater treatment container; and
    - 3. Indicate the date the inspection was performed.
  - D. Before the property is transferred, the person transferring the property shall provide to the person to whom the property is transferred:
    - 1. The completed Report of Inspection; and
    - 2. Documents in the person's possession relating to permitting, operation, and maintenance of the on-site wastewater treatment facility.
  - E. The person to whom the property is transferred shall complete a Notice of Transfer on a form approved by the Department and send the form with the applicable fee specified in 18 A.A.C. 14 within 15 calendar days after the property transfer to:
    - 1. The Department for transfer of a property with an on-site wastewater treatment facility for which construction was completed before January 1, 2001; or
    - 2. The health or environmental agency delegated by the Director to administer the on-site wastewater treatment facility program for transfer of a property with an on-site wastewater treatment facility constructed on or after January 1, 2001.
  - F. If the Department issued a Discharge Authorization for the on-site wastewater treatment facility but the facility was not put into service before the property transfer, an inspection of the facility is not required and the transferee shall complete the Notice of Transfer form as specified in subsection (E).
  - G. Effective date.
    - 1. The owner of an on-site wastewater treatment facility operating under a Type 4 General Permit shall comply with this Section by November 12, 2005.
    - 2. The owner of any on-site wastewater treatment facility other than a facility identified in subsection (G)(1) shall comply with this Section by July 1, 2006.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2002 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-A317. Nitrogen Management Area**



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- A.** The Director may designate a new Nitrogen Management Area to control groundwater pollution by sources of nitrogen regulated by Title 49, Chapter 2, Article 3 of the Arizona Revised Statutes and not covered under an individual permit, modify the boundaries or requirements of a Nitrogen Management Area, or rescind designation of a Nitrogen Management Area.
1. If existing conditions or trends in nitrogen loading to an aquifer will cause or contribute to an exceedance of the Aquifer Water Quality Standard for nitrate at a point or points of current or reasonably foreseeable use of the aquifer, the Director shall use the following criteria to determine whether to designate the area as a Nitrogen Management Area:
    - a. Population of the area;
    - b. The degree to which the area is unsewered;
    - c. Gross areal nitrogen loading, calculated as the amount of nitrogen discharged into the subsurface by use of on-site wastewater treatment facilities, divided by the land area under consideration for designation as a Nitrogen Management Area;
    - d. Population growth rate of area;
    - e. Existing contamination of groundwater by nitrogen species;
    - f. Existing and potential impact to groundwater by sources of nitrogen other than on-site wastewater treatment facilities;
    - g. Characteristics of the vadose zone and aquifer;
    - h. Location, number, and areal extent of existing and potential sources of nitrogen;
    - i. Location and characteristics of existing and potential drinking water supplies; and
    - j. Any other information relevant to determining the severity of actual or potential nitrogen impact on the aquifer.
  2. The Director may modify the boundaries or requirements of a Nitrogen Management Area or rescind designation of a Nitrogen Management Area based on:
    - a. A material change to one or more criterion specified in subsection (A)(1); or
    - b. The adoption by a local agency of a master plan to substantially sewer the area as soon as possible, but with a completion deadline within 10 years, unless a completion deadline of more than 10 years is approved by the Director.
- B.** Preliminary designation, modification, or rescission.
1. The Director shall provide a report to the mayors and members of the Board of Supervisors of all towns, cities, and counties and the directors of all sanitary districts affected by the Department's proposed action to designate, modify, or rescind a Nitrogen Management Area as follows:
    - a. If the Department proposes to designate a Nitrogen Management Area, the Department shall provide a report discussing each criterion specified in subsection (A)(1).
    - b. If the Department proposes to modify the boundaries or requirements of a Nitrogen Management Area or rescind the designation of a Nitrogen Management Area, the Department shall provide a report discussing applicable criteria in subsections (A)(1) and (2).
  2. The town, city, county, or sanitary district receiving the Director's report may provide written comments to the Department within 120 days to dispute the factual information presented in the report and supply any information supporting the comments.
  3. The Director shall evaluate the comments and supporting information obtained under subsection (B)(2) and either designate, modify, or rescind the Nitrogen Management Area or withdraw the proposal.
- C.** Final designation.
1. If the Director designates or modifies the Nitrogen Management Area, the Department shall:
    - a. Issue or modify the Nitrogen Management Area designation and any special provisions established for the area to control groundwater pollution by sources of nitrogen regulated by Title 49, Chapter 2, Article 3 of the Arizona Revised Statutes but not covered under an individual permit. The Department shall provide notice to the mayors and members of the Board of Supervisors of all towns, cities, and counties and the directors of all sanitary districts affected by the determination;
    - b. Maintain the designation and a map showing the boundaries of the Nitrogen Management Area at the Arizona Department of Environmental Quality, 1110 West Washington, Phoenix, Arizona 85007 and on the Department's web site at [www.azdeq.gov](http://www.azdeq.gov); and
    - c. Provide, upon request, a copy of the Nitrogen Management Area designation and a map of the area.
  2. If the Director withdraws the preliminary Nitrogen Management Area designation or rescinds the Nitrogen Management Area designation, the Director shall issue a determination stating the decision and post it on the Department's web site at [www.azdeq.gov](http://www.azdeq.gov).
- D.** Nitrogen Management Area requirements. Within a Nitrogen Management Area:
1. The Department shall issue a Construction Authorization, under R18-9-A301(D)(1)(c), for an on-site wastewater treatment facility only if the applicant proposes, in the Notice of Intent to Discharge, to employ one or more of the technologies allowed under R18-9-E302 through R18-9-E322 that achieves a discharge level containing not more than 15 mg/l of total nitrogen.
  2. An agricultural operation shall use the best control measure necessary to reduce nitrogen discharge when implementing the best management practices developed under 18 A.A.C. 9, Article 4. The Director may require the owner or operator to reassess the performance of the impoundment liner systems constructed under R18-9-403 before November 12, 2005.
  3. A person shall comply with any special provision established for the Nitrogen Management Area, as applicable, for the person's facility.

**Historical Note**

New Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**PART B. TYPE 1 GENERAL PERMITS****R18-9-B301. Type 1 General Permit**

- A.** A 1.01 General Permit allows any discharge of wash water from a sand and gravel operation, placer mining operation, or other similar activity, including construction, foundation, and underground dewatering, if only physical processes are employed and only hazardous substances at naturally occurring concentrations in the sand, gravel, or other rock material are present in the discharge.
- B.** A 1.02 General Permit allows any discharge from hydrostatic tests of a drinking water distribution system and pipelines not previously used, if all the following conditions are met:
1. The quality of the water used for the test does not exceed an Aquifer Water Quality Standard or for non-drinking

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- water pipelines, if reclaimed water is used, the reclaimed water meets Class A+ Reclaimed Water Quality Standards under A.A.C. R18-11-303 or Class B+ Reclaimed Water Quality Standards under A.A.C. R18-11-305;
2. The discharge is not to a water of the United States, unless the discharge is under an AZPDES permit; and
  3. The test site is restored to its natural grade.
- C.** A 1.03 General Permit allows any discharge from hydrostatic tests of a pipeline, tank, or appurtenance previously used for transmission of fluid, other than those previously used for drinking water distribution systems, if all the following conditions are met:
1. All liquid discharge is contained in an impoundment lined with flexible geomembrane. The liquid is evaporated or removed from the impoundment and taken to a treatment works or landfill authorized to accept the material within:
    - a. 60 days of the hydrostatic test if the liner is 10 mils, or
    - b. 180 days of the hydrostatic test if the liner is 30 mils or greater;
  2. The liner is placed over a layer, at least 3 inches thick, of well-sorted sand or finer grained material, or over an underliner that provides protection equal to or better than sand or finer grained material and the calculated seepage is less than 550 gallons per acre per day;
  3. The liner is removed and disposed of at an approved landfill unless the liner can be reused at another test location without a reduction in integrity;
  4. The test site is restored to its natural grade; and
  5. If the test waters are removed using a method not specified in subsection (C)(1), including a discharge under an AZPDES permit, the test waters meet Aquifer Water Quality Standards and the specific method is approved by the Department before the discharge.
- D.** A 1.04 General Permit allows any discharge from a facility that, for water quality sampling, hydrologic parameter testing, well development, redevelopment, or potable water system maintenance and repair purposes, receives water, drilling fluids, or drill cuttings from a well if the discharge is to the same aquifer in approximately the same location from which the water supply was originally withdrawn, or the discharge is under an AZPDES permit.
- E.** A 1.05 General Permit allows a discharge to an injection well, surface impoundment, and leach line only if the discharge is filter backwash from a potable water treatment system, condensate from a refrigeration unit, overflows from an evaporative cooler, heat exchange system return water, or swimming pool filter backwash and the discharge is less than 1000 gallons per day. The 1.05 General Permit allows a discharge of those sources to a navigable water if the discharge is authorized by an AZPDES permit.
- F.** A 1.06 General Permit allows the burial of mining industry off-road motor vehicle waste tires at the mine site in a manner consistent with the cover requirements in R18-13-1203.
- G.** A 1.07 General Permit allows the operation of dockside facilities and watercraft if the following conditions are met:
1. Docks that service watercraft equipped with toilets provide sanitary facilities at dockside for the disposal of sewage from watercraft toilets. No wastewater from sinks, showers, laundries, baths, or other plumbing fixtures at a dockside facility is discharged into waters of the state;
  2. Docks that service watercraft have conveniently located toilet facilities for men and women;
  3. No boat, houseboat, or other type of watercraft is equipped with a marine toilet constructed and operated to discharge sewage directly or indirectly into a water of the state, nor is any container of sewage placed, left, discharged, or caused to be placed, left, or discharged in or near any waters of the state by a person;
- 4.** Watercraft with marine toilets constructed to allow sewage to be discharged directly into waters of the state are locked and sealed to prevent usage. Chemical or other type marine toilets with approved storage containers are permitted if dockside disposal facilities are provided; and
- 5.** No bilge water or wastewater from sinks, showers, laundries, baths, or other plumbing fixtures on houseboats or other watercraft is discharged into waters of the state.
- H.** A 1.08 General Permit allows for any earth pit privy, fixed or transportable chemical toilet, incinerator toilet or privy, or pail or can-type privy if allowed by a county health or environmental department under A.R.S. Title 36 or a delegation agreement under A.R.S. § 49-107.
- I.** A 1.09 General Permit allows:
1. The operation of:
    - a. A sewage treatment facility with flows less than 20,000 gallons per day and approved by the Department before January 1, 2001, and
    - b. An on-site wastewater treatment facility with flows less than 20,000 gallons per day operating before January 1, 2001;
  2. The person who owns or operates a facility under subsections (I)(1)(a) or (b) to operate the facility if the following conditions are met:
    - a. The discharge from the facility does not cause or contribute to a violation of a water quality standard;
    - b. The owner or operator does not expand the facility to accommodate flows above the design flow or 20,000 gallons per day, whichever is less;
    - c. The facility only treats typical sewage;
    - d. The facility does not treat flows from commercial operations using hazardous substances or creating hazardous wastes, as defined in A.R.S. § 49-921(5);
    - e. The discharge from the facility does not create any environmental nuisance condition listed in A.R.S. § 49-141; or
    - f. The owner or operator does not alter the treatment or disposal characteristics of the original facility, except as allowed under R18-9-A309(A)(9)(a).
- J.** A 1.10 General Permit allows the operation of a sewage collection system installed before January 1, 2001 that serves downstream from the point where the daily design flow is 3000 gallons per day or that includes a manhole, force main, or lift station serving more than one dwelling regardless of flow, if:
1. The system complies with the performance standards in R18-9-E301(B),
  2. No sewage is released from the sewage collection system to the land surface, and
  3. The system is not operating under the 2.05 General Permit.
- K.** A 1.11 General Permit allows the operation of a sewage collection system that serves upstream from the point where the daily design flow is 3000 gallons per day to the building drains, or a single gravity sewer line conveying sewage from a building drain directly to an interceptor, lateral, or manhole, regardless of daily design flow, if all of the following are met:
1. The system does not cause or contribute to an exceedance of a water quality standard established in 18 A.A.C. 11, Articles 1 and 4;
  2. No sewage is released from the sewage collection system to the land surface;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

3. No environmental nuisance condition listed in A.R.S. § 49-141 is created;
  4. The system does not include a manhole, force main, or lift station serving more than one dwelling;
  5. Applicable local administrative requirements for review and approval of design and construction are followed;
  6. The performance standards specified in R18-9-E301(B) are met using:
    - a. Local building and construction codes,
    - b. Relevant design and construction standards specified in R18-9-E301, and
    - c. Appropriate operation and maintenance;
  7. The system flows directly into one of the following downstream facilities:
    - a. An on-site wastewater treatment facility;
    - b. A sewage treatment facility operating under an individual permit; or
    - c. A sewage collection system operating under a 1.10, 2.05, or 4.01 General Permit; and
  8. The system is not operating under a 2.05 General Permit.
- L.** A 1.12 General Permit allows the discharge of wastewater resulting from washing concrete from trucks, pumps, and ancillary equipment to an impoundment if the following conditions are met:
1. The person holds an AZPDES Construction General Permit authorizing the concrete washout activities;
  2. The Stormwater Pollution Prevention Plan required by the Construction General Permit issued according to 18 A.A.C. 9, Article 9, Part C, for the construction activity addresses the concrete washout activities;
  3. The vegetation at the soil base of the impoundment is cleared, grubbed, and compacted to uniform density not less than 95 percent. If the impoundment is located above grade, the berms or dikes are compacted to a uniform density not less than 95 percent;
  4. If groundwater is less than 20 feet below land surface, the impoundment is lined with a synthetic liner at least 30 mils thick;
  5. The impoundment is located at least 50 feet from any storm drain inlet, open drainage facility, or watercourse and 100 feet from any water supply well;
  6. The impoundment is designed and operated to maintain adequate freeboard to prevent overflow or discharge of wastewater;
  7. The concrete washout wastewater from any wash pad is routed to the impoundment;
  8. The impoundment receives only concrete washout wastewater;
  9. The annual average daily flow of wastewater to the impoundment is less than 3000 gallons per day; and
  10. The following closure requirements are met.
    - a. The facility is closed by removing and appropriately disposing of any liquids remaining in the impoundment,
    - b. The area is graded to prevent ponding of water, and
    - c. Closure activities are completed before filing of the Notice of Termination under the AZPDES Construction General Permit.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**PART C. TYPE 2 GENERAL PERMITS****R18-9-C301. 2.01 General Permit: Drywells That Drain Areas****Where Hazardous Substances Are Used, Stored, Loaded, or Treated**

- A.** A 2.01 General Permit allows for a drywell that drains an area where hazardous substances are used, stored, loaded, or treated.
- B.** Notice of Intent to Discharge. In addition to the requirements in R18-9-A301(B), an applicant shall submit:
  1. The Department registration number for the drywell or documentation that a drywell registration form was submitted to the Department;
  2. For a drywell constructed more than 90 days before submitting the Notice of Intent to Discharge to the Department, a certification signed, dated, and sealed by an Arizona-registered professional engineer or geologist that a site investigation has concluded that:
    - a. Analytical results from sampling the drywell settling chamber sediment for pollutants reasonably expected to be present do not exceed either the residential soil remediation levels or the groundwater protection levels;
    - b. The settling chamber does not contain sediments that could be used to characterize and compare results to soil remediation levels and the chamber has not been cleaned out within the last six months;
    - c. Neither a soil remediation level nor groundwater protection level is exceeded in soil samples collected from a boring drilled within 5 feet of the drywell and sampled in 5-foot increments starting from 5 feet below ground surface and extending to 10 feet below the base of the drywell injection pipe; or
    - d. If coarse grained lithology prevents the collection of representative soil samples in a soil boring, a groundwater investigation demonstrates compliance with Aquifer Water Quality Standards in groundwater at the applicable point of compliance;
  3. Design information to demonstrate that the requirements in subsection (C) are satisfied; and
  4. A copy of the Best Management Practices Plan described in subsection (D)(5).
- C.** Design requirements. An applicant shall:
  1. Locate the drywell no closer than 100 feet from a water supply well and 20 feet from an underground storage tank;
  2. Clearly mark the drywell "Stormwater Only" on the surface grate or manhole cover;
  3. Locate the bottom of the drywell hole at least 10 feet above groundwater. If during drilling and well installation the drywell borehole encounters saturated conditions, the applicant shall backfill the borehole with cement grout to at least 10 feet above the elevation of saturated conditions before constructing the drywell in the borehole;
  4. Ensure that the drywell design or drainage area design includes a method to remove, intercept, or collect pollutants that may be present at the operation with the potential to reach the drywell. The applicant may include a flow control or pretreatment device, such as an interceptor, sump, or another device or structure designed to remove, intercept, or collect pollutants. The applicant may use flow control or pretreatment devices listed under R18-9-C304(D)(1) or (2) to satisfy the design requirements of this subsection;
  5. Record the accurate latitude and longitude of the drywell using a Global Positioning System device or site survey; and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

6. Develop and maintain a current site plan showing the location of the drywell, the latitude and longitude coordinates of the drywell, surface drainage patterns, the location of floor drains and French drains plumbed to the drywell, water supply wells, monitor wells, underground storage tanks, and chemical and waste usage, storage, loading, and treatment areas.
- D. Operational and maintenance requirements.**
1. A permittee shall operate the drywell only for the disposal of stormwater. The permittee shall not release industrial process waters or wastes in the drywell or drywell retention basin drainage area.
  2. The permittee shall implement a Best Management Practices Plan for operation of the drywell and control of pollutants in the drywell drainage area.
  3. The permittee shall keep the Best Management Practices Plan on-site or at the closest practical place of work and provide the plan to the Department upon request.
  4. The permittee may substitute any Spill Prevention Containment and Control Plan, facility response plan, or an AZPDES Stormwater Pollution Prevention Plan that meets the requirements of this subsection for a Best Management Practices Plan. If the permittee submits a substitute for the Best Management Practices Plan, the permittee shall identify the conditions within the substitute plan that satisfy the requirements of subsection (D).
  5. The Best Management Practices Plan shall include:
    - a. A site plan showing surface drainage patterns and the location of floor drains, water supply, monitor wells, underground storage tanks, and chemical and waste usage, storage, loading, and treatment areas. The site plan shall show surface grading details designed to prevent drainage and spills of hazardous substances from leaving the drainage area and entering the drywell;
    - b. A design plan showing details of drywell design and drainage design, including flow control or pretreatment devices, such as interceptors, sumps, and other devices and structures designed to remove, intercept, and collect any pollutant that may be present at the operation with the potential to reach the drywell;
    - c. Procedures to prevent and contain spills and minimize discharges to the drywell;
    - d. Operational practices that include routine inspection and maintenance of the drywell and associated pretreatment and flow-control devices, periodic inspection of waste storage facilities, and proper handling of hazardous substances to prevent discharges to the drywell. Routine inspection and maintenance shall include:
      - i. Replacing the adsorbent material in the skimmers, if installed, when the adsorbent capacity is reached;
      - ii. Maintaining valves and associated piping for a drywell injection and treatment system;
      - iii. Maintaining magnetic caps and mats, if installed;
      - iv. Removing sludge from the oil/water separator, if installed, and replacing the filtration or adsorption material to maintain treatment capacity;
      - v. Removing sediment from the catch basin inlet filters and retention basin to maintain required storage capacity;
    - e. Procedures for periodic employee training on practices required by the Best Management Practices Plan specific to the drywell and prevention of unauthorized discharges.
6. The permittee shall implement waste management practices to prohibit and prevent discharges, other than those exempted in A.R.S. § 49-250(B)(23), in the drywell drainage area, including:
- a. Maintaining an up-to-date inventory of generated wastes and waste products;
  - b. Disposing or recycling all wastes or solvents through a company licensed to handle the material;
  - c. Where possible, collecting and storing waste in waste receptacles located outside the drywell drainage area. If the permittee collects and stores the waste within the drywell drainage area, the permittee shall collect and store the waste in properly designed receptacles; and
  - d. Using a licensed waste hauler to transport waste off-site to a permitted waste disposal facility.
- E. Inspection.** A permittee shall:
1. Conduct an annual inspection of the drywell for sediment accumulation in the chambers and the flow-control and treatment systems, and remove sediment annually or when 25 percent of the effective capacity is filled, whichever comes first, to restore capacity and ensure that the drywell functions properly. The permittee shall characterize the sediments that are removed from the drywell after inspection and dispose of the sediments according to local, state, and federal requirements; and
  2. If the stormwater fails to drain through the drywell within 36 hours, inspect the treatment system and piping to ensure that the treatment system is functioning properly, make repairs, and perform maintenance as needed to restore proper function.
- F. Recordkeeping.** A permittee shall maintain for at least 10 years, the following documents on-site or at the closest place of work and make the documents available to the Department upon request:
1. Documentation of drywell maintenance, inspections, employee training, and sampling activities;
  2. A site plan showing the location of the drywell, the latitude and longitude coordinates of the drywell, surface drainage patterns and the location of floor drains or French drains that are plumbed to the drywell or are used to alter drainage patterns, the location of water supply wells, monitor wells, underground storage tanks, and places where hazardous substances are used, stored, or loaded;
  3. A design plan showing details of drywell design and drainage design, including any flow control and pretreatment technologies;
  4. An operations and maintenance manual that includes:
    - a. Procedures to prevent and contain spills and minimize any discharge to the drywell and a list of actions and methods proposed to prevent and contain hazardous substance spills or leaks;
    - b. Methods and procedures for inspection, operation, and maintenance activities;
    - c. Procedures for spill response; and
    - d. A description of the employee training program for drywell inspections, operations, maintenance, and waste management practices;
  5. Drywell sediment waste characteristics and disposal manifest records for sediments removed during routine inspections and maintenance activities; and



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

6. Sampling plans, certified laboratory reports, and chain of custody forms for soil, sediment, and groundwater sampling associated with drywell site investigations.

**G. Spills.**

1. In the event of a spill, the permittee shall:
  - a. Notify the Department within 24 hours of any spill of hazardous or toxic substance that enters the drywell inlet;
  - b. Contain, clean up, and dispose of, according to local, state, and federal requirements, any spill or leak of a hazardous substance in the drywell drainage area and basin drainage area;
  - c. If a pretreatment system is present, verify that treatment capacity has not been exceeded; and
  - d. If the spill reaches the drywell injection pipe, drill a soil boring within 5 feet of the drywell inlet chamber and sample the soil in 5-foot increments from 5 feet below ground surface to a depth extending at least 10 feet below the base of the injection pipe to determine whether a soil remediation level or groundwater protection level has been exceeded in the subsurface. The permittee shall:
    - i. Submit the results to the Department within 60 days of the date of the spill; and
    - ii. Notify the Department if soil contamination at the facility, not related to the spill, is being addressed by an existing approved remedial action plan.
2. Based on the results of subsection (G)(1)(d), the Director may require the permittee to submit an application for clean closure or an individual Aquifer Protection Permit.

**H. Closure and decommissioning requirements.**

1. A permittee shall:
  - a. Retain a drywell drilling contractor, licensed under 4 A.A.C. 9, to close the drywell;
  - b. Remove sediments and any drainage component, such as standpipes and screens from the drywell's settling chamber and backfill the injection pipe with cement grout;
  - c. Remove the settling chamber;
  - d. Backfill the settling chamber excavation to the land surface with clean silt, clay, or engineered material. Materials containing hazardous substances are prohibited from use in backfilling the drywell; and
  - e. Mechanically compact the backfill.
2. Within 30 days of closure and decommissioning, the permittee shall submit a written verification to the Department that all material that contributed to a discharge has been removed and any reasonable probability of further discharge from the facility and of exceeding any Aquifer Water Quality Standard at the applicable point of compliance has been eliminated to the greatest degree practical. The written verification shall specify:
  - a. The reason for the closure;
  - b. The drywell registration number;
  - c. The general permit reference number;
  - d. The materials and methods used to close the drywell;
  - e. The name of the contractor who performed the closure;
  - f. The completion date;
  - g. Any sampling data;
  - h. Sump construction details, if a sump was constructed to replace the abandoned drywell; and
  - i. Any other information necessary to verify that closure has been achieved.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-C302. 2.02 General Permit: Intermediate Stockpiles at Mining Sites**

- A.** A 2.02 General Permit allows for intermediate stockpiles not qualifying as inert material under A.R.S. § 49-201(19) at a mining site.
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge under R18-9-A301(B), an applicant shall submit the construction and operation specifications used to satisfy the requirements in subsection (C)(1).
- C.** Design and operational requirements.
  1. An applicant shall design, construct, and operate the stockpile so that it does not impound water. An applicant may rely on stormwater run-on controls or facility design features, such as drains, or both.
  2. An applicant shall direct storm runoff contacting the stockpile to a mine pit or a facility covered by an individual or general permit.
  3. A permittee shall maintain any engineered feature of the facility in good working condition.
  4. A permittee shall visually inspect the facility at least quarterly and repair any defect as soon as practical.
  5. A permittee shall not add hazardous substances to the stockpiled material.
- D.** Closure requirements. In addition to the closure requirements in R18-9-A306, the following apply:
  1. If an intermediate stockpile covered under a 2.02 General Permit is permanently closed, a permittee shall remove any remaining material, to the greatest extent practical, and regrade the area to prevent impoundment of water.
  2. The permittee shall submit a narrative description of closure measures to the Department within 30 days after closure.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-C303. 2.03 General Permit: Hydrologic Tracer Studies**

- A.** A 2.03 General Permit allows for a discharge caused by the performance of tracer studies.
  1. The 2.03 General Permit does not authorize the use of any hazardous substance, radioactive material, or any substance identified in A.R.S. § 49-243(I) in a tracer study.
  2. A permittee shall complete a single tracer test within two years of the Notice of Intent to Discharge.
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit:
  1. A narrative description of the tracer test including the type and amount of tracer used;
  2. A Material Safety Data Sheet for the tracer; and
  3. Unless the injection or distribution is within the capture zone of an established passive containment system meeting the requirements of A.R.S. § 49-243(G), the following information:
    - a. A narrative description of the impacts that may occur if a solution migrates outside the test area, including a list of downgradient users, if any;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- b. The anticipated effects and expected concentrations, if possible to calculate; and
    - c. A description of the monitoring, including types of tests and frequency.
  - C. Design and operational requirements. A permittee shall:
    - 1. Ensure that injection into a well inside the capture zone of an established passive containment system that meets the requirements of A.R.S. § 49-243(G) does not exceed the total depth of the influence of the hydrologic sink;
    - 2. Ensure that injection into a well outside the capture zone of an established passive containment system that meets the requirements of A.R.S. § 49-243(G) does not exceed rock fracture pressures during injection of the tracer;
    - 3. Not add a substance to a well that is not compatible with the well's construction;
    - 4. Ensure that a tracer is compatible with the construction materials at the impoundment if a tracer is placed or collected in an existing impoundment;
    - 5. For at least two years, monitor quarterly a well that is hydraulically downgradient of the test site for the tracer if a tracer is used outside the capture zone of an established passive containment system that meets the requirements of A.R.S. § 49-243(G) and less than 85 percent of the tracer is recovered. The permittee may adjust this period with the consent of the Department if the permittee shows that the hydraulic gradient causes the tracer to reach the monitoring point in a shorter or longer period of time;
    - 6. Ensure that a tracer does not leave the site in concentrations distinguishable from background water quality; and
    - 7. Monitor the amount of tracer used and recovered and submit a report summarizing the test and results to the Department within 30 calendar days of test completion.
  - D. Recordkeeping. A permittee shall retain the following information at the site where the facility is located for at least three years after test completion and make it available to the Department upon request.
    - 1. Test protocols,
    - 2. Material Safety Data Sheet information,
    - 3. Recovery records, and
    - 4. A copy of the report submitted to the Department under subsection (C)(7).
  - E. Closure requirements.
    - 1. If a tracer was used outside the capture zone of an established passive containment system that meets the requirements of A.R.S. § 49-243(G), a permittee shall account for any tracer not recovered through attenuation, modeling, or monitoring.
    - 2. The permittee shall achieve closure immediately following the test, or if the test area is within a pollutant management area defined in an individual permit, at the conclusion of operations.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- R18-9-C304. 2.04 General Permit: Drywells that Drain Areas at Motor Fuel Dispensing Facilities Where Motor Fuels are Used, Stored, or Loaded**
- A. A 2.04 General Permit allows for a drywell that drains an area at a facility for dispensing motor fuel, as defined in A.A.C. R20-2-701(19), including a commercial gasoline station with an underground storage tank.
    - 1. A drywell at a motor fuel dispensing facility using hazardous substances is eligible for coverage under the 2.04 General Permit.
    - 2. A drywell at a vehicle maintenance facility owned or operated by a commercial enterprise or by a federal, state, county, or local government is not eligible for coverage under this general permit, unless the facility design ensures that only motor fuel dispensing areas will drain to the drywell. Areas where hazardous substances other than motor fuels are used, stored, or loaded, including service bays, are not covered under the 2.04 General Permit.
    - 3. Definition. For purposes of this Section, "hazardous substances" means substances that are components of commercially packaged automotive supplies, such as motor oil, antifreeze, and routine cleaning supplies such as those used for cleaning windshields, but not degreasers, engine cleaners, or similar products.
  - B. Notice of Intent to Discharge. In addition to the requirements in R18-9-A301(B), an applicant shall submit:
    - 1. The Department registration number for the drywell or documentation that a drywell registration form was submitted to the Department;
    - 2. For a drywell constructed more than 90 days before submitting the Notice of Intent to Discharge to the Department, a certification signed, dated, and sealed by an Arizona-registered professional engineer or geologist that a site investigation concluded that:
      - a. Analytical results from sampling sediment from the drywell settling chamber sediment for pollutants reasonably expected to be present do not exceed either the residential soil remediation levels or the groundwater protection levels;
      - b. The settling chamber does not contain sediment that could be used to characterize and compare results to soil remediation levels and the chamber has not been cleaned out within the last six months;
      - c. Neither a soil remediation level nor groundwater protection level is exceeded in soil samples collected from a boring drilled within 5 feet of the drywell and sampled in 5 foot increments starting at a depth of 5 feet below ground surface and extending to a depth of 10 feet below the base of the drywell injection pipe; or
      - d. If coarse grained lithology prevents the collection of soil samples in a soil boring, a groundwater investigation demonstrates compliance with Aquifer Water Quality Standards in groundwater at the applicable point of compliance.
    - 3. Design information to demonstrate that the requirements in subsection (C) are satisfied.
  - C. Design requirements.
    - 1. An applicant shall:
      - a. Include a flow control or pretreatment device identified in subsections (D)(1) or (2), or both, that removes, intercepts, or collects spilled motor fuel or hazardous substances before stormwater enters the drywell injection pipe;
      - b. Calculate the volume of runoff generated in the design storm event and anticipate the maximum potential contaminant release quantity to design the treatment and holding capacity of the drywell;
      - c. Follow local codes and regulations to meet retention periods for removing standing water;
      - d. Locate the drywell at least 100 feet from a water supply well and 20 feet from an underground storage tank;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- e. Locate the bottom of the drywell injection pipe at least 10 feet above groundwater. If during drilling and well installation the drywell borehole encounters saturated conditions, the applicant shall backfill the borehole with cement grout to a level at least 10 feet above the elevation at which saturated conditions were encountered in the borehole before constructing the drywell in the borehole;
  - f. Record the accurate latitude and longitude of the drywell using a Global Positioning System device or site survey and record the location on the site plans;
  - g. Clearly mark the drywell "Stormwater Only" on the surface grate or manhole cover;
  - h. Develop and maintain a current site plan showing the location of the drywell, the latitude and longitude coordinates of the drywell, surface drainage patterns and the location of floor drains and French drains that are plumbed to the drywell or are used to alter drainage patterns, water supply wells, monitor wells, underground storage tanks, and chemical and waste usage, storage, loading, and treatment areas; and
  - i. Prepare design plans showing details of drywell design and drainage design, including one or a combination of pre-approved technologies described in subsections (D)(1) and (2) designed to remove, intercept, and collect any pollutant that may be present at the operation with the potential to reach the drywell.
2. For an existing drywell, an applicant that cannot meet the design requirements in subsections (C)(1)(d) and (e) shall provide the Department with the date of drywell construction, the depth of the drywell borehole and injection pipe, the distance from the drywell to the nearest water supply well and from the drywell to the underground storage tank, and the depth to the groundwater from the bottom of the drywell injection pipe.
- D. Flow control and pretreatment.** A permittee shall ensure that motor fuels and other hazardous substances are not discharged to the subsurface. A permittee may use any of the following flow control or pretreatment technologies:
1. Flow control. The permittee shall ensure that motor fuel and hazardous substance spills are removed before allowing stormwater to enter the drywell.
    - a. Normally closed manual or automatic valve. The permittee shall leave a normally closed valve in a closed position except when stormwater is allowed to enter the drywell;
    - b. Raised drywell inlet. The permittee shall:
      - i. Raise the drywell inlet at least six inches above the bottom of the retention basin or other storage structure, or install a six-inch asphalt or concrete raised barrier encircling the drywell inlet to provide a non-draining storage capacity within the retention basin or storage structure for complete containment of a spill; and
      - ii. Ensure that the storage capacity is at least 110 percent of the volume of the design storm event required by the local jurisdiction and the estimated volume of a potential motor fuel spill based on the facility's past incident reports or incident reports for other facilities that are similar in design;
    - c. Magnetic mat or cap. The permittee shall ensure that the drywell inlet is sealed with a mat or cap at all times, except after rainfall or a storm event when the mat or cap is temporarily removed to allow stormwater to enter the drywell; and that the mat or cap is always used with a retention basin or other type of storage;
  - d. Primary sump, interceptor, or settling chamber. The permittee may use a primary sump, interceptor, or settling chamber only in combination with another flow control or pre-treatment technology.
    - i. The permittee shall remove motor fuel or hazardous substances from the sump, interceptor, or chamber before allowing stormwater to enter the drywell.
    - ii. The permittee shall install a settling chamber or sump and allow the suspended solids to settle before stormwater flows into a drywell; install the drywell injection pipe in a separate chamber and connect the sump, interceptor, or chamber to the drywell inlet by piping and valving to allow the stormwater to enter the drywell.
    - iii. The permittee may install fuel hydrocarbon detection sensors in the sump, interceptor, or settling chamber that use flow control to prevent fuel from discharging into the drywell;
2. Pretreatment. The permittee shall prevent the bypass of motor fuels and hazardous substances from the pretreatment system to the drywell during periods of high flow.
- a. Catch basin inlet filter. The permittee shall:
    - i. Install a catch basin inlet filter to fit inside a catchment drain to prevent motor fuels and hazardous substances from entering the drywell,
    - ii. Ensure that a motor fuel spill or a spill during a high rainfall does not bypass the system and directly release to the drywell injection pipe, and
    - iii. Combine the catch basin inlet filter with a flow control technology to prevent contaminated stormwater from entering the drywell injection pipe;
  - b. Combined settling chamber and an oil/water separator.
    - i. The permittee shall install a system that incorporates a catch basin inlet, a settling chamber, and an oil/water separator.
    - ii. The permittee may incorporate a self-sealing mechanism, such as fuel hydrocarbon detection sensors that activate a valve to cut off flow to the drywell inlet.
  - c. Combined settling chamber and oil/water separator, and filter/adsorption. The permittee shall:
    - i. Allow for adequate collection and treatment capacity for solid and liquid separation; and
    - ii. Allow a minimum treated outflow from the system to the drywell inlet of 20 gallons per minute. If a higher outflow rate is anticipated, the applicant shall design a larger collection system with storage capacity.
  - d. Passive skimmer.
    - i. If a passive skimmer is used, the permittee shall install sufficient hydrocarbon adsorbent materials, such as pads and socks, or suspend the materials on top of the static water level in a sump or other catchment to absorb the entire volume of expected or potential spill.
    - ii. The permittee may use a passive skimmer only in combination with another flow control or pre-treatment technology.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- E. Operation and maintenance.** A permittee shall:
1. Operate the drywell only for the subsurface disposal of stormwater;
  2. Remove or treat any motor fuel or hazardous substance spills;
  3. Replace the adsorbent material in skimmers, if installed; when the adsorbent capacity is reached;
  4. Maintain valves and associated piping;
  5. Maintain magnetic caps and mats, if installed;
  6. Remove sludge from the oil/water separator and replace the filtration or adsorption materials to maintain treatment capacity;
  7. Remove sediment from the catch basin inlet filters and retention basins to maintain required storage capacity;
  8. Remove accumulated sediment from the settling chamber annually or when 25 percent of the effective settling capacity is filled, whichever occurs first; and
  9. Provide new employee training within one month of hire and annual employee training on how to maintain and operate flow control and pretreatment technology used in the drywell.
- F. Inspection.** A permittee shall:
1. Conduct an annual inspection of the drywell for sediment accumulation in the chambers and in the flow control and treatment systems to ensure that the drywell is functioning properly; and
  2. If the stormwater fails to drain through the drywell within 36 hours, inspect the treatment system and piping to ensure that it is functioning properly, make repairs, and perform maintenance as needed to restore proper function.
- G. Recordkeeping.** A permittee shall maintain, for at least 10 years, the following documents on-site or at the closest place of work and make the documents available to the Department upon request:
1. Documentation of drywell maintenance, inspections, employee training, and sampling activities;
  2. A site plan showing the location of the drywell, the latitude and longitude coordinates of the drywell, surface drainage patterns and the location of floor drains or French drains that are plumbed to the drywell or are used to alter drainage patterns, water supply wells, monitor wells, underground storage tanks, and places where motor fuel and hazardous substances are used, stored, or loaded;
  3. A design plan showing details of drywell design and drainage design, including one or a combination of the pre-approved flow control and pretreatment technologies;
  4. An operations and maintenance manual that includes:
    - a. Procedures to prevent and contain spills and minimize any discharge to the drywell and a list of actions and specific methods proposed for motor fuel and hazardous substance spills or leaks;
    - b. Methods and procedures for inspection, operation, and maintenance activities;
    - c. Procedures for spill response; and
    - d. A description of the employee training program for drywell inspections, operations, and maintenance;
  5. Drywell sediment waste characterization and disposal manifest records for sediments removed during routine inspections and maintenance activities; and
  6. Sampling plans, certified laboratory reports, and chain of custody forms for soil, sediment, and groundwater sampling associated with drywell site investigations.
- H. Spills.**
1. In the event of a spill, a permittee shall:
    - a. Notify the Department within 24 hours of any spill of motor fuel or hazardous or toxic substances that enters into the drywell inlet;
    - b. Contain, clean up, and dispose of, according to local, state, and federal requirements, any spill or leak of motor fuel or hazardous substance in the drywell drainage area and basin drainage area;
    - c. If a pretreatment system is present, verify that treatment capacity has not been exceeded; and
    - d. If the spill reaches the injection pipe, drill a soil boring within 5 feet of the drywell inlet chamber and sample in 5-foot increments from 5 feet below ground surface to a depth extending at least 10 feet below the base of the injection pipe to determine whether a soil remediation level or groundwater protection level has been exceeded in the subsurface. The permittee shall:
      - i. Submit the results to the Department within 60 days of the date of the spill; and
      - ii. Notify the Department if soil contamination at the facility, not related to the spill, is being addressed by an existing approved remedial action plan.
  2. The Director may, based on the results of subsection (H)(1)(d), require the permittee to submit an application for clean closure or an individual Aquifer Protection Permit.
- I. Closure and decommissioning requirements.**
1. A permittee shall:
    - a. Retain a drywell drilling contractor, licensed under 4 A.A.C. 9, to close the drywell;
    - b. Remove sediments and any drainage component, such as standpipes and screens from the drywell's settling chamber and backfill the injection pipe with cement grout;
    - c. Remove the settling chamber;
    - d. Backfill the settling chamber excavation to the land surface with clean silt, clay, or engineered material. A permittee shall not use materials containing hazardous substances in backfilling the drywell; and
    - e. Mechanically compact the backfill.
  2. Within 30 days of closure and decommissioning, the permittee shall submit a written verification to the Department that all material that contributed to a discharge has been removed and any reasonable probability of further discharge from the facility and of exceeding any Aquifer Water Quality Standard at the applicable point of compliance has been eliminated to the greatest degree practical. The written verification shall specify:
    - a. The reason for the closure;
    - b. The drywell registration number;
    - c. The general permit reference number;
    - d. The materials and methods used to close the drywell;
    - e. The name of the contractor who performed the closure;
    - f. The completion date;
    - g. Any sampling data;
    - h. Sump construction details, if a sump was constructed to replace the abandoned drywell; and
    - i. Any other information necessary to verify that closure has been achieved.

**Historical Note**

New Section made by final rulemaking at 8 A.A.R. 4096, effective September 15, 2002 (Supp. 02-3). Amended by final rulemaking at 11 A.A.R. 4544, effective November

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

12, 2005 (05-3).

**R18-9-C305. 2.05 General Permit: Capacity, Management, Operation, and Maintenance of a Sewage Collection System**

- A.** Definition. For purposes of this Section, "imminent and substantial threat to public health or the environment" means when:
1. The volume of a release is more than 2000 gallons; or
  2. The volume of a release is more than 50 gallons but less than 2000 gallons and any one of the following apply:
    - a. The release entered onto a recognized public area and members of the public were present during the release or before the release was mitigated;
    - b. The release occurred on a public or private street and pedestrians were at risk of being splashed by vehicles during the release or before the release was mitigated;
    - c. The release entered a perennial stream, an intermittent stream during a time of flow, a waterbody other than an ephemeral stream, a normally dry detention or sedimentation basin, or a drywell;
    - d. The release occurred within an occupied building due to a condition in the permitted sewage collection system; or
    - e. The release occurred within 100 feet of a school or a public or private drinking water supply well.
- B.** A 2.05 General Permit allows a permittee to manage, operate, and maintain a sewage collection system under the terms of a CMOM Plan that complies with subsection (D). The Department considers a sewage collection system operating in compliance with an AZPDES permit that incorporates provisions for capacity, management, operation, and maintenance of the system to comply with the provisions of the 2.05 General Permit regardless of whether a Notice of Intent to Discharge for the system was submitted to the Department.
- C.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit:
1. The name and ownership of any downstream sewage collection system and sewage treatment facility that receives sewage from the applicant's sewage collection system;
  2. A map of the service area for which general permit coverage is sought, showing streets and sewage service boundaries for the sewage collection system;
  3. A statement indicating that the CMOM Plan is in effect and the principal officer or ranking elected official of the sewage collection system has approved the plan; and
  4. A statement indicating whether a local ordinance requires an on-site wastewater treatment facility to hookup to the sewage collection system.
- D.** CMOM Plan.
1. A permittee shall continuously implement a CMOM Plan for the sewage collection system under the permittee's ownership, management, or operational control. The CMOM Plan shall include information to comply with subsection (E)(1) and instructions on:
    - a. How to properly manage, operate, and maintain all parts of the sewage collection system that are owned or managed by the permittee or under the permittee's operational control, to meet the performance requirements in R18-9-E301(B);
    - b. How to maintain sufficient capacity to convey the base flows and peak wet weather flow of a 10-year, 24-hour storm event for all parts of the collection system owned or managed by the permittee or under the permittee's operational control;
    - c. All reasonable and prudent steps to minimize infiltration to the sewage collection system;
    - d. All reasonable and prudent steps to stop all releases from the collection system owned or managed by the permittee or under the permittee's operational control; and
    - e. The procedure for reporting releases described in subsection (F).
  2. The permittee shall maintain and update the CMOM Plan for the duration of this general permit and make it available for Department and public review.
  3. If the Department requests the CMOM Plan and upon review finds that the CMOM Plan is deficient, the Department shall:
    - a. Notify the permittee in writing of the specific deficiency and the reason for the deficiency, and
    - b. Establish a deadline of at least 60 days to allow the permittee to correct the deficiency and submit the amended provision to the Department for approval.
- E.** Sewage release response determination. If the sewage collection system releases sewage, the Director shall consider any of the following factors in determining compliance:
1. Sufficiency of the CMOM Plan.
    - a. The level of detail provided by the CMOM Plan is appropriate for the size, complexity, and age of the system;
    - b. The level of detail provided by the CMOM Plan is appropriate considering geographic, climatic, and hydrological factors that may influence the sewage collection system;
    - c. The CMOM Plan provides schedules for the periodic preventative maintenance of the sewage collection system, including cleaning of all reaches of the sewage collection system below a specified pipe diameter.
      - i. The CMOM Plan may allow inspection of sewer lines by Closed Circuit Television (CCTV) and postponement of cleaning to the next scheduled cleaning cycle if the CCTV inspection indicated that cleaning of a reach of the sewer is not needed.
      - ii. The CMOM Plan may specify inspection and cleaning schedules that differ according to pipe diameter or other characteristics of the sewer;
    - d. The CMOM Plan identifies components of the sewage collection system that have insufficient capacity to convey, when properly maintained, the peak wet weather flow of a 10-year, 24-hour storm event. For those identified components, a capital improvement plan exists for achieving sufficient wet weather flow capacity within ten years of the effective date of permit coverage;
    - e. The CMOM Plan includes an overflow emergency response plan appropriate to the size, complexity, and age of the sewage collection system considering geographic, climatic, and hydrological factors that may influence the system;
    - f. The CMOM Plan establishes a procedure to investigate and enforce against any commercial or industrial entity whose flows to the sewage collection system have caused or contributed to a release;
    - g. The CMOM Plan adequately addresses management of flows from upstream sewage collection systems not under the ownership, management, or operational control of the permittee; or

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- h. Any other factor necessary to determine if the CMOM Plan is sufficient;
  - 2. Compliance with the CMOM Plan.
    - a. The permittee's response to releases as established in the overflow emergency response plan, including whether:
      - i. Maintenance staff responds to and arrive at the release within the time period specified in the plan;
      - ii. Maintenance staff follow all written procedures to remove the cause of the release;
      - iii. Maintenance staff contain, recover, clean up, disinfect, and otherwise mitigate the release of sewage; and
      - iv. Required notifications to the Department, public health agencies, drinking water suppliers, and the public are provided;
    - b. The permittee's activities and timeliness in:
      - i. Implementing specified periodic preventative maintenance measures;
      - ii. Implementing the capital improvement plan; and
      - iii. Investigating and enforcing against an upstream sewage collection system, not under the ownership and operational control of the permittee, if those systems are impediments to the proper management of flows in the permittee's sewage collection system; or
    - c. Any other factor necessary to determine CMOM Plan compliance;
  - 3. Compliance with the reporting requirements in subsection (F) and the public notice requirements in subsection (G); or
  - 4. The release substantially endangers public health or the environment.
- F. Reporting requirements.**
- 1. Sewage releases.
    - a. A permittee shall report to the Department, by telephone, facsimile, or on the applicable notification form on the Department's Internet web site, any release that is an imminent and substantial threat to public health or the environment as soon as practical, but no later than 24 hours of becoming aware of the release.
    - b. A permittee shall submit a report to the Department within five business days after becoming aware of a release that is an imminent and substantial threat to public health or the environment. The report shall include:
      - i. The location of the release;
      - ii. The sewage collection system component from which the release occurred;
      - iii. The date and time the release began, was stopped, and when mitigation efforts were completed;
      - iv. The estimated number of persons exposed to the release, the estimated volume of sewage released, the reason the release is considered an imminent and substantial threat to public health or the environment if the volume is 2000 gallons or less, and where the release flowed;
      - v. The efforts made by the permittee to stop, contain, and clean up the released material;
      - vi. The amount and type of disinfectant applied to mitigate any associated public health or environmental risk; and
      - vii. The cause of the release or effort made to determine the cause and any effort made to help prevent a future reoccurrence.
  - 2. Annual report. The permittee shall:
    - a. Submit an annual report to the Department postmarked no later than March 1. The report shall:
      - i. Tabulate all releases of more than 50 gallons from the permitted sewage collection system;
      - ii. Provide the date of any release that is an imminent and substantial threat to public health or the environment; and
      - iii. For other reportable releases under subsection (F)(2)(a)(i), provide the information in subsection (F)(1)(b);
    - b. Provide an amended map of the service area boundaries if, during the calendar year, any area was removed from the service area or if any area was added to the service area that the permittee wishes to include under the 2.05 General Permit and associated CMOM Plan.
- G. Public notice.** The permittee shall:
- 1. Post a notice, in a format approved by the Department, at any location where there were more than three reportable releases under subsection (F)(2)(a) from the sewage collection system during any 12-month period,
  - 2. Include within the notice a warning that identified the releases or potential releases at the location and potential health hazards from any release,
  - 3. Post the notice at a place where the public is likely to come in contact with the release, and
  - 4. Maintain the postings until no releases from the location are reported for at least 12 months from the last release and the permittee followed all actions specified in the CMOM Plan to prevent releases at that location during the period.
- Historical Note**  
New Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- R18-9-C306. 2.06 General Permit: Fish Hatchery Discharge to a Perennial Surface Water**
- A.** A 2.06 General Permit allows a fish hatchery to discharge to a perennial surface water if Aquifer Water Quality Standards are met at the point of discharge and the fish hatchery is operating under a valid AZPDES permit.
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall provide:
- 1. The applicable AZPDES permit number;
  - 2. A description of the facility; and
  - 3. A laboratory report characterizing the wastewater discharge, including the analytical results for all numeric Aquifer Water Quality Standards under R18-11-406.
- C.** Design and operational requirements. An applicant shall:
- 1. Collect a representative sample of the discharge to demonstrate compliance with all numeric Aquifer Water Quality Standards and make the results available to the Department upon request, and
  - 2. Maintain a record of the average and daily flow rates and make it available to the Department upon request.
- Historical Note**  
New Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- PART D. TYPE 3 GENERAL PERMITS**
- R18-9-D301. 3.01 General Permit: Lined Impoundments**



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- A.** A 3.01 General Permit allows a lined surface impoundment and a lined secondary containment structure. A permittee shall:
1. Ensure that inflow to the lined surface impoundment or lined secondary containment structure does not contain organic pollutants identified in A.R.S. § 49-243(I);
  2. Ensure that inflow to the lined surface impoundment or lined secondary containment structure is from one or more of the following sources:
    - a. Evaporative cooler overflow, condensate from a refrigeration unit, or swimming pool filter backwash;
    - b. Wastewater that does not contain sewage, temporarily stored for short periods of time due to process upsets or rainfall events, provided the wastewater is promptly removed from the facility as required under subsection (D)(5). Facilities that continually contain wastewater as a normal function of facility operations are not covered under this general permit;
    - c. Stormwater runoff that is not permitted under A.R.S. § 49-245.01 because the facility does not receive solely stormwater or because the runoff is regulated but not considered stormwater under the Clean Water Act;
    - d. Emergency fire event water;
    - e. Wastewater from air pollution control devices at asphalt plants if the wastewater is routed through a sedimentation trap or sump and an oil/water separator before discharge;
    - f. Non-contact cooling tower blowdown and non-contact cooling water, except discharges from electric generating stations with more than 100 megawatts generating capacity;
    - g. Boiler blowdown;
    - h. Wastewater derived from a potable water treatment system, including clarification sludge, filtration backwash, lime and lime-softening sludge, ion exchange backwash, and reverse osmosis spent waste;
    - i. Wastewater from food washing;
    - j. Heat exchanger return water;
    - k. Wastewater from industrial laundries;
    - l. Hydrostatic test water from a pipeline, tank, or appurtenance previously used for transmission of fluid;
    - m. Wastewater treated through an oil/water separator before discharge; and
    - n. Cooling water or wastewater from food processing.
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit:
1. A listing and description of all sources of inflow;
  2. A representative chemical analysis of each expected source of inflow. If a sample is not available before facility construction, a permittee shall provide the chemical analysis of each inflow to the Department within 60 days of each inflow to the facility;
  3. A narrative description of how the conditions of this general permit are satisfied. The narrative shall include a Quality Assurance/Quality Control program for liner installation, impoundment maintenance and repair, and impoundment operational procedures; and
  4. A contingency plan that specifies actions proposed in case of an accidental release from the facility, overtopping of the impoundment, breach of the berm, or unauthorized inflows into the impoundment or containment structure.
- C.** Design and installation requirements. An applicant shall:
1. Design and construct surface water controls to:
    - a. Ensure that the impoundment or secondary containment structure maintains, using design volume or mechanical systems, normal operating volumes, if any, and any inflow from the 100-year, 24-hour storm event. The facility shall maintain at least 2 feet of freeboard or an alternative level of freeboard that the applicant demonstrates is reasonable, considering the size of the impoundment and meteorologic and other site-specific factors; and
    - b. Direct any surface water run-on from the 100-year 24-hour storm event around the facility if not intended for capture by facility;
  2. Ensure that the facility design accommodates any significant geologic hazard, addressing static and seismic stability. The applicant shall document any design adjustments made for this reason in the Notice of Intent to Discharge;
  3. Ensure that site preparation includes, as appropriate, clearing the area of vegetation, grubbing, grading, and embankment and subgrade preparation. The applicant shall ensure that supporting surface slopes and foundation are stable and structurally sound; and
  4. Comply with the following impoundment lining requirements:
    - a. If a synthetic liner is used, ensure that the liner is at least a 30-mil geomembrane liner or a 60-mil liner if High Density Polyethylene, or an alternative, that the liner's calculated seepage rate is less than 550 gallons per acre per day, and:
      - i. Anchor the liner by securing it in an engineered anchor trench;
      - ii. Ensure that the liner is ultraviolet resistant if it is regularly exposed to sunlight; and
      - iii. Ensure that the liner is constructed of a material that is chemically compatible with the wastewater or impounded solution and is not affected by corrosion or degradation;
    - b. If a soil liner is used:
      - i. Ensure that it resists swelling, shrinkage, and cracking and that the liner's calculated seepage rate is less than 550 gallons per acre per day;
      - ii. Ensure that the soil is at least 1-foot thick and compacted to a uniform density of 95 percent to meet the "Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effect (12,400 ft-lbf/ft<sup>3</sup>), D698-00a<sup>1</sup>," (2000) published by the American Society for Testing and Materials. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959; and
      - iii. Upon installation, protect the soil liner to prevent desiccation; and
    - c. For new facilities, develop and implement a construction Quality Assurance/Quality Control program that addresses site and subgrade preparation,

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

inspection procedures, field testing, laboratory testing, and final inspection after construction of the liner to ensure functional integrity.

**D. Operational requirements.** A permittee shall:

1. Maintain sufficient freeboard to manage the 100-year, 24-hour storm event including at least 2 feet of freeboard under normal operating conditions. Management of the 100-year, 24-hour storm event may be through design, pumping, or a combination of both;
2. Remove accumulated residues, sediments, debris, and vegetation to maintain the integrity of the liner and the design capacity of the impoundment;
3. Perform and document a visual inspection for damage to the liner and for accumulation of residual material at least monthly. The operator shall conduct an inspection within 72 hours after the facility receives a significant volume of stormwater inflow;
4. Repair damage to the liner by following the Quality Assurance/Quality Control Plan required under subsection (B)(3); and
5. Remove all inflow from the impoundment as soon as practical, but no later than 60 days after a temporary event, for facilities designed to contain inflow only for temporary events, such as process upsets.

**E. Recordkeeping.** A permittee shall maintain at the site, the following information for at least 10 years and make it available to the Department upon request:

1. Construction drawings and as-built plans, if available;
2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results, and facility closure;
3. Capacity design criteria;
4. A list of standard operating procedures;
5. The construction Quality Assurance/Quality Control program documentation; and
6. Records of any inflow into the impoundment other than those permitted by this Section.

**F. Reporting requirements.**

1. If the liner leaks, as evidenced by a drop in water level not attributable to evaporation, or if the berm breaches or an impoundment is overtopped due to a catastrophic or other significant event, the permittee shall report the circumstance to the Department within five days of discovery and implement the contingency plan required in subsection (B)(4). The permittee shall submit a final report to the Department within 60 days of the event summarizing the circumstances of the problem and corrective actions taken.
2. The permittee shall report unauthorized flows into the impoundment to the Department within five days of discovery and implement the contingency plan required in subsection (B)(4).

**G. Closure requirements.** The permittee shall notify the Department of the intent to close the facility permanently. Within 90 days following closure notification the permittee shall comply with the following requirements, as applicable:

1. Remove liquids and any solid residue on the liner and dispose appropriately;
2. Inspect the liner for evidence of holes, tears, or defective seams that could have leaked;
3. If evidence of leakage is discovered, remove the liner in the area of suspected leakage and sample potentially impacted soil. If soil remediation levels are exceeded, the permittee shall define the lateral and vertical extent of contamination and, within 60 days of the exceedance, notify the Department and submit an action plan for

achieving clean closure for the Department's approval before implementing the plan;

4. If there is no evidence of holes, tears, or defective seams that could have leaked:
  - a. Cover the liner in place or remove it for disposal or reuse if the impoundment is an excavated impoundment,
  - b. Remove and dispose of the liner elsewhere if the impoundment is bermed, and
  - c. Grade the facility to prevent the impoundment of water; and
5. Notify the Department within 60 days following closure that the action plan was implemented and the closure is complete.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-D302. 3.02 General Permit: Process Water Discharges from Water Treatment Facilities**

**A.** A 3.02 General Permit allows filtration backwash and discharges obtained from sedimentation and coagulation in the water treatment process from facilities that treat water for industrial process or potable uses. The permittee shall ensure that:

1. Liquid fraction. The discharge meets:
  - a. All numeric Aquifer Water Quality Standards for inorganic chemicals, organic chemicals, and pesticides established in R18-11-406(B) through (D);
  - b. The discharge meets one of the following criteria for microbiological contaminants:
    - i. Either the concentration of fecal coliform organisms is not more than 2/100 ml or the concentration of *E. coli* bacteria is not more than 1/100 ml, or
    - ii. Either the concentration of fecal coliform organisms is less than 200/100 ml or the concentration of *E. coli* bacteria is less than 126/100 ml if the average daily flow processed by the water treatment facility is less than 250,000 gallons; and
2. Solid Fraction. The solid material in the discharge qualifies as inert material, as defined in A.R.S. § 49-201(19).

**B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit:

1. A characterization of the discharge, including a representative chemical and biological analysis of expected discharges and all source waters; and
2. The design capacity of any impoundment covered by this general permit.

**C.** Impoundment design and siting requirements. An applicant shall:

1. Ensure that the depth to the static groundwater table is greater than 20 feet;
2. Not locate the area of discharge immediately above karstic or fractured bedrock, unless the discharge meets the microbial limits specified in subsection (A)(1)(b)(i);
3. Maintain a minimum horizontal setback of 100 feet between the facility and any water supply well;
4. Design and construct an impoundment to maintain, using design volume or mechanical systems, normal operating volumes and any inflow from the 100-year, 24-hour storm event. The applicant shall:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. Divert any surface water run-on from the 100-year, 24-hour storm event around the facility if not intended for capture by facility design; and
    - b. Design the facility to maintain 2 feet of freeboard or an alternative level of freeboard that the applicant demonstrates is reasonable, considering meteorological factors, the size of the impoundment, and other site-specific factors; or
    - c. Discharge to surface water under the conditions of an AZPDES permit; and
  - 5. Manage off-site disposal of sludge according to A.R.S. Title 49, Chapter 4.
  - D. Operational requirements.**
    - 1. Inorganic chemical, organic chemical, and pesticide monitoring.
      - a. The permittee shall monitor any discharge annually to determine compliance with the requirements of subsection (A).
      - b. If the concentration of any pollutant exceeds the numeric Aquifer Water Quality Standard, the permittee shall submit a report to the Department with a proposal for mitigation and shall increase monitoring frequency for that pollutant to quarterly.
      - c. If, in the quarterly sampling, the condition in subsection (D)(1)(b) continues for two consecutive quarters, the permittee shall submit an application for an individual permit.
    - 2. Microbiological contaminant monitoring.
      - a. The permittee shall monitor any discharge annually to determine compliance with the requirements of subsection (A)(1)(b).
      - b. If the concentration of any pollutant exceeds the limits established in subsection (A)(1)(b), the permittee shall submit a report to the Department with a proposal for mitigation and increase monitoring frequency for that pollutant to monthly.
      - c. If, in the monthly sampling, the condition in subsection (D)(2)(b) continues for three consecutive months, the permittee shall submit an application for an individual permit.
  - E. Recordkeeping.** A permittee shall maintain at the site, the following information, if applicable for the disposal method, for at least 10 years, and make it available to the Department upon request:
    - 1. Construction drawings and as-built plans, if available;
    - 2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results, and facility closure;
    - 3. Water quality data collected under subsection (D);
    - 4. Standard operating procedures; and
    - 5. Records of any discharge other than those identified under subsection (B).
  - F. Reporting requirements.** The permittee shall:
    - 1. Report unauthorized flows into the impoundment to the Department within five days of discovery, and
    - 2. Submit the report required in subsections (D)(1)(b) or (2)(b) within 30 days of receiving the analytical results.
- A.** A 3.03 General Permit allows a facility to discharge water from washing vehicle exteriors and vehicle equipment. The 3.03 General Permit does not authorize:
    - 1. Discharge water that typically results from the washing of vehicle engines unless the discharge is to a lined surface impoundment;
    - 2. Direct discharges of sanitary sewage, vehicle lubricating oils, antifreeze, gasoline, paints, varnishes, solvents, pesticides, or fertilizers;
    - 3. Discharges resulting from washing the interior of vessels used to transport fuel products or chemicals, or washing equipment contaminated with fuel products or chemicals; or
    - 4. Discharges resulting from washing the interior of vehicles used to transport mining concentrates that originate from the same mine site, unless the discharge is to a lined surface impoundment.
  - B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit a narrative description of the facility and a design of the disposal system and wash operations.
  - C.** Design, installation, and testing requirements. An applicant shall:
    - 1. Design and construct the wash pad:
      - a. To drain and route wash water to a sump or similar sediment-settling structure and an oil/water separator or a comparable pretreatment technology;
      - b. Of concrete or material chemically compatible with the wash water and its constituents; and
      - c. To support the maximum weight of the vehicle or equipment being washed with an appropriate safety factor;
    - 2. Not use unlined ditches or natural channels to convey wash water;
    - 3. Ensure that a surface impoundment meets the requirements in R18-9-D301(C)(1) through (3). The applicant shall ensure that berms or dikes at the impoundment can withstand wave action erosion and are compacted to a uniform density not less than 95 percent;
    - 4. Ensure that a surface impoundment required for wash water described in subsection (A)(1) meets the design and installation requirements in R18-9-D301(C);
    - 5. If wash water is received by an unlined surface impoundment or engineered subsurface disposal system, the applicant shall:
      - a. Ensure that the annual daily average flow is less than 3000 gallons per day;
      - b. Maintain a minimum horizontal setback of 100 feet between the impoundment or subsurface disposal system and any water supply well;
      - c. Ensure that the bottom of the surface impoundment or subsurface disposal system is at least 50 feet above the static groundwater level and the intervening material does not consist of karstic or fractured bedrock;
      - d. Ensure that the wash water receives primary treatment before discharge through, at a minimum, a sump or similar structure for settling sediments or solids and an oil/water separator or a comparable pretreatment technology designed to reduce oil and grease in the wastewater to 15 mg/l or less;
      - e. Withdraw the separated oil from the oil/water separator using equipment such as adjustable skimmers, automatic pump-out systems, or level sensing systems to signal manual pump-out; and

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-D303. 3.03 General Permit: Vehicle and Equipment Washes**

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- f. If a subsurface disposal system is used, design the system to prevent surfacing of the wash water.
- D. Operational requirements.** The permittee shall:
1. Inspect the oil/water separator before operation to ensure that there are no leaks and that the oil/water separator is in operable condition;
  2. Inspect the entire facility at least quarterly. The inspection shall, at a minimum, consist of a visual examination of the wash pad, the sump or similar structure, the oil/water separator, and all surface impoundments;
  3. Visually inspect each surface impoundment at least monthly, to ensure the volume of wash water is maintained within the design capacity and freeboard limitation;
  4. Repair damage to the integrity of the wash pad or impoundment liner as soon as practical;
  5. Maintain the oil/water separator to achieve the operational performance of the separator;
  6. Remove accumulated sediments in all surface impoundments to maintain design capacity; and
  7. Use best management practices to minimize the introduction of chemicals not typically associated with the wash operations. Only biodegradable surfactant or soaps are allowed. The permittee shall not use products that contain chemicals in concentrations likely to cause a violation of an Aquifer Water Quality Standard at the applicable point of compliance.
- E. Monitoring requirements.**
1. If wash water is discharged to an unlined surface impoundment or other area for subsurface disposal, the permittee shall monitor the wash water quarterly at the point of discharge for pH and for the presence of C<sub>10</sub> through C<sub>32</sub> hydrocarbons using a Department of Health Services certified method.
  2. If pH is not between 6.0 and 9.0 or the concentration of C<sub>10</sub> through C<sub>32</sub> hydrocarbons exceeds 50 mg/l, the permittee shall, within 30 days of the monitorings, submit a report to the Department with a proposal for mitigation and shall increase monitoring frequency to monthly.
  3. If the condition in subsection (E)(2) persists for three consecutive months, the permittee shall submit, within 90 days, an application for an individual permit.
- F. Recordkeeping.** A permittee shall maintain the following information for at least 10 years and make it available to the Department upon request:
1. Construction drawings and as-built plans, if available;
  2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results, and facility closure; and
  3. The Material Safety Data Sheets for the chemicals used in the wash operations and any required monitoring results.
- G. Closure requirements.** A permittee shall comply with the closure requirements specified in R18-9-D301(G) if a liner has been used. If no liner is used the permittee shall remove and appropriately dispose of any liquids and grade the facility to prevent impoundment of water.
- A. A 3.04 General Permit allows discharges to lined surface impoundments, lined secondary containment structures, and associated lined conveyance systems at mining sites.**
1. The following discharges are allowed under the 3.04 General Permit:
    - a. Seepage from tailing impoundments, unleached rock piles, or process areas;
    - b. Process solution temporarily stored for short periods of time due to process upsets or rainfall, provided the solution is promptly removed from the facility as required under subsection (D);
    - c. Stormwater runoff not permitted under A.R.S. § 49-245.01 because the facility does not receive solely stormwater or because the runoff is regulated but not considered stormwater under the Clean Water Act; and
    - d. Wash water specific to sand and gravel operations not covered by R18-9-B301(A).
  2. Facilities that continually contain process solution as a normal function of facility operations are not eligible for coverage under the 3.04 General Permit. If a normal process solution contains a pollutant regulated under A.R.S. § 49-243(I) the 3.04 General Permit does not apply if the pollutant will compromise the integrity of the liner.
- B. Notice of Intent to Discharge.** In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit:
1. A description of the sources of inflow to the facility. An applicant shall include a representative chemical analysis of expected sources of inflow to the facility unless a sample is not available, before facility construction, in which case the applicant shall provide a chemical analysis of solution present in the facility to the Department within 90 days after the solution first enters the facility;
  2. Documentation demonstrating that the facility design and operation under subsections (C) and (D) have been reviewed by a mining engineer or an Arizona-registered professional engineer before submission to the Department; and
  3. A contingency plan that specifies actions proposed in case of an accidental release from the facility, overtopping of the impoundment, breach of the berm, or unauthorized inflows into the impoundment or containment structure.
- C. Design, construction, and installation requirements.** An applicant shall:
1. Design and construct the impoundment or secondary containment structure as specified under R18-9-D301(C)(1);
  2. Ensure that conveyance systems are capable of handling the peak flow from the 100-year storm;
  3. Construct the liner as specified in R18-9-D301(C)(4)(a);
  4. Develop and implement a Quality Assurance/Quality Control program that meets or exceeds the liner manufacturer's guidelines. The program shall address site and subgrade preparation, inspection procedures, field testing, laboratory testing, repair of seams during installation, and final inspection of the completed liner for functional integrity;
  5. If the facility is located in the 100-year flood plain, design the facility so it is protected from damage or flooding as a result of a 100-year, 24-hour storm event;
  6. Design and manage the facility so groundwater does not come into contact with the liner;
  7. Ensure that the facility design addresses any significant geologic hazard relating to static and seismic stability.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-D304. 3.04 General Permit: Non-Stormwater Impoundments at Mining Sites**

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

The applicant shall document any design adjustments made for this reason in the Notice of Intent to Discharge;

8. Ensure that the site preparation includes, as appropriate, clearing the area of vegetation, grubbing, grading, and embankment and subgrade preparation. The applicant shall ensure that supporting surface slopes and foundation are stable and structurally sound;
  9. Ensure that the liner is anchored by being secured in an engineered anchor trench. If regularly exposed to sunlight, the applicant shall ensure that the liner is ultraviolet resistant; and
  10. Use compacted clay subgrade in areas with shallow groundwater conditions.
- D. Operational requirements.** The permittee shall:
1. Maintain the freeboard required in subsection (C)(1) through design, pumping, or both;
  2. Remove accumulated residues, sediments, debris, and vegetation to maintain the integrity of the liner and the design capacity of the impoundment;
  3. Perform and document a visual inspection for cracks, tears, perforations and residual build-up at least monthly. The operator shall conduct and document an inspection after the facility receives significant volumes of stormwater inflow;
  4. Report cracks, tears, and perforations in the liner to the Department, and repair them as soon as practical, but no later than 60 days under normal operating conditions, after discovery of the crack, tear, or perforation;
  5. For facilities that temporarily contain a process solution due to process upsets, remove the process solution from the facility as soon as practical, but no later than 60 days after cessation of the upset; and
  6. For facilities that temporarily contain a process solution due to rainfall, remove the process solution from the facility as soon as practical.
- E. Recordkeeping.** A permittee shall maintain the following information for at least 10 years and make it available to the Department upon request:
1. Construction drawings and as-built plans, if available;
  2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results and facility closure;
  3. Capacity design criteria;
  4. A list of standard operating procedures;
  5. The Quality Assurance/Quality Control program required under subsection (C)(4); and
  6. Records of any unauthorized flows into the impoundment.
- F. Reporting requirements.**
1. If the liner is breached, as evidenced by a drop in water level not attributable to evaporation, or if the impoundment breaches or is overtopped due to a catastrophic or other significant event, the permittee shall report the circumstance to the Department within five days of discovery and implement the contingency plan required in subsection (B)(3). The permittee shall submit a final report to the Department within 60 days of the event summarizing the circumstances of the problem and corrective actions taken.
  2. The permittee shall report unauthorized flows into the impoundment to the Department within five days of discovery and implement the contingency plan required in subsection (B)(3).
- G. Closure requirements.**
1. The permittee shall notify the Department of the intent to close the facility permanently.
2. Within 90 days following closure notification the permittee shall comply with the following requirements, as applicable:
    - a. Remove liquids and any solid residue on the liner and dispose appropriately;
    - b. Inspect the liner for evidence of holes, tears, or defective seams that could have leaked;
    - c. If evidence of leakage is discovered, remove the liner in the area of suspected leakage and sample potentially impacted soil. If soil remediation levels are exceeded, the permittee shall, within 60 days notify the Department and submit an action plan for the Department's approval before implementing the plan;
    - d. If there is no evidence of holes, tears, or defective seams that could have leaked:
      - i. Cover the liner in place or remove it for disposal or reuse if the impoundment is an excavated impoundment,
      - ii. Remove and dispose of the liner elsewhere if the impoundment is bermed, and
      - iii. Grade the facility to prevent the impoundment of water; and
  3. Notify the Department within 60 days following closure that the action plan has been implemented and the closure is complete.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-D305. 3.05 General Permit: Disposal Wetlands**

- A.** A 3.05 General Permit allows discharges of reclaimed water into constructed or natural wetlands, including waters of the United States, waters of the state, and riparian areas, for disposal. This general permit does not apply if the purpose of the wetlands is to provide treatment.
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit the name and individual permit number of the facility providing the reclaimed water.
- C.** Design requirements. An applicant shall:
1. Ensure that the reclaimed water released into the wetland meets numeric and narrative Aquifer Water Quality Standards for all parameters except for coliform bacteria and is Class A+ reclaimed water. A+ reclaimed water is wastewater that has undergone secondary treatment established under R18-9-B204(B)(1), filtration, and meets a total nitrogen concentration under R18-9-B204(B)(3) and fecal coliform limits under R18-9-B204(B)(4);
  2. Maintain a minimum horizontal separation of 100 feet between any water supply well and the maximum wetted area of the wetland;
  3. Post signs at points of access and every 250 feet along the perimeter of the wetland stating, "CAUTION. THESE WETLANDS CONTAIN RECLAIMED WATER. DO NOT DRINK." The applicant shall ensure that the signs are in English and Spanish, or in English with inclusion of the international "do not drink" symbol; and
  4. Ensure that wetland siting is consistent with local zoning and land use requirements.
- D.** Operational requirements.
1. A permittee shall manage the wetland to minimize vector problems.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

2. The permittee shall submit to the Department and implement a Best Management Practices Plan for operation of the wetland. The Best Management Practices Plan shall include:
    - a. A site plan showing the wetland footprint, point of inflow, stormwater drainage, and placement of vegetation;
    - b. Management of flows into and through the wetland to minimize erosion and damage to vegetation;
    - c. Management of visitation and use of the wetlands by the public;
    - d. A management plan for vector control;
    - e. A plan or criteria for enhancing or supplementing of wetland vegetation; and
    - f. Management of shallow groundwater conditions on existing on-site wastewater treatment facilities.
  3. The permittee shall perform quarterly inspections to review bank integrity, erosion evidence, the condition of signage and vegetation, and correct any problem noted.
  - E. Recordkeeping. A permittee shall maintain the following information for at least 10 years and make it available to the Department upon request:
    1. Construction drawings and as-built plans, if available; and
    2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results, and facility closure.
  - F. Reporting requirements. The permittee shall, by January 30, provide the Department in writing with an annual assessment of the biological condition of the wetland, including the volume of inflow to the wetland in the past year.
- a. Ensure that, if a synthetic liner is used, such as geomembrane, the liner is underlain by at least 6 inches of prepared and compacted subgrade;
  - b. Anchor the liner along the perimeter of the treatment wetland; and
  - c. Manage the plants in the treatment wetland to prevent species with root penetration that impairs liner performance;
  3. Design the treatment wetland for optimum:
    - a. Sizing appropriate for the anticipated treatment,
    - b. Cell configuration,
    - c. Vegetative species composition, and
    - d. Berm configuration;
  4. Construct and locate the treatment wetland so that it:
    - a. Maintains physical integrity during a 100-year, 24-hour storm event; and
    - b. Operates properly during a 25-year, 24-hour storm event;
  5. Ensure that the bottom of the treatment wetland is at least 20 feet above the seasonal high groundwater table; and
  6. If public access to the treatment wetland is anticipated or encouraged, post signs at points of access and every 250 feet along the perimeter of the treatment wetland stating, "CAUTION. THESE WETLANDS CONTAIN MINE DRAINAGE WATER. DO NOT DRINK." The permittee shall ensure that the signs are in English and Spanish, or in English with inclusion of the international "do not drink" symbol.
- D. Operational requirements.
1. The permittee shall monitor the water leaving the treatment wetlands at least quarterly for the standards specified in subsection (C)(1)(b). Monitoring shall include nutrients or other constituents used as indicators of treatment wetland performance.
  2. The permittee shall submit to the Department and implement a Best Management Practices Plan for operation of the treatment wetland. The Best Management Practices Plan shall include:
    - a. A site plan showing the treatment wetland footprint, point of inflow, stormwater drainage, and placement of vegetation;
    - b. A contingency plan to address problems, including treatment performance, wash-out and vegetation die-off, and a plan to apply for an individual permit if the treatment wetland is unable to achieve the treatment standards in subsection (C)(1)(b) on a continued basis;
    - c. Management of flows into and through the treatment wetland to minimize erosion and damage to vegetation;
    - d. A description of the measures for restricting access to the treatment wetlands by the public;
    - e. A management plan for vector control; and
    - f. A plan or criteria for enhancing or supplementing treatment wetland vegetation.
  3. The permittee shall perform quarterly inspections to review the bank and liner integrity, erosion evidence, and the condition of signage and vegetation, and correct any problems noted.
- E. Recordkeeping. A permittee shall maintain the following information for at least 10 years and make it available to the Department upon request:
1. Construction drawings and as-built plans, if available; and

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-D306. 3.06 General Permit: Constructed Wetlands to Treat Acid Rock Drainage at Mining Sites**

- A. A 3.06 General Permit allows the operation of constructed wetlands that receive, with the intent to treat, acid rock drainage from a closed facility.
- B. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit a design, including information on the quality of the influent, the treatment process to be used, the expected quality of the wastewater, and the nutrients and other constituents that will indicate wetland performance.
- C. Design, construction, and installation. An applicant shall:
  1. Ensure that:
    - a. Water released into the treatment wetland is compatible with construction materials and vegetation;
    - b. Water released from the treatment wetland:
      - i. Meets numeric Aquifer Water Quality Standards,
      - ii. Has a pH between 6.0 and 9.0, and
      - iii. Has a sulfate concentration less than 1000 mg/l; and
    - c. Water released from the treatment wetland complies with and is released under an individual permit and an AZPDES Permit, if required;
  2. Construct the treatment wetland with a liner, using a low-hydraulic conductivity synthetic liner, site-specific liner, or both, to achieve a calculated seepage rate of less than 550 gallons per acre per day. The applicant shall:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results, and facility closure.
- F. Reporting requirements.**
1. If preliminary laboratory results indicate that the quality of the water leaving the treatment wetlands does not meet the standards specified in subsection (C)(1)(b), the permittee may request that the laboratory re-analyze the sample before reporting the results to the Department. The permittee shall:
    - a. Conduct verification sampling within 15 days of receiving final laboratory results,
    - b. Conduct verification sampling only for parameters that are present in concentrations greater than the standards specified in subsection (C)(1)(b), and
    - c. Notify the Department in writing within five days of receiving final laboratory results.
  2. If the final laboratory result confirms that the quality of the water leaving the treatment wetlands does not meet the standards in subsection (C)(1)(b), the permittee shall implement the contingency plan required by subsection (D)(2)(b) and notify the Department that the plan is being implemented.
  3. The permittee shall, by January 30, provide the Department in writing with an annual assessment of the biological condition of the treatment wetland, including the volume of inflow to the treatment wetland in the past year.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- R18-9-D307. 3.07 General Permit: Tertiary Treatment Wetlands**
- A.** A 3.07 General Permit allows constructed wetlands that receive with the intent to treat, discharges of reclaimed water that meet the secondary treatment level requirements specified in R18-9-B204(B)(1).
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit:
1. The name and individual permit number of any facility that provides the reclaimed water to the treatment wetland;
  2. The name and individual permit number of any facility that receives water released from the treatment wetland;
  3. The design of the treatment wetland construction and management project, including information on the quality of the influent, the treatment process, and the expected quality of the wastewater;
  4. A Best Management Practices Plan that includes:
    - a. A site plan showing the treatment wetland footprint, point of inflow, stormwater drainage, and placement of vegetation;
    - b. A contingency plan to address any problem, including treatment performance, wash-out, and vegetation die-off;
    - c. A management plan for flows into and through the treatment wetland to minimize erosion and damage to vegetation;
    - d. A description of the measures for restricting access to the treatment wetlands by the public;
    - e. A management plan for vector control; and
  - f. A plan or criteria for enhancing or supplementing treatment wetland vegetation.
- C. Design requirements.** An applicant shall:
1. Release water from the treatment wetland under an individual permit and an AZPDES permit, if required. The applicant shall release water from the treatment wetland only to a direct reuse site if the site is permitted to receive reclaimed water of the quality generated under the individual permit specified in subsection (B)(1);
  2. Construct and locate the treatment wetland so that it:
    - a. Maintains physical integrity during a 100-year, 24-hour storm event; and
    - b. Operates properly during a 25-year, 24-hour storm event;
  3. Ensure that the bottom of the treatment wetland is at least 20 feet above the seasonal high groundwater table;
  4. Maintain a minimum horizontal separation of 100 feet between a water supply well and the maximum wetted area of the treatment wetland;
  5. Maintain the setbacks specified in R18-9-B201(I) for no noise, odor, or aesthetic controls between the property boundary at the site and the maximum wetted area of the treatment wetland;
  6. Fence the treatment wetland area to prevent unauthorized access;
  7. Post signs at points of access stating "CAUTION. THESE WETLANDS CONTAIN RECLAIMED WATER, DO NOT DRINK." The applicant shall ensure that the signs are in English and Spanish, or in English with inclusion of the international "do not drink" symbol;
  8. Construct the treatment wetland with a liner using low hydraulic conductivity liner, site-specific liner, or both, to achieve a calculated seepage rate of less than 550 gallons per acre per day. The applicant shall:
    - a. Ensure that if a synthetic liner is used, such as geomembrane, the liner is underlain by at least 6 inches of prepared and compacted subgrade;
    - b. Anchor the liner along the perimeter of the treatment wetland; and
    - c. Manage the plants in the treatment wetland to prevent species with root penetration that impairs liner performance;
  9. Calculate the size and depth of the treatment wetland so that the rate of flow allows adequate treatment detention time. The applicant shall design the treatment wetland with at least two parallel treatment cells to allow for efficient system operation and maintenance;
  10. Ensure that the treatment wetland vegetation includes cat-tails, bulrush, common reed, or other species of plants with high pollutant treatment potential to achieve the intended water quality identified in subsection (B)(3); and
  11. Ensure that construction and operation of the treatment wetlands is consistent with local zoning and land use requirements.
- D. Operational requirements.** The permittee shall:
1. Implement the Best Management Practices Plan approved under subsection (B);
  2. Monitor wastewater leaving the treatment wetland to ensure that discharge water quality meets the expected wastewater quality specified in subsection (B)(3). The permittee shall ensure that analyses of wastewater samples are conducted by a laboratory certified by the Department of Health Services, following the Department's Quality Assurance/Quality Control requirements;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

3. Follow the prescribed measures as required in the contingency plan under subsection (B)(4)(b) and submit a written report to the Department within five days if verification sampling demonstrates that an alert level or discharge limit is exceeded;
  4. Inspect the treatment wetlands at least quarterly for bank and liner integrity, erosion evidence, and condition of signage and vegetation, and correct any problem discovered; and
  5. Ensure that the treatment wetland is operated by a certified operator under 18 A.A.C. 5, Article 1.
- E. Recordkeeping.** A permittee shall maintain the following information for at least 10 years and make it available to the Department upon request:
1. Construction drawings and as-built plans, if available; and
  2. A log book or similar documentation to record inspection results, repair and maintenance activities, monitoring results, and facility closure.
- F. Reporting requirements.** The permittee shall, by January 30, provide the Department in writing with an annual assessment of the biological condition of the treatment wetland including the volume of inflow to the treatment wetland in the past year.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**PART E. TYPE 4 GENERAL PERMITS****R18-9-E301. 4.01 General Permit: Sewage Collection Systems**

- A.** A 4.01 General Permit allows for construction and operation of a new sewage collection system or expansion of an existing sewage collection system involving new construction as follows:
1. A sewage collection system or portion of a sewage collection system that serves downstream from the point where the daily design flow is 3000 gallons per day based on Table 1, Unit Design Flows, except a gravity sewer line conveying sewage from a single building drain directly to an interceptor, collector sewer, lateral, or manhole regardless of daily design flow;
  2. A sewage collection system that includes a manhole; or
  3. A sewage collection system that includes a force main or lift station serving more than one dwelling.
- B. Performance.** An applicant shall design, construct, and operate a sewage collection system so that the sewage collection system:
1. Provides adequate wastewater flow capacity for the planned service area;
  2. Minimizes sedimentation, blockage, and erosion through maintenance of proper flow velocities throughout the system;
  3. Prevents releases of sewage to the land surface through appropriate sizing, capacities, and inflow and infiltration prevention measures throughout the system;
  4. Protects water quality through minimization of exfiltration losses from the system;
  5. Provides for adequate inspection, maintenance, testing, visibility, and accessibility;
  6. Maintains system structural integrity; and
  7. Minimizes septic conditions in the sewage collection system.
- C. Notice of Intent to Discharge.** In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B), an applicant shall submit the following information:
1. A statement on a form approved by the Director, signed by the owner or operator of the sewage treatment facility that treats or processes the sewage from the proposed sewage collection system.
    - a. The statement shall affirm that the additional volume of wastewater delivered to the facility by the proposed sewage collection system will not cause any flow or effluent quality limits of the individual permit for the facility to be exceeded.
    - b. If the facility is classified as a groundwater protection permit facility under A.R.S. § 49-241.01(C), or if no flow or effluent limits are applicable, the statement shall affirm that the design flow of the facility will not be exceeded;
  2. If the proposed sewage collection system delivers wastewater to a downstream sewage collection system under different ownership or control, a statement on a form approved by the Director, signed by the owner or operator of the downstream sewage collection system, affirming that the downstream system can maintain the performance required by subsection (B) when receiving the increased flows;
  3. A general site plan showing the boundaries and key aspects of the project;
  4. Construction quality drawings that provide overall details of the site and the engineered works comprising the project including:
    - a. The plans and profiles for all sewer lines, manholes, force mains, depressed sewers, and lift stations with sufficient detail to allow Department verification of design and performance characteristics;
    - b. Relevant cross sections showing construction details and elevations of key components of the sewage collection system to allow Department verification of design and performance characteristics, including the slope of each gravity sewer segment stated as a percentage; and
    - c. Drainage features and controls, and erosion protection as applicable, for the components of the project; and
    - d. Horizontal and vertical location of utilities within the area affected by the sewer line construction;
  5. Documentation of design flows for significant components of the sewage collection system and the basis for calculating the design flows;
  6. Drawings, reports, and other information that are clear, reproducible, and in a size and format specified by the Department. The applicant may submit the drawings in a Department-approved electronic format; and
  7. Design documents, including plans, specifications, drawings, reports, and calculations that are signed, dated, and sealed by an Arizona-registered professional engineer. The designer shall use good engineering judgment by following engineering standards of practice, and rely on appropriate engineering methods, calculations, and guidance.
- D. Design requirements.**
1. General Provisions. An applicant shall design and construct a new sewage collection system or an expansion of an existing sewage collection system involving new construction, according to the requirements of this general permit. An applicant shall:
    - a. Base design flows for components of the system on unit flows specified in Table 1, Unit Design Flows.
    - b. Design gravity sewer lines and all other sewage collection system components, including, manholes,

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

force mains, lift stations, depressed sewers, and appurtenant devices and structures to accommodate maximum sewage flows as follows:

- i. Any point in a sewer main when flowing full can accommodate a peak wet weather flow calculated by multiplying the sum of the upstream sources of flow from Table 1, Unit Design Flows by a dry weather peaking factor based on upstream population, as tabulated below, and adding a wet weather infiltration and inflow rate based on either a percentage of peak dry weather flow or a gallons per acre rate of flow;

| Upstream Population                                        | Dry Weather Peaking Factor               |
|------------------------------------------------------------|------------------------------------------|
| 100                                                        | 3.62                                     |
| 200                                                        | 3.14                                     |
| 300                                                        | 2.90                                     |
| 400                                                        | 2.74                                     |
| 500                                                        | 2.64                                     |
| 600                                                        | 2.56                                     |
| 700                                                        | 2.50                                     |
| 800                                                        | 2.46                                     |
| 900                                                        | 2.42                                     |
| 1000                                                       | 2.38                                     |
| 1001 to 10,000                                             | $PF = (6.330 \times p^{-0.231}) + 1.094$ |
| 10,001 to 100,000                                          | $PF = (6.177 \times p^{-0.233}) + 1.128$ |
| More than 100,000                                          | $PF = (4.500 \times p^{-0.174}) + 0.945$ |
| PF = Dry Weather Peaking Factor<br>p = Upstream Population |                                          |

- ii. For a lift station serving less than 600 single family dwelling units (d.u.), use either of the following methods to size the pumps for peak dry weather flow in gallons per minute and add an allowance for wet weather flow and infiltration:
  - (1) Peak dry weather flow =  $17 \text{ d.u.}^{0.42}$ , or
  - (2) Peak dry weather flow =  $11.2 (\text{population})^{0.42}$
- iii. If justified by the applicant, the Department may accept lower unit flow values in the served area due to significant use of low-flow fixtures, hydrographs of actual flows, or other factors;
- c. Use the "Uniform Standard Specifications for Public Works Construction" (revisions through 2004) and the "Uniform Standard Details for Public Works Construction" (revisions through 2004) published by the Maricopa Association of Governments, and the "Standard Specifications for Public Improvements," (2003 Edition), and "Standard Details for Public Improvements," (2003 Edition), published jointly by Pima County Wastewater Management and the City of Tucson, as the applicable design and construction criteria, unless the Department approves alternative design standards or specifications. An applicant in a county other than Maricopa and Pima shall use design and construction criteria from either the Maricopa Association of Governments or the Pima County Wastewater Management and the City of

Tucson for the facility unless alternative criteria are designated by the Department.

- i. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material.
- ii. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the Maricopa Association of Governments, 302 N. 1st Avenue, Suite 300, Phoenix, Arizona 85003, or on the web at <http://www.mag.maricopa.gov/archive/Newpages/on-line.htm>; or from Pima County Wastewater Management, 201 N. Stone Avenue, Tucson, Arizona 85701-1207, or on the web at <http://www.pima.gov/www/stdtdet>;
- d. Ensure that sewage collection system components are separated from drinking water distribution system components as specified in 18 A.A.C. 5, Article 5;
- e. Ensure that sewage collection system components are separated from reclaimed water system components as specified in 18 A.A.C. 9, Article 6; and
- f. Request review and approval of an alternative to a design feature specified in this Section by following the requirements in R18-9-A312(G).
2. Gravity sewer lines. An applicant shall:
  - a. Ensure that any sewer line that runs between manholes, if not straight, is of constant horizontal curvature with a radius of curvature not less than 200 feet;
  - b. Cover each sewer line with at least 3 feet of earth cover meeting the requirements of subsection (D)(2)(h). The applicant shall:
    - i. Include at least one note specifying this requirement in construction plans;
    - ii. If site-specific limitations prevent 3 feet of earth cover, provide the maximum cover attainable, construct the sewer line of ductile iron pipe or other design of equivalent or greater tensile and compressive strength, and note the change on the construction plans; and
    - iii. Ensure that the design of the pipe and joints can withstand crushing or shearing from any expected static and live load to protect the structural integrity of the pipe. Construction plans shall note locations requiring these measures;
  - c. If sewer lines cross or are constructed in floodways;
    - i. Place the lines at least 2 feet below the level of the 100-year storm scour depth and calculated 100-year bed degradation and construct the lines using ductile iron pipe or pipe with equivalent tensile strength, compressive strength, shear resistance, and scour protection.
    - ii. If it is not possible to maintain the 2 feet of clearance specified in subsection (D)(2)(c)(i), using the process described in R18-9-A312(G), provide a design that ensures that the sewer line will withstand any lateral and vertical load for the scour and bed degradation conditions specified in subsection (D)(2)(c)(i);
    - iii. Ensure that sewer lines constructed in a floodway extend at least 10 feet beyond the boundary of the 100-year storm scouring;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- iv. If a sewer line is constructed in a floodway and is longer than the applicable maximum manhole spacing distance in subsection (D)(3)(a), using the process described in R18-9-A312(G), provide a design that ensures the performance standards in subsection (B) are met; and
  - v. Note locations requiring these measures on the construction plans;
  - d. Ensure that each sewer line is 8 inches in diameter or larger except the first 400 feet of a dead end sewer line with no potential for extension may be 6 inches in diameter if the design flow criteria specified in subsections (D)(1)(a) and (D)(1)(b) are met and the sewer line is installed with a slope sufficient to achieve a velocity of at least 3 feet per second when flowing full. If the line is extended, the applicant seeking the extension shall replace the entire length with larger pipe to accommodate the new design flow unless the applicant demonstrates with engineering calculations that using the existing 6-inch pipe will accommodate the design flow;
  - e. Design sewer lines with at least the minimum slope calculated from Manning's Formula using a coefficient of roughness of 0.013 and a sewage velocity of 2 feet per second when flowing full.
    - i. An applicant may request a smaller minimum slope under R18-9-A312(G) if the smaller slope is justified by a quarterly program of inspections, flushings, and cleanings.
    - ii. If a smaller minimum slope is requested, the applicant shall not specify a slope that is less than 50 percent of that calculated from Manning's formula using a coefficient of roughness of 0.013 and a sewage velocity of 2 feet per second.
    - iii. The ratio of flow depth in the pipe to the diameter of the pipe shall not exceed 0.75 in peak dry weather flow conditions;
  - f. Design sewer lines to avoid a slope that creates a sewage velocity greater than 10 feet per second. The applicant shall construct any sewer line carrying a flow with a normal velocity of greater than 10 feet per second using ductile iron pipe or pipe with equivalent erosion resistance, and structurally reinforce the receiving manhole or sewer main;
  - g. Design and install sewer lines, connections, and fittings with materials that meet or exceed manufacturer's specifications consistent with this Chapter to:
    - i. Limit inflows, infiltration, and exfiltration;
    - ii. Resist corrosion in the ambient electrochemical environment;
    - iii. Withstand anticipated static and live loads; and
    - iv. Provide internal erosion protection;
  - h. Indicate trenching and bedding details applicable for each pipe material and size in the design plans. Unless the Department approved alternative design standards or specifications under subsection (D)(1)(c), the applicant shall place and bed the sewer lines in trenches following the specifications in "Trench Excavation, Backfilling, and Compaction" (Section 601) revised 2004, published by the Maricopa Association of Governments; and "Rigid Pipe Bedding for Sanitary Sewers" (WWM 104) revised July 2002, and "Flexible Pipe Bedding for Sanitary Sewers" (WWM 105) revised July 2002, published by Pima County Wastewater Management. This material is part of the material incorporated by reference in subsection (D)(1)(b).
  - i. Perform a deflection test of the total length of all sewer lines made of flexible materials to ensure that the installation meets or exceeds the manufacturer's recommendations and record the results;
  - j. Test each segment of the sewer line for leakage using the applicable method below and record the results:
    - i. "Standard Test Method for Installation of Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air, F1417-92(1998)," published by the American Society for Testing and Materials;
    - ii. "Standard Practice for Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method, C924-02 (2002)," published by the American Society for Testing and Materials;
    - iii. "Standard Test Method for Low-Pressure Air Test of Vitrified Clay Pipe Lines, C828-03 (2003)," published by the American Society for Testing and Materials;
    - iv. "Standard Test Method for Hydrostatic Infiltration Testing of Vitrified Clay Pipe Lines, C1091-03a (2003)," published by the American Society for Testing Materials;
    - v. "Standard Practice for Infiltration and Exfiltration Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines, C969-02 (2002)," published by the American Society for Testing Material; or
    - vi. "Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications, D2321-00 (2000)," published by the American Society for Testing Materials; or
    - vii. The material listed in subsections (D)(2)(j)(i) through (vi) is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959;
  - k. Test the total length of the sewer line for uniform slope by lamp lighting, remote camera or similar method approved by the Department, and record the results; and
  - l. Minimize the planting within the disturbed area of new sewage collection system construction of plant species having roots that are likely to reach and damage the sewer or impair the operation of the sewer or visual and vehicular access to any manhole.
3. Manholes.
- a. An applicant shall install manholes at all grade changes, size changes, alignment changes, sewer intersections, and at any location necessary to comply with the following spacing requirements:

| Sewer Pipe Diameter<br>(inches) | Maximum Manhole<br>Spacing (feet) |
|---------------------------------|-----------------------------------|
| Less than 8                     | 400                               |
| 8 to less than 18               | 500                               |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- |                                                                                                                                                              |                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| <p>18 to less than 36                      600</p> <p>36 to less than 60                      800</p> <p>60 or greater                              1300</p> | <p>(2) Where the words “pipe” or “pipeline” are used, use the word “manhole” instead.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
- b. The Department shall allow greater manhole spacing if the applicant follows the procedure provided in R18-9-A312(G) and provides documentation showing the operator possesses or has available specialized sewer cleaning equipment suitable for the increased spacing.
  - c. The applicant shall ensure that manhole design is consistent with “Pre-cast Concrete Sewer Manhole” #420-1, revised January 1, 2004 and #420-2, revised January 1, 2001, “Offset Manhole for 8” – 30” Pipe” #421 (1998), and “Sewer Manhole and Cover Frame Adjustment” #422, revised January 1, 2001, published by the Maricopa Association of Governments; and “Manholes and Appurtenant Items” (WWM 201 through WWM 211, except WWM 204, 205, and 206), revised July 2002, published by Pima County Wastewater Management. This material is part of the material incorporated by reference in subsection (D)(1)(b).
  - d. The applicant shall not locate manholes in areas subject to more than incidental runoff from rain falling in the immediate vicinity unless the manhole cover assembly is designed to restrict or eliminate storm-water inflow.
  - e. The applicant shall test each manhole using one of the following test protocols:
    - i. Watertightness testing by filling the manhole with water. The applicant shall ensure that the drop in water level following presoaking does not exceed 0.0034 of total manhole volume per hour;
    - ii. Negative air pressure testing using the “Standard Test Method for Concrete Sewer Manholes by Negative Air Pressure (Vacuum) Test, C1244-02e1 (2002),” published by the American Society for Testing and Materials. This material is incorporated by reference, does not include any later amendments or editions of the incorporated material and may be viewed at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007, or obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959; or
    - iii. Holiday testing of a lined manhole constructed with uncoated rebar using the “High-Voltage Electrical Inspection of Pipeline Coatings, RP0274-2004 (2004),” published by the National Association of Corrosion Engineers (NACE International). This material is incorporated by reference as modified below, does not include any later amendments or editions of the incorporated material and may be viewed at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or obtained from NACE International, 1440 South Creek Drive, Houston, Texas 77084-4906. The following substitutions apply:
      - (1) Where the word “metal” is used in the standard, use the word “surface” instead; and
- f. The applicant shall perform manhole testing under subsection (D)(3)(e) after installation of the manhole cone or top riser to verify watertightness integrity of the manhole from the top of the cone or riser down.
    - i. Upon satisfactory test results, the applicant shall install the manhole ring and any spacers, complete the joints, and seal the manhole to a watertight condition.
    - ii. If the applicant can install the manhole cone or top riser, spacers, and ring to final grade without disturbance or adjustment by later construction, the applicant may perform the testing from the top of the manhole ring on down.
  - g. The applicant shall locate a manhole to provide adequate visibility and vehicular maintenance accessibility following construction.
4. Force mains. An applicant may install a force main if it meets the following design, installation, and testing requirements. The applicant shall:
    - a. Design force mains to maintain a minimum flow velocity of 3 feet per second and a maximum flow velocity of 7 feet per second. The applicant may design for sustained periods of flow above 7 feet per second, if the applicant justifies the design using the process specified in R18-9-A312(G);
    - b. Ensure that force mains have the appropriate valves and controls required to prevent drainback to the lift station. If drainback is necessary during cold weather to prevent freezing, the control system may allow manual or automatic drainback;
    - c. Incorporate air release valves or other appropriate components in force mains at all high points along the line to eliminate air accumulation. If engineering calculations provided by the applicant demonstrate that air will not accumulate in a given high point under typical flow conditions, the Department shall waive the requirement for an air release valve;
    - d. Design restrained joints or thrust blocks on force mains to accommodate water hammer, surge control, and to prevent excessive movement of the force main. Submitted construction plans shall show restrained joint or thrust block locations and details;
    - e. If a force main is proposed to discharge directly to a sewage treatment facility without entering a flow equalization basin, include in the Notice of Intent to Discharge a statement from the owner or operator of the sewage treatment facility that the design is acceptable;
    - f. Design a force main to withstand a pressure of 50 pounds per square inch or more above the design working pressure for two hours and test upon completion to ensure no leakage;
    - g. Supply flow to a force main using a lift station that meets the requirements of subsection (D)(5); and
    - h. Ensure that force mains are designed to control odor.
  5. Lift stations. An applicant shall:
    - a. Secure a lift station to prevent tampering and affix on its exterior, or on the nearest vertical object if the lift station is entirely below grade, at least one warning sign that includes the 24-hour emergency phone number of the owner or operator of the collection system;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- b. Protect lift stations from physical damage from a 100-year flood event. An applicant shall not construct a lift station in a floodway;
  - c. Lift station wet well design.
    - i. Ensure that the minimum wet well volume in gallons is 1/4 of the product of the minimum pump cycle time, in minutes, and the total pump capacity, in gallons per minute;
    - ii. Protect the wet well against corrosion to provide at least a 20-year operational life;
    - iii. Ensure that wet well volume does not allow the sewage retention time to exceed 30 minutes unless the sewage is aerated, chemicals are added to prevent or eliminate hydrogen sulfide formation, or adequate ventilation is provided. Notwithstanding these measures, the applicant shall not allow the septic condition of the sewage to adversely affect downstream collection systems or sewage treatment facility performance;
    - iv. Ensure that excessively high or low levels of sewage in the wet well trigger an audible or visible alarm at the wet well site and at the system control center;
    - v. Ensure that a wet well designed to accommodate more than 5000 gallons per day has a horizontal cross-sectional area of at least 20 square feet; and
    - vi. Ensure that lift stations are designed to prevent odor from emanating beyond the lift station site;
  - d. Equip a lift station wet well with at least two pumps. The applicant shall ensure that:
    - i. The pumps are capable of passing a 2.5-inch sphere or are grinder pumps;
    - ii. The lift station is capable of operating at design flow with any one pump out of service; and
    - iii. Piping, valves, and controls are arranged to allow independent operation of each pump;
  - e. Not use suction pumps if the sewage lift is more than 15 feet. The applicant shall ensure that other types of pumps are self-priming and that pump water brake horsepower is at least 0.00025 times the product of the required discharge, in gallons per minute, and the required total dynamic head, in feet; and
  - f. For lift stations receiving an average flow of more than 10,000 gallons per day, include a standby power source and redundant wastewater level controls in the lift station design that will provide immediate service and remain available for 24 hours per day if the main power source or controls fail.
6. Depressed sewers. An applicant shall:
- a. Size the depressed sewer to attain a minimum velocity of 3 feet per second through all barrels of the depressed sewer when the flow equals or exceeds the design daily peak dry weather flow,
  - b. Design the depressed sewer to convey the sewage flow through at least two parallel pipes at least 6 inches in diameter,
  - c. Include an inlet and outlet structure at each end of the inverted sewer,
  - d. Design the depressed sewer so that the barrels are brought progressively into service as flow increases to its design value, and
  - e. Design the depressed sewer to minimize release of odors to the atmosphere.
- E. Additional Discharge Authorization requirements. An applicant shall:
- 1. Supply a signed, dated, and sealed Engineer's Certificate of Completion in a format approved by the Department that provides the following:
    - a. Confirmation that the project was completed in compliance with the requirements of this Chapter, as described in the plans and specifications corresponding to the Construction Authorization issued by the Director, or with changes that are reflected in as-built plans submitted with the Engineer's Certificate of Completion;
    - b. As-built plans, if required, that are properly identified and numbered; and
    - c. Satisfactory field test results from deflection, leakage, and uniform slope testing;
  - 2. Provide any other relevant information required by the Department to determine that the facility conforms to the terms of the 4.01 General Permit; and
  - 3. Provide a signed certification on a form approved by the Department that:
    - a. Confirms that an operation and maintenance manual exists for the sewage collection system;
    - b. Confirms that the operation and maintenance manual addresses components of operation and maintenance specified on the certification form;
    - c. Provides the 24-hour emergency number of the owner or operator of the sewage collection system; and
    - d. Provides an address where the operation and maintenance manual is maintained and confirms that the manual is available for inspection at that address by the Department on request.
- F. Operation and maintenance requirements. The permittee shall:
- 1. Operate the new sewage collection system or expansion of an existing sewage collection system involving new construction using the operation and maintenance manual certified by the owner or operator in subsection (E)(3), to meet the performance standards specified in subsection (B), unless the permittee is operating the sewage collection system under a CMOM Plan under the general permit established in R18-9-C305;
  - 2. Ensure that the sewage collection system is operated according to the operator certification requirements in 18 A.A.C. 5, Article 1; and
  - 3. For safety during operation and maintenance of lift station and other confined space components of the sewage collection system, follow all applicable state and federal confined space entry requirements.
- G. Recordkeeping. A person owning or operating a facility permitted under this Section shall maintain the documents listed in subsection (E) for the life of the facility and make them available to the Department upon request.
- H. Repairs.
- 1. A Notice of Intent to Discharge is not required for sewage collection system repairs. Repairs include work performed in response to deterioration or damage of existing structures, devices, and appurtenances with the intent to maintain or restore the system to its original design flow and operational characteristics. Repairs do not include changes in vertical or horizontal alignment.
  - 2. Components used in the repair shall meet the design, installation, and operational requirements of this Section.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E302. 4.02 General Permit: Septic Tank with Disposal by Trench, Bed, Chamber Technology, or Seepage Pit, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.02 General Permit allows for the construction and operation of a system with less than 3000 gallons per day design flow consisting of a septic tank dispensing wastewater to an approved means of disposal described in this Section. Only gravity flow of wastewater from the septic tank to the disposal works is authorized by this general permit.
1. The standard septic tank and disposal works design specified in the 4.02 General Permit serves sites where no site limitations are identified by the site investigation conducted under R18-9-A310.
  2. If site conditions allow, this general permit authorizes the discharge of wastewater from a septic tank meeting the requirements of R18-9-A314 to one of the following disposal works:
    - a. Trench,
    - b. Bed,
    - c. Chamber technology, or
    - d. Seepage pit.
- B.** Performance. An applicant shall design a system consisting of a septic tank and one of the disposal works listed in subsection (A)(2) so that treated wastewater released to the native soil meets the following criteria:
1. TSS of 75 milligrams per liter, 30-day arithmetic mean;
  2. BOD<sub>5</sub> of 150 milligrams per liter, 30-day arithmetic mean;
  3. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean; and
  4. Total coliform level of 100,000,000 (Log<sub>10</sub> 8) colony forming units per 100 milliliters, 95th percentile.
- C.** Design and installation requirements.
1. General provisions. In addition to the applicable requirements in R18-9-A312, the applicant shall:
    - a. Ensure that the septic tank meets the requirements specified in R18-9-A314;
    - b. Before placing aggregate or disposal pipe in a prepared excavation, remove all smeared or compacted surfaces from trenches by raking to a depth of 1 inch and removing loose material. The applicant shall:
      - i. Place aggregate in the trench to the depth and grade specified in subsection (C)(2);
      - ii. Place the drain pipe on aggregate and cover it with aggregate to the minimum depth specified in subsection (C)(2); and
      - iii. Cover the aggregate with landscape filter material, geotextile, or similar porous material to prevent filling of voids with earth backfill;
    - c. Use a grade board stake placed in the trench to the depth of the aggregate if the disposal pipe is constructed of drain tile or flexible pipe that will not maintain alignment without continuous support;
    - d. Disposal pipe. If two or more disposal pipes are installed, install a distribution box approved by the Department of sufficient size to receive all lateral lines and flows at the head of each disposal works and:
      - i. Ensure that the inverts of all outlets are level and the invert of the inlet is at least 1 inch above the outlets;
      - ii. Design distribution boxes to ensure equal flow and install the boxes on a stable level surface

such as a concrete slab or native or compacted soil; and

- iii. Protect concrete distribution boxes from corrosion by coating them with an appropriate bituminous coating, constructing the boxes with concrete that has a 15 to 18 percent fly ash content, or by using other equivalent means;
  - e. Construct all lateral pipes running from a distribution box to the disposal works with watertight joints and ensure that multiple disposal laterals, wherever practical, are of uniform length;
  - f. Lay pipe connections between the septic tank and a distribution box on natural ground or compact fill and construct the pipe connections with watertight joints;
  - g. Construct steps within distribution line trenches or beds, if necessary, to maintain a level disposal pipe on sloping ground. The applicant shall construct the lines between each horizontal section with watertight joints and install them on natural or unfilled ground; and
  - h. Ensure that a disposal works consisting of trenches, beds, chamber technology, or seepage pits is not paved over or covered by concrete or any material that can reduce or inhibit possible evaporation of wastewater through the soil to the land surface or oxygen transport to the soil absorption surfaces.
2. Trenches.
- a. The applicant shall calculate the trench absorption area as the total of the trench bottom area and the sum of both trench sidewall areas to a maximum depth of 48 inches below the bottom of the disposal pipe.
  - b. The applicant shall ensure that trench bottoms and disposal pipe are level. The applicant shall calculate trench sizing from the soil absorption rate specified under R18-9-A312(D) and the design flow established in R18-9-A312(B).
  - c. The following design criteria for trenches apply:

| Trenches                                                                         | Minimum               | Maximum                |
|----------------------------------------------------------------------------------|-----------------------|------------------------|
| 1. Number of trenches                                                            | 1 (2 are recommended) | No Maximum             |
| 2. Length of trench <sup>1</sup>                                                 | ----                  | 100 feet               |
| 3. Bottom width of trench                                                        | 12 inches             | 36 inches              |
| 4. Trench absorption area (sq. ft. of absorption area per linear foot of trench) | No Minimum            | 11 sq. ft.             |
| 5. Depth of cover over aggregate surrounding disposal pipe                       | 9 inches              | 24 inches <sup>2</sup> |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|                                                                                                                  |                                                                         |            |
|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|------------|
| 6. Thickness of aggregate material over disposal pipe                                                            | 2 inches                                                                | 2 inches   |
| 7. Thickness of aggregate material under disposal pipe                                                           | 12 inches                                                               | No Maximum |
| 8. Slope of disposal pipe                                                                                        | Level                                                                   | Level      |
| 9. Disposal pipe diameter                                                                                        | 3 inches                                                                | 4 inches   |
| 10. Spacing of trenches (measured between nearest side-walls)                                                    | 2 times effective depth <sup>3</sup> or five feet, whichever is greater | No Maximum |
| Notes:                                                                                                           |                                                                         |            |
| 1. If unequal trench lengths are used, proportional distribution of wastewater is required.                      |                                                                         |            |
| 2. For more than 24 inches, Standard Dimensional Ratio 35 or equivalent strength pipe is required.               |                                                                         |            |
| 3. The effective depth is the distance between the bottom of the disposal pipe and the bottom of the trench bed. |                                                                         |            |

- d. The applicant may substitute clean, durable, crushed, and washed recycled concrete for aggregate if noted in design documents and the trench absorption area calculation excludes the trench bottom.

3. Beds. An applicant shall:

- a. If a bed is installed, use the soil absorption rate specified in R18-9-A312(D) for "SAR, Bed. The applicant may, in computing the bed bottom absorption area, include the bed bottom and the perimeter sidewall area not more than 36 inches below the disposal pipe;
- b. Comply with the following design criteria for beds:

| Gravity Beds                                                                                              | Minimum                                                              | Maximum    |
|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------|
| 1. Number of disposal pipes                                                                               | 2                                                                    | No Maximum |
| 2. Length of bed                                                                                          | No Minimum                                                           | 100 feet   |
| 3. Distance between disposal pipes                                                                        | 4 feet                                                               | 6 feet     |
| 4. Spacing of beds measured between nearest sidewalls                                                     | 2 times effective depth <sup>1</sup> or 5 feet, whichever is greater | No Maximum |
| 5. Width of bed                                                                                           | 10 feet                                                              | 12 feet    |
| 6. Distance from disposal pipe to sidewall                                                                | 3 feet                                                               | 3 feet     |
| 7. Depth of cover over disposal pipe                                                                      | 9 inches                                                             | 14 inches  |
| 8. Thickness of aggregate material under disposal pipe                                                    | 12 inches                                                            | No Maximum |
| 9. Thickness of aggregate material over disposal pipe                                                     | 2 inches                                                             | 2 inches   |
| 10. Slope of disposal pipe                                                                                | Level                                                                | Level      |
| 11. Disposal pipe diameter                                                                                | 3 inches                                                             | 4 inches   |
| Note:                                                                                                     |                                                                      |            |
| 1. The effective depth is the distance between the bottom of the disposal pipe and the bottom of the bed. |                                                                      |            |

4. Chamber technology. An applicant shall:

- a. Calculate an effective chamber absorption area to size the disposal works area and determine the number of chambers needed. The effective absorption area of each chamber is calculated as follows:  

$$A = (1.8 \times B \times L) + (2 \times V \times L)$$
i. "A" is the effective absorption area of each chamber,

- ii. "B" is the exterior width of the bottom of the chamber,
- iii. "V" is the vertical height of the louvered sidewall of the chamber, and
- iv. "L" is the length of the chamber;
- b. Calculate the disposal works size and number of chambers from the effective absorption area of each chamber and the soil absorption rates specified in R18-9-A312(D);
- c. Ensure that the sidewall of the chamber provides at least 35 percent open area for sidewall credit and that the design and construction minimizes the movement of fines into the chamber area. The applicant shall not use filter fabric or geotextile against the sidewall openings.
5. Seepage pits. If allowed by R18-9-A311(B)(1), the applicant shall:
- a. Design a seepage pit to comply with R18-9-A312(E)(1) for minimum vertical separation distance;
- b. Ensure that multiple seepage pit installations are served through a distribution box approved by the Department or connected in series with a watertight connection laid on undisturbed or compacted soil. The applicant shall ensure that the outlet from the pit has a sanitary tee with the vertical leg extending at least 12 inches below the inlet;
- c. Ensure that each seepage pit is circular and has an excavated diameter of 4 to 6 feet. If multiple seepage pits are installed, ensure that the minimum spacing between seepage pit sidewalls is 12 feet or three times the diameter of the seepage pit, whichever is greater. The applicant may use the alternative design procedure specified in R18-9-A312(G) for a proposed seepage pit more than 6 feet in diameter;
- d. For a gravel filled seepage pit, backfill the entire pit with aggregate. The applicant shall ensure that each pit has a breather conductor pipe that consists of a perforated pipe at least 4 inches in diameter, placed vertically within the backfill of the pit. The pipe shall extend from the bottom of the pit to within 12 inches below ground level;
- e. For a lined, hollow seepage pit, lay a concrete liner or a liner of a different protective material in the pit on a firm foundation and fill excavation voids behind the liner with at least 9 inches of aggregate;
- f. For the cover of a lined seepage pit, use an approved one or two piece reinforced concrete slab with a minimum compressive strength of 2500 pounds per square inch. The applicant shall ensure that the cover:
- i. Is at least 5 inches thick and designed to support an earth load of at least 400 pounds per square foot;
- ii. Has a 12-inch square or diameter minimum access hole with a plug or cap that is coated on the underside with a protective bituminous seal, constructed of concrete with 15 percent to 18 percent fly ash content, or made of other nonpermeable protective material; and
- iii. Has a 4 inch or larger inspection pipe placed vertically not more than 6 inches below ground level;
- g. Ensure that the top of the seepage pit cover is 4 to 18 inches below the surface of the ground;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- h. Install a vented inlet fitting in every seepage pit to prevent flows into the seepage pit from damaging the sidewall. An applicant may use a 1/4 bend fitting placed through an opening in the top of the slab cover if a one or two piece concrete slab cover inlet is used;
  - i. Bore seepage pits five feet deeper than the proposed pit depth to verify underlying soil characteristics and backfill the five feet of overdrill with low permeability drill cuttings or other suitable material;
  - j. Backfill seepage pits that terminate in gravelly, coarse sand zones five feet above the beginning of the zone with low permeability drill cuttings or other suitable material;
  - k. Determine the minimum sidewall area for a seepage pit from the design flow and the soil absorption rate derived from the testing procedure described in R18-9-A310(G). The effective absorption surface for a seepage pit is the sidewall area only. The sidewall area is calculated using the following formula:  

$$A = 3.14 \times D \times H$$
    - i. "A" is the minimum sidewall area in square feet needed for the design flow and soil absorption rate for the installation,
    - ii. "D" is the diameter of the proposed seepage pit in feet,
    - iii. "H" is the vertical height in feet in the seepage pit through which wastewater infiltrates native soil. The applicant shall ensure that H is at least 10 feet for any seepage pit.
- D. Operation and maintenance.** The permittee shall follow the applicable operation and maintenance requirements in R18-9-A313.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- R18-9-E303. 4.03 General Permit: Composting Toilet, Less Than 3000 Gallons Per Day Design Flow**
- A.** A 4.03 General Permit allows for the use of a composting toilet with less than 3000 gallons per day design flow.
- 1. **Definition.** For purposes of this Section, "composting toilet" means a manufactured turnkey or kit form treatment technology that receives human waste from a waterless toilet directly into an aerobic composting chamber where dehydration and biological activity reduce the waste volume and the content of nutrients and harmful microorganisms to an appropriate level for later disposal at the site or by other means.
  - 2. An applicant may use a composting toilet if:
    - a. Limited water availability prevents use of other types of on-site wastewater treatment facilities,
    - b. Environmental constraints prevent the discharge of wastewater or nutrients to a sensitive area,
    - c. Inadequate space prevents use of other systems,
    - d. Severe site limitations exist that make other forms of treatment or disposal unacceptable, or
    - e. The applicant desires maximum water conservation.
  - 3. A permittee may use a composting toilet only if:
    - a. Wastewater is managed as provided in this Section and, if gray water is separated and reused, the gray water reuse complies with 18 A.A.C. 9, Article 7; and
- b. Soil conditions support subsurface disposal of all wastewater sources.
- B. Restrictions.**
- 1. A permittee shall ensure that no more than 50 persons per day use the composting toilet.
  - 2. A composting toilet shall only receive human excrement unless the manufacturer's specifications allow the deposit of kitchen or other wastes into the toilet.
- C. Performance.** An applicant shall ensure that:
- 1. The composting toilet provides containment to prevent the discharge of toilet contents to the native soil except leachate, which may drain to the wastewater disposal works described in subsection (F);
  - 2. The composting toilet limits access by vectors to the contained waste; and
  - 3. Wastewater is disposed into the subsurface to prevent any wastewater from surfacing.
- D. Notice of Intent to Discharge.** In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), the applicant shall submit the following information:
- 1. **Composting toilet.**
    - a. The name and address of the composting toilet system manufacturer;
    - b. A copy of the manufacturer's warranty, and the specifications for installation operation, and maintenance;
    - c. The product model number;
    - d. Composting rate, capacity, and waste accumulation volume calculations;
    - e. Documentation of listing by a national listing organization indicating that the composting toilet meets the stated manufacturer's specifications for loading, treatment performance, and operation, unless the composting toilet is listed under R18-9-A309(E) or is a component of a reference design approved by the Department;
    - f. The method of vector control;
    - g. The planned method and frequency for disposing the composted human excrement residue; and
    - h. The planned method for disposing of the drainage from the composting unit; and
  - 2. **Wastewater.**
    - a. The number of bedrooms in the dwelling or persons served on a daily basis, as applicable, and the corresponding design flow of the disposal works for the wastewater;
    - b. The results from soil evaluation or percolation testing that adequately characterize the soils into which the wastewater will be dispersed and the locations of soil evaluation and percolation testing on the site plan; and
    - c. The design for the disposal works in subsection (F), including the location of the interceptor, the location and configuration of the trench or bed used for wastewater dispersal, the location of connecting wastewater pipelines, and the location of the reserve area.
- E. Design requirements for a composting toilet.** An applicant shall ensure that:
- 1. The composting chamber is watertight, constructed of solid durable materials not subject to excessive corrosion or decay, and is constructed to exclude access by vectors;
  - 2. The composting chamber has airtight seals to prevent odor or toxic gas from escaping into the building. The system may be vented to the outside;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

3. The capacity of the chamber and rate of composting are calculated based on:
- The lowest monthly average chamber temperature; or
  - The yearly average chamber temperature, if the composting toilet is designed to compost on a yearly cycle or longer; and
4. The composting system provides adequate storage of all waste produced during the months when the average temperature is below 55°F, unless a temperature control device is installed to increase the composting rate and reduce waste volume.
- F. Design requirements for the disposal works.**
- Interceptor. An applicant shall ensure that the design complies with the following:
    - Wastewater passes into an interceptor before it is conducted to the subsurface for dispersal;
    - The interceptor is designed to remove grease, oil, fibers, and solids to ensure long-term performance of the trench or bed used for subsurface dispersal;
    - The interceptor is covered to restrict access and eliminate habitat for mosquitoes and other vectors; and
    - Minimum interceptor size is based on design flow.
      - For a dwelling, the following apply:
 

| No. of Bedrooms                    | Design Flow (gallons per day) | Minimum Interceptor Size (gallons)                                        |                                                                         |
|------------------------------------|-------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------|
|                                    |                               | Kitchen Wastewater Only (All gray water sources are collected and reused) | Combined Non-Toilet Wastewater (Gray water is not separated and reused) |
| 1 (7 fixture units or less)        | 90                            | 42                                                                        | 200                                                                     |
| 1-2 (greater than 7 fixture units) | 180                           | 84                                                                        | 400                                                                     |
| 3                                  | 270                           | 125                                                                       | 600                                                                     |
| 4                                  | 330                           | 150                                                                       | 700                                                                     |
| 5                                  | 380                           | 175                                                                       | 800                                                                     |
| 6                                  | 420                           | 200                                                                       | 900                                                                     |
| 7                                  | 460                           | 225                                                                       | 1000                                                                    |
      - For other than a dwelling, minimum interceptor size in gallons is 2.1 times the design flow from Table 1, Unit Design Flows.
  - Dispersal of wastewater. An applicant shall ensure that the design complies with the following:
    - A trench or bed is used to disperse the wastewater into the subsurface;
    - Sizing of the trench or bed is based on the design flow of wastewater as determined in subsection (F)(1)(d) and an SAR determined under R18-9-A312(D);
  - The minimum vertical separation from the bottom of the trench or bed to a limiting subsurface condition is at least 5 feet; and
  - Other aspects of trench or bed design follow R18-9-E302, as applicable.
3. Setback distances. Setback distances are no less than 1/4 of the setback distances specified in R18-9-A312(C), but not less than 5 feet, except the setback distance from wells is 100 feet.
- G. Operation and maintenance requirements. A permittee shall:**
- Composting toilet.
    - Provide adequate mixing, ventilation, temperature control, moisture, and bulk to reduce fire hazard and prevent anaerobic conditions;
    - Follow manufacturer's specifications for addition of any organic bulking agent to control liquid drainage, promote aeration, or provide additional carbon;
    - Follow the manufacturer's specifications for operation and maintenance regarding movement of material within the composting chamber;
    - If batch system containers are mounted on a carousel, place a new container in the toilet area if the previous one is full;
    - Ensure that only human waste, paper approved for septic tank use, and the amount of bulking material required for proper maintenance is introduced to the composting chamber. The permittee shall remove all other materials or trash. If allowed by the manufacturer's specifications the permittee may add, other nonliquid compostable food preparation residues to the toilet;
    - Ensure that any liquid end product is:
      - Sprayed back onto the composting waste material;
      - Removed by a person who licensed a vehicle under 18 A.A.C. 13, Article 11; or
      - Is drained to the interceptor described in subsection (F);
    - Remove and dispose of composted waste as necessary, using a person who licensed a vehicle under 18 A.A.C. 13, Article 11 if the waste is not placed in a disposal area for burial or used on-site as mulch;
    - Before ending use for an extended period take measures to ensure that moisture is maintained to sustain bacterial activity and free liquids in the chamber do not freeze; and
    - After an extended period of non-use, empty the composting chamber of solid end product and inspect all mechanical components to verify that the mechanical components are operating as designed;
  - Wastewater Disposal Works.
    - Ensure that the interceptor is maintained regularly according to manufacturer's instructions to prevent grease and solid wastes from impairing performance of the trench or bed used for dispersal of wastewater, and
    - Protect the area of the trench or bed from soil compaction or other activity that will impair dispersal performance.
- H. Reference design.**
- An applicant may use a composting toilet that achieves the performance requirements in subsection (C) by following a reference design on file with the Department.
  - The applicant shall file a form provided by the Department for supplemental information about the proposed



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

system with the applicant's submittal of the Notice of Intent to Discharge.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E304. 4.04 General Permit: Pressure Distribution System, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.04 General Permit allows for the use of a pressurized distribution of wastewater system with a design flow less than 3000 gallons per day that treats wastewater to a level equal to or better than that specified in R18-9-E302(B).
1. Definition. For purposes of this Section, a "pressure distribution system" means a tank, pump, controls, and piping that conducts wastewater under pressure in controlled amounts and intervals to a bed or trench or other means of distribution authorized by a general permit for an on-site wastewater treatment facility.
  2. An applicant may use a pressure distribution system if a gravity flow system is unsuitable, inadequate, unfeasible, or cost prohibitive because of site limitations or other conditions, or if needed to optimally distribute wastewater.
- B.** Performance. An applicant shall ensure that a pressure distribution system:
1. Disperses wastewater so that:
    - a. Loading rates are optimized for the intended purpose, and
    - b. The wastewater is delivered under pressure and evenly distributed within the disposal works, and
  2. Prevents ponding on the land surface.
- C.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), the applicant shall submit:
1. A copy of operation, maintenance, and warranty materials for the principal components; and
  2. A copy of dosing specifications, including pump curves, dispersing component details, and float control settings.
- D.** Design requirements.
1. Pumps. An applicant shall ensure that pumps used in the on-site wastewater treatment facility:
    - a. Are rated for wastewater service by the manufacturer and certified by Underwriters Laboratories;
    - b. Achieve the minimum design flow rate and total dynamic head requirements for the particular site; and
    - c. Incorporate a quick disconnect using compression-type unions for pressure connections. The applicant shall ensure that:
      - i. Quick-disconnects are accessible in the pressure piping, and
      - ii. A pump has adequate lift attachments for removal and replacement of the pump and switch assembly without entering the dosing tank or process chamber.
  2. Switches, controls, alarms, timers, and electrical components. An applicant shall ensure that:
    - a. Switches and controls accommodate the minimum and maximum dose capacities of the distribution network design. The applicant shall not use pressure diaphragm level control switches;
    - b. Fail-safe controls that can be tested in the field are used to prevent discharge of inadequately treated wastewater. The applicant shall include counters or flow meters if critical to control functions, such as timed dosing;
- c.** Control panels and alarms:
- i. Are mounted in an exterior location visible from the dwelling,
  - ii. Provide manual pump switch and alarm test features, and
  - iii. Include written instructions covering standard operation and alarm events;
- d.** Audible and visible alarms are used for all critical control functions, such as pump failures, treatment failures, and excess flows. The applicant shall ensure that:
- i. The visual portion of the signal is conspicuous from a distance 50 feet from the system and its appurtenances;
  - ii. The audible portion of the signal is between 70 and 75 db at 5 feet and is discernible from a distance of 50 feet from the system and its appurtenances; and
  - iii. Alarms, test features, and controls are on a non-dedicated electrical circuit associated with a frequently used household lighting fixture and separate from the dedicated circuit for the pump;
- e.** All electrical wiring complies with the National Electrical Code, 2005 Edition, published by the National Fire Protection Association. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101. The applicant shall ensure that:
- i. Connections are made using National Electrical Manufacturers Association (NEMA) 4x junction boxes certified by Underwriters Laboratories; and
  - ii. All controls are in NEMA 3r, 4, or 4x enclosures for outdoor use.
- 3.** Dosing tanks and wastewater distribution components.
- a.** An applicant shall:
- i. Design dosing tanks to withstand anticipated internal and external loads under full and empty conditions, and design concrete tanks to meet the "Standard Specification for Precast Concrete Water and Wastewater Structures, C913-02 (2002)," published by the American Society for Testing and Materials. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959;
  - ii. Design dosing tanks to be easily accessible and have secured covers;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- iii. Install risers to provide access to the inlet and outlet of the tank and to service internal components;
  - iv. Ensure that the volume of the dosing tank accommodates bottom depth below maximum drawdown, maximum design dose, including any drainback, volume to high water alarm, and a reserve volume above the high water alarm level that is not less than the daily design flow volume. If the tank is time dosed, the applicant shall ensure that the combined surge capacity and reserve volume above the high water alarm is not less than the daily design flow volume;
  - v. Ensure that dosing tanks are watertight and anti-buoyant;
  - vi. Design the wastewater distribution components to withstand system pumping pressures;
  - vii. Design the wastewater distribution system to allow air to purge from the system;
  - viii. Design pressure piping to minimize freezing during cold weather;
  - ix. Ensure that the end of each wastewater distribution line is accessible for maintenance;
  - x. Ensure that orifices emit the design discharge rate uniformly throughout the wastewater distribution system; and
  - xi. Design orifices using orifice shields to provide proper distribution of wastewater to the receiving medium.
- b. An applicant may use a septic tank second compartment or a second septic tank in series as a dosing tank if all dosing tank requirements of this Section are met and a screened vault is used instead of the septic tank effluent filter.
4. Design SAR. If the site conditions of the property for the on-site wastewater treatment facility do not require pressure distribution, but an applicant chooses to use pressure distribution, the applicant shall use a design SAR for the absorption surfaces in the disposal works that is not more than 1.10 times the adjusted SAR determined in R18-9-A312(D).
- E. Additional Discharge Authorization requirements.** An applicant shall obtain copies of instructions for the critical controls of the system from the person who installed the pressure distribution system. The applicant shall submit one copy of the instructions with the information required in subsection (C).
- F. Operation and maintenance requirements.** In addition to the applicable requirements specified in R18-9-A313(B), a permittee shall ensure that:
- 1. The operation and maintenance manual for the on-site wastewater treatment facility that supplies the wastewater to the pressure distribution system specifies inspection and maintenance needed for the following items:
    - a. Sludge level in the bottom of the treatment and dosing tanks,
    - b. Watertightness,
    - c. Condition of electrical and mechanical components, and
    - d. Piping and other components functioning within design limits;
  - 2. All critical control functions are specified in the operation and maintenance manual for testing to demonstrate compliance with design specifications, including:
    - a. Alarms, test features, and controls;
    - b. Float switch level settings;
    - c. Dose rate, volume, and frequency, if applicable;
    - d. Distal pressure or squirt height, if applicable; and
    - e. Voltage test on pumps, motors, and controls, as applicable;
  - 3. The finished grade is observed and maintained for proper surface drainage. The applicant shall observe the levelness of the tank for differential settling. If there is settling, the applicant shall grade the facility to maintain surface drainage.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E305. 4.05 General Permit: Gravelless Trench, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.05 General Permit allows for the use of a gravelless trench with less than 3000 gallons per day design flow receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
- 1. Definition. For purposes of this Section, a "gravelless trench" means a disposal technology characterized by installation of a proprietary pipe and geocomposite or other substitute media into native soil instead of the distribution pipe and aggregate fill used in a trench allowed in R18-9-E302.
  - 2. A permittee may use a gravelless trench if suitable gravel or volcanic rock aggregate is unavailable, excessively expensive, or if adverse site conditions make movement of gravel difficult, damaging, or time consuming.
- B.** Performance. An applicant shall design a gravelless trench so that treated wastewater released to the native soil meets the following criteria:
- 1. TSS of 75 milligrams per liter, 30-day arithmetic mean;
  - 2. BOD<sub>5</sub> of 150 milligrams per liter, 30-day arithmetic mean;
  - 3. Total nitrogen (as nitrogen) of 53 milligrams per liter, 5-month arithmetic mean; and
  - 4. Total coliform level of 100,000,000 (Log<sub>10</sub> 8) colony forming units per 100 milliliters, 95th percentile.
- C.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit the following:
- 1. The soil absorption area that would be required if a conventional disposal trench filled with aggregate was used at the site,
  - 2. The configuration and size of the proposed gravelless disposal works, and
  - 3. The manufacturer's installation instructions and warranty of performance for absorbing wastewater into the native soil.
- D.** Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall:
- 1. Ensure that the top of the gravelless disposal pipe or similar disposal mechanism is at least 6 inches below the surface of the native soil and 12 to 36 inches below finished grade if approved fill is placed on top of the installation;
  - 2. Calculate the infiltration surface as follows:
    - a. For 8-inch diameter pipe, 2 square feet of absorption area is allowed per linear foot;
    - b. For 10-inch diameter pipe, 3 square feet of absorption area is allowed per linear foot;
    - c. For bundles of two pipes of the same diameter, the absorption area is calculated as 1.67 times the absorption area of one pipe; and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- d. For bundles of three pipes of the same diameter, the absorption area is calculated as 2.00 times the absorption area of one pipe;
- 3. Use a pressure distribution system meeting the requirements of R18-9-E304 in medium sand, coarse sand, and coarser soils; and
- 4. Construct the drainfield of material that will not decay, deteriorate, or leach chemicals or byproducts if exposed to sewage or the subsurface soil environment.
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall:
  - 1. Install the gravelless pipe material according to manufacturer's instructions if the instructions are consistent with this Chapter,
  - 2. Ensure that the installed disposal system can withstand the physical disturbance of backfilling and the load of any soil cover above natural grade placed over the installation, and
  - 3. Shape any backfill and soil cover in the area of installation to prevent settlement and ponding of rainfall for the life of the disposal works.
- F. Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B), the permittee shall inspect the finished grade in the vicinity of the gravelless disposal works for maintenance of proper drainage and protection from damaging loads.
- D. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
  - 1. Capillary rise potential test results for the media used to fill the evapotranspiration bed, unless sand meeting a  $D_{50}$  of 0.1 millimeter (50 percent by weight of grains equal to or smaller than 0.1 millimeter) is used; and
  - 2. Water mass balance calculations used to size the evapotranspiration bed.
- E. Design requirements. An applicant shall:
  - 1. Ensure that the evapotranspiration bed is from 18 to 36 inches deep and shall calculate the bed design based on the capillary rise of the bed media, following the "Standard Test Method for Capillary-Moisture Relationships for Coarse- and Medium-Textured Soils by Porous-Plate Apparatus, D2325-68 (2000)," incorporated by reference in R18-9-E307(E), and the anticipated maximum frost depth;
  - 2. Ensure the media is sand or other durable material;
  - 3. Base design area calculations on a water mass balance for the winter months and the design seepage rate;
  - 4. Ensure that the natural seal liner is a durable, low-hydraulic conductivity liner and is accompanied by the liner performance specification and calculations for bottom and sidewall seepage rate;
  - 5. If a surfacing layer is used, use topsoil, dark cinders, decomposed granite, or similar landscaping material placed to a maximum depth of 2 inches and ensure that:
    - a. If topsoil is used as a surfacing layer for growth of landscape plants:
      - i. The topsoil is a fertile, friable soil obtained from well-drained arable land;
      - ii. The topsoil is free of nut grass, refuse, roots, heavy clay, clods, noxious weeds, or any other material toxic to plant growth;
      - iii. The pH of the topsoil is between 5.5 and 8.0;
      - iv. The plasticity index of the topsoil is between 3 and 15; and
      - v. The topsoil contains approximately 1-1/2 percent organic matter, by dry weight, either natural or added;
    - b. If landscaping material other than topsoil is used as a surfacing layer, the material meets the following gradation:

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E306. 4.06 General Permit: Natural Seal Evapotranspiration Bed, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.06 General Permit allows for the use of a natural seal evapotranspiration bed with less than 3000 gallons per day design flow receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
  - 1. Definition. For purposes of this Section, a "natural seal evapotranspiration bed" means a disposal technology characterized by a bed of sand or other media with an internal wastewater distribution system, contained on the bottom and sidewalls by an engineered liner consisting of natural soil and clay materials.
  - 2. An applicant may use a natural seal evapotranspiration bed if site conditions restrict soil infiltration or require reduction of the volume of wastewater discharged to the native soil underlying the natural seal liner.
- B. Restrictions. Unless a person provides design documentation to show that a natural seal evapotranspiration bed will properly function, the person shall not install this technology if:
  - 1. Average minimum temperature in any month is 20° F or less,
  - 2. Over 1/3 of the average annual precipitation falls in a 30-day period, or
  - 3. Design flow exceeds net evaporation.
- C. Performance. An applicant shall ensure that a natural seal evapotranspiration bed:
  - 1. Minimizes discharge to the native soil through the natural seal liner,
  - 2. Maximizes wastewater disposed to the atmosphere by evapotranspiration, and
  - 3. Prevents ponding of wastewater on the bed surface and maintains an interval of unsaturated media directly beneath the bed surface.
- 6. Use shallow-rooted, non-invasive, salt- and drought-tolerant evergreens if vegetation is planted on the evapotranspiration bed;
- 7. Install at least two observation ports to determine the level of the liquid surface of wastewater within the evapotranspiration bed;
- 8. Design the bed to pump out the saturated zone if accumulated salts or a similar condition impairs bed performance; and
- 9. Instead of the minimum vertical separation required under R18-9-A312(E), ensure that the minimum vertical

| Sieve Size | Percent Passing |
|------------|-----------------|
| 1"         | 100             |
| 1/2"       | 95-100          |
| No. 4      | 90-100          |
| No. 10     | 70-100          |
| No. 200    | 15-70           |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

separation from the bottom of the natural seal evapotranspiration bed liner to the seasonal high water table is at least 12 inches.

- F.** Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall ensure that:
1. The liner covers the bottom and all sidewalls of the bed and is installed on a stable base according to the manufacturer's installation specifications;
  2. If the inlet pipe passes through the liner, the joint is tightly sealed to minimize leakage during the operational life of the facility;
  3. The liner is leak tested under the supervision of an Arizona-registered professional engineer to confirm the design leakage rate; and
  4. A 2- to 4-inch layer of 1/2- to 1-inch gravel or crushed stone is placed around the distribution pipes within the bed. The applicant shall ensure that the filter cloth is placed on top of the gravel or crushed stone to prevent sand from settling into the gravel or crushed stone.
- G.** Additional Discharge Authorization requirements. An applicant shall submit the satisfactory results of the leakage test required under subsection (F)(3) to the Department before the Department issues the Discharge Authorization.
- H.** Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B), the permittee shall:
1. Not allow irrigation of an evapotranspiration bed, and
  2. Protect the bed from vehicle loads and other damaging activities.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E307. 4.07 General Permit: Lined Evapotranspiration Bed, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.07 General Permit allows for the use of a lined evapotranspiration bed receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
1. Definition. For purposes of this Section, a "lined evapotranspiration bed" means a disposal technology characterized by a bed of sand or other media with an internal wastewater distribution system contained on the bottom and sidewalls by an impervious synthetic liner.
  2. An applicant may use a lined evapotranspiration bed if site conditions restrict soil infiltration or require reduction or elimination of the volume of wastewater or nitrogen load discharged to the native soil.
  3. Provision of a reserve area is not required for a lined evapotranspiration bed.
- B.** Restrictions. Unless a person provides design documentation to show that a lined evapotranspiration bed will properly function, the person shall not install this technology if:
1. Average minimum temperature in any month is 20° F or less,
  2. Over 1/3 of average annual precipitation falls in a 30-day period, or
  3. Design flow exceeds net evaporation.
- C.** Performance. An applicant shall ensure that a lined evapotranspiration bed:
1. Prevents discharge to the native soil by a synthetic liner,
  2. Attains full disposal of wastewater to the atmosphere by evapotranspiration, and

3. Prevents ponding of wastewater on the bed surface and maintains an interval of unsaturated media directly beneath the bed surface.
- D.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
1. Capillary rise potential test results for the media used to fill the evapotranspiration bed, unless sand meeting a  $D_{50}$  of 0.1 millimeter (50 percent by weight of grains equal to or smaller than 0.1 millimeter in size) is used; and
  2. Water mass balance calculations used to size the evapotranspiration bed.
- E.** Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall:
1. Ensure that the evapotranspiration bed is from 18 to 36 inches deep and calculate the bed design on the basis of the capillary rise of the bed media, according to the "Standard Test Method for Capillary-Moisture Relationships for Coarse- and Medium-Textured Soils by Porous-Plate Apparatus, D2325-68 (2003)," published by the American Society for Testing and Materials and the anticipated maximum frost depth. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959;
  2. Ensure the media is sand or other durable material;
  3. Base design area calculations on a water mass balance for the winter months;
  4. Ensure that the evapotranspiration bed liner is a durable, low hydraulic conductivity synthetic liner that has a calculated bottom area and sidewall seepage rate of less than 550 gallons per acre per day;
  5. If a surfacing layer is used, use topsoil, dark cinders, decomposed granite, or similar landscaping material placed to a maximum depth of 2 inches. The applicant shall ensure that:
    - a. If topsoil is used as a surfacing layer for growth of landscape plants:
      - i. The topsoil is a fertile, friable soil obtained from well-drained arable land;
      - ii. The topsoil is free of nut grass, refuse, roots, heavy clay, clods, noxious weeds, or any other material toxic to plant growth;
      - iii. The pH of the topsoil is between 5.5 and 8.0;
      - iv. The plasticity index of the topsoil is between 3 and 15; and
      - v. The topsoil contains approximately 1 1/2 percent organic matter, by dry weight, either natural or added;
    - b. If another landscaping material is used as a surfacing layer, the material meets the following gradation:

| Sieve Size | Percent Passing |
|------------|-----------------|
| 1"         | 100             |
| 1/2"       | 95-100          |
| No. 4      | 90-100          |
| No. 10     | 70-100          |
| No. 200    | 15-70           |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

6. Use shallow-rooted, non-invasive, salt and drought tolerant evergreens if vegetation is planted on the evapotranspiration bed;
  7. Install at least two observation ports to allow determination of the depth to the liquid surface of wastewater within the evapotranspiration bed;
  8. Design the bed to pump out the saturated zone if accumulated salts or a similar condition impairs bed performance; and
  9. Instead of the minimum vertical separation required under R18-9-A312(E), ensure that the minimum vertical separation from the bottom of the evapotranspiration bed liner to the surface of the seasonal high water table or impervious layer or formation is at least 12 inches.
- F.** Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall ensure that:
1. All liner seams are factory fabricated or field welded according to manufacturer's specifications. The applicant shall ensure that:
  2. The liner covers the bottom and all sidewalls of the bed and is cushioned on the top and bottom with layers of sand at least 2 inches thick or other puncture-protective material;
  3. If the inlet pipe passes through the liner, the joint is tightly sealed to minimize leakage during the operational life of the facility;
  4. The liner is leak tested under the supervision of an Arizona-registered professional engineer; and
  5. A 2- to 4-inch layer of one-half to 1-inch gravel or crushed stone is placed around the distribution pipes within the bed. The applicant shall place filter cloth on top of the gravel or crushed stone to prevent sand from settling into the crushed stone or gravel.
- G.** Additional Discharge Authorization requirements. An applicant shall submit the liner test results sealed by an Arizona-registered professional engineer to the Department for issuance of the Discharge Authorization.
- H.** Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B), the permittee shall:
1. Not allow irrigation of an evapotranspiration bed; and
  2. Protect the bed from vehicle loads and other damaging activities.
- c. Wastewater treated by passage through the mound before percolation into the native soil below the mound.
2. An applicant may use a Wisconsin mound if:
    - a. The native soil has excessively high or low permeability,
    - b. There is little native soil overlying fractured or excessively permeable rock, or
    - c. A reduction in minimum vertical separation is desired.
- B.** Performance. An applicant shall design a Wisconsin mound so that treated wastewater released to the native soil meets the following criteria:
1. Performance Category A.
    - a. TSS of 20 milligrams per liter, 30-day arithmetic mean;
    - b. BOD<sub>5</sub> of 20 milligrams per liter, 30-day arithmetic mean;
    - c. Total nitrogen (as nitrogen) of 53 milligrams per liter, 5-month arithmetic mean; and
    - d. Total coliform level of 1000 (Log<sub>10</sub> 3.0) colony forming units per 100 milliliters, 95th percentile; or
  2. Performance Category B.
    - a. TSS of 30 milligrams per liter, 30-day arithmetic mean;
    - b. BOD<sub>5</sub> of 30 milligrams per liter, 30-day arithmetic mean;
    - c. Total nitrogen (as nitrogen) of 53 milligrams per liter, 5-month arithmetic mean; and
    - d. Total coliform level of 300,000 (Log<sub>10</sub> 5.5) colony forming units per 100 milliliters, 95th percentile.
- C.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
1. Specifications for the internal wastewater distribution system media proposed for use in the Wisconsin mound;
  2. Two scaled or dimensioned cross sections of the mound (one of the shortest basal area footprint dimension and one of the lengthwise dimension); and
  3. Design calculations following the "Wisconsin Mound Soil Absorption System: Siting, Design, and Construction Manual," published by the University of Wisconsin – Madison, January 1990 Edition (the Wisconsin Mound Manual). This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the University of Wisconsin – Madison, SSWMP, 1525 Observatory Drive, Room 345, Madison, WI 53706.
- D.** Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:
1. Pressure dosed wastewater is delivered into the Wisconsin mound through a pressurized line and secondary distribution lines into an engineered aggregate infiltration bed, or equivalent system, in conformance with R18-9-E304 and the Wisconsin Mound Manual. The applicant shall ensure that the aggregate is washed;
  2. Wastewater is applied to the inlet surface of the mound media at not more than 1.0 gallon per day per square foot of mound bed inlet surface if the mound bed media conforms with the "Standard Specification for Concrete Aggregates, C33-03 (2003)," published by the American Society for Testing and Materials and the Wisconsin Mound Manual, except if cinder sand is used that is the

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E308. 4.08 General Permit: Wisconsin Mound, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.08 General Permit allows for the use of a Wisconsin mound with a design flow of less than 3000 gallons per day receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
1. Definition. For purposes of this Section, a "Wisconsin mound" means a disposal technology characterized by:
    - a. An above-grade bed system that blends with the land surface into which is dispensed pressure dosed wastewater from a septic tank or other upstream treatment device,
    - b. Dispersal of wastewater under unsaturated flow conditions through the engineered media system contained in the mound, and



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- appropriate grade with not more than 5 percent passing a #200 screen. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959. The applicant shall:
- a. For cinder sand, ensure that the rate is not more than 0.8 gallons per day per square foot of mound bed inlet surface; and
  - b. Wash the media used for the mound bed;
3. The aggregate infiltration bed and mound bed is capped by coarser textured soil, such as sand, sandy loam, or silt loam. An applicant shall not use silty clay, clay loam, or clays;
  4. The cap material is covered by topsoil, following the procedure in the Wisconsin Mound Manual, and the topsoil is capable of supporting vegetation, is not clay, and is graded to drain;
  5. The top and bottom surfaces of the aggregate infiltration bed are level and do not exceed 10 feet in width and that:
    - a. The minimum depth of the aggregate infiltration bed is 9 inches, or
    - b. Synthetic filter fabric permeable to water and air and capable of supporting the cap and topsoil load is placed on the top surface of the aggregate infiltration bed;
  6. The minimum depth of mound bed media is:
    - a. Performance Category A, 24 inches; or
    - b. Performance Category B, 12 inches;
  7. The maximum allowable side slope of the mound bed, cap material, and topsoil is not more than one vertical to three horizontal;
  8. Ports for inspection and monitoring are provided to verify performance, including verification of unsaturated flow within the aggregate infiltration bed. The applicant shall:
    - a. Install a vertical PVC pipe and cap with a minimum diameter of 4 inches as an inspection port at the end of the disposal line, and
    - b. Install the pipe with a physical restraint to maintain pipe position;
  9. The main pressurized line and secondary distribution lines for the aggregate infiltration bed are equipped at appropriate locations with cleanouts to grade;
  10. The following requirements and the setbacks specified in R18-9-A312(C) are observed:
    - a. Increase setbacks for the following downslope features at least 30 feet from the toe of the mound system:
      - i. Property line,
      - ii. Driveway,
      - iii. Building,
      - iv. Ditch or interceptor drain, or
      - v. Any other feature that impedes water movement away from the mound; and
    - b. Ensure that no upslope natural feature or improvement channels surface water or groundwater to the mound area;
  11. The portion of the basal area of native soil below the mound conforms to the Wisconsin Mound Manual. The applicant shall:
    - a. Calculate the absorption of wastewater into the native soil for only the effective basal area;
    - b. Apply the soil absorption rate specified in R18-9-A312(D). The applicant may increase allowable loading rate to the mound bed inlet surface up to 1.6 times if the wastewater dispersed to the mound is pretreated to reduce the sum of TSS and BOD<sub>5</sub> to 60 mg/l or less. The applicant may increase the soil absorption rate to not more than 0.20 gallons per day per square foot of basal area if the following slowly permeable soils underlie the mound:
      - i. Sandy clay loam, clay loam, silty clay loam, or finer with weak platy structure; or
      - ii. Sandy clay loam, clay loam, silty clay loam, or silt loam with massive structure;
  12. The slope of the native soil at the basal area does not exceed 25 percent, and a slope stability analysis is performed whenever the basal area or site slope within 50 horizontal feet from the mound system footprint exceeds 15 percent.
- E. Installation.** An applicant shall:
1. Prepare native soil for construction of a Wisconsin mound system. The applicant shall:
    - a. Mow vegetation and cut down trees in the vicinity of the basal area site to within 2 inches of the surface;
    - b. Leave in place boulders and tree stumps and other herbaceous material that would excessively alter the soil structure if removed after mowing and cutting;
    - c. Plow native soil serving as the basal area footprint along the contours to 7- to 8- inch depth;
    - d. Not substitute rototilling for plowing; and
    - e. Begin mound construction immediately after plowing;
  2. Place each layer of the bed system to prevent differential settling and promote uniform density; and
  3. Use the Wisconsin Mound Manual to guide any other detail of installation. The applicant may vary installation procedures and criteria depending on mound design but shall use installation procedures and criteria that are at least equivalent to those in the Wisconsin Mound Manual.
- F. Operation and maintenance requirements.** In addition to the applicable requirements specified in R18-9-A313(B), the permittee shall:
1. If an existing mound system shows evidence of overload or hydraulic failure, conduct the following sequence of evaluations:
    - a. Verify the actual loading and performance of the pretreatment system.
    - b. Verify the watertightness of the pretreatment and dosing tanks;
    - c. Determine the dosing rates and dosing intervals to the aggregate infiltration bed and compare it with the original design to evaluate the presence or absence of saturated conditions in the aggregate infiltration bed;
    - d. If the above steps in subsections (F)(1)(a) through (c) do not indicate an anomalous condition, evaluate the site and recalculation of the disposal capability to determine if mound lengthening is feasible;
    - e. Determine if site modifications are possible including changing surface drainage patterns at upgrade locations and lowering the groundwater level by installing interceptor drains to reduce native soil saturation at shallow levels; and
    - f. Determine if the basal area can be increased, consistent with R18-9-A309(A)(9)(b)(iv);



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

2. Prepare servicing and waste disposal procedures and task schedules necessary for clearing the main pressurized wastewater line and secondary distribution lines, septic tank effluent filter, pump intake, and controls.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E309. 4.09 General Permit: Engineered Pad System, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.09 General Permit allows for the use of an engineered pad system receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).

1. Definition. For purposes of this Section, an "engineered pad system" means a treatment and disposal technology characterized by:
  - a. The delivery of pretreated wastewater by gravity or pressure distribution to the engineered pad and sand bed assembly, followed by dispersal of the wastewater into the native soil; and
  - b. Wastewater movement through the engineered pad and sand bed assembly by gravity under unsaturated flow conditions to provide additional passive biological treatment.
2. The applicant may use an engineered pad system if:
  - a. The native soil is excessively permeable,
  - b. There is little native soil overlying fractured or excessively permeable rock, or
  - c. The available area is limited for installing a disposal works authorized by R18-9-E302.

- B. Performance. An applicant shall ensure that:

1. The engineered pad system is designed so that the treated wastewater released to the native soil meets the following criteria:
  - a. TSS of 50 milligrams per liter, 30-day arithmetic mean;
  - b. BOD<sub>5</sub> of 50 milligrams per liter, 30-day arithmetic mean;
  - c. Total nitrogen (as nitrogen) of 53 milligrams per liter, 5-month arithmetic mean; and
  - d. Total coliform level of 1,000,000 (Log<sub>10</sub> 6) colony forming units per 100 milliliters, 95th percentile; or
2. The engineered pad system is designed to meet any other performance, loading rate, and configuration criteria specified in the reviewed product list maintained by the Department as required under R18-9-A309(E).

- C. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit design materials and construction specifications for the engineered pad system.

- D. Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:

1. Gravity and pressurized wastewater delivery is from a septic tank or intermediate watertight chamber equipped with a pump and controls. The applicant shall ensure that:
  - a. Delivered wastewater is distributed onto the top of the engineered pad system and achieves even distribution by good engineering practice, and
  - b. The dosing rate for pressurized wastewater delivery is at least four doses per day and no more than 24 doses per day;
2. The sand bed consists of mineral sand washed to conform to the "Standard Specification for Concrete Aggregates,

C33-03 (2003)," which is incorporated by reference in R18-9-E308(D)(2), unless the performance testing and design specifications of the engineered pad manufacturer justify a substitute specification. The applicant shall ensure that:

- a. The sand bed design provides for the placement of at least 6 inches of sand bed material below and along the perimeter of each pad, and
  - b. The contact surface between the bottom of the sand bed and the native soil is level;
3. The spacing between adjacent two-pad-wide rows is at least two times the distance between the bottom of the distribution pipe and the bottom of the sand bed or 5 feet, whichever is greater;
  4. The wastewater distribution system installed on the top of the engineered pad system is covered with a breathable geotextile material and the breathable geotextile material is covered with at least 10 inches of backfill.
    - a. The applicant shall ensure that rocks and cobbles are removed from backfill cover and grade the backfill for drainage.
    - b. The applicant may place the engineered pad system above grade, partially bury it, or fully bury it depending on site and service circumstances;
  5. The engineered pad system is constructed with durable materials and capable of withstanding stress from installation and operational service; and
  6. At least two inspection ports are installed in the engineered pad system to confirm unsaturated wastewater treatment conditions at diagnostic locations.
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall place sand media to obtain a uniform density of 1.3 to 1.4 grams per cubic centimeter.
  - F. Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B), an applicant shall inspect the backfill cover for physical damage or erosion and promptly repair the cover, if necessary.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended to correct a manifest typographical error in subsection (B)(2) (Supp. 01-1). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E310. 4.10 General Permit: Intermittent Sand Filter, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.10 General Permit allows for the use of an intermittent sand filter receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).

1. Definition. For purposes of this Section, an "intermittent sand filter" means a treatment technology characterized by:
  - a. The pressurized delivery of pretreated wastewater to an engineered sand bed in a containment vessel equipped with an underdrain system or designed as a bottomless filter;
  - b. Delivered wastewater dispersed throughout the sand media by periodic doses from the delivery pump to maintain unsaturated flow conditions in the bed; and
  - c. Wastewater that is treated during passage through the media, collected by a bed underdrain chamber, and removed by pump or gravity to the disposal works, or wastewater that percolates downward directly into the native soil as part of a bottomless filter design.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

2. An applicant may use an intermittent sand filter if:
  - a. The native soil is excessively permeable,
  - b. There is little native soil overlying fractured or excessively permeable rock, or
  - c. The applicant desires a reduction in setback distances or minimum vertical separation.
- B. Performance. An applicant shall ensure that:
  1. An intermittent sand filter with underdrain system is designed so that it produces treated wastewater that meets the following criteria:
    - a. TSS of 10 milligrams per liter, 30-day arithmetic mean;
    - b. BOD<sub>5</sub> of 10 milligrams per liter, 30-day arithmetic mean;
    - c. Total nitrogen (as nitrogen) of 40 milligrams per liter, 5-month arithmetic mean; and
    - d. Total coliform level of 1000 (Log<sub>10</sub> 3) colony forming units per 100 milliliters, 95th percentile; or
  2. An intermittent sand filter with a bottomless filter is designed so that it produces treated wastewater released to the native soil that meets the following criteria:
    - a. TSS of 20 milligrams per liter, 30-day arithmetic mean;
    - b. BOD<sub>5</sub> of 20 milligrams per liter, 30-day arithmetic mean;
    - c. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean; and
    - d. Total coliform level of 100,000 (Log<sub>10</sub> 5 colony forming units per 100 milliliters, 95th percentile.
- C. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit specifications for the media proposed for use in the intermittent sand filter.
- D. Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:
  1. Pressurized wastewater delivery is from the septic tank or separate watertight chamber with a pump sized and controlled to deliver the pretreated wastewater to the top of the intermittent sand filter. The applicant shall ensure that the dosing rate is at least 4 doses per day and not more than 24 doses per day;
  2. The pressurized wastewater delivery system provides even distribution in the sand filter through good engineering practice. The applicant shall:
    - a. Specify all necessary controls, pipes, valves, orifices, filter cover materials, gravel, or other distribution media, and monitoring and servicing components in the design documents; and
    - b. Ensure that the cover and topsoil is 6 to 12 inches in depth and graded to drain;
  3. The sand filter containment vessel is watertight, structurally sound, durable, and capable of withstanding stress from installation and operational service. The applicant may place the intermittent sand filter above grade, partially buried, or fully buried depending on site and service circumstances;
  4. Media used in the intermittent sand filter is mineral sand and that the media is washed and conforms to "Standard Specification for Concrete Aggregates, C33-03," which is incorporated by reference in R18-9-E308(D)(2);
  5. The sand media depth is a minimum of 24 inches with the top and bottom surfaces level and the maximum wastewater loading rate is 1.0 gallons per day per square foot of inlet surface at the rated daily design flow;
  6. The underdrain system:
    - a. Is within the containment vessel;
  7. Supports the filter media and all overlying loads from the unsupported construction above the top surface of the sand media;
  8. Has sufficient void volume above the normal high level of the intermittent sand filter effluent to prevent saturation of the bottom of the sand media by a 24-hour power outage or pump malfunction; and
  9. Includes necessary monitoring, inspection, and servicing features;
  10. Inspection ports are installed in the distribution media and in the underdrain;
  11. The bottomless filter is designed similar to the underdrain system, except that the sand media is positioned on top of the native soil absorption surface. The applicant shall ensure that companion modifications are made that eliminate the containment vessel bottom and underdrain and relocate the underdrain inspection port to ensure reliable indication of the presence or absence of water saturation in the sand media;
  12. The native soil absorption system is designed to ensure that the linear loading rate does not exceed site disposal capability; and
  13. The bottomless sand filter discharge rate per unit area to the native soil does not exceed the adjusted soil absorption rate for the quality of wastewater specified in subsection (B)(2).
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall place the containment vessel, underdrain system, filter media, and pressurized wastewater distribution system in an excavation with adequate foundation and each layer installed to prevent differential settling and promote a uniform density throughout of 1.3 to 1.4 grams per cubic centimeter within the sand media.
- F. Operation and maintenance requirements. The applicant shall follow the applicable requirements in R18-9-A313(B).

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E311. 4.11 General Permit: Peat Filter, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.11 General Permit allows for the use of a peat filter receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
  1. Definition. For purposes of this Section, a "peat filter" means a disposal technology characterized by:
    - a. The dosed delivery of treated wastewater to the peat bed, which can be a manufactured module or a disposal bed excavated in native soil and filled with compacted peat;
    - b. Wastewater passing through the peat that is further treated by removal of positively charged molecules, filtering, and biological activity before entry into native soil; and
    - c. If the peat filter system is constructed as a disposal bed filled with compacted peat, wastewater that is absorbed into native soil at the bottom and sides of the bed.
  2. An applicant may configure a modular system if a portion of the wastewater that has passed through the peat filter is recirculated back to the pump chamber.
  3. An applicant may use a peat filter system if:
    - a. The native soil is excessively permeable,

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- b. There is little native soil overlying fractured or excessively permeable rock,
  - c. A reduction in setback distances or minimum vertical separation is desired, or
  - d. Cold weather inhibits performance of other treatment or disposal technologies.
- B. Performance.** An applicant shall ensure that a peat filter is designed so that it produces treated wastewater that meets the following criteria:
  - 1. TSS of 15 milligrams per liter, 30-day arithmetic mean;
  - 2. BOD<sub>5</sub> of 15 milligrams per liter, 30-day arithmetic mean;
  - 3. Total nitrogen (as nitrogen) of 53 milligrams per liter, 5-month arithmetic mean; and
  - 4. Total coliform level of 100,000 (Log<sub>10</sub> 5) colony forming units per 100 milliliters, 95th percentile.
- C. Notice of Intent to Discharge.** In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
  - 1. Specifications for the peat media proposed for use in the peat filter or provided in the peat module, including:
    - a. Porosity;
    - b. Degree of humification;
    - c. pH;
    - d. Particle size distribution;
    - e. Moisture content;
    - f. A statement of whether the peat is air dried, and whether the peat is from sphagnum moss or bog cotton; and
    - g. A description of the degree of decomposition;
  - 2. Specifications for installing the peat media; and
  - 3. If a peat module is used:
    - a. The name and address of the manufacturer,
    - b. The model number, and
    - c. A copy of the manufacturer's warranty.
- D. Design requirements.**
  - 1. If a pump tank is used to dose the peat module or bed, an applicant shall:
    - a. Ensure that the pump tank is sized to contain the dose volume and a reserve volume above the high water alarm that will contain the volume of daily design flow; and
    - b. Use a control panel with a programmable timer to dose at the applicable loading rate.
  - 2. Peat module system. In addition to the applicable requirements in R18-9-A312, the applicant shall:
    - a. Size the gravel bed supporting the peat filter modules to allow it to act as a disposal works and ensure that the bed is level, long, and narrow, and installed on contour to optimize lateral movement away from the disposal area;
    - b. For modules designed to allow wastewater flow through the peat filter and base material into underlying native soil, size the base on which the modules rest to accommodate the soil absorption rate of the native soil;
    - c. Place fill over the module so that it conforms to the manufacturer's specification. If the fill is planted, the applicant shall use only grass or shallow rooted plants; and
    - d. Ensure that the peat media depth is at least 24 inches, the peat is installed with the top and bottom surfaces level, and the maximum wastewater loading rate is 5.5 gallons per day per square foot of inlet surface at the rated daily design flow, unless the Department approves a different wastewater loading rate under R18-9-A309(E).
- 3. Peat filter bed system. In addition to the applicable requirements in R18-9-A312, the applicant shall ensure that:
  - a. The bed is filled with peat derived from sphagnum moss and compacted according to the installation specification;
  - b. The maximum wastewater loading rate is 1 gallon per day per square foot of inlet surface at the rated daily design flow;
  - c. At least 24 inches of installed peat underlies the distribution piping and 10 to 14 inches of installed peat overlies the piping;
  - d. The cover material over the peat filter bed is slightly mounded to promote runoff of rainfall. The applicant shall not place additional fill over the peat; and
  - e. The peat is air dried, with a porosity greater than 90 percent, and a particle size distribution of 92 to 100 percent passing a No. 4 sieve and less than 8 percent passing a No. 30 sieve.
- E. Installation requirements.** In addition to the applicable requirements in R18-9-A313(A), the applicant shall:
  - 1. Peat module system.
    - a. Compact the bottom of all excavations for the filter modules, pump, aerator, and other components to provide adequate foundation, slope the bottom toward the discharge to minimize ponding, and ensure that the bottom is flat, and free of debris, rocks, and sharp objects. If the excavation is uneven or rocky, the applicant shall use a bed of sand or pea gravel to create an even, smooth surface;
    - b. Place the peat filter modules on a level, 6-inch deep gravel bed;
    - c. Place backfill around the modules and grade the backfill to divert surface water away from the modules;
    - d. Not place objects on or move objects over the system area that might damage the module containers or restrict airflow to the modules;
    - e. Cover gaps between modules to prevent damage to the system;
    - f. Fit each system with at least one sampling port that allows collection of wastewater at the exit from the final treatment module;
    - g. Provide the modules and other components with anti-buoyancy devices to ensure stability in the event of flooding or high water table conditions; and
    - h. Provide a mechanism for draining the filter module inlet line; or
  - 2. Peat filter bed system.
    - a. Scarify the bottom and sides of the leaching bed excavation to remove any smeared surfaces, and:
      - i. Unless directed by an installation specification consistent with this Chapter, place peat media in the excavation in 6-inch lifts; and
      - ii. Compact each lift before the next lift is added. The applicant shall take care to avoid compaction of the underlying native soil;
    - b. Lay distribution pipe in trenches cut in the compacted peat, and
      - i. Ensure that at least 3 inches of aggregate underlie the pipe to reduce clogging of holes or scouring of the peat surrounding the pipe, and
      - ii. Place peat on top of and around the sides of the pipes.
- F. Operation and maintenance requirements.** In addition to the applicable requirements in R18-9-A313(B), the permittee shall

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

inspect the finished grade over the peat filter for proper drainage, protection from damaging loads, and root invasion of the wastewater distribution system and perform maintenance as needed.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E312. 4.12 General Permit: Textile Filter, Less Than 3000 Gallons Per Day Design Flow**

A. A 4.12 General Permit allows for the use of a textile filter receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).

1. Definition. For purposes of this Section, a "textile filter" means a disposal technology characterized by:
  - a. The flow of wastewater into a packed bed filter in a containment structure or structures. The packed bed filter uses a textile filter medium with high porosity and surface area; and
  - b. The textile filter medium provides further treatment by removing suspended material from the wastewater by physical straining, and reducing nutrients by microbial action.
2. An applicant may use a textile filter in conjunction with a two-compartment septic tank or a two-tank system if the second compartment or tank is used as a recirculation and blending tank. The applicant shall divert a portion of the wastewater flow from the textile filter back into the second tank for further treatment.
3. An applicant may use a textile filter if:
  - a. Nitrogen reduction is desired,
  - b. The native soil is excessively permeable,
  - c. There is little native soil overlying fractured or excessively permeable rock, or
  - d. A reduction in setback distances or minimum vertical separation is desired.

B. Performance. An applicant shall ensure that a textile filter is designed so that it produces treated wastewater that meets the following criteria:

1. TSS of 15 milligrams per liter, 30-day arithmetic mean;
2. BOD<sub>5</sub> of 15 milligrams per liter, 30-day arithmetic mean;
3. Total nitrogen (as nitrogen) of 30 milligrams per liter, five-month arithmetic mean, or 15 milligrams, five-month arithmetic mean per liter if documented under subsection (C)(4); and
4. Total coliform level of 100,000 (Log<sub>10</sub> 5) colony forming units per 100 milliliters, 95th percentile.

C. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:

1. The name and address of the filter manufacturer;
2. The filter model number;
3. A copy of the manufacturer's filter warranty;
4. If the system is for nitrogen reduction to 15 milligrams per liter, five-month arithmetic mean, specifications on the nitrogen reduction performance of the filter system and corroborating third-party test data;
5. The manufacturer's operation and maintenance recommendations to achieve a 20-year operational life; and
6. If a pump or aerator is required for proper operation, the pump or aerator model number and a copy of the manufacturer's warranty.

D. Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:

1. The textile medium has a porosity of greater than 80 percent;
2. The wastewater is delivered to the textile filter by gravity flow or a pump;
3. If a pump is used to dose the textile filter, the pump and appurtenances meet following criteria:
  - a. The textile media loading rate and wastewater recirculation rate are based on calculations that conform with performance data listed in the reviewed product list maintained by the Department as required under R18-9-A309(E),
  - b. The tank and recirculation components are sized to contain the dose volume and a reserve volume above the high water level alarm that will contain the volume of daily design flow, and
  - c. A control panel with a programmable timer is used to dose the textile media at the applicable loading rate and wastewater recirculation rate.
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall:
  1. Before placing the filter modules, slope the bottom of the excavation for the modules toward the discharge point to minimize ponding;
  2. Ensure that the bottom of all excavations for the filter modules, pump, aerator, or other components is level and free of debris, rocks, and sharp objects. If the excavation is uneven or rocky, the applicant shall use a bed of sand or pea gravel to create an even, smooth surface;
  3. Provide the modules and other components with anti-buoyancy devices to ensure they remain in place in the event of high water table conditions; and
  4. Provide a mechanism for draining the filter module inlet line.
- F. Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313, the permittee shall not flush corrosives or other materials known to damage the textile material into any drain that transmits wastewater to the on-site wastewater treatment facility.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E313. 4.13 General Permit: Denitrifying System Using Separated Wastewater Streams, Less Than 3000 Gallons Per Day Design Flow**

A. A 4.13 General Permit allows for the use of a separated wastewater streams, denitrifying system for a dwelling.

1. Definition. For purposes of this Section a "denitrifying system using wastewater streams" means a gravity flow treatment and disposal system for a dwelling that requires separate plumbing drains for conducting dishwasher, kitchen sink, and toilet flush water to wastewater treatment tank "A" and all other wastewater to a wastewater treatment tank "B."
  - a. Treated wastewater from tanks "A" and "B" is delivered to an engineered composite disposal bed system that includes an upper distribution pipe to deliver treated wastewater from tank "A" to a columnar celled, sand-filled bed.
  - b. The wastewater drains downward into a sand bed, then into a pea gravel bed with an internal distribution pipe system that delivers the treated wastewater from tank "B."



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- c. The entire composite bed is constructed within an excavation about 6 feet deep.
- d. The system operates under gravity flow from tanks "A" and "B."
- e. An engineered sampling assembly is installed at the midpoint of the disposal line run and at the base of the composite bed during construction to monitor system performance.
- 2. An applicant may use a separated wastewater streams, denitrifying system where total nitrogen reduction is required under this Article before release to the native soil.
- B. Performance.** An applicant shall ensure that a separated wastewater streams, denitrifying system is designed so that the treated wastewater released to the native soil meets the following criteria:
  - 1. TSS of 30 milligrams per liter, 30-day arithmetic mean;
  - 2. BOD<sub>5</sub> of 30 milligrams per liter, 30-day arithmetic mean;
  - 3. Total nitrogen (as nitrogen) of 30 milligrams per liter, five-month arithmetic mean; and
  - 4. Total coliform level of 1,000,000 (Log<sub>10</sub> 6) colony forming units per 100 milliliters, 95th percentile.
- C. Notice of Intent to Discharge.** The applicant shall comply with the Notice of Intent to Discharge requirements in R18-9-A301(B) and R18-9-A309(B).
- D. Design, installation, operation, and maintenance requirements.** The applicant shall comply with the applicable design, installation, operation, and maintenance requirements in R18-9-A312, R18-9-A313(A), and R18-9-A313(B).
- E. Reference design.**
  - 1. An applicant may use a separated wastewater streams, denitrifying system achieving the performance requirements specified in subsection (B) by following a reference design on file with the Department.
  - 2. The applicant shall file a form provided by the Department for supplemental information about the proposed system with the applicant's submittal of the Notice of Intent to Discharge.
- D. Design requirements.** In addition to the requirements in R18-9-A312, an applicant shall:
  - 1. Install a sewage vault with a capacity that is at least 10 times the daily design flow determined by R18-9-A314(4)(a)(i),
  - 2. Use design elements to prevent the buoyancy of the vault if installed in an area where a high groundwater table may impinge on the vault,
  - 3. Test the sewage vault for leakage using the procedure under R18-9-A314(5)(d). The tank passes the water test if the water level does not drop over a 24-hour period,
  - 4. Install an alarm or signal on the vault to indicate when 85 percent of the vault capacity is reached, and
  - 5. Contract with a person who licensed a vehicle under 18 A.A.C. 13, Article 11 to pump out the vault on a schedule specified within the contract to ensure that the vault is pumped before full.
- E. Installation, operation, and maintenance requirements.** The applicant shall comply with the applicable installation, operation, and maintenance requirements in R18-9-A313(A) and (B).
- F. Reference design.**
  - 1. An applicant may use a sewage vault that achieves the performance requirements in subsection (B) by following a reference design on file with the Department.
  - 2. The applicant shall file a form provided by the Department for supplemental information about the proposed storage vault with the applicant's submittal of the Notice of Intent to Discharge.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E315. 4.15 General Permit: Aerobic System Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.15 General Permit allows for the construction and use of an aerobic system that uses aeration for treatment.**
    - 1. **Definition.** For purposes of this Section, an "aerobic system" means a treatment unit consisting of components that:
      - a. Mechanically introduce oxygen to wastewater,
      - b. Typically provide clarification of the wastewater after aeration, and
      - c. Convey the treated wastewater by pressure or gravity distribution to the disposal works.
    - 2. An applicant may use an aerobic system if:
      - a. Enhanced biological processing is needed to treat wastewater with high organic content,
      - b. A soil or site condition is not adequate for installation of a standard septic tank and disposal works under R18-9-E302,
      - c. A highly treated wastewater amenable to disinfection is needed, or
      - d. Nitrogen removal from the wastewater is needed and removal performance of the system is documented according to subsection (C)(6).
  - B. Performance.**
    - 1. An applicant shall ensure that the aerobic system is designed so that the treated wastewater released to the native soil meets the following criteria:
      - a. TSS of 30 milligrams per liter, 30-day arithmetic mean;
      - b. BOD<sub>5</sub> of 30 milligrams per liter, 30-day arithmetic mean;
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- R18-9-E314. 4.14 General Permit: Sewage Vault, Less Than 3000 Gallons Per Day Design Flow**
- A. A 4.14 General Permit allows for the use of a sewage vault that receives sewage.**
    - 1. An applicant may use a sewage vault if a severe site or operational constraint prevents installation of a conventional septic tank and disposal works or any other on-site wastewater treatment facility allowed under this Article.
    - 2. An applicant may install a sewage vault as a temporary measure if connection to a sewer or installation of another on-site wastewater treatment facility occurs within two years of the connection or installation.
  - B. Performance.** An applicant shall:
    - 1. Not allow a discharge from a sewage vault to the native soil or land surface, and
    - 2. Pump and dispose of vault contents at a sewage treatment facility or other sewage disposal mechanism allowed by law.
  - C. Notice of Intent to Discharge.** The applicant shall comply with the Notice of Intent to Discharge requirements in R18-9-A301(B) and R18-9-A309(B).



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- c. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean, or as low as 15 milligrams, five-month arithmetic mean per liter if documented under subsection (C)(6); and
    - d. Total coliform level of 300,000 ( $\text{Log}_{10}$  5.5) colony forming units per 100 milliliters, 95th percentile.
  - 2. An applicant may use an aerobic system that meets the following less stringent performance criteria if the aerobic technology is listed by the Department under R18-9-A309(E) and the Department bases its review and listing on the technology being less costly and simpler to operate when compared to other aerobic technologies:
    - a. TSS of 60 milligrams per liter, 30-day arithmetic mean;
    - b.  $\text{BOD}_5$  of 60 milligrams per liter, 30-day arithmetic mean;
    - c. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean, or as low as 15 milligrams, five month arithmetic mean per liter, if documented under subsection (C)(6); and
    - d. Total coliform level of 1,000,000 ( $\text{Log}_{10}$  7) colony forming units per 100 milliliters, 95th percentile.
  - C. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
    - 1. The name and address of the aerobic system manufacturer;
    - 2. The model number of the aerobic system;
    - 3. Evidence of performance specified in subsection (B)(1) or (B)(2), as applicable;
    - 4. A list of pretreatment components needed to meet performance requirements;
    - 5. A copy of the manufacturer's warranty and operation and maintenance recommendations to achieve performance over a 20-year operational life; and
    - 6. If the aerobic system will be used for nitrogen removal from the wastewater, either:
      - a. Evidence of a valid product listing under R18-9-E309(E) indicating nitrogen removal performance, or
      - b. Specifications and third party test data corroborating nitrogen reduction to the intended level.
  - D. Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:
    - 1. The wastewater is delivered to the aerobic treatment unit by gravity flow either directly or by a lift pump;
    - 2. An interceptor or other pretreatment device is incorporated if necessary to meet the performance criteria specified in subsection (B)(1) or (2), or if recommended by the manufacturer for pretreatment if a garbage disposal appliance is used;
    - 3. A clarifier is provided after aeration for any treatment technology that achieves performance that is equal to or better than the performance criteria specified in subsection (B)(1); and
    - 4. Ports for inspection and monitoring are provided to verify performance.
  - E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall ensure that:
    - 1. The installation of the aerobic treatment components conforms to manufacturer's specifications that do not conflict with Articles 1 and 3 of this Chapter and to the design documents specified in the Construction Authorization issued under R18-9-A301(D)(1)(c); and
    - 2. Excavation and foundation work, and backfill placement is performed to prevent differential settling and adverse drainage conditions.
  - F. Operation and maintenance requirements. The permittee shall:
    - 1. Follow the applicable requirements in R18-9-A313(B), and
    - 2. Ensure that filters are cleaned and replaced as necessary.
  - G. Reference design.
    - 1. An applicant may use an aerobic system that achieves the applicable performance requirements by following a reference design on file with the Department.
    - 2. An applicant using a reference design shall submit, with the Notice of Intent to Discharge, supplemental information specific to the proposed installation on a form approved by the Department.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).
- R18-9-E316. 4.16 General Permit: Nitrate-Reactive Media Filter, Less Than 3000 Gallons Per Day Design Flow**
- A. A 4.16 General Permit allows for the construction and use of a nitrate-reactive media filter receiving pretreated wastewater.
    - 1. Definition. "Nitrate-reactive media filter" means a treatment technology characterized by:
      - a. The application of pretreated, nitrified wastewater to a packed bed filter in a containment structure. A packed bed filter consists of nitrate-reactive media that receives pretreated wastewater under appropriate design and operational conditions, and
      - b. The ability of the nitrate-reactive filter to further treat the nitrified wastewater by removing total nitrogen by chemical and physical processes.
    - 2. An applicant shall use a nitrate-reactive media filter with a treatment or disposal works to pretreat and dispose of the wastewater.
    - 3. An applicant may use a nitrate-reactive media filter if nitrogen reduction is required under this Article.
  - B. Restrictions. The applicant shall not use any product to supply pretreated wastewater to the nitrate-reactive media filter unless:
    - 1. The product meets the pretreatment requirements for the filter based on product performance information in the product listing, and
    - 2. The product is listed by the Department as a reviewed product under R18-9-A309(E).
  - C. Performance. An applicant shall ensure that a nitrate-reactive media filter is designed so that it produces treated wastewater that does not exceed the following criteria:
    - 1. TSS of 30 milligrams per liter, 30-day arithmetic mean;
    - 2.  $\text{BOD}_5$  of 30 milligrams per liter, 30-day arithmetic mean;
    - 3. Total nitrogen (as nitrogen) of 10 milligrams per liter, five-month arithmetic mean; and
    - 4. Total coliform level of 1,000,000 ( $\text{Log}_{10}$  6) colony forming units per 100 milliliters, 95th percentile.
  - D. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
    - 1. The name and address of the filter manufacturer;
    - 2. The filter model number;
    - 3. The manufacturer's requirements for pretreated wastewater supplied to the nitrate-reactive media filter;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

4. The manufacturer's specifications for design, installation, and operation for the nitrate-reactive media filter system and appurtenances;
  5. The manufacturer's warranty for the nitrate-reactive media filter system and appurtenances;
  6. The manufacturer's operation and maintenance recommendations to achieve a 20-year operational life for the nitrate-reactive media filter system and appurtenances; and
  7. The manufacturer name and model number for all appurtenances that significantly contribute to achieving the performance required in subsection (C).
- E.** Design requirements. In addition to the applicable design requirements specified in R18-9-A312, an applicant shall ensure that:
1. The nitrate-reactive media filter and appurtenances conform with manufacturer's specifications,
  2. The loading rate of pretreated wastewater to the nitrate-reactive media inlet surface meets the manufacturer's specification and does not exceed 5.00 gallons per day per square foot of media inlet surface area, and
  3. The bed packed with nitrate reactive media is at least 24 inches thick.
- F.** Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall ensure that:
1. The nitrate-reactive media filter and appurtenances are installed according to manufacturer's specifications to achieve proper wastewater treatment, hydraulic performance, and operational life; and
  2. Anti-buoyancy devices are installed when high water table or extreme soil saturation conditions are likely during operational life of the facility.
- G.** Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B) and the manufacturer's specifications for the nitrite-reactive media filter, the permittee shall not dispose of corrosives or other materials that are known to damage the nitrate-reactive media filter system into the on-site wastewater treatment facility.
- Historical Note**
- New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Section repealed; new Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (Supp. 05-3).
- R18-9-E317. 4.17 General Permit: Cap System, Less Than 3000 Gallons Per Day Design Flow**
- A.** A 4.17 General Permit allows for the use of a cap fill cover over a conventional trench disposal works receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
1. Definition. For purposes of this Section, a "cap system" means a disposal technology characterized by:
    - a. A soil cap, consisting of engineered fill placed over a trench that is not as deep as a trench allowed by R18-9-E302; and
    - b. A design that compensates for reduced trench depth by maintaining and enhancing the infiltration of wastewater into native soil through the trench side-walls.
  2. An applicant may use a cap system if:
    - a. There is little native soil overlying fractured or excessively permeable rock, or
    - b. A high water table does not allow the minimum vertical separation to be met by a system authorized by R18-9-E302.
- B.** Performance. An applicant shall ensure that the design soil absorption rate and vertical separation complies with this Chapter for a trench, based on the following performance, unless additional pretreatment is provided:
1. TSS of 75 milligrams per liter, 30-day arithmetic mean;
  2. BOD<sub>5</sub> of 150 milligrams per liter, 30-day arithmetic mean;
  3. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean; and
  4. Total coliform level of 100,000,000 (Log<sub>10</sub> 8) colony forming units per 100 milliliters, 95th percentile.
- C.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit specifications for the proposed cap fill material.
- D.** Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:
1. The soil texture from the natural grade to the depth of the layer or the water table that limits the soil for unsaturated wastewater flow is no finer than silty clay loam;
  2. Cap fill material used is free of debris, stones, frozen clods, or ice, and is the same as or one soil group finer than that of the disposal site material, except that the applicant shall not use fill material finer than clay loam as an additive;
  3. Trench construction.
    - a. The trench bottom is at least 12 inches below the bottom of the disposal pipe and not more than 24 inches below the natural grade, and the trench bottom and disposal pipe are level;
    - b. The aggregate cover over the disposal pipe is 2 inches thick and the top of the aggregate cover is level and not more than 9 inches above the natural grade;
    - c. The cap fill cover above the top of the aggregate cover is at least 9 inches but not more than 18 inches thick. The applicant shall ensure that:
      - i. The cap surface is protected to prevent erosion and sloped to route surface drainage around the ends of the trench; and
      - ii. If the top of the aggregate is at or below the original ground surface, the cap surface has side slopes not more than one vertical to three horizontal; or
      - iii. If the top of the aggregate is above the original ground surface, the horizontal extent of the finished fill edges is at least 10 feet beyond the nearest trench sidewall or endwall;
    - d. The criteria for trench length, bottom width and spacing, and disposal pipe size is the same as that for the trench system prescribed in R18-9-E302;
    - e. Permeable geotextile fabric is placed on the aggregate top, trench end, and sidewalls extending above natural grade;
    - f. The native soil within the disposal site and the adjacent downgradient area to a 50-foot horizontal distance does not exceed a 12 percent slope if the top of the aggregate cover extends above the natural grade at any location along the trench length. The applicant shall ensure that the slope within the disposal site and the adjacent downgradient area to a 50-foot horizontal distance does not exceed 20 percent if the top of the aggregate cover does not extend above the natural grade;
    - g. The fill material is compacted to a density of 90 percent of the native soil if the invert elevation of the

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

disposal pipe is at or above the natural grade at any location along the trench length;

- h. At least one observation port is installed to the bottom of each cap fill trench;
  - i. The effective absorption area for each trench is the sum of the trench bottom area and the sidewall area. The height of the sidewall used for calculating the sidewall area is the vertical distance between the trench bottom and the lowest point of the natural land surface along the trench length; and
  - j. If the applicant uses correction factors for soil absorption rate under R18-9-A312(D)(3) and minimum vertical separation under R18-9-A312(E), additional wastewater pretreatment is provided.
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall prepare the disposal site when high soil moisture is not present and equipment operations do not create platy soil conditions. The applicant shall:
- 1. Plow or scarify the fill area to disrupt the vegetative mat while avoiding smearing,
  - 2. Construct trenches as specified in subsection (D)(3),
  - 3. Scarify the site and apply part of the cap fill to the fill area and blend the fill with the scarified native soil within the contact layers, and
  - 4. Follow the construction design specified in the Construction Authorization issued under R18-9-A301(D)(1)(c).
- F. Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B), the permittee shall inspect and repair the cap fill and other surface features as needed to ensure proper disposal function, proper drainage of surface water, and prevention of damaging loads on the cap.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E318. 4.18 General Permit: Constructed Wetland, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.18 General Permit allows for the use of a constructed wetland receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
- 1. Definition. "Constructed wetland" means a treatment technology characterized by a lined excavation, filled with a medium for growing plants and planted with marsh vegetation. The treated wastewater flows horizontally through the medium in contact with the aquatic plants.
    - a. As the wastewater flows through the wetland system, additional treatment is provided by filtering, settling, volatilization, and evapotranspiration.
    - b. The wetland system allows microorganisms to break down organic material and plants to take up nutrients and other pollutants.
    - c. The wastewater treated by a wetland system is discharged to a subsurface soil disposal system.
  - 2. An applicant may use a constructed wetland if further wastewater treatment is needed before disposal.
- B. Performance. An applicant shall ensure that a constructed wetland is designed so that it produces treated wastewater that meets the following criteria:
- 1. TSS of 20 milligrams per liter, 30-day arithmetic mean;
  - 2. BOD<sub>5</sub> of 20 milligrams per liter, 30-day arithmetic mean;
  - 3. Total nitrogen (as nitrogen) of 45 milligrams per liter, five-month arithmetic mean; and

- 4. Total coliform level of 100,000 (Log<sub>10</sub> 5) colony forming units per 100 milliliters, 95th percentile.

- C. Notice of Intent to Discharge. The applicant shall comply with the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B).
- D. Design, installation, operation, and maintenance requirements. The permittee shall comply with the applicable design, installation, operation, and maintenance requirements in R18-9-A312, R18-9-A313(A), and R18-9-A313(B).
- E. Reference design.
  - 1. An applicant may use a constructed wetland that achieves the performance requirements in subsection (B) by following a reference design on file with the Department.
  - 2. The applicant shall file a form provided by the Department for supplemental information about the proposed constructed wetland with the applicant's submittal of the Notice of Intent to Discharge.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E319. 4.19 General Permit: Sand-Lined Trench, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.19 General Permit allows for the use of a sand-lined trench receiving wastewater treated to a level equal to or better than that specified in R18-9-E302(B).
- 1. Definition. For purposes of this Section, a "sand-lined trench" means a disposal technology characterized by:
    - a. Engineered placement of sand or equivalently graded glass in trenches excavated in native soil,
    - b. Wastewater dispersed throughout the media by pressure distribution technology as specified in R18-9-E304 using a timer-controlled pump in periodic uniform doses that maintain unsaturated flow conditions, and
    - c. Wastewater treated during travel through the media and absorbed into the native soil at the bottom of the trench.
  - 2. An applicant may use a sand-lined trench if:
    - a. The native soil is excessively permeable,
    - b. There is little native soil overlying fractured or excessively permeable rock, or
    - c. Reduction in setback distances, or minimum vertical separation is desired.
- B. Performance. An applicant shall ensure that a sand-lined trench is designed so that treated wastewater released to the native soil meets the following criteria:
- 1. TSS of 20 milligrams per liter, 30-day arithmetic mean;
  - 2. BOD<sub>5</sub> of 20 milligrams per liter, 30-day arithmetic mean;
  - 3. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean; and
  - 4. Total coliform level of 100,000 (Log<sub>10</sub> 5) colony forming units per 100 milliliters, 95th percentile.
- C. Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit specifications for the proposed media in the trench.
- D. Design requirements. In addition to the applicable requirements in R18-9-A312, an applicant shall ensure that:
- 1. The media used in the trench is mineral sand, crushed glass, or cinder sand and that:
    - a. The media conforms to "Standard Specifications for Concrete Aggregates, C33-03," which is incorporated by reference in R18-9-E308(D)(2), "Standard

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

Test Method for Materials Finer than 75- $\mu$ m (No. 200) Sieve in Mineral Aggregates by Washing, C117-04 (2004),” published by the American Society for Testing and Materials, or an equivalent method approved by the Department. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959; and

- b. Sieve analysis complies with the “Standard Test Method for Materials Finer than 75- $\mu$ m (No. 200) Sieve in Mineral Aggregates by Washing, C11704,” which is incorporated by reference in subsection (D)(1)(a), or an equivalent method approved by the Department;
2. Trenches.
  - a. Distribution pipes are capped on the end;
  - b. The spacing between trenches is at least two times the distance between the bottom of the distribution pipe and the bottom of the trench or 5 feet, whichever is greater;
  - c. The inlet filter media surface, wastewater distribution pipe, and bottom of the trench are level and the maximum effluent loading rate is not more than 1.0 gallon per day per square foot of sand media inlet surface;
  - d. The depth of sand below the gravel layer containing the distribution system is at least 24 inches;
  - e. The gravel layer containing the distribution system is 5 to 12 inches thick, at least 36 inches wide, and level;
  - f. Permeable geotextile fabric is placed at the base of and along the sides of the gravel layer, as necessary. The applicant shall ensure that:
    - i. Geotextile fabric is placed on top of the gravel layer, and
    - ii. Any cover soil placed on top of the geotextile fabric is capable of maintaining vegetative growth while allowing passage of air;
  - g. At least one observation port is installed to the bottom of each sand lined trench;
  - h. If the trench is installed in excessively permeable soil or rock, at least 1 foot of loamy sand is placed in the trench below the filter media. The minimum vertical separation distance is measured from the bottom of the loamy sand; and
  - i. The trench design is based on the design flow, native soil absorption area at the trench bottom, minimum vertical separation below the trench bottom, design effluent infiltration rate at the top of the sand fill, and the adjusted soil absorption rate for the final effluent quality; and
3. The dosing system consists of a timer-controlled pump, electrical components, and distribution network and that:
  - a. Orifice spacing on the distribution piping does not exceed 4 square feet of media infiltrative surface area per orifice, and
  - b. The dosing rate is at least four doses per day and not more than 24 doses per day.
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A), an applicant shall ensure that the fil-

ter media is placed in the trench to prevent differential settling and promote a uniform density throughout of 1.3 to 1.4 grams per cubic centimeter.

- F. Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B), the permittee shall ensure that:
  1. The septic tank filter and pump tank are inspected and cleaned;
  2. The dosing tank pump screen, pump switches, and floats are cleaned yearly and any residue is disposed of lawfully; and
  3. Lateral lines are flushed and the liquid waste discharged into the treatment system headworks.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E320. 4.20 General Permit: Disinfection Devices, Less Than 3000 Gallons Per Day Design Flow**

- A. A 4.20 General Permit allows for the use of a disinfection device to reduce the level of harmful organisms in wastewater, provided the wastewater is pretreated to equal or better than the performance criteria in R18-9-E315(B)(1)(a). An applicant may use a disinfection device if:
  1. The disinfection device kills the microorganisms by exposing the wastewater to heat, radiation, or a chemical disinfectant.
  2. Some means of disinfection is required before discharge.
  3. A reduction in harmful microorganisms, as represented by the total coliform level, is needed for surface or near surface disposal of the wastewater or reduction of the minimum vertical separation distance specified in R18-9-A312(E) is desired.
- B. Restrictions.
  1. Unless the disinfection device is designed to operate without electricity, an applicant shall not install the device if electricity is not permanently available at the site.
  2. The 4.20 General Permit does not authorize a disinfection device that releases chemical disinfectants or disinfection byproducts harmful to plants or wildlife in the discharge area or causes a violation of an Aquifer Water Quality Standard.
- C. Performance. An applicant shall ensure that:
  1. A fail-safe wastewater control or operational process is incorporated to prevent a release of inadequately treated wastewater;
  2. The performance of a disinfection device meets the level of disinfection needed for the type of disposal and produces effluent that:
    - a. Is nominally free of coliform bacteria;
    - b. Is clear and odorless, and
    - c. Has a dissolved oxygen content of at least 6 milligrams per liter;
- D. Design requirements. An applicant shall ensure that an on-site wastewater treatment facility with a disposal works designed to discharge to the land surface includes disinfection technology that conforms with the following requirements:
  1. Chlorine disinfection.
    - a. Available chlorine is maintained as indicated in the following table:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

| pH of Waste-water (s.u.) | Required Concentration of Available Chlorine in Wastewater (mg/L)                            |                                                                                              |
|--------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
|                          | Wastewater to the Disinfection Device Meets a TSS of 30 mg/L and BOD <sub>5</sub> of 30 mg/L | Wastewater to the Disinfection Device Meets a TSS of 20 mg/L and BOD <sub>5</sub> of 20 mg/L |
| 6                        | 15 – 30                                                                                      | 6 – 10                                                                                       |
| 7                        | 20 – 35                                                                                      | 10 – 20                                                                                      |
| 8                        | 30 – 45                                                                                      | 20 – 35                                                                                      |

b. The minimum chlorine contact time is 15 minutes for wastewater at 70°F and 30 minutes for wastewater at 50°F, based on a flow equal to four times the daily design flow;

2. Contact chambers are watertight and made of plastic, fiberglass, or other durable material and are configured to prevent short-circuiting; and
3. For a device that disinfects by another method other than chlorine disinfection, dose and contact time are determined to reliably produce treated wastewater that is nominally free of coliform bacteria, based on a flow equal to four times the daily design flow.

**E. Operation and maintenance.** A permittee shall ensure that:

1. If the disinfection device relies on the addition of chemicals for disinfection, the device is operated to minimize the discharge of disinfection chemicals while achieving the required level of disinfection; and
2. The disinfection device is inspected and maintained at least once every three months by a qualified person.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E321. 4.21 General Permit: Surface Disposal, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.21 General Permit allows for surface application of treated wastewater that is nominally free of coliform bacteria produced by the treatment works of an on-site wastewater treatment facility.
- B.** Performance. An applicant shall ensure that the treated wastewater distributed for surface application meets the following criteria:
  1. TSS of 30 milligrams per liter, 30-day arithmetic mean;
  2. BOD<sub>5</sub> of 30 milligrams per liter, 30-day arithmetic mean;
  3. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean;
  4. Is nominally free of total coliform bacteria as indicated by a total coliform level of Log<sub>10</sub> 0 colony forming units per 100 milliliters, 95th percentile.
- C.** Restrictions. The applicant shall not install the disposal works if weather records indicate that:
  1. Average minimum temperature in any month is 20°F or less, or
  2. Over 1/3 of the average annual precipitation falls in a 30-day period.
- D.** Design requirements. An applicant shall ensure that:
  1. The land surface application rate does not exceed the lowest application rate as determined under R18-9-

A312(D) minus no greater than 50 percent of the evapotranspiration that may occur during the month with the least evapotranspiration in any soil zone within the top 5 feet of soil;

2. The design incorporates sprinklers, bubbler heads, or other dispersal components that optimize wastewater loading rates and prevent ponding on the land surface;
  3. The design specifies containment berms:
    - a. Compacted to a minimum of 95 percent Proctor;
    - b. Designed to contain the runoff of the 10-year, 24-hour storm event in addition to the daily design flow; and
    - c. Designed to remain intact in the event of a more severe rainfall event; and
  4. The design incorporates placement of signage on hose bibs, human ingress points to the surface disposal area, and at intervals around the perimeter of the surface disposal area to provide notification of use of treated wastewater and a warning against ingestion.
- E.** Installation requirements. An applicant shall ensure that installation of the wastewater dispersal components conforms to manufacturer's specifications that do not conflict with this Article and to the design documents specified in the Construction Authorization issued under R18-9-A301(D)(1)(c).
- F.** Operation and maintenance. In addition to the requirements specified in R18-9-A313(B), the permittee shall operate and maintain the surface disposal works to:
1. Prevent treated wastewater from coming into contact with drinking fountains, water coolers, or eating areas;
  2. Contain all treated wastewater within the bermed area; and
  3. Ensure that hose bibs discharging treated wastewater are secured to prevent use by the public.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Section repealed; new Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (Supp. 05-3).

**R18-9-E322. 4.22 General Permit: Subsurface Drip Irrigation Disposal, Less Than 3000 Gallons Per Day Design Flow**

- A.** A 4.22 General Permit allows for the construction and use of a subsurface drip irrigation disposal works that receives high quality wastewater from an on-site wastewater treatment facility to dispense the wastewater to an irrigation system that is buried at a shallow depth in native soil. A 4.22 General Permit includes a pressure distribution system under R18-9-E304.
  1. The subsurface drip irrigation disposal works is designed to disperse the treated wastewater into the soil under unsaturated conditions by pressure distribution and timed dosing. The applicant shall ensure that the pressure distribution system meets the requirements specified in R18-9-E304, and the Department shall consider whether the requirements of R18-9-E304 are met when processing the application under R18-9-A301(B).
  2. A subsurface drip irrigation disposal works reduces the downward percolation of wastewater by enhancing evapotranspiration to the atmosphere.
  3. An applicant may use a subsurface drip irrigation disposal works to overcome site constraints, such as high groundwater, shallow soils, slowly permeable soils, or highly permeable soils, or if water conservation is needed.
  4. The subsurface drip irrigation disposal works includes pipe, pressurization and dosing components, controls,



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

and appurtenances to reliably deliver treated wastewater to driplines using supply and return manifold lines.

**B. Performance.** An applicant shall ensure that:

1. Treated wastewater that meets the following criteria is delivered to a subsurface drip irrigation disposal works:
  - a. Performance Category A.
    - i. TSS of 20 milligrams per liter, 30-day arithmetic mean;
    - ii. BOD<sub>5</sub> of 20 milligrams per liter, 30-day arithmetic mean;
    - iii. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean; and
    - iv. Total coliform level of one colony forming unit per 100 milliliters, 95th percentile; or
  - b. Performance Category B.
    - i. TSS of 30 milligrams per liter, 30-day arithmetic mean;
    - ii. BOD<sub>5</sub> of 30 milligrams per liter, 30-day arithmetic mean;
    - iii. Total nitrogen (as nitrogen) of 53 milligrams per liter, five-month arithmetic mean; and
    - iv. Total coliform level of 300,000 (Log<sub>10</sub> 5.5) colony forming units per 100 milliliters, 95th percentile; and
2. The subsurface drip irrigation works is designed to meet the following performance criteria:
  - a. Prevention of ponding on the land surface, and
  - b. Incorporation of a fail-safe wastewater control or operational process to prevent inadequately treated wastewater from being discharged.

**C. Notice of Intent to Discharge.** In addition to the Notice of Intent to Discharge requirements in R18-9-A301(B), R18-9-A309(B), and R18-9-E304, the applicant shall submit:

1. Documentation of the pretreatment method proposed to achieve the wastewater criteria specified in subsection (B)(1), such as the type of pretreatment system and the manufacturer's warranty;
2. Initial filter and drip irrigation flushing settings;
3. Site evapotranspiration calculations if used to reduce the size of the disposal works; and
4. If supplemental irrigation water is introduced to the subsurface drip irrigation disposal works, an identification of the cross-connection controls, backflow controls, and supplemental water sources.

**D. Design requirements.** In addition to the applicable design requirements specified in R18-9-A312, an applicant shall ensure that:

1. The design requirements of R18-9-E304 are followed, except that:
  - a. The requirement for quick disconnects in R18-9-E304(D)(1)(c) is not applicable, and
  - b. The applicant may provide the reserve volume specified in R18-9-E304(D)(3)(a)(iv) in an oversized treatment tank or a supplemental storage tank;
2. Drip irrigation components and appurtenances are properly placed.
  - a. Performance category A subsurface drip irrigation disposal works. The applicant shall ensure that:
    - i. Driplines and emitters are placed to prevent ponding on the land surface, and
    - ii. Cover material and placement depth follow manufacturer's requirements to prevent physical damage or ultraviolet degradation of components and appurtenances; or
  - b. Performance category B subsurface drip irrigation disposal works. The applicant shall ensure that:

- i. Driplines and emitters are placed at least 6 inches below the surface of the native soil;
  - ii. A cover of soil or engineered fill is placed on the surface of the native soil to achieve a total emitter burial depth of at least 12 inches;
  - iii. Cover material and placement depth follow manufacturer's requirements to prevent physical damage or ultraviolet degradation of components and appurtenances; and
  - iv. The drip irrigation disposal works is not used for irrigating food crops;
3. Wastewater is filtered upstream of the dripline emitters to remove particles 100 microns in size and larger;
4. A pressure regulator is provided to limit the pressure of wastewater in the drip irrigation disposal works;
5. Wastewater pipe meets the approved pressure rating in "Standard Specification for Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120, D1785-04a (2004)," or "Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80, F441/F441M-02 (2002)," published by the American Society for Testing and Materials. This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959;
6. The system design flushes the subsurface drip irrigation disposal works components with wastewater at a minimum velocity of 2 feet per second, unless the manufacturer's manual and warranty specify another flushing practice. The applicant shall ensure that piping and appurtenances allow the wastewater to be pumped in a line flushing mode of operation with discharge returned to the treatment system headworks;
7. Air vacuum release valves are installed to prevent water and soil drawback into the emitters;
8. Driplines.
  - a. Driplines are placed from 12 to 24 inches apart unless other configurations are allowed by the manufacturer's specifications;
  - b. Dripline installation and design requirements, including the allowable deflection, follow manufacturer's requirements;
  - c. The maximum length of a single dripline follows manufacturer's specifications to provide even distribution;
  - d. The dripline incorporates a herbicide to prevent root intrusion for at least 10 years;
  - e. The dripline incorporates a bactericide to reduce bacterial slime buildup;
  - f. Disinfection does not reduce the life of the bactericide or herbicide in the dripline;
  - g. Any return flow from a drip irrigation disposal works to the treatment works does not impair the treatment performance; and
  - h. When dripline installation is under subsection (E)(1)(b) or (c), backfill consists of the excavated soil or similar soil obtained from the site that is screened for removal of debris and rock larger than 1/2-inch;
9. Emitters.
  - a. Emitters are spaced no more than 2 feet apart, and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- b. Emitters are designed to discharge from 0.5 to 1.5 gallons per hour;
10. A suitable backflow prevention system is installed if supplemental water for irrigation is introduced to the pumping system. The applicant shall not introduce supplemental water to the treatment works;
11. The drip irrigation disposal works is installed in soils classified as:
  - a. Sandy clay loam, clay loam, silty clay loam, or finer with weak platy structure or in soil with a percolation rate from 45 to 120 minutes per inch;
  - b. Sandy clay loam, clay loam, silty clay loam, or silt loam with massive structure or in soil with a percolation rate from 31 to 120 minutes per inch; and
  - c. Other soils if an appropriate site-specific SAR is determined;
12. The minimum vertical separation distances are 1/2 of those specified in R18-9-A312(E)(2) if the design evapotranspiration rate during the wettest 30-day period of the year is 50 percent or more of design flow, except that the applicant shall not use a minimum vertical separation distance less than 1 foot;
13. In areas where freezing occurs, the irrigation system is protected as recommended by the manufacturer;
14. If drip irrigation components are used for a disposal works using a shaded trench constructed in native soil, the following requirements are met:
  - a. The trench is between 12 and 24 inches wide;
  - b. The trench bottom is between 12 and 30 inches below the original grade of native soil and level to within 2 inches per 100 feet of length;
  - c. Two driplines are positioned in the bottom of the trench, not more than 4 inches from each sidewall;
  - d. The trench with the positioned driplines is filled to a depth of 6 to 10 inches with decomposed granite or C-33 sand or a mixture of both, with mixture composition, if applicable, and placement specified on the construction drawing;
  - e. A minimum of 8 inches of backfill is placed over the decomposed granite or C-33 sand fill to an elevation of 1 to 3 inches above the native soil finished grade;
  - f. Observation ports are placed at both ends of each shaded trench to confirm the saturated wastewater level during operation; and
  - g. A separation distance of 24 inches or more is maintained between the nearest sidewall of an adjacent trench; and
15. The soil absorption area used for design of a drip irrigation works is calculated using:
  - a. For a design that uses the shaded trench method described in subsection (D)(14), the bottom and sidewall area of the shaded trench not more than 4 square feet per linear foot of trench; or
  - b. For all other designs, the number of emitters times an area for each emitter where the emitter area is a square centered on each emitter with the side dimension equal to the emitter separation distance selected by the designer in accordance with R18-9-E322(D)(9)(a), excluding all areas of overlap of adjacent squares.
- E. Installation requirements. In addition to the applicable requirements in R18-9-A313(A) and R18-9-E304, the applicant shall ensure that:
  1. The dripline is installed by:
    - a. A plow mechanism that cuts a furrow, dispenses pipe, and covers the dripline in one operation;
    - b. A trencher that digs a trench 4 inches wide or less;
    - c. Digging the trench with hand tools to minimize trench width and disruption to the native soil; or
    - d. Without trenching, removing surface vegetation, scarifying the soil parallel with the contours of the land surface, placing the pipe grid, and covering with fill material, unless prohibited in subsection (D)(2)(b)(ii);
  2. Drip irrigation pipe is stored to preserve the herbicidal and bactericidal characteristics of the pipe;
  3. Pipe deflection conforms to the manufacturer's requirements and installation is completed without kinking to prevent flow restriction;
  4. A shaded trench drip irrigation disposal works is installed as specified in the design documents used for the Construction Authorization; and
  5. The pressure piping and electrical equipment are installed according to the Construction Authorization in R18-9-A301(D)(1)(c) and any local building codes.
- F. Operation and maintenance requirements. In addition to the applicable requirements in R18-9-A313(B) and R18-9-E304, the permittee shall:
  1. Test any fail-safe wastewater control or operational process quarterly to ensure proper operation to prevent discharge of inadequately treated wastewater, and
  2. Maintain the herbicidal and bacteriological capability of the drip irrigation disposal works.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-E323. 4.23 General Permit: 3000 to less than 24,000 Gallons Per Day Design Flow**

- A. A 4.23 General Permit allows for the construction and use of an on-site wastewater treatment facility with a design flow from 3000 gallons per day to less than 24,000 gallons per day or more than one on-site wastewater treatment facility on a property or on adjacent properties under common ownership with an combined design flow from 3000 to less than 24,000 gallons per day if all of the following apply:
  1. Except as specified in subsection (A)(3), the treatment and disposal works consists of technologies or designs that are covered under other general permits, but are sized larger to accommodate increased flows;
  2. The on-site wastewater treatment facility complies with all applicable requirements of Articles 1, 2, and 3 of this Chapter;
  3. The facility is not a system or a technology covered by one of the following general permits available for a design flow of less than 3000 gallons per day:
    - a. An aerobic system with subsurface or surface disposal described in R18-9-E315;
    - b. A disinfection device described in R18-9-E320; or
    - c. A seepage pit or pits described in R18-9-E302; and
  4. The discharge of total nitrogen to groundwater is controlled.
    - a. An applicant shall:
      - i. Demonstrate that the nitrogen loading calculated over the property served by the on-site wastewater treatment facility, including streets, common areas, and other non-contributing areas, is not more than 0.088 pounds (39.9 grams) of total nitrogen per day per acre calculated at a horizontal plane immediately beneath

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- the zone of active treatment of the on-site wastewater treatment facility including its disposal field; or
- ii. Justify a nitrogen loading that is equally protective of aquifer water quality as the nitrogen loading specified in subsection (A)(4)(a)(i) based on site-specific hydrogeological or other factors.
- b. For purposes of the demonstration in subsection (A)(4)(a)(i), the applicant may assume that 0.0333 pounds (15.0 grams) of total nitrogen per day per person is contributed to raw sewage and may determine the nitrogen concentration in the treated wastewater at a horizontal plane immediately beneath the zone of active treatment of the on-site wastewater treatment facility including its disposal field.
- B.** Notice of Intent to Discharge. In addition to the Notice of Intent to Discharge requirements specified in R18-9-A301(B) and R18-9-A309(B), an applicant shall submit:
1. A performance assurance plan consisting of tasks, schedules, and estimated annual costs for operating, maintaining, and monitoring performance over a 20-year operational life;
  2. Design documents and the performance assurance plan, signed, dated, and sealed by an Arizona-registered professional engineer;
  3. Any documentation submitted under the alternative design procedure in R18-9-A312(G) that pertains to achievement of better performance levels than those specified in the general permit for the corresponding facility with a design flow of less than 3000 gallons per day, or for any other alternative design, construction, or operational change proposed by the applicant; and
  4. A demonstration of total nitrogen discharge control specified in subsection (A)(4).
- C.** Design requirements. The applicant shall comply with the applicable requirements in R18-9-A312 and the applicable general permits for the treatment works and disposal works used in the design of the on-site wastewater treatment facility.
- D.** Installation requirements. The applicant shall comply with the applicable requirements in R18-9-A313(A) and the applicable general permits for the treatment works and disposal works used in the design of the on-site wastewater treatment facility.
- E.** Operation and maintenance requirements. The applicant shall comply with the applicable requirements in R18-9-A313(B) and the applicable general permits for the treatment works and disposal works used in the design of the on-site wastewater treatment facility.
- F.** Additional Discharge Authorization requirements. In addition to any other requirements, the applicant shall submit the following information before the Discharge Authorization is issued.
1. A signed, dated, and sealed Engineer's Certificate of Completion in a format approved by the Department affirming that:
    - a. The project was completed in compliance with the requirements of this Section and as described in the plans and specifications, or
    - b. Any changes are reflected in as-built plans submitted with the Engineer's Certificate of Completion.
  2. The name of the service provider or certified operator that is responsible for implementing the performance assurance plan.
- G.** Reporting requirement. The permittee shall provide the Department with the following information on the anniversary date of the Discharge Authorization:
1. A form signed by the certified operator or service provider that:
    - a. Provides any data or documentation required by the performance assurance plan,
    - b. Certifies compliance with the requirements of the performance assurance plan, and
    - c. Describes any additions to the facility during the year that increased flows and certifies that the flow did not exceed 24,000 gallons per day during any day; and
  2. Any applicable fee required by 18 A.A.C. 14.
- H.** Facility expansion. If an expansion of an on-site wastewater treatment facility operating under this Section involves the installation of a separate on-site wastewater treatment facility on the property with a design flow of less than 3000 gallons per day, the applicant shall submit the applicable Notice of Intent to Discharge and fee required under 18 A.A.C. 14 for the separate on-site wastewater treatment facility.
1. The applicant shall indicate in the Notice of Intent to Discharge the Department's file number and the issuance date of the Discharge Authorization previously issued by the Director under this Section for the property.
  2. Upon satisfactory review, the Director shall reissue the Discharge Authorization for this Section, with the new issuance date and updated information reflecting the expansion.
  3. If the expansion causes the accumulative design flow from on-site wastewater treatment facilities on the property to equal or exceed 24,000 gallons per day, the Director shall not reissue the Discharge Authorization, but shall require the applicant to submit an application for an individual permit addressing all proposed and operating facilities on the property.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**Table 1. Unit Design Flows**

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

| Wastewater Source                                                                                                                                                                    | Applicable Unit                  | Sewage Design Flow per Applicable Unit, Gallons Per Day |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------------------------------------------|
| Airport                                                                                                                                                                              | Passenger (average daily number) | 4                                                       |
|                                                                                                                                                                                      | Employee                         | 15                                                      |
| Auto Wash                                                                                                                                                                            | Facility                         | Per manufacturer, if consistent with this Chapter       |
| Bar/Lounge                                                                                                                                                                           | Seat                             | 30                                                      |
| Barber Shop                                                                                                                                                                          | Chair                            | 35                                                      |
| Beauty Parlor                                                                                                                                                                        | Chair                            | 100                                                     |
| Bowling Alley (snack bar only)                                                                                                                                                       | Lane                             | 75                                                      |
| Camp                                                                                                                                                                                 |                                  |                                                         |
| Day camp, no cooking facilities                                                                                                                                                      | Camping unit                     | 30                                                      |
| Campground, overnight, flush toilets                                                                                                                                                 | Camping unit                     | 75                                                      |
| Campground, overnight, flush toilets and shower                                                                                                                                      | Camping unit                     | 150                                                     |
| Campground, luxury                                                                                                                                                                   | Person                           | 100-150                                                 |
| Camp, youth, summer, or seasonal                                                                                                                                                     | Person                           | 50                                                      |
| Church                                                                                                                                                                               |                                  |                                                         |
| Without kitchen                                                                                                                                                                      | Person (maximum attendance)      | 5                                                       |
| With kitchen                                                                                                                                                                         | Person (maximum attendance)      | 7                                                       |
| Country Club                                                                                                                                                                         | Resident Member                  | 100                                                     |
|                                                                                                                                                                                      | Nonresident Member               | 10                                                      |
| Dance Hall                                                                                                                                                                           | Patron                           | 5                                                       |
| Dental Office                                                                                                                                                                        | Chair                            | 500                                                     |
| Dog Kennel                                                                                                                                                                           | Animal, maximum occupancy        | 15                                                      |
| Dwelling                                                                                                                                                                             |                                  |                                                         |
| For determining design flow for sewage treatment facilities under R18-9-B202(A)(9)(a) and sewage collection systems under R18-9-E301(D) and R18-9-B301(K), excluding peaking factor. | Person                           | 80                                                      |
| Dwelling                                                                                                                                                                             |                                  |                                                         |
| For on-site wastewater treatment facilities per R18-9-E302 through R18-9-E323:                                                                                                       |                                  |                                                         |
| Apartment Building                                                                                                                                                                   |                                  |                                                         |
| 1 bedroom                                                                                                                                                                            | Apartment                        | 200                                                     |
| 2 bedroom                                                                                                                                                                            | Apartment                        | 300                                                     |
| 3 bedroom                                                                                                                                                                            | Apartment                        | 400                                                     |
| 4 bedroom                                                                                                                                                                            | Apartment                        | 500                                                     |
| Seasonal or Summer Dwelling (with recorded seasonal occupancy restriction)                                                                                                           | Resident                         | 100                                                     |
| Single Family Dwellings                                                                                                                                                              | see R18-9-A314(D)(1)             | see R18-9-A314(D)(1)                                    |
| Other than Single Family Dwelling, the greater flow value based on:                                                                                                                  |                                  |                                                         |
| Bedroom count                                                                                                                                                                        |                                  |                                                         |
| 1-2 bedrooms                                                                                                                                                                         | Bedroom                          | 300                                                     |
| Each bedroom over 2                                                                                                                                                                  | Bedroom                          | 150                                                     |
| Fixture count                                                                                                                                                                        | Fixture unit                     | 25                                                      |
| Fire Station                                                                                                                                                                         | Employee                         | 45                                                      |
| Hospital                                                                                                                                                                             |                                  |                                                         |
| All flows                                                                                                                                                                            | Bed                              | 250                                                     |
| Kitchen waste only                                                                                                                                                                   | Bed                              | 25                                                      |
| Laundry waste only                                                                                                                                                                   | Bed                              | 40                                                      |
| Hotel/motel                                                                                                                                                                          |                                  |                                                         |
| Without kitchen                                                                                                                                                                      | Bed (2 person)                   | 50                                                      |
| With kitchen                                                                                                                                                                         | Bed (2 person)                   | 60                                                      |

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

|                                                        |                             |                                                   |
|--------------------------------------------------------|-----------------------------|---------------------------------------------------|
| Industrial facility                                    |                             |                                                   |
| Without showers                                        | Employee                    | 25                                                |
| With showers                                           | Employee                    | 35                                                |
| Cafeteria, add                                         | Employee                    | 5                                                 |
| Institutions                                           |                             |                                                   |
| Resident                                               | Person                      | 75                                                |
| Nursing home                                           | Person                      | 125                                               |
| Rest home                                              | Person                      | 125                                               |
| Laundry                                                |                             |                                                   |
| Self service                                           | Wash cycle                  | 50                                                |
| Commercial                                             | Washing machine             | Per manufacturer, if consistent with this Chapter |
| Office Building                                        | Employee                    | 20                                                |
| Park (temporary use)                                   |                             |                                                   |
| Picnic, with showers, flush toilets                    | Parking space               | 40                                                |
| Picnic, with flush toilets only                        | Parking space               | 20                                                |
| Recreational vehicle, no water or sewer connections    | Vehicle space               | 75                                                |
| Recreational vehicle, with water and sewer connections | Vehicle space               | 100                                               |
| Mobile home/Trailer                                    | Space                       | 250                                               |
| Restaurant/Cafeteria                                   | Employee                    | 20                                                |
| With toilet, add                                       | Customer                    | 7                                                 |
| Kitchen waste, add                                     | Meal                        | 6                                                 |
| Garbage disposal, add                                  | Meal                        | 1                                                 |
| Cocktail lounge, add                                   | Customer                    | 2                                                 |
| Kitchen waste disposal service, add                    | Meal                        | 2                                                 |
| Restroom, public                                       | Toilet                      | 200                                               |
| School                                                 |                             |                                                   |
| Staff and office                                       | Person                      | 20                                                |
| Elementary, add                                        | Student                     | 15                                                |
| Middle and High, add                                   | Student                     | 20                                                |
| with gym & showers, add                                | Student                     | 5                                                 |
| with cafeteria, add                                    | Student                     | 3                                                 |
| Boarding, total flow                                   | Person                      | 100                                               |
| Service Station with toilets                           | First bay                   | 1000                                              |
|                                                        | Each additional bay         | 500                                               |
| Shopping Center, no food or laundry                    | Square foot of retail space | 0.1                                               |
| Store                                                  | Employee                    | 20                                                |
| Public restroom, add                                   | Square foot of retail space | 0.1                                               |
| Swimming Pool, Public                                  | Person                      | 10                                                |
| Theater                                                |                             |                                                   |
| Indoor                                                 | Seat                        | 5                                                 |
| Drive-in                                               | Car space                   | 10                                                |

Note: Unit flow rates published in standard texts, literature sources, or relevant area or regional studies are considered by the Department, if appropriate to the project.

**Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 235, effective January 1, 2001 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**ARTICLE 4. NITROGEN MANAGEMENT GENERAL PERMITS****R18-9-401. Definitions**

In addition to the definitions established in A.R.S. §§ 49-101 and 49-201 and A.A.C. R18-9-101, the following terms apply to this Article:

1. "Application of nitrogen fertilizer" means any use of a substance containing nitrogen for the commercial production of a crop or plant. The commercial production of a crop or plant includes commercial sod farms and nurseries.
2. "Contact stormwater" means stormwater that comes in contact with animals or animal wastes within a concentrated animal feeding operation.
3. "Crop or plant needs" means the amount of water and nitrogen required to meet the physiological demands of a crop or plant to achieve a defined yield.
4. "Crop or plant uptake" means the amount of water and nitrogen that can be physiologically absorbed by the roots and vegetative parts of a crop or plant following the application of water.
5. "Impoundment" means any structure, other than a tank or a sump, designed and maintained to contain liquids. A structure that stores or impounds only non-contact stormwater is not an impoundment under this Article.
6. "Liner" or "lining system" means any natural, amendment, or synthetic material used to reduce seepage of impounded liquids into a vadose zone or aquifer.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

7. "NRCS guidelines" means the United States Department of Agriculture, Natural Resources Conservation Service, National Engineering Handbook, Part 651 Agricultural Waste Management Field Handbook, Chapter 10, 651.1080, Appendix 10D – Geotechnical, Design, and Construction Guideline (November 1997). This material is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 W. Washington, Phoenix, AZ 85007 or may be obtained from the United States Department of Agriculture, Natural Resources Conservation Service at <ftp://ftp.wcc.nrcs.usda.gov/downloads/wastemgmt/AWMFH/awmfh-chap10-app10d.pdf>.

**Historical Note**

Adopted effective January 4, 1991 (Supp. 91-1). Section R18-9-401 renumbered from R18-9-201 and amended by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-402. Nitrogen Management General Permits: Nitrogen Fertilizers**

An owner or operator may apply a nitrogen fertilizer under this general permit without submitting a notice to the Director, if the owner or operator complies with the following best management practices:

1. Limit application of the fertilizer so that it meets projected crop or plant needs;
2. Time application of the fertilizer to coincide to maximum crop or plant uptake;
3. Apply the fertilizer by a method designed to deliver nitrogen to the area of maximum crop or plant uptake;
4. Manage and time application of irrigation water to minimize nitrogen loss by leaching and runoff; and
5. Use tillage practices that maximize water and nitrogen uptake by a crop or plant.

**Historical Note**

Adopted effective January 4, 1991 (Supp. 91-1). Section R18-9-402 renumbered from R18-9-202 and amended by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-403. Nitrogen Management General Permits: Concentrated Animal Feeding Operations**

A. An owner or operator may discharge from a concentrated animal feeding operation without submitting a notice to the Director, if the owner or operator complies with the following best management practices:

1. Harvest, stockpile, and dispose of animal manure from a concentrated animal feeding operation to minimize discharge of any nitrogen pollutant by leaching and runoff;
2. Control and dispose of nitrogen-contaminated water resulting from an activity associated with a concentrated animal feeding operation, up to a 25-year, 24-hour storm event equivalent, to minimize the discharge of any nitrogen pollutant;
3. Following the requirements in subsection (B), construct and maintain a lining for an impoundment, used to contain process wastewater or contact stormwater from a concentrated animal feeding operation to minimize the discharge of any nitrogen pollutant; and

4. Close a facility in a manner that will minimize the discharge of any nitrogen pollutant. If a liner was used in an impoundment:
  - a. Remove liquids and any solid residue on the liner and dispose appropriately;
  - b. Inspect any synthetic liner for evidence of holes, tears, or defective seams that could have leaked. If evidence of leakage is discovered:
    - i. Remove the liner in the area of suspected leakage;
    - ii. Sample potentially impacted soil, and
    - iii. Properly dispose of impacted soil or restore to background nitrogen levels;
  - c. Cover the liner in place or remove it for disposal or reuse if the impoundment is an excavated impoundment;
  - d. Remove and dispose of the liner elsewhere if the impoundment is bermed;
  - e. Grade the facility to prevent the impoundment of water; and
  - f. Notify the Department within 60 days following closure.

**B. Lining requirements for concentrated animal feeding operation impoundments.**

1. New impoundments. The owner or operator shall:
  - a. Follow the NRCS guidelines for any newly constructed impoundment or an impoundment first used after November 12, 2005, and
  - b. Use a coefficient of permeability of  $1 \times 10^{-7}$  centimeters per second or less as acceptable liner performance. The owner or operator may include up to 1 order of magnitude reduction in permeability from manure sealing in impoundments that hold wastes having manure as a significant component.
2. Impoundments already in use.
  - a. The owner or operator shall maintain the existing seal for any impoundment first used before November 12, 2005.
  - b. If any of the following conditions exist at a concentrated animal feeding operation, the Director shall send a notice requiring the owner or operator to reassess the performance of the lining system:
    - i. The concentrated animal feeding operation is located within a Nitrogen Management Area designated under R18-9-A317; or
    - ii. Existing conditions or trends in nitrogen loading to an aquifer will cause or contribute to an exceedance of an Aquifer Water Quality Standard for a nitrogen pollutant at the point of compliance determined under A.R.S. § 49-244, based on the following information:
      - (1) Existing contamination of groundwater by nitrogen species;
      - (2) Existing and potential impact to groundwater by sources of nitrogen other than the concentrated animal feeding operation;
      - (3) Characteristics of the soil surface, vadose zone, and aquifer;
      - (4) Depth to groundwater;
      - (5) The estimated operational life of the impoundment;
      - (6) Location and characteristics of existing and potential drinking water supplies;
      - (7) Construction material and design of existing impoundment structure; and
      - (8) Any other information relevant to deter-

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- mining the severity of actual or potential nitrogen impact on the aquifer.
- c. The owner or operator shall, within 90 days of the Director's notice, submit either:
    - i. A report to the Department demonstrating consistency with NRCS guidelines and the acceptable liner performance criteria established in subsection (B)(1)(b); or
    - ii. Plans and a schedule to upgrade the liner for the impoundment to meet the NRCS guidelines and the acceptable liner performance criteria in subsection (B)(1)(b). The Director may provide additional time for the submittal of the plans and a schedule for upgrade, if the owner or operator demonstrates that technical or financial assistance to develop the plans is needed.
  - d. Preliminary decision.
    - i. Within 90 days from the date of receipt, the Director shall review the report or the plans submitted under subsection (B)(2)(c) and provide to the owner or operator a preliminary decision on the submittal.
    - ii. The owner or operator may, within 30 days of the preliminary decision, submit written comments and supporting information to the Director on the preliminary decision.
    - iii. The Director shall evaluate any comments on the preliminary decision and supporting information and, within 90 days of receipt of the comments and information, make a final decision.
  - e. Final decision.
    - i. If the Director determines that the owner or operator has demonstrated that the lining system meets NRCS guidelines and the acceptable performance criteria in subsection (B)(1)(b), no additional action is necessary.
    - ii. If the Director approves the plans and schedules under subsection (B)(2)(c)(ii), the owner or operator shall implement the plans within the time-frame specified in the approved schedule.
    - iii. If the Director determines that the owner or operator failed to demonstrate that the lining system meets NRCS guidelines and the acceptable performance criteria in subsection (B)(1)(b) or that the schedule to upgrade the lining is not acceptable, the owner or operator shall upgrade the lining system within a time-frame specified by the Director.
    - iv. The owner or operator may appeal the Director's decision under A.R.S. Title 41, Chapter 6, Article 10.
3. Notification requirement. The owner or operator of any lined impoundment shall either:
    - a. Notify the Department of the type of liner that was used to line each impoundment by February 19 of each year following either:
      - i. The first use of an impoundment not used before November 12, 2005; or
      - ii. Completion of a liner upgrade required under this Section for an impoundment used before November 12, 2005; or
    - b. Include the information required in subsections (B)(3)(a)(i) and (ii) in the next annual report submitted for the AZPDES Concentrated Animal Feeding

Operation General Permit, issued under 18 A.A.C. 9, Article 9, Part C.

**Historical Note**

Adopted effective January 4, 1991 (Supp. 91-1). Section R18-9-403 renumbered from R18-9-203 and amended by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4). Amended by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**R18-9-404. Revocation of Coverage under a Nitrogen Management General Permit**

- A. The Director may revoke coverage under a nitrogen management general permit and require the permittee to obtain an individual permit under 18 A.A.C. 9, Article 2, if the Director determines that the permittee failed to comply with the best management practices under R18-9-403.
- B. Notification.
  1. If coverage under the nitrogen management general permit is revoked under subsection (A), the Director shall notify the permittee by certified mail of the decision according to the notification and hearing procedures in A.R.S. Title 41, Chapter 6, Article 10. The notification shall include:
    - a. A brief statement of the reason for the decision,
    - b. The effective revocation date of the general permit coverage, and
    - c. A statement of whether the discharge shall cease immediately or whether the discharge may continue until the individual permit is issued, and
  2. If the Director requires a person to obtain an individual permit, the notification shall include:
    - a. An individual permit application form, and
    - b. A deadline between 90 and 180 days after receipt of the notification for filing the application.
- C. When the Director issues an individual permit to an owner or operator of a facility covered under a nitrogen management general permit, the coverage under the nitrogen management general permit is superseded by the individual permit allowing the discharge.

**Historical Note**

New Section made by final rulemaking at 11 A.A.R. 4544, effective November 12, 2005 (05-3).

**ARTICLE 5. GRAZING BEST MANAGEMENT PRACTICES****R18-9-501. Surface Water Quality General Grazing Permit**

- A. A person who engages in livestock grazing and applies any of the following voluntary best management practices to maintain soil cover and prevent accelerated erosion, nitrogen discharges, and bacterial impacts to surface water greater than the natural background amount is issued a Surface Water Quality General Grazing Permit:
  1. Manages the location, timing, and intensity of grazing activities to help achieve Surface Water Quality Standards;
  2. Installs rangeland improvements, such as fences, water developments, trails, and corrals to help achieve Surface Water Quality Standards;
  3. Implements land treatments to help achieve Surface Water Quality Standards;
  4. Implements supplemental feeding, salting, and parasite control measures to help achieve Surface Water Quality Standards.
- B. The person to whom a permit is issued shall make the following information available to the Department, at the person's place of business, within 10 business days of Department notice:
  1. Manages the location, timing, and intensity of grazing activities to help achieve Surface Water Quality Standards;
  2. Installs rangeland improvements, such as fences, water developments, trails, and corrals to help achieve Surface Water Quality Standards;
  3. Implements land treatments to help achieve Surface Water Quality Standards;
  4. Implements supplemental feeding, salting, and parasite control measures to help achieve Surface Water Quality Standards.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

1. The name and address of the person grazing livestock, and
2. The best management practices selected for livestock grazing.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 1768, effective April 5, 2001 (Supp. 01-2).

**ARTICLE 6. REPEALED****R18-9-601. Repealed****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section repealed by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-602. Repealed****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section repealed by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-603. Repealed****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section repealed by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**ARTICLE 7. USE OF RECYCLED WATER****R18-9-701. Renumbered****Historical Note**

Former Section R9-20-401 repealed, new Section R9-20-401 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-401 renumbered without change as Section R18-9-701 (Supp. 87-3). Amended by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-701 renumbered to R18-9-A701 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-702. Renumbered****Historical Note**

Former Section R9-20-402 repealed, new Section R9-20-402 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-402 renumbered without change as Section R18-9-702 (Supp. 87-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-702 renumbered to R18-9-A702 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-703. Renumbered****Historical Note**

Former Section R9-20-403 repealed, new Section R9-20-403 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-403 renumbered without change as Section R18-9-703 (Supp. 87-3). Editorial change to labels in subsection (c)(8) (Supp. 89-4). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-703 renumbered to R18-9-B701 by final rulemaking at 23

A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-704. Renumbered****Historical Note**

Former Section R9-20-404 repealed, new Section R9-20-404 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-404 renumbered without change as Section R18-9-704 (Supp. 87-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-704 amended by final rulemaking at 22 A.A.R. 1696, effective August 12, 2016 (Supp. 16-2). Section R18-9-704 and Table 1 renumbered to R18-9-B702 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-705. Renumbered****Historical Note**

Former Section R9-20-405 repealed, new Section R9-20-405 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-405 renumbered without change as Section R18-9-705 (Supp. 87-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-705 renumbered to R18-9-A703 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-706. Renumbered****Historical Note**

Former Section R9-20-406 repealed, new Section R9-20-406 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-406 renumbered without change as Section R18-9-706 (Supp. 87-3). Amended effective December 1, 1988 (Supp. 88-4). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-706 renumbered to R18-9-B703 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-707. Renumbered****Historical Note**

Former Section R9-20-407 repealed, new Section R9-30-407 adopted effective May 24, 1985 (Supp. 85-3). Former Section R9-20-407 renumbered without change as Section R18-9-707 (Supp. 87-3). Section repealed; new Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-707 renumbered to R18-9-C701 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-708. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-708 renumbered to R18-9-A704 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-709. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-709 renumbered to R18-9-A705 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

17-4).

**R18-9-710. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-710 renumbered to R18-9-A706 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-711. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-711 renumbered to R18-9-D701 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-712. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-712 renumbered to R18-9-B704 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-713. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-713 renumbered to R18-9-B705 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-714. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-714 renumbered to R18-9-B706 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-715. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-715 renumbered to R18-9-B707 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-716. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-716 renumbered to R18-9-B708 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-717. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-717 renumbered to R18-9-B709 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

17-4).

**R18-9-718. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-718 renumbered to R18-9-B710 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-719. Renumbered****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section R18-9-719 renumbered to R18-9-D702 by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-720. Repealed****Historical Note**

New Section adopted by final rulemaking at 7 A.A.R. 758, effective January 16, 2001 (Supp. 01-1). Section repealed by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

## PART A. GENERAL PROVISIONS

**R18-9-A701. Definitions**

Unless provided otherwise, the definitions provided in A.R.S. § 49-201, A.A.C. R18-9-101, R18-9-601, R18-11-301, and the following terms apply to this Article:

1. "Advanced reclaimed water treatment facility" means a facility that treats and purifies Class A+ or Class B+ reclaimed water to produce potable water suitable for distribution for human consumption. R18-9-B702(B) does not apply to an advanced reclaimed water treatment facility. Potable water produced by an advanced reclaimed water treatment facility is not reclaimed water.
2. "Direct reuse" means the beneficial use of reclaimed water for a purpose allowed by this Article. The following is not a direct reuse of reclaimed water:
  - a. The use of water subsequent to its discharge under the conditions of a National or Arizona Pollutant Discharge Elimination System permit;
  - b. The use of water subsequent to discharge under the conditions of an Aquifer Protection Permit issued under 18 A.A.C. 9, Articles 1 through 3;
  - c. The use of industrial wastewater, reclaimed water, or both, in a workplace subject to a federal program that protects workers from workplace exposures; or
  - d. The use of potable water produced by an advanced reclaimed water treatment facility.
3. "Direct reuse site" means an area permitted for the application or impoundment of reclaimed water. An impoundment operated for disposal under an Aquifer Protection Permit is not a direct reuse site.
4. "End user" means a person who directly reuses reclaimed water meeting the standards for Classes A+, A, B+, B, and C, established under 18 A.A.C. 11, Article 3.
5. "Gray water" means wastewater that has been collected separately from a sewage flow and that originates from a clothes washer or a bathroom tub, shower or sink but that does not include wastewater from a kitchen sink, dishwasher or toilet. A.R.S. § 49-201(18).
6. "Industrial wastewater" means wastewater generated from an industrial process.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

7. "Irrigation" means the beneficial use of water or reclaimed water, or both, for growing crops, turf, or silviculture, or for landscaping.
8. "Open access" means access to reclaimed water by the general public is uncontrolled.
9. "Open water conveyance" means any constructed open waterway, including canals and laterals, that transports reclaimed water from a sewage treatment facility to a reclaimed water blending facility or from a sewage treatment facility or reclaimed water blending facility to the point of land application or end use. An open water conveyance does not include waters of the United States.
10. "Pipeline conveyance" means any system of pipelines that transports reclaimed water from a sewage treatment facility to a reclaimed water blending facility or from a sewage treatment facility or reclaimed water blending facility to the point of land application or end use.
11. "Reclaimed water" means water that has been treated or processed by a wastewater treatment plant or an on-site wastewater treatment facility. A.R.S. § 49-201(32).
12. "Reclaimed water agent" means a person who holds a permit to distribute reclaimed water to more than one end user.
13. "Reclaimed water blending facility" means an installation or method of operation that receives reclaimed water from a sewage treatment facility or other reclaimed water blending facility classified to produce Class C or better reclaimed water and blends it with other water so that the produced water may be used for a higher-class purpose listed in 18 A.A.C. 11, Article 3, Table A.
14. "Recycled water" means a processed water that originated as a waste or discarded water, including reclaimed water and gray water, for which the Department has designated water quality specifications to allow the water to be used as a supply.
15. "Restricted access" means that access to reclaimed water by the general public is controlled.
16. "Sewage Treatment Facility" means a sewage treatment facility as defined in 18 A.A.C. 9, Article 1.

**Historical Note**

New Section R18-9-A701 renumbered from R18-9-701 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-A702. Applicability and Standards for Recycled Water**

- A. This Article applies to:
  1. An owner or operator of a sewage treatment facility that generates reclaimed water for direct reuse,
  2. An owner or operator of a reclaimed water blending facility,
  3. A reclaimed water agent,
  4. An end user of reclaimed water,
  5. A person who uses recycled water regulated under this Article,
  6. A person who directly reuses reclaimed water from a sewage treatment facility combined with industrial wastewater or combined with water from an industrial wastewater treatment facility, and
  7. A person who directly reuses reclaimed water from an industrial wastewater treatment facility in the production or processing of a crop or substance that may be used as human or animal food.
- B. Reclaimed water classes A+, A, B+, B, and C specified in this Article shall meet the standards established in 18 A.A.C. 11, Article 3.

- C. Nothing in this Article exempts the disposal of reclaimed water from the Aquifer Protection Permit requirements under A.R.S. Title 49, Chapter 2, Articles 1, 2, and 3.

**Historical Note**

New Section R18-9-A702 renumbered from R18-9-702 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-A703. Recycled Water Individual Permit Application**

- A. To apply for a Recycled Water Individual Permit, a person shall provide the Department with:
  1. The applicable permit fee specified under 18 A.A.C. 14; and
  2. The following information on a form provided by the Department:
    - a. The name, e-mail address, telephone number, and mailing address of the owner or operator of the facility or, if applicable, the reclaimed water agent;
    - b. The latitude and longitude coordinates; township range, and section; site address, if applicable; and a map showing the facility or site location;
    - c. Any other federal or state environmental permits issued to the applicant;
    - d. Source of recycled water to be used;
    - e. The applicant may propose for approval, and the Department may issue, a single permit that includes more than one type of recycled water allowed by this article, including for multiple classes of reclaimed water, if the applicant demonstrates the waters will be treated appropriately for the end use;
    - f. The applicant may propose, and the Department may permit, the inclusion of kitchen sink and dishwasher wastewater with gray water under a Recycled Water Individual Permit, if the applicant demonstrates such waters will be treated appropriately for the end use;
    - g. Estimated volume of recycled water to be used on an annual basis;
    - h. Class of reclaimed water to be directly reused, if applicable;
    - i. Description of the use activity;
    - j. Any treatment measures utilized to meet or maintain reclaimed water quality standards or otherwise ensure the quality of the recycled water is fit for the intended use; and
    - k. The applicant's certification that the information submitted in the application is true and accurate to the best of the applicant's knowledge.
- B. Public participation.
  1. Notice of Preliminary Decision.
    - a. The Department shall publish the Notice of Preliminary Decision regarding the issuance or denial of a final permit determination on the Department's website.
    - b. The Department shall accept written comments from the public before a Recycled Water Individual Permit is issued or denied.
    - c. The written public comment period begins on the publication date of the Notice of Preliminary Decision and extends for 30 calendar days.
  2. After publishing the notice specified in subsection (B)(1)(a), the Department shall hold a public hearing to address the Notice of Preliminary Decision if the Department determines that:
    - a. Significant public interest in a public hearing exists, or



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- b. Significant issues or information have been brought to the attention of the Department that are relevant to the permitting decision and have not been considered previously in the permitting process.
  - 3. If the Department determines a public hearing is necessary and a public hearing has not already been noticed under subsection (B)(1)(a), the Department shall schedule a public hearing and republish the Notice of Preliminary Decision and notice of the public hearing on the Department's website.
  - 4. The Department shall accept written public comment until the close of the hearing record as specified by the person presiding at the public hearing.
- C. Final permit issuance or denial.
  - 1. The Department may deny a Recycled Water Individual Permit if the Department determines upon completion of the application process the applicant has:
    - a. Failed or refused to correct a deficiency in the permit application;
    - b. Failed to demonstrate the facility and the operation will protect public health and water quality. This determination shall be based on:
      - i. The information submitted in the permit application,
      - ii. Any information submitted to the Department as written public comment or following a public hearing; or
      - iii. Any information relevant to the demonstration developed or acquired by the Department, or
    - c. Provided false or misleading information.
  - 2. If the Department denies a Recycled Water Individual Permit the Department shall provide the applicant with written notification explaining the following:
    - a. The reasons for the denial with references to the statutes or rules on which the denial is based.
    - b. The applicant's right to appeal the denial, including the number of days the applicant has to file a notice of appeal, and the name and telephone number of the Department contact person who can answer questions regarding the appeals process.
    - c. The applicant's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.

**Historical Note**

New Section R18-9-A703 renumbered from R18-9-705 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-A704. Recycled Water General Permit**

- A. Type 1 Recycled Water General Permit for Gray Water. A person may use recycled water without notice to the Department if the use:
  - 1. Is specifically authorized by and meets the requirements of this Article, and
  - 2. Complies with the requirements of the Type 1 Recycled Water General Permit under this Article.
- B. Type 2 Recycled Water General Permit for Reclaimed Water.
  - 1. A person may use recycled water under a Type 2 Recycled Water General Permit if:
    - a. The use is authorized by and meets the requirements of this Article;
    - b. The use meets all the conditions of the applicable Type 2 Recycled Water General Permit under this Article;
    - c. The person files a Notice of Intent to Use Recycled Water under subsection (B)(2); and
  - d. The person submits the applicable fee established in 18 A.A.C. 14.
- 2. Notice of Intent to Use Recycled Water.
  - a. A person shall submit, by mail, in person, or by another method approved by the Department, the Notice of Intent to Use Recycled Water on a form provided by the Department.
  - b. The Notice of Intent to Use Recycled Water shall include:
    - i. The name, address, e-mail address, and telephone number of the applicant;
    - ii. The name, address, and telephone number of the contact person;
    - iii. The source, estimated volume, and, if applicable, class of recycled water to be used;
    - iv. The latitude and longitude coordinates of the approximate center point of the use site;
    - v. The description of the use activity; and
    - vi. The applicant's certification that the applicant agrees to comply with all requirements of this Article, including specific terms of the applicable Recycled Water General Permit.
  - c. For a Type 2 Recycled Water General Permit for Direct Reuse of Reclaimed Water, the Notice of Intent to Use Recycled Water must include the description of the direct reuse activity, including a description of acreage and the type of vegetation to be irrigated, if applicable to the type of direct reuse activity.
- 3. The Department shall notify the applicant that the Department received the Notice of Intent to Use Recycled Water and that the applicant is authorized to use the recycled water according to Type 2 permit conditions.
- C. Type 3 Recycled Water General Permit for Reclaimed Water and Type 3 Recycled Water General Permit for Gray Water. A person shall not operate under a Type 3 Recycled Water General Permit until the Department issues a written Recycled Water Authorization.
  - 1. Application submittal. The applicant shall submit, either by mail, in person at the Department, or by another method approved by the Department:
    - a. The Notice of Intent to Use Recycled Water on a form provided by the Department containing the information specified in the applicable Type 3 Recycled Water General Permit under this Article, and
    - b. The applicable fee established in 18 A.A.C. 14.
  - 2. Issuance of Recycled Water Authorization. If, after reviewing the Notice of Intent to Use Recycled Water, the Department determines the direct reuse conforms with the conditions of a Type 3 Recycled Water General Permit and all other applicable requirements of this Article, the Department shall issue the Recycled Water Authorization.
  - 3. Denial of Recycled Water Authorization.
    - a. If the Department determines on the basis of its review or an inspection the use does not conform to the conditions of the applicable Type 3 Recycled Water General Permit or other applicable requirements of this Article, the Department shall notify the applicant of its decision not to issue the Recycled Water Authorization.
    - b. The applicant may appeal the decision not to issue a Recycled Water Authorization under A.R.S. §§ 41-1092 through 41-1092.12.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

**Historical Note**

New Section R18-9-A704 renumbered from R18-9-708 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-A705. Recycled Water Permit Term, Information Changes, and Renewal**

- A.** A recycled water general permit is valid as follows:
1. A Type 1 Recycled Water General Permit is valid as long as the conditions of the general permit and the requirements of this Article are met. No renewal is required.
  2. A Type 2 Recycled Water General Permit is valid for five years from the date the Department receives the Notice of Intent to Use Recycled Water;
  3. A Type 3 Recycled Water General Permit is valid for five years from the date the Recycled Water Authorization is issued.
- B.** If any change in the following information occurs, a permittee operating under any individual, or Type 2 or Type 3 recycled water general permit shall update the Department with such changes at least once annually by January 31:
1. Permittee,
  2. Ownership,
  3. Contact person,
  4. Phone number, address, email address, or telephone number, or any combination of any of the above, for permittee or contact person,
  5. Name of the use site,
  6. For a Type 2 Recycled Water General Permit for Direct Reuse of Class A + or B + Reclaimed Water remaining under the same ownership:
    - a. Expansion of the reuse area,
    - b. Addition of another allowable use if it is located within the same property boundary as the boundary identified in the Notice of Intent to Use Recycled Water submitted to the Department.
  7. An increase in Class A, B, or C reclaimed water use of more than ten percent but less than twenty percent above the volume of reclaimed water currently permitted for use at the reuse site, if applicable.
- C.** To renew any Type 2 or Type 3 Recycled Water General Permit, a permittee must submit a Notice of Renewal at least 30 days before the permit expires and include the applicable fee established in 18 A.A.C. 14. A permittee may update or change any information as described in subsection (B) in a Notice of Renewal.
- D.** For changes not described in subsections (B) or (C), the permittee must submit a new Notice of Intent to Use Recycled Water or a Recycled Water Individual Permit application, as applicable.

**Historical Note**

New Section R18-9-A705 renumbered from R18-9-709 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-A706. Recycled Water Permit Revocation**

- A.** After notice and opportunity for a hearing, the Director may revoke coverage under a Recycled Water General Permit and require the permittee to obtain an individual permit in order to operate for any of the following:
1. The permittee failed to comply with any applicable provision of A.R.S. Title 49, Chapter 2; Article 7 of this Chapter; or any permit condition;
  2. The permittee misrepresented or omitted a fact, information, or data related to an application or permit condition;

3. The Director determines a permitted activity is causing or will cause a violation of a water quality standard established under A.R.S. § 49-221;
  4. A permitted activity is causing or will cause imminent and substantial endangerment to public health or the environment.
- B.** The Director may revoke coverage under a general permit for any or all facilities within a specific geographic area, if, due to geologic or hydrologic conditions, the cumulative effect of the facilities subject to the Recycled Water General Permit has violated or will violate a water quality standard established under A.R.S. § 49-221.
- C.** If an individual permit is issued to replace general permit coverage, the coverage under the general permit is automatically revoked upon issuance of the individual permit.
- D.** The Director may, after notice and opportunity for hearing, suspend or revoke a Recycled Water Individual Permit for any of the reasons listed in subsections (A)(1) through (A)(4) of this section.

**Historical Note**

New Section R18-9-A706 renumbered from R18-9-710 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-A707. Recycled Water Permit Transition**

The terms and conditions of Type 2, Type 3, and individual reclaimed water permits issued before January 1, 2018, including permits issued for gray water, shall remain in effect according to the language of this Article effective as of the date the permit was issued.

**Historical Note**

New Section R18-9-A707 made by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**PART B. RECLAIMED WATER****R18-9-B701. Transition of Aquifer Protection Permits and Permits for the Reuse of Reclaimed Wastewater**

- A.** A person may directly reuse reclaimed water under an individual Aquifer Protection Permit or a Permit for the Reuse of Reclaimed Wastewater issued by the Department before January 1, 2001 if the person meets the conditions of the permit and the permit does not expire.
- B.** A person meeting the requirements of subsection (A) may apply for a new reclaimed water permit under this Article.
1. To obtain a reclaimed water permit, a person shall submit a Recycled Water Individual Permit application, required under R18-9-A703(A), or a Notice of Intent to Use Recycled Water, required under R18-9-A704(B)(2) or R18-9-A704(B)(3), to the Department at least 120 days before the current permit expires.
  2. The Department shall continue the terms of the individual Aquifer Protection Permit or the Permit for the Reuse of Reclaimed Wastewater beyond the stated date of expiration if:
    - a. The permitted direct reuse is of a continuing nature; and
    - b. The permittee submits a timely and complete application for a new permit.
- C.** Sewage treatment facility generating reclaimed water.
1. At the request of a permittee holding an individual Aquifer Protection Permit, the Department shall amend an individual Aquifer Protection Permit if the permittee adequately demonstrates that the applicable quality of reclaimed water produced for direct reuse is achieved. The Department shall review:

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. The information in the individual Aquifer Protection Permit, any applicable supporting documentation, and the water quality test results from the previous two years to determine the classification of reclaimed water generated by the sewage treatment facility; and
- b. The available water quality data if the sewage treatment facility has operated for less than two years.
- 2. The Department shall issue an amended individual Aquifer Protection Permit under procedures specified under 18 A.A.C. 9, Article 2 containing:
  - a. Identification of the class of reclaimed water generated by the facility;
  - b. Requirements for monitoring reclaimed water quality and flow at a frequency appropriate to demonstrate compliance with this Article and 18 A.A.C. 11, Article 3;
  - c. Requirements for quarterly reporting of the following data to the Department, any reclaimed water agent who has contracted for delivery of reclaimed water from the facility, and any end user who has not waived interest in receiving this information:
    - i. Water quality test results demonstrating reclaimed water produced by the facility meets the applicable standards for the class of water identified in subsection (C)(2)(a), and
    - ii. The total volume of reclaimed water generated for direct reuse.
  - d. Provision for cessation of delivery, if necessary, and storage or disposal if reclaimed water cannot be delivered for direct reuse.
- G. Hose bibbs. A permittee directly reusing reclaimed water shall secure hose bibbs discharging reclaimed water to prevent use by the public.
- H. Prohibited activities.
  - 1. Irrigating with untreated sewage;
  - 2. Providing water for human consumption from a reclaimed water source except as allowed in Part E of this Article.
  - 3. Providing or using reclaimed water for any of the following activities:
    - a. Direct reuse for swimming, wind surfing, water skiing, or other full-immersion water activity with a potential of ingestion; or
    - b. Direct reuse for evaporative cooling or misting.
  - 4. Misapplying reclaimed water for any of the following reasons:
    - a. Application of a stated class of reclaimed water of lesser quality than allowed by this Article for the type of direct reuse application;
    - b. Application of reclaimed water to any area other than a direct reuse site; or
    - c. Allowing runoff of reclaimed water or reclaimed water mixed with stormwater from a direct reuse site, except for:
      - i. agricultural return flow directed onto an adjacent field or returned to an open water conveyance; or
      - ii. a discharge authorized by an individual or general NPDES or AZPDES permit.
- I. Signage and Notification. A permittee shall place and maintain signage at locations and provide applicable notification as specified in Table 1 so the public is informed reclaimed water is in use and no one should drink from the system.
- J. Pipeline Conveyances of Reclaimed Water.
  - 1. Applicability. Any person constructing a pipeline conveyance, whether new or a replacement of an existing pipeline, shall meet the requirements of this subsection.
  - 2. A person shall design and construct a pipeline conveyance system using good engineering judgment following standards of practice.
  - 3. A person shall construct a pipeline conveyance so that:
    - a. Reclaimed water does not find its way into, or otherwise contaminate, a potable water system;
    - b. System structural integrity is maintained; and
    - c. The capability for inspection, maintenance, and testing is maintained.
  - 4. A person shall construct a pipeline conveyance and all appurtenances conducting reclaimed water to withstand a static pressure of at least 50 pounds per square inch greater than the design working pressure without leakage as determined in R18-9-E301(D)(2)(j).
  - 5. A person shall provide a pipeline conveyance with thrust blocks or restrained joints where needed to prevent excessive movement of the pipeline.
  - 6. The following requirements for minimum separation distance apply. A person shall:
    - a. Locate a pipeline conveyance no closer than 50 feet from a drinking water well unless the pipeline conveyance is constructed as specified under subsection (J)(6)(c);
    - b. Locate a pipeline conveyance no closer than two feet vertically nor six feet horizontally from a potable water pipeline unless the pipeline conveyance is constructed as specified under subsection (J)(6)(c);
    - c. Construct a pipeline conveyance that does not meet the minimum separation distances specified in sub-

**Historical Note**

New Section R18-9-B701 renumbered from R18-9-703 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B702. General Requirements for Reclaimed Water**

- A. Sewage treatment facility. A sewage treatment facility owner or operator shall provide reclaimed water for direct reuse only as authorized under an individual Aquifer Protection Permit.
- B. Additional treatment. If an owner or operator of a facility accepts reclaimed water and provides additional treatment for a higher quality direct reuse, the facility is considered a sewage treatment facility and shall provide reclaimed water for direct reuse only as authorized under an individual Aquifer Protection Permit.
- C. Reclaimed water blending facility. An owner or operator of a reclaimed water blending facility shall conduct blending operations only as authorized under a Recycled Water Individual Permit or a Type 3 Recycled Water General Permit for a Reclaimed Water Blending Facility.
- D. Reclaimed water agent. A person shall operate as a reclaimed water agent only as authorized under a Recycled Water Individual Permit or a Type 3 Recycled Water General Permit for a Reclaimed Water Agent.
- E. End user. A person shall not directly reuse reclaimed water unless permitted under this Article.
- F. Irrigating with reclaimed water. A permittee applying reclaimed water for an irrigation use allowed in 18 A.A.C. 11, Article 3, Table A shall:
  - 1. Use application methods that reasonably preclude human contact with reclaimed water;
  - 2. Prevent reclaimed water from standing on open access areas during normal periods of use; and
  - 3. Prevent reclaimed water from coming into contact with drinking fountains, water coolers, or eating areas.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

sections (J)(6)(a) and (J)(6)(b) by encasing the pipeline conveyance in at least six inches of concrete or using mechanical joint ductile iron pipe or other materials of equivalent or greater tensile and compressive strength at least 10 feet beyond any point on the pipeline conveyance within the specified minimum separation distance; and

- d. If a reclaimed water system is supplemented with water from a potable water system, separate the potable water system from the pipeline conveyance by an air gap.

7. A person shall:

- a. For a pipeline conveyance, eight inches in diameter or less, use pipe marked on opposite sides in English: "CAUTION: RECLAIMED WATER, DO NOT DRINK" in intervals of three feet or less and colored purple or wrapped with durable purple tape.
- b. For a mechanical appurtenance to a pipeline conveyance, ensure the mechanical appurtenance is colored purple or legibly marked to identify it as part of the reclaimed water distribution system and distinguish it from systems for potable water distribution and sewage collection.

**K. Open Water Conveyances of Reclaimed Water.**

1. This subsection applies to an open water conveyance, regardless of the date of construction.

2. A person shall maintain an open water conveyance to prevent release of reclaimed water except as allowed under federal and state regulations. The maintenance program shall include periodic inspections and follow-up corrective measures to ensure the integrity of conveyance banks and capacity of the conveyance to safely carry operational flows.

3. Signage for Class B+, B, and C Reclaimed Water. A person shall:

- a. Ensure signs state: "CAUTION: RECLAIMED WATER, DO NOT DRINK," and display the international "do not drink" symbol;
- b. Place signs at all points of ingress and, if the open water conveyance is operated with open access, at least every 1/4-mile along the length of the open water conveyance or other interval as approved in writing by the Department; and
- c. Ensure signs are visible and legible from both sides of the open water conveyance.

**Historical Note**

New Section R18-9-B702 renumbered from R18-9-704 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018; clerical error to subsections corrected at (J)(6)(a), (b), and (c) as published at 23 A.A.R. 3091 (Supp. 17-4).

**Table 1. Signage and Notification Requirements for Direct Reuse Sites**

| Reclaimed Water Class | Hose Bibbs         | Residential Irrigation                                                                                                                                               | Schoolground Irrigation                   | Other Open Access Irrigation | Restricted Access Irrigation                                                                                                                                                                                                                              | Mobile Reclaimed Water Dispersal                 |
|-----------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| A+, A                 | Each bibb at valve | Front yard, or all entrances to a subdivision if the signage is supplemented by written yearly notification to individual homeowners by the homeowner's association. | On premises visible to staff and students | None                         | None                                                                                                                                                                                                                                                      | On dispersal equipment and visible to the public |
| B+, B                 | Each bibb at valve | Direct Reuse Not Allowed                                                                                                                                             | Direct Reuse Not Allowed                  | Direct Reuse Not Allowed     | 1. Ingress points;<br>2. At reasonably spaced intervals of not more than 1/4 mile at the reuse site or along the open water conveyance, unless access to vehicular and pedestrian traffic is secured; and<br>3. If applicable, notice on golf score cards | On dispersal equipment and visible to the public |
| C                     | Each bibb at valve | Direct Reuse Not Allowed                                                                                                                                             | Direct Reuse Not Allowed                  | Direct Reuse Not Allowed     | 1. Ingress points;<br>2. At reasonably spaced intervals of not more than 1/4 mile at the reuse site or along the open water conveyance, unless access to vehicular and pedestrian traffic is secured; and<br>3. If applicable, notice on golf score cards | On dispersal equipment and visible to the public |

Note: All impoundments with open access including lakes, ponds, ornamental fountains, waterfalls, and other water features shall be posted with signs regardless of the class of reclaimed water.

**Historical Note**

New Section R18-9-B702, Table 1 renumbered from R18-9-704, Table 1 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B703. General Provisions for Recycled Water Individual Permit for Reclaimed Water**



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- A. A Recycled Water Individual Permit for Reclaimed Water is obtained under R18-9-A703. A Recycled Water Individual Permit for Reclaimed Water:
  - 1. Is valid for five years;
  - 2. Must be updated as prescribed by R18-9-A705; and
  - 3. Continues, pending the issuance of a new permit, with the same terms following its expiration if the following are met:
    - a. The permittee submits an application for a new permit at least 60 days before the expiration of the existing permit; and
    - b. The permitted activity is of a continuing nature.
- B. A Recycled Water Individual Permit for Reclaimed Water shall contain, if applicable:
  - 1. The class of reclaimed water to be applied for direct reuse or the alternative water quality criteria appropriate for a direct reuse type not listed in 18 A.A.C. 11, Article 3, Table A that ADEQ may allow under R18-11-309;
  - 2. Specific types of direct reuse and any limitations on reuse;
  - 3. Requirements for monitoring reclaimed water quality and flow to demonstrate compliance with this Article and 18 A.A.C. 11, Article 3;
  - 4. Requirements for reporting the following data to demonstrate compliance with this Article and 18 A.A.C. 11, Article 3:
    - a. Water quality test results demonstrating the reclaimed water meets the applicable standards for the class of water or the alternative water quality criteria identified in subsection (B)(1), and
    - b. The total volume of reclaimed water generated for direct reuse.
  - 5. Requirements for maintaining records of all monitoring information and monitoring activities include:
    - a. The date, description of sampling location, and time of sampling or measurement;
    - b. The name of the person who performed the sampling or measurement;
    - c. The date the analyses were performed;
    - d. The name of the person who performed the analyses;
    - e. The analytical techniques or methods used;
    - f. The results of the analyses; and
    - g. Documentation of sampling technique, sample preservation, and transportation, including chain-of-custody forms.
  - 6. Requirements to retain all monitoring activity records and results, including all data for continuous monitoring instrumentation, and calibration and maintenance records for five years from the date of sampling or analysis. The Director shall extend the five-year retention period:
    - a. During the course of an unresolved litigation regarding compliance with the permit conditions, or
    - b. For any other justifiable cause.
  - 7. A requirement to allow all end users access to the records of physical, chemical, and biological quality of the reclaimed water.
  - 8. Signage or other notification requirements appropriate to the use; and
  - 9. Closure requirements, if applicable.

**Historical Note**

New Section R18-9-B703 renumbered from R18-9-706 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B704. Type 2 Recycled Water General Permit for Direct Reuse of Class A+ Reclaimed Water**

- A. A Type 2 Recycled Water General Permit for Direct Reuse of Class A+ Reclaimed Water allows any direct reuse application of reclaimed water listed in 18 A.A.C. 11, Article 3, Table A, if the conditions in this Article are met.
- B. Record maintenance. A permittee shall maintain records for five years describing the direct reuse site and the total amount of reclaimed water used annually for the permitted direct reuse activity. The records shall be made available to the Department upon request.
- C. A permittee shall post signs or provide notification or both as specified in R18-9-B702(I).
- D. No lining is required for an impoundment storing Class A+ reclaimed water.

**Historical Note**

New Section R18-9-B704 renumbered from R18-9-712 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B705. Type 2 Recycled Water General Permit for Direct Reuse of Class A Reclaimed Water**

- A. A Type 2 Recycled Water General Permit for the Direct Reuse of Class A Reclaimed Water allows any direct reuse application of reclaimed water listed in 18 A.A.C. 11, Article 3, Table A, if the conditions in this Article are met.
- B. Records and reporting. A permittee shall:
  - 1. Maintain records containing the following information for five years, and make them available to the Department upon request:
    - a. The direct reuse site,
    - b. The volume of reclaimed water applied monthly for each category of direct reuse activity listed in 18 A.A.C. 11, Article 3, Table A,
    - c. The total nitrogen concentration of the reclaimed water applied, and
    - d. The acreage and type of vegetation to which the reclaimed water is applied.
  - 2. Report annually to the Department on or before the anniversary date of the Notice of Intent to Use Recycled Water:
    - a. The volume of reclaimed water received,
    - b. The type of reclaimed water application, and
    - c. If used for irrigation, the vegetation and acreage irrigated.
- C. Nitrogen management. A permittee shall ensure:
  - 1. Impoundments storing reclaimed water allowed by the general permit are lined using a low-hydraulic conductivity artificial or site-specific liner material achieving a calculated discharge rate less than 550 gallons per acre per day; and
  - 2. The application rates of the reclaimed water are based on one of the following:
    - a. If assigned, the water allotment specified by the Arizona Department of Water Resources;
    - b. A water balance that considers consumptive use of water by the crop, turf, or landscape vegetation; or
    - c. An alternative method approved by the Department.
- D. In addition to the Notice of Intent to Use Recycled Water specified in R18-9-A704(B)(2), the applicant shall provide a list of impoundments, water depth, freeboard, and the liner characteristics and the method chosen from the list in subsection (C)(2).
- E. The permittee shall post signs or provide notification, or both, as specified in R18-9-B702(I).



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

**Historical Note**

New Section R18-9-B705 renumbered from R18-9-713 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B706. Type 2 Recycled Water General Permit for Direct Reuse of Class B+ Reclaimed Water**

- A. A Type 2 Recycled Water General Permit for Direct Reuse of Class B+ Reclaimed Water allows any direct reuse application of Class B and Class C reclaimed water listed in 18 A.A.C. 11, Article 3, Table A, if the conditions in this Article are met.
- B. A permittee shall comply with the record maintenance and posting requirements established under R18-9-B704 and make records available to the Department upon request.
- C. No lining is required for an impoundment storing Class B+ reclaimed water.

**Historical Note**

New Section R18-9-B706 renumbered from R18-9-714 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B707. Type 2 Recycled Water General Permit for Direct Reuse of Class B Reclaimed Water**

- A. A Type 2 Recycled Water General Permit for the Direct Reuse of Class B Reclaimed Water allows the direct reuse application of Class B and Class C reclaimed water listed in 18 A.A.C. 11, Article 3, Table A, if conditions in this Article are met.
- B. A permittee shall comply with the requirements established under R18-9-B705(B), (C), (D), and (E).

**Historical Note**

New Section R18-9-B707 renumbered from R18-9-715 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B708. Type 2 Recycled Water General Permit for Direct Reuse of Class C Reclaimed Water**

- A. A Type 2 Recycled Water General Permit for the Direct Reuse of Class C Reclaimed Water allows the direct reuse application of Class C reclaimed water listed in 18 A.A.C. 11, Article 3, Table A, if conditions in this Article are met.
- B. A permittee shall comply with the requirements established under R18-9-B705(B), (C), (D), and (E).

**Historical Note**

New Section R18-9-B708 renumbered from R18-9-716 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B709. Type 3 Recycled Water General Permit for a Reclaimed Water Blending Facility****A. Permit conditions.**

- 1. A Type 3 Recycled Water General Permit for a Reclaimed Water Blending Facility allows the blending of reclaimed water with other water, if the conditions in this Article are met.
- 2. Blending reclaimed water with industrial wastewater or with reclaimed water from an industrial wastewater treatment plant is not authorized by this general permit.

**B. A person shall file with the Department a Notice of Intent to Operate a reclaimed water blending facility on a form provided by the Department. The Notice of Intent to Operate shall include:**

- 1. The name, address, e-mail address, and telephone number of the applicant;
- 2. The name, address, e-mail address, and telephone number of a contact person;
- 3. The source and volume of reclaimed water to be blended;
- 4. The class of reclaimed water to be blended;
- 5. The source, volume, and quality of other water to be blended;
- 6. The latitude and longitude coordinates of the blending facility;
- 7. A description of the reclaimed water blending facility, including a demonstration the proposed blending methodology will meet the standards established in 18 A.A.C. 11, Article 3 for the class of reclaimed water the facility will produce;
- 8. The applicant's certification that the applicant agrees to comply with the requirements of this Article, 18 A.A.C. 11, Article 3, and the terms of this recycled water general permit; and
- 9. The applicable permit fee specified under 18 A.A.C. 14.

**C. A person shall not operate a reclaimed water blending facility until the Department issues a written Recycled Water Authorization under R18-9-A704(C).****D. A permittee shall monitor:**

- 1. The blended water quality for total nitrogen and fecal coliform at frequencies specified by the class of reclaimed water in 18 A.A.C. 11, Article 3.
  - a. If the concentration in the blended water of either total nitrogen or fecal coliform, as applicable, exceeds the limits for the applicable reclaimed water class established in 18 A.A.C. 11, Article 3, within 30 days of the exceedance, the permittee shall submit a plan to the Department to change the blending process or to otherwise correct the deficiency. The permittee shall also double the monitoring frequency for the next four months.
  - b. If another exceedance occurs within the interval of increased monitoring, the permittee shall submit an application within 45 days for a Recycled Water Individual Permit for Reclaimed Water.
- 2. The volume of reclaimed water, the volume of the other water, and the total volume of blended water delivered for direct reuse on a monthly basis.

**E. The permittee shall report the results of the monitoring under subsection (D) to the Department by January 31, for the immediately preceding calendar year, and shall make this information available to the end users.**

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

**Historical Note**

New Section R18-9-B709 renumbered from R18-9-717 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-B710. Type 3 Recycled Water General Permit for a Reclaimed Water Agent**

- A.** A Type 3 Recycled Water General Permit for a Reclaimed Water Agent allows a person to operate as a Reclaimed Water Agent if the conditions of this Article are met, and the following conditions are met for the class of reclaimed water delivered by the Reclaimed Water Agent:
1. Signage and notification requirements specified under R18-9-B702(I), as applicable;
  2. Impoundment liner requirements specified under R18-9-B704(D), R18-9-B705(C), R18-9-B706(C), R18-9-B707(B) or R18-9-B708(B), as applicable; and
  3. Nitrogen management requirements specified under R18-9-B705(C), R18-9-B707(B), and R18-9-B708(B), as applicable.
- B.** A person holding a Type 3 Recycled Water Permit for a Reclaimed Water Agent:
1. Is responsible for the direct reuse of reclaimed water by more than one end user instead of direct reuse by the end users under separate Type 2 Recycled Water General Permits, and
  2. Shall maintain a contractual agreement with each end user stipulating any end user responsibilities for the requirements specified under subsection (A).
- C.** A person shall file with the Department a Notice of Intent to Operate as a reclaimed water agent. The Notice of Intent to Operate shall include:
1. The name, address, e-mail address, and telephone number of the applicant;
  2. The name, address, e-mail address, and telephone number of a contact person;
  3. The following information for each end user to be supplied reclaimed water by the applicant:
    - a. The name, address, e-mail address, and telephone number of the end user;
    - b. A system map showing the locations of the direct reuse sites and the latitude and longitude coordinates of each site; and
    - c. A description of each direct reuse activity, including the type of vegetation, acreage, and annual volume of reclaimed water to be used, unless Class A+ or Class B+ reclaimed water is delivered.
  4. The source, class, and annual volume of reclaimed water to be delivered by the applicant;
  5. A description of the contractual arrangement between the applicant and each end user, including any end user responsibilities for the requirements specified under subsection (A); and
  6. The applicable permit fee specified under 18 A.A.C. 14.
- D.** A proposed reclaimed water agent shall not distribute reclaimed water to end users until the Department issues a written Recycled Water Authorization under R18-9-A704(C).
- E.** A reclaimed water agent shall record and annually report the following information to the Department by January 31, for the immediately preceding year:
1. The total volume of reclaimed water delivered by the reclaimed water agent;
  2. The volume of reclaimed water delivered to each end user for Class A, Class B, and Class C reclaimed water; and
  3. Any change in the information submitted under subsection (C).

**Historical Note**

New Section R18-9-B710 renumbered from R18-9-718 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**PART C. RECYCLED INDUSTRIAL WASTEWATER****R18-9-C701. Recycled Water Individual Permit for Industrial Wastewater That Is Reused**

- A.** The following activities are prohibited unless a Recycled Water Individual Permit is obtained under R18-9-A703:
1. Use of reclaimed water from a sewage treatment facility that is combined with industrial wastewater or water from an industrial wastewater treatment facility.
  2. Use of reclaimed water from an industrial wastewater treatment facility for production or processing of a crop or substance that may be used as human or animal food.
- B.** In addition to the requirements in R18-9-A703(A), an application for a Recycled Water Individual Permit shall include:
1. Each source of the industrial wastewater with Standard Industrial Code or North American Industry Classification System Code, and the projected rates and volumes from each source;
  2. The chemical, biological, and physical characteristics of the industrial wastewater from each source; and
  3. If reclaimed water will be used in the processing of any crop or substance that may be used as human or animal food, the information regarding food safety and any potential adverse health effects of this direct reuse.

**Historical Note**

New Section R18-9-C701 renumbered from R18-9-707 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**PART D. GRAY WATER****R18-9-D701. Type 1 Recycled Water General Permit for Gray Water**

- A.** A Type 1 Recycled Water General Permit for Gray Water allows private residential use of gray water for a flow of less than 400 gallons per day if all the following conditions are met:
1. Gray water originating from the residence is used and contained within the property boundary for household gardening, composting, or landscape watering;
  2. Human contact with gray water and soil watered by gray water is avoided;
  3. Surface application of gray water is not used for watering of food plants, except for trees and shrubs which have an edible portion that does not come into contact with the gray water;
  4. The gray water does not contain hazardous chemicals derived from activities such as cleaning car parts, washing greasy or oily rags, or disposing of waste solutions from hobbyist or home occupational activities;
  5. The gray water does not contain water used to wash diapers or similarly soiled or infectious garments;
  6. The application of gray water is managed to minimize standing water on the surface by using measures such as avoiding overwatering, distributing the gray water beneath a mulch or other cover, and using best practices to improve soil condition and increase filtration;
  7. If blockage, backup, or overload of the system occurs, gray water distribution shall cease until the deficiency is corrected. The gray water system may include components to reduce blockage and backup and be operated using best practices to extend system lifetime;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

8. Gray water surge tanks, if any, are covered to restrict access and to eliminate habitat for mosquitoes or other vectors, and holding time is minimized to avoid development of anaerobic conditions and odors;
  9. The gray water system is sited outside of a floodway;
  10. The gray water system is operated to maintain a minimum vertical separation distance of at least five feet from the point of gray water application to the top of the seasonally high groundwater table;
  11. For a residence using an on-site wastewater treatment facility for black water treatment and disposal, the use of a gray water system does not change the design, capacity, or reserve area requirements for the on-site wastewater treatment facility at the residence, and ensures the facility can handle the combined black water and gray water flow;
  12. Any pressure piping used in a gray water system that may be susceptible to cross connection with a potable water system clearly indicates the piping does not carry potable water; and
  13. Surface application of gray water is only by flood or drip distribution methods. Flood distribution methods may include containment by horticultural mulch basins and swales.
- B. Prohibitions.** The following are prohibited:
1. Gray water use for purposes other than watering and composting, and
  2. Application of gray water by a spray method.

**Historical Note**

New Section R18-9-D701 renumbered from R18-9-711 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**R18-9-D702. Type 3 Recycled Water General Permit for Gray Water**

- A.** A Type 3 Recycled Water General Permit for Gray Water allows for the use of gray water for landscape irrigation and composting if:
1. The general permit described in R18-9-D701 does not apply,
  2. The flow is not more than 3000 gallons per day, and
  3. The gray water system satisfies the notification, design, and installation requirements specified in subsections (B) and (C).
- B.** A person shall file a Notice of Intent to Operate a Gray Water System with the Department on a form provided by the Department. The Notice of Intent to Operate shall include:
1. The name, address, e-mail address, and telephone number of the applicant;
  2. The latitude and longitude coordinates;
  3. A description of the sources of gray water and calculations demonstrating the flow is not more than 3000 gallons per day;
  4. Design plans for the gray water system;
  5. The applicant's certification that the applicant agrees to comply with the requirements of this Article and the terms of this Recycled Water General Permit for Gray Water; and
  6. The applicable permit fee specified under 18 A.A.C. 14.
- C.** The following requirements apply to the design, installation, and operation of a gray water system allowed under this Recycled Water General Permit for Gray Water:
1. Human contact with gray water and soil irrigated by gray water is avoided;
  2. Gray water is not applied to an exposed surface but into a bed or trench of permeable material, through piping

installed below the soil surface, or by similar means. Spray irrigation of gray water is not allowed. The application of gray water shall not result in standing water on the surface.

3. The design shall ensure gray water is used and contained within the property boundary for landscape irrigation or composting;
  4. Gray water is not used for irrigation of food plants, except for trees and shrubs which have an edible portion that does not come into contact with the gray water;
  5. The gray water may contain water from drinking fountains but does not contain hazardous chemicals derived from industrial, hobbyist, or similar activities at the site;
  6. Gray water does not contain water used to wash diapers or similarly soiled or infectious garments;
  7. The gray water system is constructed so if blockage, plugging, or backup of the system occurs, gray water can be directed into the sewage collection system or on-site wastewater treatment and disposal system, as applicable;
  8. Gray water surge tanks, if any, are covered to restrict access and to eliminate habitat for mosquitoes or other vectors, and holding time is minimized to avoid development of anaerobic conditions and odors;
  9. The gray water system is sited outside of a floodway;
  10. The gray water system is operated to maintain a minimum vertical separation distance of at least five feet from the point of gray water application to the top of the seasonally high groundwater table;
  11. If an on-site wastewater treatment facility is used for black water treatment and disposal, the use of a gray water system does not change the design, capacity, or reserve area requirements for the on-site wastewater treatment facility so the facility may handle the combined black water and gray water flow; and
  12. Any piping used in a gray water system susceptible to cross connection with a potable water system clearly indicates the piping does not carry potable water.
- D.** The applicant shall not operate the gray water system until the Department issues a written Recycled Water Authorization under R18-9-A704(C).
- E.** The Department may issue a Recycled Water Authorization that differs from the requirements specified in subsection (C) if the system provides equivalent performance and protection of human health and water quality.
- F.** In the Recycled Water Authorization, the Department may require a permittee to report data or information for any of the conditions in this section if the Department deems the reporting necessary to protect human health or water quality or both.

**Historical Note**

New Section R18-9-D702 renumbered from R18-9-719 and amended by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**PART E. PURIFIED WATER FOR POTABLE USE****R18-9-E701. Recycled Water Individual Permit for an Advanced Reclaimed Water Treatment Facility**

- A.** An application for a Recycled Water Individual Permit for an Advanced Reclaimed Water Treatment Facility must be submitted to the Department according to the requirements in R18-9-A703, as applicable.
- B.** Safe Drinking Water Act. For purposes of Safe Drinking Water Act requirements, water produced by an Advanced Reclaimed Water Treatment Facility shall be considered surface water for purposes of compliance with Title 18, Chapter 4 of the Arizona Administrative Code. Nothing in this section exempts an

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

applicable facility from Safe Drinking Water Act requirements.

- C. Design Report. In addition to the information required by subsection (A), the applicant shall submit a design report for the Advanced Reclaimed Water Treatment Facility according to a form prescribed by the Department and certified by an Arizona-registered professional engineer. The design report must include the following information:

1. Characterization of source water quantity and quality, including:
  - a. Average and anticipated minimum and maximum source water flows to the facility;
  - b. Concentrations of the source water's physical, microbiological, and chemical constituents regulated for drinking water Maximum Contaminant Levels under the Safe Drinking Water Act and which the Department determines are appropriate for the particular facility and source water;
  - c. Description and concentrations of constituents in the source water used for unit treatment process monitoring and assessment of unit treatment process efficiency, and
  - d. A list of unregulated microbial and chemical constituents and corresponding concentrations in the source water a facility proposes to monitor in order to assess the treatment effectiveness of the overall treatment train. The particular constituents will depend on consideration of factors, such as:
    - i. Occurrence of the constituent in source and local waters,
    - ii. Availability of standardized laboratory methods for quantification of the constituent,
    - iii. Usefulness as representatives of or surrogates for larger classes of constituents, and
    - iv. Availability of toxicity data for the constituent.
2. Description of, and results from, the pilot water treatment system for the facility or of analogous systems where comparable treatment components are demonstrated as appropriate for treating the particular characteristics of the applicant's proposed source water;
3. Identification and description of the technologies, processes, methodologies, and process control monitoring to be employed for microbial control;
4. Logarithmic reduction targets for microbial control, to ensure the product water is free of pathogens and suitable for potable use;
5. Identification and description of technologies, processes, methodologies and process control monitoring for chemical control;
6. Plan for monitoring the product water for public health protection;
7. Commissioning and startup plan, including preoperational and startup testing and monitoring, expected timeframe for meeting full operational performance, and any other special startup condition meriting consideration in the individual permit;
8. Operation and maintenance plan including corrective actions for out-of-range monitoring results and contingencies for non-compliant water;
9. Operator training plan; and
10. Documentation of technical, financial, and management capability.

**Historical Note**

New Section made by final rulemaking at 23 A.A.R. 3091, effective January 1, 2018 (Supp. 17-4).

**ARTICLE 8. REPEALED****R18-9-801. Repealed****Historical Note**

Corrected A.R.S. reference (Supp. 77-3). Former Section R9-8-311 renumbered without change as Section R18-9-801 (Supp. 87-3). Amended effective December 1, 1988 (Supp. 88-4). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-802. Repealed****Historical Note**

Amended by adding subsections (N) through (R) effective June 8, 1981 (Supp. 81-3). Former Section R9-8-312 renumbered without change as Section R18-9-802 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-803. Repealed****Historical Note**

Amended effective April 18, 1979 (Supp. 79-2). Amended by adding subsection (E) effective October 2, 1986 (Supp. 86-5). Former Section R9-8-313 renumbered without change as Section R18-9-803 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-804. Repealed****Historical Note**

Amended effective April 18, 1979 (Supp. 79-2). Amended effective February 20, 1980 (Supp. 80-1). Amended by adding subsections (I) and (J) effective June 8, 1981 (Supp. 81-3). Amended subsections (A), (F) and (H) effective October 2, 1986 (Supp. 86-5). Former Section R9-8-314 renumbered without change as Section R18-9-804 (Supp. 87-3). Amended effective July 25, 1990 (Supp. 90-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-805. Repealed****Historical Note**

Adopted effective April 18, 1979 (Supp. 79-2). Amended effective October 2, 1986 (Supp. 86-5). Former Section R9-8-315 renumbered without change as Section R18-9-805 (Supp. 87-3). Amended effective July 25, 1990 (Supp. 90-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-806. Repealed****Historical Note**

Adopted effective October 2, 1986 (Supp. 86-5). Former Section R9-8-317 renumbered without change as Section R18-9-806 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-807. Repealed****Historical Note**

Former Section R9-8-321 renumbered without change as Section R18-9-807 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-808. Repealed****Historical Note**

Former Section R9-8-323 renumbered without change as



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

Section R18-9-808 (Supp. 87-3). Amended effective July 25, 1990 (Supp. 90-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-809. Repealed****Historical Note**

Former Section R9-8-324 renumbered without change as Section R18-9-809 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-810. Repealed****Historical Note**

Former Section R9-8-325 renumbered without change as Section R18-9-810 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-811. Repealed****Historical Note**

Former Section R9-8-326 repealed, new Section R9-8-326 adopted effective October 2, 1986 (Supp. 86-5). Former Section R9-8-326 renumbered without change as Section R18-9-811 (Supp. 87-3). First entry in Historical Note corrected to reflect Section numbers at time of rule repeal and adoption by changing R18-9-326 to R9-8-326 (Supp. 96-4). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-812. Repealed****Historical Note**

Former Section R9-8-327 renumbered without change as Section R18-9-812 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-813. Repealed****Historical Note**

Amended effective April 18, 1979 (Supp. 79-2). Former Section R9-8-329 renumbered without change as Section R18-9-813 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-814. Repealed****Historical Note**

Former Section R9-8-331 renumbered without change as Section R18-9-814 (Supp. 87-3). Amended effective October 19, 1989 (Supp. 89-4). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-815. Repealed****Historical Note**

Former Section R9-8-332 renumbered without change as Section R18-9-815 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-816. Repealed****Historical Note**

Former Section R9-8-351 renumbered without change as Section R18-9-816 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8,

2000 (Supp. 00-4).

**R18-9-817. Repealed****Historical Note**

Former Section R9-8-352 renumbered without change as Section R18-9-817 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-818. Repealed****Historical Note**

Former Section R9-8-353 renumbered without change as Section R18-9-818 (Supp. 87-3). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**R18-9-819. Repealed****Historical Note**

Former Section R9-8-361 renumbered without change as Section R18-9-819 (Supp. 87-3). Amended effective December 1, 1988 (Supp. 88-4). Section repealed by final rulemaking at 7 A.A.R. 235, effective December 8, 2000 (Supp. 00-4).

**ARTICLE 9. ARIZONA POLLUTANT DISCHARGE ELIMINATION SYSTEM**

*Editor's Note: The recodification at 7 A.A.R. 2522 described below erroneously moved Sections into 18 A.A.C. 9, Article 9. Those Sections were actually recodified to 18 A.A.C. 9, Article 10. See the Historical Notes for more information (Supp. 01-4).*

*Article 9, consisting of Sections R18-9-901 through R18-9-914 and Appendix A, recodified from 18 A.A.C. 13, Article 15 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2).*

**PART A. GENERAL REQUIREMENTS****R18-9-A901. Definitions**

In addition to the definitions in A.R.S. § 49-201 and 49-255, the following terms apply to this Article:

1. "Animal confinement area" means any part of an animal feeding operation where animals are restricted or confined including open lots, housed lots, feedlots, confinement houses, stall barns, free stall barns, milkrooms, milking centers, cowyards, barnyards, medication pens, walkers, animal walkways, and stables.
2. "Animal feeding operation" means a lot or facility (other than an aquatic animal production facility) where the following conditions are met:
  - a. Animals (other than aquatic animals) have been, are, or will be stabled or confined and fed or maintained for a total of 45 days or more in any 12-month period, and
  - b. Crops, vegetation, forage growth, or post-harvest residues are not sustained in the normal growing season over any portion of the lot or facility.
3. "Aquaculture project" means a defined managed water area that uses discharges of pollutants into that designated project area for the maintenance or production of harvestable freshwater plants or animals. For purposes of this definition, "designated project area" means the portion or portions of the navigable waters within which the permittee or permit applicant plans to confine the cultivated species using a method or plan of operation, including physical confinement, that on the basis of reliable scientific evidence, is expected to ensure that specific individual organisms comprising an aquaculture crop will enjoy



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- increased growth attributable to the discharge of pollutants, and be harvested within a defined geographic area.
4. "Border area" means 100 kilometers north and south of the Arizona-Sonora, Mexico border.
  5. "Bypass" means the intentional diversion of waste streams from any portion of a treatment facility.
  6. "CAFO" means any large concentrated animal feeding operation, medium concentrated animal feeding operation, or animal feeding operation designated under R18-9-D901.
  7. "Concentrated aquatic animal production facility" means a hatchery, fish farm, or other facility that contains, grows, or holds aquatic animals in either of the following categories:
    - a. Cold-water aquatic animals. Cold-water fish species or other cold-water aquatic animals (including the Salmonidae family of fish) in a pond, raceway, or other similar structure that discharges at least 30 days per year, but does not include:
      - i. A facility that produces less than 9,090 harvest weight kilograms (approximately 20,000 pounds) of aquatic animals per year; and
      - ii. A facility that feeds the aquatic animals less than 2,272 kilograms (approximately 5,000 pounds) of food during the calendar month of maximum feeding.
    - b. Warm-water aquatic animals. Warm-water fish species or other warm-water aquatic animals (including the Ameiuridae, Centrarchidae, and Cyprinidae families of fish) in a pond, raceway, or other similar structure that discharges at least 30 days per year, but does not include:
      - i. A closed pond that discharges only during periods of excess runoff; or
      - ii. A facility that produces less than 45,454 harvest weight kilograms (approximately 100,000 pounds) of aquatic animals per year.
  8. "Daily discharge" means the discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in units of mass, the daily discharge is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the daily discharge is calculated as the average measurement of the pollutant over the day.
  9. "Discharge of a pollutant" means any addition of any pollutant or combination of pollutants to a navigable water from any point source.
    - a. The term includes the addition of any pollutant into a navigable water from:
      - i. A treatment works treating domestic sewage;
      - ii. Surface runoff that is collected or channeled by man;
      - iii. A discharge through a pipe, sewer, or other conveyance owned by a state, municipality, or other person that does not lead to a treatment works; and
      - iv. A discharge through a pipe, sewer, or other conveyance, leading into a privately owned treatment works.
    - b. The term does not include an addition of a pollutant by any industrial user as defined in A.R.S. § 49-255(4).
  10. "Draft permit" means a document indicating the Director's tentative decision to issue, deny, modify, revoke and reissue, terminate, or reissue a permit.
    - a. A notice of intent to terminate a permit is a type of draft permit unless the entire discharge is permanently terminated by elimination of the flow or by connection to a POTW, but not by land application or disposal into a well.
    - b. A notice of intent to deny a permit is a type of draft permit.
    - c. A proposed permit or a denial of a request for modification, revocation and reissuance, or termination of a permit, are not draft permits.
  11. "EPA" means the U.S. Environmental Protection Agency.
  12. "General permit" means an AZPDES permit issued under 18 A.A.C. 9, Article 9, authorizing a category of discharges within a geographical area.
  13. "Individual permit" means an AZPDES permit for a single point source, a single facility, or a municipal separate storm sewer system.
  14. "Land application area," for purposes of Article 9, Part D, means land under the control of an animal feeding operation owner or operator, whether it is owned, rented, or leased, to which manure, litter, or process wastewater from the production area is or may be applied.
  15. "Large concentrated animal feeding operation" means an animal feeding operation that stables or confines at least the number of animals specified in any of the following categories:
    - a. 700 mature dairy cows, whether milked or dry;
    - b. 1,000 veal calves;
    - c. 1,000 cattle other than mature dairy cows or veal calves. Cattle includes heifers, steers, bulls, and cow and calf pairs;
    - d. 2,500 swine each weighing 55 pounds or more;
    - e. 10,000 swine each weighing less than 55 pounds;
    - f. 500 horses;
    - g. 10,000 sheep or lambs;
    - h. 55,000 turkeys;
    - i. 30,000 laying hens or broilers, if the animal feeding operation uses a liquid manure handling system;
    - j. 125,000 chickens (other than laying hens), if the animal feeding operation uses other than a liquid manure handling system;
    - k. 82,000 laying hens, if the animal feeding operation uses other than a liquid manure handling system;
    - l. 30,000 ducks, if the animal feeding operation uses other than a liquid manure handling system; or
    - m. 5,000 ducks, if the animal feeding operation uses a liquid manure handling system.
  16. "Large municipal separate storm sewer system" means a municipal separate storm sewer that is either:
    - a. Located in an incorporated area with a population of 250,000 or more as determined by the 1990 Decennial Census by the Bureau of the Census;
    - b. Located in a county with an unincorporated urbanized area with a population of 250,000 or more, according to the 1990 Decennial Census by the Bureau of Census, but not a municipal separate storm sewer that is located in an incorporated place, township, or town within the county; or
    - c. Owned or operated by a municipality other than those described in subsections (16)(a) and (16)(b) and that are designated by the Director under R18-9-A902(D)(2) as part of the large municipal separate storm sewer system.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

17. "Manure" means any waste or material mixed with waste from an animal including manure, bedding, compost and raw materials, or other materials commingled with manure or set aside for disposal.
18. "Manure storage area" means any part of an animal feeding operation where manure is stored or retained including lagoons, run-off ponds, storage sheds, stockpiles, under-house or pit storages, liquid impoundments, static piles, and composting piles.
19. "Medium concentrated animal feeding operation" means an animal feeding operation in which:
  - a. The type and number of animals that it stables or confines falls within any of the following ranges:
    - i. 200 to 699 mature dairy cows, whether milked or dry;
    - ii. 300 to 999 veal calves;
    - iii. 300 to 999 cattle other than mature dairy cows or veal calves. Cattle includes heifers, steers, bulls, and cow and calf pairs;
    - iv. 750 to 2,499 swine each weighing 55 pounds or more;
    - v. 3,000 to 9,999 swine each weighing less than 55 pounds;
    - vi. 150 to 499 horses;
    - vii. 3,000 to 9,999 sheep or lambs;
    - viii. 16,500 to 54,999 turkeys;
    - ix. 9,000 to 29,999 laying hens or broilers, if the animal feeding operation uses a liquid manure handling system;
    - x. 37,500 to 124,999 chickens (other than laying hens), if the animal feeding operation uses other than a liquid manure handling system;
    - xi. 25,000 to 81,999 laying hens, if the animal feeding operation uses other than a liquid manure handling system;
    - xii. 10,000 to 29,999 ducks, if the animal feeding operation uses other than a liquid manure handling system; or
    - xiii. 1,500 to 4,999 ducks, if the animal feeding operation uses a liquid manure handling system; and
  - b. Either one of the following conditions are met:
    - i. Pollutants are discharged into a navigable water through a man-made ditch, flushing system, or other similar man-made device; or
    - ii. Pollutants are discharged directly into a navigable water that originates outside of and passes over, across, or through the animal feeding operation or otherwise comes into direct contact with the animals confined in the operation.
20. "Medium municipal separate storm sewer system" means a municipal separate storm sewer that is either:
  - a. Located in an incorporated area with a population of 100,000 or more but less than 250,000, as determined by the 1990 Decennial Census by the Bureau of the Census; or
  - b. Located in a county with an unincorporated urbanized area with a population of 100,000 or more but less than 250,000 as determined by the 1990 Decennial Census by the Bureau of the Census; or
  - c. Owned or operated by a municipality other than those described in subsections (20)(a) and (20)(b) and that are designated by the Director under R18-9-A902(D)(2) as part of the medium municipal separate storm sewer system.
21. "MS4" means municipal separate storm sewer system.
22. "Municipal separate storm sewer" means a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, manmade channels, and storm drains):
  - a. Owned or operated by a state, city, town county, district, association, or other public body (created by or pursuant to state law) having jurisdiction over disposal of sewage, industrial wastes, stormwater, or other wastes, including special districts under state law such as a sewer district, flood control district or drainage district, or similar entity, or a designated and approved management agency under section 208 of the Clean Water Act (33 U.S.C. 1288) that discharges to waters of the United States;
  - b. Designed or used for collecting or conveying stormwater;
  - c. That is not a combined sewer; and
  - d. That is not part of a POTW.
23. "Municipal separate storm sewer system" means all separate storm sewers defined as "large," "medium," or "small" municipal separate storm sewer systems or any municipal separate storm sewers on a system-wide or jurisdiction-wide basis as determined by the Director under R18-9-C902(A)(1)(g)(i) through (iv).
24. "New discharger" includes an industrial user and means any building, structure, facility, or installation:
  - a. From which there is or may be a discharge of pollutants;
  - b. That did not commence the discharge of pollutants at a particular site before August 13, 1979;
  - c. That is not a new source; and
  - d. That has never received a finally effective NPDES or AZPDES permit for discharges at that site.
25. "New source" means any building, structure, facility, or installation from which there is or may be a discharge of pollutants, the construction of which commenced:
  - a. After the promulgation of standards of performance under section 306 of the Clean Water Act (33 U.S.C. 1316) that are applicable to the source, or
  - b. After the proposal of standards of performance in accordance with section 306 of the Clean Water Act (33 U.S.C. 1316) that are applicable to the source, but only if the standards are promulgated under section 306 (33 U.S.C. 1316) within 120 days of their proposal.
26. "NPDES" means the National Pollutant Discharge Elimination System, which is the national program for issuing, modifying, revoking, reissuing, terminating, monitoring, and enforcing permits, and imposing and enforcing pretreatment and biosolids requirements under sections 307 (33 U.S.C. 1317), 318 (33 U.S.C. 1328), 402 (33 U.S.C. 1342), and 405 (33 U.S.C. 1345) of the Clean Water Act.
27. "Pollutant" means dredged spoil, solid waste, incinerator residue, filter backwash, sewage, garbage, sewage sludge, munitions, chemical wastes, biological materials, radioactive materials (except those regulated under the Atomic Energy Act of 1954, as amended (42 U.S.C. 2014 et seq.)), heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal, and agricultural waste discharged into water. It does not mean:
  - a. Sewage from vessels; or
  - b. Water, gas, or other material that is injected into a well to facilitate production of oil or gas, or water derived in association with oil and gas production and disposed of in a well, if the well used either to facilitate production or for disposal purposes is

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- approved by authority of this state, and if the state determines that the injection or disposal will not result in the degradation of ground or surface water resources. (40 CFR 122.2)
28. "POTW" means a publicly owned treatment works.
  29. "Process wastewater," for purposes of Article 9, Part D, means any water that comes into contact with a raw material, product, or byproduct including manure, litter, feed, milk, eggs, or bedding and water directly or indirectly used in the operation of an animal feeding operation for any or all of the following:
    - a. Spillage or overflow from animal or poultry watering systems;
    - b. Washing, cleaning, or flushing pens, barns, manure pits, or other animal feeding operation facilities;
    - c. Direct contact swimming, washing, or spray cooling of animals; or
    - d. Dust control.
  30. "Proposed permit" means an AZPDES permit prepared after the close of the public comment period (including EPA review), and any applicable public hearing and administrative appeal, but before final issuance by the Director. A proposed permit is not a draft permit.
  31. "Pretreatment" means the reduction of the amount of pollutants, the elimination of pollutants, or the alteration of the nature of pollutant properties in wastewater before or instead of discharging or otherwise introducing the pollutants into a POTW.
  32. "Production area," for purposes of Article 9, Part D, means the animal confinement area, manure storage area, raw materials storage area, and waste containment areas. Production area includes any egg washing or egg processing facility and any area used in the storage, handling, treatment, or disposal of animal mortalities.
  33. "Raw materials storage area" means the part of an animal feeding operation where raw materials are stored including feed silos, silage bunkers, and bedding materials.
  34. "Silviculture point source" means any discernible, confined, and discrete conveyance related to rock crushing, gravel washing, log sorting, or log storage facilities that are operated in connection with silvicultural activities and from which pollutants are discharged into navigable waters. The term does not include nonpoint source silvicultural activities such as nursery operations, site preparation, reforestation and subsequent cultural treatment, thinning, prescribed burning, pest and fire control, harvesting operations, surface drainage, or road construction and maintenance from which there is natural runoff. For purposes of this definition:
    - a. "Log sorting and log storage facilities" means facilities whose discharge results from the holding of unprocessed wood, for example, logs or round wood with or without bark held in self-contained bodies of water or stored on land if water is applied intentionally on the logs.
    - b. "Rock crushing and gravel washing facilities" mean facilities that process crushed and broken stone, gravel, and riprap.
  35. "Small municipal separate storm sewer system" means a separate storm sewer that is:
    - a. Owned or operated by the United States, a state, city, town, county, district, association, or other public body (created by or pursuant to state law) having jurisdiction over disposal of sewage, industrial wastes, storm water, or other wastes, including special districts under state law such as a sewer district, flood control district or drainage district, or similar entity, an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the Clean Water Act (33 U.S.C. 1288) that discharge to navigable waters.
    - b. Not defined as a "large" or "medium" municipal separate storm sewer system or designated under R18-9-A902(D)(2).
    - c. Similar to municipal separate storm sewer systems such as systems at military bases, large hospital or prison complexes, universities, and highways and other thoroughfares. The term does not include a separate storm sewer in a very discrete area such as an individual building.
  36. "Stormwater" means stormwater runoff, snow melt runoff, and surface runoff and drainage.
  37. "Treatment works treating domestic sewage" means a POTW or any other sewage sludge or waste water treatment device or system, regardless of ownership (including federal facilities), used in the storage, treatment, recycling, and reclamation of municipal or domestic sewage, including land dedicated for the disposal of sewage sludge. This definition does not include septic tanks or similar devices. For purposes of this definition, "domestic sewage" includes waste and wastewater from humans or household operations that are discharged to or otherwise enter a treatment works.
  38. "Waste containment area" means any part of an animal feeding operation where waste is stored or contained including settling basins and areas within berms and diversions that separate uncontaminated stormwater.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-A902. AZPDES Permit Transition, Applicability, and Exclusions**

- A. Upon the effective date of EPA approval of the AZPDES program, the Department shall, under A.R.S. Title 49, Chapter 2, Article 3.1 and Articles 9 and 10 of this Chapter, administer any permit authorized or issued under the NPDES program, including an expired permit that EPA has continued in effect under 40 CFR 122.6.
  1. The Director shall give a notice to all Arizona NPDES permittees, except NPDES permittees located on and discharging in Indian Country, and shall publish a notice in one or more newspapers of general circulation in the state. The notice shall contain:
    - a. The effective date of EPA approval of the AZPDES program;
    - b. The name and address of the Department;
    - c. The name of each individual permitted facility and its permit number;
    - d. The title of each general permit administered by the Department;
    - e. The name and address of the contact person, to which the permittee will submit notification and monitoring reports;
    - f. Information specifying the state laws equivalent to the federal laws or regulations referenced in a NPDES permit; and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- g. The name, address, and telephone number of a person from whom an interested person may obtain further information about the transition.
- 2. The Department shall provide the following entities with a copy of the notice:
  - a. Each county department of health, environmental services, or comparable department;
  - b. Each Arizona council of government, tribal government, the states of Utah, Nevada, New Mexico, and California, and EPA Region 9;
  - c. Any person who requested, in writing, notification of the activity;
  - d. The Mexican Secretaria de Medio Ambiente y Recursos Naturales, and
  - e. The United States Section of the International Boundary and Water Commission.
- 3. If a timely application for a NPDES permit is submitted to EPA before approval of the AZPDES program, the applicant may continue the process with EPA or request the Department to act on the application. In either case, the Department shall issue the permit.
- 4. The terms and conditions under which the permit was issued remain the same until the permit is modified.
- B.** Article 9 of this Chapter applies to any "discharge of a pollutant." Examples of categories that result in a "discharge of a pollutant" and may require an AZPDES permit include:
  - 1. CAFOs;
  - 2. Concentrated aquatic animal production facilities;
  - 3. Case-by-case designation of concentrated aquatic animal production facilities;
    - a. The Director may designate any warm- or cold-water aquatic animal production facility as a concentrated aquatic animal production facility upon determining that it is a significant contributor of pollution to navigable waters. The Director shall consider the following factors when making this determination:
      - i. The location and quality of the receiving waters of the United States;
      - ii. The holding, feeding, and production capacities of the facility;
      - iii. The quantity and nature of the pollutants reaching navigable waters; and
      - iv. Any other relevant factor;
    - b. A permit application is not required from a concentrated aquatic animal production facility designated under subsection (B)(3)(a) until the Director conducts an onsite inspection of the facility and determines that the facility should and could be regulated under the AZPDES permit program;
  - 4. Aquaculture projects;
  - 5. Manufacturing, commercial, mining, and silviculture point sources;
  - 6. POTWs;
  - 7. New sources and new dischargers;
  - 8. Stormwater discharges:
    - a. Associated with industrial activity as defined under 40 CFR 122.26(b)(14), incorporated by reference in R18-9-A905(A)(1)(d). The Department shall not consider a discharge to be a discharge associated with industrial activity if the discharge is composed entirely of stormwater and meets the conditions of no exposure as defined under 40 CFR 122.26(g), incorporated by reference in R18-9-A905(A)(1)(d);
    - b. From a large, medium, or small MS4;
- c. From a construction activity, including clearing, grading, and excavation, that results in the disturbance of:
  - i. Equal to or greater than one acre or;
  - ii. Less than one acre of total land area that is part of a larger common plan of development or sale if the larger common plan will ultimately disturb equal to or greater than one acre; but
  - iii. Not including routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of the facility;
- d. Any discharge that the Director determines contributes to a violation of a water quality standard or is a significant contributor of pollutants to a navigable water, which may include a discharge from a conveyance or system of conveyances (including roads with drainage systems and municipal streets) used for collecting and conveying stormwater runoff or a system of discharges from municipal separate storm sewers.
- C.** Articles 9 and 10 of this Chapter apply to the following biosolids categories and may require an AZPDES permit:
  - 1. Treatment works treating domestic sewage that would not otherwise require an AZPDES permit; and
  - 2. Using, applying, generating, marketing, transporting, and disposing of biosolids.
- D.** Director designation of MS4s.
  - 1. The Director may designate and require any small MS4 located outside of an urbanized area to obtain an AZPDES stormwater permit. The Director shall base this designation on whether a stormwater discharge results in or has the potential to result in an exceedance of a water quality standard, including impairment of a designated use, or another significant water quality impact, including a habitat or biological impact.
    - a. When deciding whether to designate a small MS4, the Director shall consider the following criteria:
      - i. Discharges to sensitive waters,
      - ii. Areas with high growth or growth potential,
      - iii. Areas with a high population density,
      - iv. Areas that are contiguous to an urbanized area,
      - v. Small MS4s that cause a significant contribution of pollutants to a navigable water,
      - vi. Small MS4s that do not have effective programs to protect water quality, and
      - vii. Any other relevant criteria.
    - b. The same requirements for small MS4s designated under 40 CFR 122.32(a)(1) apply to permits for designated MS4s not waived under R18-9-B901(A)(3).
  - 2. The Director may designate an MS4 as part of a large or medium system due to the interrelationship between the discharges from a designated storm sewer and the discharges from a municipal separate storm sewer described under R18-9-A901(16)(a) and (b), or R18-9-A901(20)(a) or (b), as applicable. In making this determination, the Director shall consider the following factors:
    - a. Physical interconnections between the municipal separate storm sewers;
    - b. The location of discharges from the designated municipal separate storm sewer relative to discharges from municipal separate storm sewers described in R18-9-A901(16)(a) and R18-9-A901(20)(a);
    - c. The quantity and nature of pollutants discharged to a navigable water;



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- d. The nature of the receiving waters; and
  - e. Any other relevant factor.
3. The Director shall designate a small MS4 that is physically interconnected with a MS4 that is regulated by the AZPDES program if the small MS4 substantially contributes to the pollutant loading of the regulated MS4.
- E. Petitions.** The Director may, upon a petition, designate as a large, medium or small MS4, a municipal separate storm sewer located within the boundaries of a region defined by a stormwater management regional authority based on a jurisdictional, watershed, or other appropriate basis that includes one or more of the systems described in R18-9-A901(16), R18-9-A901(20) or R18-9-A901(35), as applicable.
- F. Phase-ins.**
- 1. The Director may phase-in permit coverage for a small MS4 serving a jurisdiction with a population of less than 10,000 if a phasing schedule is developed and implemented for approximately 20 percent annually of all small MS4s that qualify for the phased-in coverage.
    - a. If the phasing schedule is not yet approved for permit coverage, the Director shall, by December 9, 2002, determine whether to issue an AZPDES permit or allow a waiver under R18-9-B901(A)(3) for each eligible MS4.
    - b. All regulated MS4s shall have coverage under an AZPDES permit no later than March 8, 2007.
  - 2. The Director may provide a waiver under R18-9-B901(A)(3) for any municipal separate storm sewage system operating under a phase-in plan.
- G. Exclusions.** The following discharges do not require an AZPDES permit:
- 1. Discharge of dredged or fill material into a navigable water that is regulated under section 404 of the Clean Water Act (33 U.S.C. 1344);
  - 2. The introduction of sewage, industrial wastes, or other pollutants into POTWs by indirect dischargers. Plans or agreements to switch to this method of disposal in the future do not relieve dischargers of the obligation to have and comply with a permit until all discharges of pollutants to a navigable water are eliminated. This exclusion does not apply to the introduction of pollutants to privately owned treatment works or to other discharges through a pipe, sewer, or other conveyance owned by the state, a municipality, or other party not leading to treatment works;
  - 3. Any discharge in compliance with the instructions of an on-scene coordinator under 40 CFR 300, The National Oil and Hazardous Substances Pollution Contingency Plan; or 33 CFR 153.10(e), Control of Pollution by Oil and Hazardous Substances, Discharge Removal;
  - 4. Any introduction of pollutants from a nonpoint source agricultural or silvicultural activity, including stormwater runoff from an orchard, cultivated crop, pasture, rangeland, and forest land, but not discharges from a concentrated animal feeding operation, concentrated aquatic animal production facility, silvicultural point source, or to an aquaculture project;
  - 5. Return flows from irrigated agriculture;
  - 6. Discharges into a privately owned treatment works, except as the Director requires under 40 CFR 122.44(m), which is incorporated by reference in R18-9-A905(A)(3)(d);
  - 7. Discharges from conveyances for stormwater runoff from mining operations or oil and gas exploration, production, processing or treatment operations, or transmission facilities, composed entirely of flows from conveyances or systems of conveyances, including pipes, conduits, ditches, and channels, used for collecting and conveying precipitation runoff and that are not contaminated by contact with or that has not come into contact with, any overburden, raw material, intermediate products, finished product, byproduct, or waste product located on the site of the operations.
- H. Conditional no exposure exclusion.**
- 1. Discharges composed entirely of stormwater are not considered stormwater discharges associated with an industrial activity if there is no exposure, and the discharger satisfies the conditions under 40 CFR 122.26(g), which is incorporated by reference in R18-9-A905(A)(1)(d).
  - 2. For purposes of this subsection:
    - a. "No exposure" means that all industrial materials and activities are protected by a storm resistant shelter to prevent exposure to rain, snow, snowmelt, and runoff.
    - b. "Industrial materials or activities" include material handling equipment or activities, industrial machinery, raw materials, intermediate products, by-products, final products, or waste products.
    - c. "Material-handling activities" include storage, loading and unloading, transportation, or conveyance of any raw material, intermediate product, final product, or waste product.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 2704, effective June 5, 2002 (Supp. 02-2). Amended by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-A903. Prohibitions**

The Director shall not issue a permit:

- 1. If the conditions of the permit do not provide for compliance with the applicable requirements of A.R.S. Title 49, Chapter 2, Article 3.1; 18 A.A.C. 9, Articles 9 and 10; and the Clean Water Act;
- 2. Before resolution of an EPA objection to a draft or proposed permit under R18-9-A908(C);
- 3. If the imposition of conditions cannot ensure compliance with the applicable water quality requirements from Arizona or an affected state or tribe, or a federally promulgated water quality standard under 40 CFR 131.31;
- 4. If in the judgment of the Secretary of the U.S. Army, acting through the Chief of Engineers, the discharge will substantially impair anchorage and navigation in or on any navigable water;
- 5. For the discharge of any radiological, chemical, or biological warfare agent, or high-level radioactive waste;
- 6. For any discharge inconsistent with a plan or plan amendment approved under section 208(b) of the Clean Water Act (33 U.S.C. 1288); and
- 7. To a new source or a new discharger if the discharge from its construction or operation will cause or contribute to the violation of a water quality standard. The owner or operator of a new source or new discharger proposing to discharge into a water segment that does not meet water quality standards or is not expected to meet those standards even after the application of the effluent limitations required under R18-9-A905(A)(8), and for which the Department has performed a wasteload allocation for the proposed discharge, shall demonstrate before the close of the public comment period that:



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. There are sufficient remaining wasteload allocations to allow for the discharge, and
- b. The existing dischargers into the segment are subject to schedules of compliance designed to bring the segment into compliance with water quality standards.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 2704, effective June 5, 2002 (Supp. 02-2).

**R18-9-A904. Effect of a Permit**

- A. Except for a standard or prohibition imposed under section 307 of the Clean Water Act (33 U.S.C. 1317) for a toxic pollutant that is injurious to human health and standards for sewage sludge use or disposal under Article 10 of this Chapter, compliance with an AZPDES permit during its term constitutes compliance, for purposes of enforcement, with Article 9 of this Chapter. However, the Director may modify, revoke and reissue, suspend, or terminate a permit during its term for cause under R18-9-B906.
- B. The issuance of a permit does not convey any property rights of any sort, or any exclusive privilege.
- C. The issuance of a permit does not authorize any injury to a person or property or invasion of other private rights, or any infringement of federal, state, or local law, or regulations.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-A905. AZPDES Program Standards**

- A. Except for subsection (A)(11), the following 40 CFR sections and appendices, July 1, 2003 edition, as they apply to the NPDES program, are incorporated by reference, do not include any later amendments or editions of the incorporated matter, and are on file with the Department:
  1. General program requirements.
    - a. 40 CFR 122.7;
    - b. 40 CFR 122.21, except 40 CFR 122.21(a) through (e) and (l);
    - c. 40 CFR 122.22;
    - d. 40 CFR 122.26, except 40 CFR 122.26(c)(2), and 40 CFR 122.26(e)(2);
    - e. 40 CFR 122.29;
    - f. 40 CFR 122.32;
    - g. 40 CFR 122.33;
    - h. 40 CFR 122.34;
    - i. 40 CFR 122.35;
    - j. 40 CFR 122.62(a) and (b).
  2. Procedures for Decision making.
    - a. 40 CFR 124.8, except 40 CFR 124.8(b)(3); and
    - b. 40 CFR 124.56.
  3. Permit requirements and conditions.
    - a. 40 CFR 122.41, except 40 CFR 122.41(a)(2) and (a)(3);
    - b. 40 CFR 122.42;
    - c. 40 CFR 122.43;
    - d. 40 CFR 122.44;
    - e. 40 CFR 122.45;
    - f. 40 CFR 122.47;
    - g. 40 CFR 122.48; and
    - h. 40 CFR 122.50.
  4. Criteria and standards for the national pollutant discharge elimination system. 40 CFR 125, subparts A, B, D, H, and I.

5. Toxic pollutant effluent standards. 40 CFR 129.
6. Secondary treatment regulation. 40 CFR 133.
7. Guidelines for establishing test procedures for the analysis of pollutants, 40 CFR 136.
8. Effluent guidelines and standards.
  - a. General provisions, 40 CFR 401; and
  - b. General pretreatment regulations for existing and new sources of pollution, 40 CFR 403 and Appendices A, D, E, and G.
9. Effluent limitations guidelines. 40 CFR 405 through 40 CFR 471.
10. Standards for the use or disposal of sewage sludge. 40 CFR 503, Subpart C.
11. The following substitutions apply to the material in subsections (A)(1) through (A)(10):
  - a. Substitute the term AZPDES for any reference to NPDES;
  - b. Except for 40 CFR 122.21(f) through (q), substitute R18-9-B901 (individual permit), and R18-9-C901 (general permit), for any reference to 40 CFR 122.21;
  - c. Substitute Articles 9 and 10 of this Chapter for any reference to 40 CFR 122;
  - d. Substitute R18-9-C901 for any reference to 40 CFR 122.28;
  - e. Substitute R18-9-B901 (individual permit), and R18-9-C901 (general permit), for any reference to 40 CFR 122 subpart B;
  - f. Substitute Articles 9 and 10 of this Chapter for any reference to 40 CFR 123;
  - g. Substitute Articles 9 and 10 of this Chapter for any reference to 40 CFR 124;
  - h. Substitute R18-9-1006 for any reference to 40 CFR 503.32; and
  - i. Substitute R18-9-1010 for any reference to 40 CFR 503.33.

- B. A person shall analyze a pollutant using a test procedure for the pollutant specified by the Director in an AZPDES permit. If the Director does not specify a test procedure for a pollutant in an AZPDES permit, a person shall analyze the pollutant using:
  1. A test procedure listed in 40 CFR 136, which is incorporated by reference in subsection (A)(7);
  2. An alternate test procedure approved by the EPA as provided in 40 CFR 136;
  3. A test procedure listed in 40 CFR 136, with modifications allowed by the EPA and approved as a method alteration by the Arizona Department of Health Services under A.A.C. R9-14-610(B); or
  4. If a test procedure for a pollutant is not available under subsection (B)(1) through (B)(3), a test procedure listed in A.A.C. R9-14-612 or approved under A.A.C. R9-14-610(B).

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 2704, effective June 5, 2002 (Supp. 02-2). Amended by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-A906. General Pretreatment Regulations for Existing and New Sources of Pollution**

- A. The reduction or alteration of a pollutant may be obtained by physical, chemical, or biological processes, process changes, or by other means, except as prohibited under 40 CFR 403.6(d), which is incorporated by reference in R18-9-

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

A905(A)(8)(b). Appropriate pretreatment technology includes control equipment, such as equalization tanks or facilities, for protection against surges or slug loading that might interfere with or otherwise be incompatible with the POTW. However, if wastewater from a regulated process is mixed in an equalization facility with unregulated wastewater or with wastewater from another regulated process, the effluent from the equalization facility shall meet an adjusted pretreatment limit calculated under 40 CFR 403.6(e), which is incorporated by reference in R18-9-A905(A)(8)(b).

**B. Pretreatment applies to:**

1. Pollutants from non-domestic sources covered by pretreatment standards that are indirectly discharged, transported by truck or rail, or otherwise introduced into POTWs;
2. POTWs that receive wastewater from sources subject to national pretreatment standards; and
3. Any new or existing source subject to national pretreatment standards.

**C. National pretreatment standards do not apply to sources that discharge to a sewer that is not connected to a POTW.**

**D. For purposes of this Section the terms "National Pretreatment Standard" and "Pretreatment Standard" mean any regulation containing pollutant discharge limits promulgated by EPA under section 307(b) and (c) of the Clean Water Act (33 U.S.C. 1317), which applies to Industrial Users. This term includes prohibitive discharge limits established under 40 CFR 403.5.**

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-A907. Public Notice**

**A. Individual permits.**

1. The Director shall publish a notice that a draft individual permit has been prepared, or a permit application has been tentatively denied, in one or more newspapers of general circulation where the facility is located. The notice shall contain:
  - a. The name and address of the Department;
  - b. The name and address of the permittee or permit applicant and if different, the name of the facility or activity regulated by the permit;
  - c. A brief description of the business conducted at the facility or activity described in the permit application;
  - d. The name, address, and telephone number of a person from whom an interested person may obtain further information, including copies of the draft permit, fact sheet, and application;
  - e. A brief description of the comment procedures, the time and place of any hearing, including a statement of procedures to request a hearing (unless a hearing has already been scheduled), and any other procedure by which the public may participate in the final permit decision;
  - f. A general description of the location of each existing or proposed discharge point and the name of the receiving water;
  - g. For sources subject to section 316(a) of the Clean Water Act, a statement that the thermal component of the discharge is subject to effluent limitations under the Clean Water Act, section 301 (33 U.S.C. 1311) or 306 (33 U.S.C. 1316) and a brief description, including a quantitative statement, of the thermal effluent limitations proposed under section 301 (33 U.S.C. 1311) or 306 (33 U.S.C. 1316);

- h. Requirements applicable to cooling water intake structures at new facilities subject to 40 CFR 125, subpart I; and
  - i. Any additional information considered necessary to the permit decision.
2. The Department shall provide the applicant with a copy of the draft individual permit.
  3. Copy of the notice. The Department shall provide the following entities with a copy of the notice:
    - a. The applicant or permittee;
    - b. Any user identified in the permit application of a privately owned treatment works;
    - c. Any affected federal, state, tribal, or local agency, or council of government;
    - d. Federal and state agencies with jurisdiction over fish, shellfish, and wildlife resources, the Arizona Historic Preservation Office, and the U.S. Army Corps of Engineers;
    - e. Each applicable county department of health, environmental services, or comparable department;
    - f. Any person who requested, in writing, notification of the activity; and
    - g. The Secretaria de Medio Ambiente y Recursos Naturales and the United States Section of the International Boundary and Water Commission, if the Department is aware the effluent discharge is expected to reach Sonora, Mexico, either through surface water or groundwater.

**B. General permits. If the Director considers issuing a general permit applicable to a category of discharge under R18-9-C901, the Director shall publish a general notice of the draft permit in the *Arizona Administrative Register*. The notice shall contain:**

1. The name and address of the Department,
2. The name of the person to contact regarding the permit,
3. The general permit category,
4. A brief description of the proposed general permit,
5. A map or description of the permit area,
6. The web site or any other location where the proposed general permit may be obtained, and
7. The ending date for public comment.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-A908. Public Participation, EPA Review, EPA Hearing**

**A. Public comment period.**

1. The Director shall accept written comments from any interested person before a decision is made on any notice published under R18-9-A907(A) or (B).
2. The public comment period begins on the publication date of the notice and extends for 30 calendar days.
3. The Director may extend the comment period to provide commenters a reasonable opportunity to participate in the decision-making process.
4. If any data, information, or arguments submitted during the public comment period appear to raise substantial new questions concerning a permit, the Director may reopen or extend the comment period to provide interested persons an opportunity to comment on the information or arguments submitted. Comments filed during a reopened comment period are limited to the substantial new questions that caused its reopening.
  - a. Corps of Engineers.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- i. If the District Engineer advises the Director that denying the permit or imposing specified conditions upon a permit is necessary to avoid any substantial impairment of anchorage or navigation, then the Director shall deny the permit or include the specified conditions in the permit.
    - ii. A person shall use the applicable procedures of the Corps of Engineers Review and not the procedures under this Article to appeal the denial of a permit or conditions specified by the District Engineer.
    - iii. If the conditions are stayed by a court of competent jurisdiction or by applicable procedures of the Corps of Engineers, those conditions are considered stayed in the AZPDES permit for the duration of that stay.
  - b. If an agency with jurisdiction over fish, wildlife, or public health advises the Director in writing that the imposition of specified conditions upon the permit is necessary to avoid substantial impairment of fish, shellfish, or wildlife resource, the Director may include the specified conditions in the permit to the extent they are determined necessary to carry out the provisions of the Clean Water Act.
- B. Public hearing.**
- 1. The Director shall provide notice and conduct a public hearing to address a draft permit or denial regarding a final decision if:
    - a. Significant public interest in a public hearing exists, or
    - b. Significant issues or information have been brought to the attention of the Director during the comment period that was not considered previously in the permitting process.
  - 2. If, after publication of the notice under R18-9-A907, the Director determines that a public hearing is necessary, the Director shall schedule a public hearing and publish notice of the public hearing at least once, in one or more newspapers of general circulation where the facility is located. The notice for public hearing shall contain:
    - a. The date, time, and place of the hearing;
    - b. Reference to the date of a previous public notice relating to the proposed decision, if any; and
    - c. A brief description of the nature and purpose of the hearing, including reference to the applicable laws and rules.
  - 3. The Department shall accept written public comment until the close of the hearing or until a later date specified by the person presiding at the public hearing.
- C. EPA review of draft and proposed permits.**
- 1. Individual permits.
    - a. The Department shall send a copy of the draft permit to EPA.
    - b. If EPA objects to the draft permit within 30 days from the date of receipt of the draft permit, the EPA comment period is extended to 90 days from the date of receipt of the draft permit and the substantive review time-frame is suspended until EPA makes a final determination.
    - c. If, based on public comments, the Department revises the draft permit, the Department shall send EPA a copy of the proposed permit. If EPA objects to the proposed permit within 30 days from the date of receipt of the proposed permit, the EPA comment period is extended to 90 days from the date of receipt of the proposed permit and the substantive review time-frame is suspended until EPA makes a final determination.
  - d. If EPA withdraws its objection to the draft or proposed permit or does not submit specific objections within 90 days, the Director shall issue the permit.
2. General permits. The Director shall send a copy of the draft permit to EPA and comply with the following review procedure for EPA comments:
- a. If EPA objects to the draft permit within 90 days from receipt of the draft permit, the Department shall not issue the permit until the objection is resolved;
  - b. If, based on public comments, the Department revises the draft permit, the Department shall send EPA a copy of the proposed permit. If EPA objects to the proposed permit within 90 days from receipt of the proposed permit, the Department shall not issue the permit until the objection is resolved;
  - c. If EPA withdraws its objection to the draft or proposed permit or does not submit specific objections within 90 days, the Director shall issue the permit.
- D. EPA hearing.** Within 90 days of receipt by the Director of a specific objection by EPA, the Director or any interested person may request that EPA hold a public hearing on the objection.
- 1. If following the public hearing EPA withdraws the objection, the Director shall issue the permit.
  - 2. If a public hearing is not held, and EPA reaffirms the original objection, or modifies the terms of the objection, and the Director does not resubmit a permit revised to meet the EPA objection within 90 days of receipt of the objection, EPA may issue the permit for one term. Following the completion of the permit term, authority to issue the permit reverts to the Department.
  - 3. If a public hearing is held and EPA does not withdraw an objection or modify the terms of the objection, and the Director does not resubmit a permit revised to meet the EPA objection within 30 days of notification of the EPA objection, EPA may issue the permit for one permit term. Following the completion of the permit term, authority to issue the permit reverts to the Department.
  - 4. If EPA issues the permit instead of the Director, the Department shall close the application file.
- E. Final permit determination.**
- 1. Individual permits. At the same time the Department notifies a permittee or an applicant of the final individual permit determination, the Department shall send, through regular mail, a notice of the determination to any person who submitted comments or attended a public hearing on the final individual permit determination. The Department shall:
    - a. Specify the provisions, if any, of the draft individual permit that have been changed in the final individual permit determination, and the reasons for the change; and
    - b. Briefly describe and respond to all significant comments on the draft individual permit or the permit application raised during the public comment period, or during any hearing.
  - 2. General permits. The Director shall publish a general notice of the final permit determination in the *Arizona Administrative Register*. The notice shall:
    - a. Specify the provisions, if any, of the draft general permit that have been changed in the final general

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- permit determination, and the reasons for the change;
- b. Briefly describe and respond to all significant comments on the draft general permit raised during the public comment period, or during any hearing; and
  - c. Specify where a copy of the final general permit may be obtained.
3. The Department shall make the response to comments available to the public.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-A909. Petitions**

- A. Any person may submit a petition to the Director requesting:
  1. The issuance of a general permit;
  2. An individual permit covering any discharge into an MS4 under 40 CFR 122.26(f), which is incorporated by reference in R18-9-A905(A)(1)(d); or
  3. An individual permit under R18-9-C902(B)(1).
- B. The petition shall contain:
  1. The name, address, and telephone number of the petitioner;
  2. The location of the facility;
  3. The exact nature of the petition, and
  4. Evidence of the validity of the petition.
- C. The Department shall provide the permittee with a copy of the petition.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

## PART B. INDIVIDUAL PERMITS

**R18-9-B901. Individual Permit Application**

- A. Time to apply.
  1. Any person who owns or operates a facility covered by R18-9-A902(B) or R18-9-A902(C), shall apply for an AZPDES individual permit at least 180 days before the date of the discharge or a later date if granted by the Director, unless the person:
    - a. Is exempt under R18-9-A902(G);
    - b. Is covered by a general permit under Article 9, Part C of this Chapter; or
    - c. Is a user of a privately owned treatment works, unless the Director requires a permit under 40 CFR 122.44(m).
  2. Construction. Any person who proposes a construction activity under R18-9-A902(B)(9)(c) or R18-9-A902(B)(9)(d) and wishes coverage under an individual permit, shall apply for the individual permit at least 90 days before the date on which construction is to commence.
  3. Waivers.
    - a. Unless the Director grants a waiver under 40 CFR 122.32, a person operating a small MS4 is regulated under the AZPDES program.
    - b. The Director shall review any waiver granted under subsection (A)(3)(a) at least every five years to determine whether any of the information required for granting the waiver has changed.
- B. Application. An individual permit applicant shall submit the following information on an application obtained from the Department. The Director may require more than one application from a facility depending on the number and types of discharges or outfalls.
  1. Discharges, other than stormwater.

- a. The information required under 40 CFR 122.21(f) through (l);
  - b. The signature of the certifying official required under 40 CFR 122.22;
  - c. The name and telephone number of the operator, if the operator is not the applicant; and
  - d. Whether the facility is located in the border area, and, if so:
    - i. A description of the area into which the effluent discharges from the facility may flow, and
    - ii. A statement explaining whether the effluent discharged is expected to cross the Arizona-Sonora, Mexico border.
2. Stormwater. In addition to the information required in subsection (B)(1)(c) and (B)(1)(d):
    - a. For stormwater discharges associated with industrial activity, the application requirements under 40 CFR 122.26(c)(1);
    - b. For large and medium MS4s, the application requirements under 40 CFR 122.26(d);
    - c. For small MS4s:
      - i. A stormwater management program under 40 CFR 122.34, and
      - ii. The application requirements under 40 CFR 122.33.
  - C. Consolidation of permit applications.
    1. The Director may consolidate two or more permit applications for any facility or activity that requires a permit under Articles 9 and 10 of this Chapter.
    2. Whenever a facility or activity requires an additional permit under Articles 9 and 10 of this Chapter, the Director may coordinate the expiration date of the new permit with the expiration date of an existing permit so that all permits expire simultaneously. The Department may then consolidate the processing of the subsequent applications for renewal permits.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-B902. Requested Coverage Under a General Permit**

An owner or operator may request that an individual permit be revoked, if a source is excluded from a general permit solely because it already has an individual permit.

1. The Director shall grant the request for revocation of an individual permit upon determining that the permittee otherwise qualifies for coverage under a general permit.
2. Upon revocation of the individual permit, the general permit applies to the source.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-B903. Individual Permit Issuance or Denial**

- A. Once the application is complete, the Director shall tentatively decide whether to prepare a draft permit or to deny the application.
- B. Permit issuance. If, based upon the information obtained by or available to the Department under R18-9-A907, R18-9-A908, and R18-9-B901, the Director determines that an applicant complies with A.R.S. Title 49, Chapter 2, Article 3.1 and Articles 9 and 10 of this Chapter, the Director shall issue a permit that is effective as prescribed in A.R.S. 49-255.01(H).
- C. Permit denial.
  1. If the Director decides to deny the permit application, the Director shall provide the applicant with a written notice



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

of intent to deny the permit application. The written notification shall include:

- a. The reason for the denial with reference to the statute or rule on which the denial is based;
  - b. The applicant's right to appeal the denial with the Water Quality Appeals Board under A.R.S. § 49-323, the number of days the applicant has to file a protest challenging the denial, and the name and telephone number of the Department contact person who can answer questions regarding the appeals process; and
  - c. The applicant's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.
2. The Director shall provide an opportunity for public comment under R18-9-A907 and R18-9-A908 on a denial.
  3. The decision of the Director to deny the permit application takes effect 30 days after the decision is served on the applicant, unless the applicant files an appeal under A.R.S. 49-255.01(H)(1).

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-B904. Individual Permit Duration, Reissuance, and Continuation****A. Permit duration.**

1. An AZPDES individual permit is effective for a fixed term of not more than five years. The Director may issue a permit for a duration that is less than the full allowable term.
2. If the Director does not reissue a permit within the period specified in the permit, the permit expires, unless it is continued under subsection (C).
3. If a permittee of a large or medium MS4 allows a permit to expire by failing to reapply within the time period specified in subsection (B), the permittee shall submit a new application under R18-9-B901 and follow the application requirements under 40 CFR 122.26(d), which is incorporated by reference in R18-9-A905(A)(1)(d).

**B. Permit reissuance.**

1. A permittee shall reapply for an individual permit at least 180 days before the permit expiration date.
2. Unless otherwise specified in the permit, an annual report submitted 180 days before the permit expiration date satisfies the reapplication requirement for an MS4 permit. The annual report shall contain:
  - a. The name, address, and telephone number of the MS4;
  - b. The name, address, and telephone number of the contact person;
  - c. The status of compliance with permit conditions, including an assessment of the appropriateness of the selected best management practices and progress toward achieving the selected measurable goals for each minimum measure;
  - d. The results of any information collected and analyzed, including monitoring data, if any;
  - e. A summary of the stormwater activities planned for the next reporting cycle;
  - f. A change in any identified best management practices or measurable goals for any minimum measure; and
  - g. Notice of relying on another governmental entity to satisfy some of the permit obligations.

**C. Continuation.** A NPDES or AZPDES individual permit may continue beyond its expiration date if:

1. The permittee has submitted a complete application for an AZPDES individual permit at least 180 days before the expiration date of the existing permit and the permitted activity is of a continuing nature; and
2. The Department is unable, through no fault of the permittee, to issue an AZPDES individual permit on or before the expiration date of the existing permit.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-B905. Individual Permit Transfer****A.** A permittee may request the Director to transfer an individual permit to a new permittee. The Director may modify, or revoke and reissue the permit to identify the new permittee, or make a minor modification to identify the new permittee.**B.** Automatic transfer. The Director may automatically transfer an individual permit to a new permittee if:

1. The current permittee notifies the Director by certified mail at least 30 days in advance of the proposed transfer date and includes a written agreement between the existing and new permittee containing a specific date for transfer of permit responsibility, coverage, and liability between them; and
2. The Director does not notify the existing permittee and the proposed new permittee of the Director's intent to modify, or revoke and reissue the permit. A modification under this subsection may include a minor modification specified in R18-9-B906(B).

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-B906. Modification, Revocation and Reissuance, and Termination of Individual Permits****A.** Permit modification, revocation and reissuance.

1. The Director may modify, or revoke and reissue an individual permit for any of the following reasons:
  - a. The Director receives a written request from an interested person;
  - b. The Director receives information, such as when inspecting a facility;
  - c. The Director receives a written request to modify, or revoke and reissue a permit from a permittee as required in the individual permit; or
  - d. After review of a permit file, the Director determines one or more of the causes listed under 40 CFR 122.62(a) or (b) exists.
    - i. If the Director decides a written request is not justified under 40 CFR 122.62 or subsection (B), the Director shall send the requester a brief written response giving a reason for the decision.
    - ii. The denial of a request for modification, or revocation and reissuance is not subject to public notice, comment, or hearing under R18-9-A907 and R18-9-A908(A) and (B).
2. If the Director tentatively decides to modify, or revoke and reissue an individual permit, the Director shall prepare a draft permit incorporating the proposed changes. The Director may request additional information and, in the case of a modified permit, may require the submission of an updated application.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. Modified individual permit. The Director shall reopen only the modified conditions when preparing a new draft permit and process the modifications.
  - b. Revoked and reissued individual permit.
    - i. The permittee shall submit a new application.
    - ii. The Director shall reopen the entire permit just as if the permit had expired and was being reissued.
  3. During any modification, or revocation and reissuance proceeding, the permittee shall comply with all conditions of the existing permit until a new final permit is issued.
- B. Minor modifications.**
1. Upon consent of the permittee, the Director may make any of the following modifications to an individual permit:
    - a. Correct typographical errors;
    - b. Update a permit condition that changed as a result of updating an Arizona water quality standard;
    - c. Require more frequent monitoring or reporting by the permittee;
    - d. Change an interim compliance date in a schedule of compliance, provided the new date is not more than 120 days after the date specified in the existing permit and does not interfere with attainment of the final compliance date requirement;
    - e. Allow for a change in ownership or operational control of a facility, if no other change in the permit is necessary, provided that a written agreement containing a specific date for transfer of permit responsibility, coverage, and liability between the current and new permittees has been submitted to the Director;
    - f. Change the construction schedule for a new source discharger. The change shall not affect a discharger's obligation to have all pollution control equipment installed and in operation before the discharge;
    - g. Delete a point source outfall if the discharge from that outfall is terminated and does not result in a discharge of pollutants from other outfalls except under permit limits;
    - h. Incorporate conditions of a POTW pretreatment program approved under 40 CFR 403.11 and 40 CFR 403.18, which is incorporated by reference in R18-9-A905(A)(7)(b) as enforceable conditions of the permit, and
    - i. Annex an area by a municipality.
  2. Any modification processed under subsection (B)(1) is not subject to the public notice provision under R18-9-A907 or public participation procedures under R18-9-A908.
- C. Permit termination.**
1. The Director may terminate an individual permit during its term or deny reissuance of a permit for any of the following causes:
    - a. The permittee's failure to comply with any condition of the permit;
    - b. The permittee's failure in the application or during the permit issuance process to disclose fully all relevant facts, or the permittee's misrepresentation of any relevant fact;
    - c. The Director determined that the permitted activity endangers human health or the environment and can only be regulated to acceptable levels by permit modification or termination; or
    - d. A change occurs in any condition that requires either a temporary or permanent reduction or elimination of any discharge, sludge use, or disposal practice controlled by the permit, for example, a plant closure or termination of discharge by connection to a POTW.
  2. If the Director terminates a permit during its term or denies a permit renewal application for any cause listed in subsection (C)(1), the Director shall issue a Notice of Intent to Terminate, except when the entire discharge is terminated.
    - a. Unless the permittee objects to the termination notice within 30 days after the notice is sent, the termination is final at the end of the 30 days.
    - b. If the permittee objects to the termination notice, the permittee shall respond in writing to the Director within 30 days after the notice is sent.
    - c. Expedited permit termination. If a permittee requests an expedited permit termination procedure, the permittee shall certify that the permittee is not subject to any pending state or federal enforcement actions, including citizen suits brought under state or federal law.
    - d. The denial of a request for termination is not subject to public notice, comment, or hearing under R18-9-A907 and R18-9-A908(A) and (B).

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-B907. Individual Permit Variances**

- A.** The Director may grant or deny a request for any of the following variances:
1. An extension under section 301(i) of the Clean Water Act (33 U.S.C. 1311) based on a delay in completion of a POTW;
  2. After consultation with EPA, an extension under section 301(k) of the Clean Water Act (33 U.S.C. 1311) based on the use of innovative technology;
  3. A variance under section 316(a) of the Clean Water Act (33 U.S.C. 1326) for thermal pollution, or
  4. A variance under R18-11-122 for a water quality standard.
- B.** The Director may deny, forward to EPA with a written concurrence, or submit to EPA without recommendation a completed request for:
1. A variance based on the economic capability of the applicant under section 301(c) of the Clean Water Act (33 U.S.C. 1311); or
  2. A variance based on water quality related effluent limitations under 302(b)(2) (33 U.S.C. 1312) of the Clean Water Act.
- C.** The Director may deny or forward to EPA with a written concurrence a completed request for:
1. A variance based on the presence of fundamentally different factors from those on which an effluent limitations guideline is based; and
  2. A variance based upon water quality factors under section 301(g) of the Clean Water Act (33 U.S.C. 1311).
- D.** If the Department approves a variance under subsection (A) or if EPA approves a variance under subsection (B) or (C), the Director shall prepare a draft permit incorporating the variance. Any public notice of a draft permit for which a variance or modification has been approved or denied shall identify the applicable procedures for appealing the decision.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**PART C. GENERAL PERMITS****R18-9-C901. General Permit Issuance**

- A.** The Director may issue a general permit to cover one or more categories of discharges, sludge use, or disposal practices, or facilities within a geographic area corresponding to existing geographic or political boundaries, if the sources within a covered category of discharges are either:
1. Stormwater point sources; or
  2. One or more categories of point sources other than stormwater point sources, or one or more categories of treatment works treating domestic sewage, if the sources, or treatment works treating domestic sewage, within each category all:
    - a. Involve the same or substantially similar types of operations;
    - b. Discharge the same types of wastes or engage in the same types of sludge use or disposal practices;
    - c. Require the same effluent limitations, operating conditions, or standards for sludge use or disposal;
    - d. Require the same or similar monitoring; and
    - e. Are more appropriately controlled under a general permit than under an individual permit.
- B.** Any person seeking coverage under a general permit issued under subsection (A) shall submit a Notice of Intent on a form provided by the Department within the time-frame specified in the general permit unless exempted under the general permit as provided in subsection (C)(2). The person shall not discharge before the time specified in the general permit unless the discharge is authorized by another permit.
- C.** Exemption from filing a Notice of Intent.
1. The following dischargers are not exempt from submitting a Notice of Intent:
    - a. A discharge from a POTW;
    - b. A combined sewer overflow;
    - c. A MS4;
    - d. A primary industrial facility;
    - e. A stormwater discharge associated with industrial activity;
    - f. A CAFO;
    - g. A treatment works treating domestic sewage; and
    - h. A stormwater discharge associated with construction activity.
  2. For dischargers not listed in subsection (C)(1), the Director may consider a Notice of Intent inappropriate for the discharge and authorize the discharge under a general permit without a Notice of Intent. In making this finding, the Director shall consider:
    - a. The type of discharge,
    - b. The expected nature of the discharge,
    - c. The potential for toxic and conventional pollutants in the discharge,
    - d. The expected volume of the discharge,
    - e. Other means of identifying the discharges covered by the permit, and
    - f. The estimated number of discharges covered by the permit.
  3. The Director shall provide reasons for not requiring a Notice of Intent for a general permit in the public notice.
- D.** Notice of Intent. The Director shall specify the contents of the Notice of Intent in the general permit and the applicant shall submit information sufficient to establish coverage under the general permit, including, at a minimum:

1. The name, position, address, and telephone number of the owner of the facility;
  2. The name, position, address, and telephone number of the operator of the facility, if different from subsection (D)(1);
  3. The name and address of the facility;
  4. The type and location of the discharge;
  5. The receiving streams;
  6. The latitude and longitude of the facility;
  7. For a CAFO, the information specified in 40 CFR 122.21(i)(1) and a topographic map;
  8. The signature of the certifying official required under 40 CFR 122.22; and
  9. Any other information necessary to determine eligibility for the AZPDES general permit.
- E.** The general permit shall contain:
1. The expiration date; and
  2. The appropriate permit requirements, permit conditions, and best management practices, and measurable goals for MS4 general permits, under R18-9-A905(A)(1), R18-9-A905(A)(2), and R18-9-A905(A)(3) and determined by the Director as necessary and appropriate for the protection of navigable waters.
- F.** The Department shall inform a permittee if EPA requests the permittee's Notice of Intent, unless EPA requests that the permittee not be notified.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-C902. Required and Requested Coverage Under an Individual Permit**

- A.** Individual permit requirements.
1. The Director may require a person authorized by a general permit to apply for and obtain an individual permit for any of the following cases:
    - a. A discharger or treatment works treating domestic sewage is not in compliance with the conditions of the general permit;
    - b. A change occurs in the availability of demonstrated technology or practices for the control or abatement of pollutants applicable to the point source or treatment works treating domestic sewage;
    - c. Effluent limitation guidelines are promulgated for point sources covered by the general permit;
    - d. An Arizona Water Quality Management Plan containing requirements applicable to the point sources is approved;
    - e. Circumstances change after the time of the request to be covered so that the discharger is no longer appropriately controlled under the general permit, or either a temporary or permanent reduction or elimination of the authorized discharge is necessary;
    - f. Standards for sewage sludge use or disposal are promulgated for the sludge use and disposal practices covered by the general permit; or
    - g. If the Director determines that the discharge is a significant contributor of pollutants. When making this determination, the Director shall consider:
      - i. The location of the discharge with respect to navigable waters,
      - ii. The size of the discharge,
      - iii. The quantity and nature of the pollutants discharged to navigable waters, and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- iv. Any other relevant factor.
- 2. If an individual permit is required, the Director shall notify the discharger in writing of the decision. The notice shall include:
  - a. A brief statement of the reasons for the decision,
  - b. An application form,
  - c. A statement setting a deadline to file the application,
  - d. A statement that on the effective date of issuance or denial of the individual permit, coverage under the general permit will automatically terminate,
  - e. The applicant's right to appeal the individual permit requirement with the Water Quality Appeals Board under A.R.S. § 49-323, the number of days the applicant has to file a protest challenging the individual permit requirement, and the name and telephone number of the Department contact person who can answer questions regarding the appeals process; and
  - f. The applicant's right to request an informal settlement conference under A.R.S. §§ 41-1092.03(A) and 41-1092.06.
- 3. The discharger shall apply for a permit within 90 days of receipt of the notice, unless the Director grants a later date. In no case shall the deadline be more than 180 days after the date of the notice.
- 4. If the permittee fails to submit the individual permit application within the time period established in subsection (A)(3), the applicability of the general permit to the permittee is automatically terminated at the end of the day specified by the Director for application submittal.
- 5. Coverage under the general permit shall continue until an individual permit is issued unless the permit coverage is terminated under subsection (A)(4).
- B. Individual permit request.**
  - 1. An owner or operator authorized by a general permit may request an exclusion from coverage of a general permit by applying for an individual permit.
    - a. The owner or operator shall submit an individual permit application under R18-9-B901(B) and include the reasons supporting the request no later than 90 days after publication of the general permit.
    - b. The Director shall grant the request if the reasons cited by the owner or operator are adequate to support the request.
  - 2. If an individual permit is issued to an owner or operator otherwise subject to a general permit, the applicability of the general permit to the discharge is automatically terminated on the effective date of the individual permit.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-C903. General Permit Duration, Reissuance, and Continuation**

- A. General permit duration.**
  - 1. An AZPDES general permit is effective for a fixed term of not more than five years. The Director may issue a permit for a duration that is less than the full allowable term.
  - 2. If the Director does not reissue a general permit before the expiration date, the current general permit will be administratively continued and remain in force and effect until the general permit is reissued.
- B. Continued coverage.** Any permittee granted permit coverage before the expiration date automatically remains covered by the continued permit until the earlier of:

- 1. Reissuance or replacement of the permit, at which time the permittee shall comply with the Notice of Intent conditions of the new permit to maintain authorization to discharge; or
- 2. The date the permittee has submitted a Notice of Termination; or
- 3. The date the Director has issued an individual permit for the discharge; or
- 4. The date the Director has issued a formal permit decision not to reissue the general permit, at which time the permittee shall seek coverage under an alternative general permit or an individual permit.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-C904. Change of Ownership or Operator Under a General Permit**

If a change of ownership or operator occurs for a facility operating under a general permit:

- 1. Permitted owner or operator. The permittee shall provide the Department with a Notice of Termination by certified mail within 30 days after the new owner or operator assumes responsibility for the facility.
  - a. The Notice of Termination shall include all requirements for termination specified in the general permit for which the Notice of Termination is submitted.
  - b. A permittee shall comply with the permit conditions specified in the general permit for which the Notice of Termination is submitted until the Notice of Termination is received by the Department.
- 2. New owner or operator.
  - a. The new owner or operator shall complete and file a Notice of Intent with the Department within the time period specified in the general permit before taking over operational control of, or initiation of activities at, the facility.
  - b. If the previous permittee was required to implement a stormwater pollution prevention plan, the new owner shall develop a new stormwater pollution prevention plan, or may modify, certify, and implement the old stormwater pollution prevention plan if the old stormwater pollution prevention plan complies with the requirements of the current general permit.
  - c. The permittee shall provide the Department with a Notice of Termination if a permitted facility ceases operation, ceases to discharge, or changes operator status. In the case of a construction site, the permittee shall submit a Notice of Termination to the Department when:
    - i. The facility ceases construction operations and the discharge is no longer associated with construction or construction-related activities,
    - ii. The construction is complete and final site stabilization is achieved, or
    - iii. The operator's status changes.

**Historical Note**

New Section made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-C905. General Permit Modification and Revocation and Reissuance**

- A.** The Director may modify or revoke a general permit issued under R18-9-A907(B), R18-9-A908, and R18-9-C901 if one or more of the causes listed under 40 CFR 122.62(a) or (b) exists.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- B. The Director shall follow the procedures specified in R18-9-A907(B) and R18-9-A908 to modify or revoke and reissue a general permit.

**Historical Note**

New Section made by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**PART D. ANIMAL FEEDING OPERATIONS AND CONCENTRATED ANIMAL FEEDING OPERATIONS****R18-9-D901. CAFO Designations**

- A. Two or more animal feeding operations under common ownership are considered a single animal feeding operation if they adjoin each other or if they use a common area or system for the disposal of wastes.
- B. The Director shall designate an animal feeding operation as a CAFO if the animal feeding operation significantly contributes a pollutant to a navigable water. The Director shall consider the following factors when making this determination:
1. The size of the animal feeding operation and the amount of wastes reaching a navigable water;
  2. The location of the animal feeding operation relative to a navigable water;
  3. The means of conveyance of animal wastes and process wastewaters into a navigable water;
  4. The slope, vegetation, rainfall, and any other factor affecting the likelihood or frequency of discharge of animal wastes and process wastewaters into a navigable water; and
  5. Any other relevant factor.
- C. The Director shall conduct an onsite inspection of the animal feeding operation before the making a designation under subsection (B).
- D. The Director shall not designate an animal feeding operation having less than the number of animals established in R18-9-A901(19)(a) as a CAFO unless a pollutant is discharged:
1. Into a navigable water through a manmade ditch, flushing system, or other similar manmade device; or
  2. Directly into a navigable water that originates outside of and passes over, across, or through the animal feeding operation or otherwise comes into direct contact with the animals confined in the operation.
- E. If the Director makes a designation under subsection (B), the Director shall notify the owner or operator of the operation, in writing, of the designation.

**Historical Note**

New Section made by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-D902. AZPDES Permit Coverage Requirements**

- A. Any person who owns or operates a CAFO, except as provided in subsections (B) and (C), shall submit an application for an individual permit under R18-9-B901(B) or seek coverage under a general permit under R18-9-C901(B) within the applicable deadline specified in R18-9-D904(A).
- B. If a person who owns or operates a large CAFO receives a no potential to discharge determination under R18-9-D903, coverage under an AZPDES permit described in this Part is not required.
- C. The discharge of manure, litter, or process wastewater to a navigable water from a CAFO as a result of the application of manure, litter, or process wastewater by the CAFO to land areas under its control is subject to AZPDES permit requirements, except where it is an agricultural stormwater discharge as provided in section 502(14) of the Clean Water Act (33 U.S.C. 1362(14)). For purposes of this Section, an "agricultural stormwater discharge" means a precipitation-related dis-

charge of manure, litter, or process wastewater from land areas under the control of a CAFO when the person who owns or operates the CAFO has applied the manure, litter, or process wastewater according to site-specific nutrient management practices to ensure appropriate agricultural use of the nutrients in the manure, litter, or process wastewater, as specified under 40 CFR 122.42(e)(1)(vi) through (ix).

**Historical Note**

New Section made by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-D903. No Potential To Discharge Determinations for Large CAFOs**

- A. For purposes of this Section, "no potential to discharge" means that there is no potential for any CAFO manure, litter, or process wastewater to enter into a navigable water under any circumstance or climatic condition.
- B. Any person who owns or operates a large CAFO and has not had a discharge within the previous five years may request a no potential to discharge determination by submitting to the Department:
1. The information specified in 40 CFR 122.21(f) and 40 CFR 122.21(i)(1)(i) through (ix) on a form obtained from the Department, by the applicable date specified in R18-9-D904(A); and
  2. Any additional information requested by the Director to supplement the request or requested through an onsite inspection of the CAFO.
- C. Process for making a no potential to discharge determination.
1. Upon receiving a request under subsection (B), the Director shall consider:
    - a. The potential for discharges from both the production area and any land application area, and
    - b. Any record of prior discharges by the CAFO.
  2. The Director shall issue a public notice that includes:
    - a. A statement that a no potential to discharge request has been received;
    - b. A fact sheet, when applicable;
    - c. A brief description of the type of facility or activity that is the subject of the no potential to discharge determination;
    - d. A brief summary of the factual basis, upon which the request is based, for granting the no potential to discharge determination; and
    - e. A description of the procedures for reaching a final decision on the no potential to discharge determination.
  3. The Director shall base the decision to grant a no potential to discharge determination on the administrative record, which includes all information submitted in support of a no potential to discharge determination and any other supporting data gathered by the Director.
  4. The Director shall notify the owner or operator of the large CAFO of the final determination within 90 days of receiving the request.
- D. If the Director determines that the operation has the potential to discharge, the person who owns or operates the CAFO shall seek coverage under an AZPDES permit within 30 days after the determination of potential to discharge.
- E. A no potential to discharge determination does not relieve the CAFO from the consequences of a discharge. An unpermitted CAFO discharging a pollutant into a navigable water is in violation of the Clean Water Act even if the Director issues a no potential to discharge determination for the facility. If the Director issues a determination of no potential to discharge to a CAFO facility but the owner or operator anticipates a change



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

in circumstances that could create the potential for a discharge, the owner or operator shall contact the Director and apply for and obtain permit authorization before the change of circumstances.

- F. When the Director issues a determination of no potential to discharge, the Director retains the authority to subsequently require AZPDES permit coverage if:
1. Circumstances at the facility change;
  2. New information becomes available; or
  3. The Director determines, through other means, that the CAFO has a potential to discharge.

**Historical Note**

New Section made by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-D904. AZPDES Permit Coverage Deadlines**

- A. Any person who owns or operates a CAFO shall apply for or seek coverage under an AZPDES permit and shall comply with all applicable AZPDES requirements, including the duty to maintain permit coverage under subsection (C).
1. Permit coverage deadline for an animal feeding operation operating before April 14, 2003.
    - a. An owner or operator of an animal feeding operation that operated before April 14, 2003 and was defined as a CAFO before February 2, 2004 shall apply for or seek permit coverage or maintain permit coverage and comply with the conditions of the applicable AZPDES permit;
    - b. An owner or operator of an animal feeding operation that operated before April 14, 2003 and was not defined as a CAFO until February 2, 2004 shall apply for or seek permit coverage by a date specified by the Director, but no later than February 13, 2006;
    - c. An owner or operator of an animal feeding operation that operated before April 14, 2003 who changes the operation on or after February 2, 2004, resulting in the operation being defined as a CAFO, shall apply for or seek permit coverage as soon as possible, but no later than 90 days after the operational change. If the operational change will not make the operation a CAFO as defined before February 2, 2004, the owner or operator may take until April 13, 2006 or 90 days after the operation is defined as a CAFO, whichever is later, to apply for or seek permit coverage;
    - d. An owner or operator of an animal feeding operation that operated before April 14, 2003 who constructs additional facilities on or after February 2, 2004, resulting in the operation being defined as a CAFO that is a new source, shall apply for or seek permit coverage at least 180 days before the new source portion of the CAFO commences operation. If the calculated 180-day deadline occurs before February 2, 2004 and the operation is not subject to this Article before February 2, 2004, the owner or operator shall apply for or seek permit coverage no later than March 3, 2004.
  2. Permit coverage deadline for an animal feeding operation operating on or after April 14, 2003. An owner or operator who started construction of a CAFO on or after April 14, 2003, including a CAFO subject to the effluent limitations guidelines in 40 CFR 412, shall apply for or seek permit coverage at least 180 days before the CAFO commences operation. If the calculated 180-day deadline occurs before February 2, 2004 and the operation is not subject to this Article before February 2, 2004, the owner

or operator shall apply for or seek permit coverage no later than March 3, 2004.

3. Permit coverage deadline for a designated CAFO. Any person who owns or operates a CAFO designated under R18-9-D901(B) shall apply for or seek permit coverage no later than 90 days after receiving a designation notice.
- B. Unless specified under R18-9-D903(E) and (F), the Director shall not require permit coverage for a CAFO that the Director determines under R18-9-D903 to have no potential to discharge. If circumstances change at a CAFO that has a no potential to discharge determination and the CAFO now has a potential to discharge, the person who owns or operates the CAFO shall notify the Director within 30 days after the change in circumstances and apply for or seek coverage under an AZPDES permit.
- C. Duty to maintain permit coverage.
1. The permittee shall:
    - a. If covered by an individual AZPDES permit, submit an application to renew the permit no later than 180 days before the expiration of the permit under R18-9-B904(B); or
    - b. If covered by a general AZPDES permit, comply with R18-9-C903(B).
  2. Continued permit coverage or reapplication for a permit is not required if:
    - a. The facility ceases operation or is no longer a CAFO; and
    - b. The permittee demonstrates to the Director that there is no potential for a discharge of remaining manure, litter, or associated process wastewater (other than agricultural stormwater from land application areas) that was generated while the operation was a CAFO.

**Historical Note**

New Section made by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**R18-9-D905. Closure Requirements**

- A. Closure.
1. A person who owns or operates a CAFO shall notify the Department of the person's intent to cease operations without resuming an activity for which the facility was designed or operated.
  2. A person who owns or operates a CAFO shall submit a closure plan to the Department for approval 90 days before ceasing operation. The closure plan shall describe:
    - a. For operations that met the "no potential to discharge" under R18-9-D903, facility-related information based on the Notice of Termination form for the applicable general permit;
    - b. The approximate quantity of manure, process wastewater, and other materials and contaminants to be removed from the facility;
    - c. The destination of the materials to be removed from the facility and documentation that the destination is approved to accept the materials;
    - d. The method to treat any material remaining at the facility;
    - e. The method to control the discharge of pollutants from the facility;
    - f. Any limitations on future land or water use created as a result of the facility's operations or closure activities;
    - g. A schedule for implementing the closure plan; and
    - h. Any other relevant information the Department determines necessary.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- B. The owner or operator shall provide the Department with written notice that a closure plan has been fully implemented within 30 calendar days of completion and before redevelopment.

**Historical Note**

New Section made by final rulemaking at 9 A.A.R. 5564, effective February 2, 2004 (Supp. 03-4).

**ARTICLE 10. ARIZONA POLLUTANT DISCHARGE  
ELIMINATION SYSTEM - DISPOSAL, USE, AND  
TRANSPORTATION OF BIOSOLIDS**

**R18-9-1001. Definitions**

In addition to the definitions in A.R.S. § 49-255 and R18-9-A901, the following terms apply to this Article:

1. "Aerobic digestion" means the biochemical decomposition of organic matter in biosolids into carbon dioxide and water by microorganisms in the presence of air.
2. "Agronomic rate" means the whole biosolids application rate on a dry-weight basis that meets the following conditions:
  - a. The amount of nitrogen needed by existing vegetation or a planned or actual crop has been provided, and
  - b. The amount of nitrogen that passes below the root zone of the crop or vegetation is minimized.
3. "Anaerobic digestion" means the biochemical decomposition of organic matter in biosolids into methane gas and carbon dioxide by microorganisms in the absence of air.
4. "Annual biosolids application rate" means the maximum amount of biosolids (dry-weight basis) that can be applied to an acre or hectare of land during a 365-day period.
5. "Annual pollutant loading rate" means the maximum amount of a pollutant that can be applied to an acre or hectare of land during a 365-day period.
6. "Applicator" means a person who arranges for and controls the site-specific land application of biosolids in Arizona.
7. "Biosolids" means sewage sludge, including exceptional quality biosolids, that is placed on, or applied to the land to use the beneficial properties of the material as a soil amendment, conditioner, or fertilizer. Biosolids do not include any of the following:
  - a. Sludge determined to be hazardous under A.R.S. Title 49, Chapter 5, Article 2 and 40 CFR 261;
  - b. Sludge with a concentration of polychlorinated biphenyls (PCBs) equal to or greater than 50 milligrams per kilogram of total solids (dry-weight basis);
  - c. Grit (for example, sand, gravel, cinders, or other materials with a high specific gravity) or screenings generated during preliminary treatment of domestic sewage by a treatment works;
  - d. Sludge generated during the treatment of either surface water or groundwater used for drinking water;
  - e. Sludge generated at an industrial facility during the treatment of industrial wastewater, including industrial wastewater combined with domestic sewage;
  - f. Commercial septage, industrial septage, or domestic septage combined with commercial or industrial septage; or
  - g. Special wastes as defined and controlled under A.R.S. Title 49, Chapter 4, Article 9.
8. "Bulk biosolids" means biosolids that are transported and land-applied in a manner other than in a bag or other container holding biosolids of 1.102 short tons or 1 metric ton or less.
9. "Class I sludge management facility" means any POTW identified under 40 CFR 403.8(a) as being required to have an approved pretreatment program (including a POTW for which the Department assumes local program responsibilities under 40 CFR 403.10(e)) and any other treatment works treating domestic sewage classified as a Class I sludge management facility by the regional administrator in conjunction with the Director or by the Director because of the potential for its sludge use or disposal practices to adversely affect public health or the environment.
10. "Clean water act" means the federal water pollution control act amendments of 1972, as amended (P.L. 92-500; 86 Stat. 816; 33 United States Code sections 1251 through 1376). A.R.S. 49-201(6).
11. "Coarse fragments" means rock particles in the gravel-size range or larger.
12. "Coarse or medium sands" means a soil mixture of which more than 50% of the sand fraction is retained on a No. 40 (0.425 mm) sieve.
13. "Cumulative pollutant loading rate" means the maximum amount of a pollutant applied to a land application site.
14. "Domestic septage" means the liquid or solid material removed from a septic tank, cesspool, portable toilet, marine sanitation device, or similar system or device that receives only domestic sewage. Domestic septage does not include commercial or industrial wastewater or restaurant grease-trap wastes.
15. "Domestic sewage" means waste or wastewater from humans or household operations that is discharged to a publicly or privately owned treatment works. Domestic sewage also includes commercial and industrial wastewaters that are discharged into a publicly-owned or privately-owned treatment works if the industrial or commercial wastewater combines with human excreta and other household and nonindustrial wastewaters before treatment.
16. "Dry-weight basis" means the weight of biosolids calculated after the material has been dried at 105° C until reaching a constant mass.
17. "Exceptional quality biosolids" means biosolids certified under R18-9-1013(A)(6) as meeting the pollutant concentrations in R18-9-1005 Table 2, Class A pathogen reduction in R18-9-1006, and one of the vector attraction reduction requirements in subsections R18-9-1010(A)(1) through R18-9-1010(A)(8).
18. "Feed crops" means crops produced for animal consumption.
19. "Fiber crops" means crops grown for their physical characteristics. Fiber crops, including flax and cotton, are not produced for human or animal consumption.
20. "Food crops" means crops produced for human consumption.
21. "Gravel" means soil predominantly composed of rock particles that will pass through a 3-inch (75 mm) sieve and be retained on a No. 4 (4.75 mm) sieve.
22. "Industrial wastewater" means wastewater that is generated in a commercial or industrial process.
23. "Land application," "apply biosolids," or "biosolids applied to the land" means spraying or spreading biosolids on the surface of the land, injecting biosolids below the land's surface, or incorporating biosolids into the soil to amend, condition, or fertilize the soil.

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

24. "Monthly average" means the arithmetic mean of all measurements taken during a calendar month.
25. "Municipality" means a city, town, county, district, association, or other public body, including an intergovernmental agency of two or more of the foregoing entities created by or under state law. The term includes special districts such as a water district, sewer district, sanitary district, utility district, drainage district, or similar entity that has as one of its principal responsibilities, the treatment, transport, use, or disposal of biosolids.
26. "Navigable waters" means the waters of the United States as defined by section 502(7) of the clean water act (33 United States Code section 1362(7)). A.R.S. § 49-201(21).
27. "Other container" means a bucket, bin, box, carton, trailer, pickup truck bed, or a tanker vehicle or an open or closed receptacle with a load capacity of 1.102 short tons or one metric ton or less.
28. "Pathogen" means a disease-causing organism.
29. "Person" means an individual, employee, officer, managing body, trust, firm, joint stock company, consortium, public or private corporation, including a government corporation, partnership, association or state, a political subdivision of this state, a commission, the United States government or a federal facility, interstate body or other entity. A.R.S. § 49-201(26).
30. "Person who prepares biosolids" means a person who generates biosolids during the treatment of domestic sewage in a treatment works, packages biosolids, or derives a new product from biosolids either through processing or by combining it with another material, including blending several biosolids together.
31. "pH" means the logarithm of the reciprocal of the hydrogen ion concentration.
32. "Pollutant" means an organic substance, an inorganic substance, a combination of organic and inorganic substances, or a pathogenic organism that, after release into the environment and upon exposure, ingestion, inhalation, or assimilation into an organism, either directly from the environment or indirectly by ingestion through the food chain, could cause death, disease, behavioral abnormalities, cancer, genetic mutations, physiological malfunctions (including malfunction in reproduction), or physical deformities in either organisms or reproduced offspring.
33. "Pollutant limit" means:
  - a. A numerical value that describes the quantity of a pollutant allowed in a unit of biosolids such as milligrams per kilogram of total solids,
  - b. The quantity of a pollutant that can be applied to a unit area of land such as kilograms per hectare, or
  - c. The volume of biosolids that can be applied to a unit area of land such as gallons per acre.
34. "Privately owned treatment works" means a device or system owned by a non-governmental entity used to treat, recycle, or reclaim, either domestic sewage or a combination of domestic sewage and industrial waste that is generated off-site.
35. "Public contact site" means a park, sports field, cemetery, golf course, plant nursery, or other land with a high potential for public exposure to biosolids.
36. "Reclamation" means the use of biosolids to restore or repair construction sites, active or closed mining sites, landfill caps, or other drastically disturbed land.
37. "Responsible official" means a principal corporate officer, general partner, proprietor, or, in the case of a municipality, a principal executive official or any duly authorized agent.
38. "Runoff" means rainwater, leachate, or other liquid that drains over any part of a land surface and runs off of the land surface.
39. "Sand" means soil that contains more than 85% grains in the size range that will pass through a No. 4 (4.75 mm) sieve and be retained on a No. 200 (0.075 mm) sieve.
40. "Sewage sludge":
  - (a) Means solid, semisolid or liquid residue that is generated during the treatment of domestic sewage in a treatment works.
  - (b) Includes domestic septage, scum or solids that are removed in primary, secondary or advanced wastewater treatment processes, and any material derived from sewage sludge.
  - (c) Does not include ash that is generated during the firing of sewage sludge in a sewage sludge incinerator or grit and screenings that are generated during preliminary treatment of domestic sewage in a treatment works. A.R.S. § 49-255(6)
41. "Sewage sludge unit" means land on which only sewage sludge is placed for final disposal. This does not include land on which sewage sludge is either stored or treated. Land does not include navigable waters.
42. "Specific oxygen uptake rate (SOUR)" means the mass of oxygen consumed per unit time per unit mass of total solids (dry-weight basis) in biosolids.
43. "Store biosolids" or "storage of biosolids" means the temporary holding or placement of biosolids on land before land application.
44. "Surface disposal site" means an area of land that contains one or more active sewage sludge units.
45. "Ton" means a net weight of 2000 pounds and is known as a short ton.
46. "Total solids" means the biosolids material that remains when sewage sludge is dried at 103° C to 105° C.
47. "Treatment of biosolids" means the thickening, stabilization, dewatering, and other preparation of biosolids for land application. Storage is not a treatment of biosolids.
48. "Unstabilized solids" means the organic matter in biosolids that has not been treated or reduced through an aerobic or anaerobic process.
49. "Vectors" means rodents, flies, mosquitoes, or other organisms capable of transporting pathogens.
50. "Volatile solids" means the amount of total solids lost when biosolids are combusted at 550° C in the presence of excess air.
51. "Wetlands" means those areas that are inundated or saturated by surface water or groundwater at a frequency and duration to support, and do under normal circumstances support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, cienegas, tinajas, and similar areas.

**Historical Note**

New Section recodified from R18-13-1502 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1002. Applicability and Prohibitions**

- A.** This Article applies to:
1. Any person who:

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. Prepares biosolids for land application or disposal in a sewage sludge unit or in an incinerator,
  - b. Transports biosolids for land application or incineration, or disposal in a sewage sludge unit,
  - c. Applies biosolids to the land,
  - d. Owns or operates a sewage sludge unit,
  - e. Owns or leases land to which biosolids are applied, or
  - f. Owns or operates an incinerator that fires sewage sludge,
- 2. Biosolids applied to the land or placed on a surface disposal site,
- 3. Land where biosolids are applied, and
- 4. A surface disposal site.
- B.** The land application of biosolids in a manner consistent with this Article is exempt from the requirements of the aquifer protection program established under A.R.S. Title 49, Chapter 2, Article 3 and 18 A.A.C. 9, Articles 1, 2, and 3.
- C.** Except as provided in subsection (D), the land application of biosolids in a manner that is not consistent with Articles 9 and 10 of this Chapter is prohibited.
- D.** The Department may permit the land application of biosolids in a manner that differs from the requirements in R18-9-1007 and R18-9-1008 if the land application is permitted under the aquifer protection permit program established under A.R.S. Title 49, Chapter 2, Article 3, and 18 A.A.C. 9, Articles 1, 2, and 3.
- E.** Surface disposal site.
  - 1. Any person who prepares biosolids that are placed in a sewage sludge unit, or places biosolids in a sewage sludge unit, or who owns or operates a biosolids surface disposal site shall comply with 40 CFR 503, Subpart C, which is incorporated by reference in R18-9-A905(A)(9), and
    - a. The pathogen reduction requirements in R18-9-1006, and
    - b. The vector attraction reduction requirements in R18-9-1010.
  - 2. In addition to the requirements under subsection (E)(1), any person who owns or operates a biosolids surface disposal site shall apply for, and obtain, a permit under 18 A.A.C. 9, Articles 1 and 2.
- F.** A person shall not apply bulk biosolids to the land or place bulk biosolids in a surface disposal site or fire sewage sludge in a sewage sludge incinerator if the biosolids are likely to adversely affect a threatened or endangered species as listed under section 4 of the Endangered Species Act (16 U.S.C. 1533), or its designated critical habitat as defined in 16 U.S.C. 1532.
- G.** A person incinerating biosolids shall comply with the requirements set out in 40 CFR Part 503, Subpart E, July 1, 2013 edition, which is incorporated by reference and does not include any later amendments or editions of the incorporated material. Copies of the incorporated material are available for inspection at the Arizona Department of Environmental Quality, 1110 West Washington Street, Phoenix, Arizona 85007 or may be obtained from the U.S. General Printing office at <http://www.gpo.gov/fdsys/browse/collectionCfr.action?collectionCode=CFR>.

**Historical Note**

New Section recodified from R18-13-1501 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4). Amended by final rulemaking at 21 A.A.R. 751, effective

July 4, 2015 (Supp. 15-2).

**R18-9-1003. General Requirements**

- A.** A person shall not use or transport biosolids, apply biosolids to land, or place biosolids on a surface disposal site in Arizona, except as established in this Article.
- B.** The management practices in R18-9-1007 and R18-9-1008 do not apply if biosolids are exceptional quality biosolids.
- C.** The applicator shall obtain, submit to the Department, and maintain the information required to comply with the requirements of this Article.
- D.** The applicator shall not receive bulk biosolids without prior written confirmation of the filing of a "Request for Registration" under R18-9-1004.
- E.** The land owner or lessee of land on which bulk biosolids, that are not exceptional quality biosolids, have been applied shall notify any subsequent land owner and lessee of all previous land applications of biosolids and shall disclose any site restrictions listed in R18-9-1009 that are in effect at the time the property is transferred.
- F.** A person who prepares biosolids shall ensure that the applicable requirements in this Article are met when the biosolids are applied to the land or placed on a surface disposal site.
- G.** If necessary to protect public health and the environment from any adverse effect of a pollutant in the biosolids, the Department may impose, on a case-by-case basis, requirements for the use or disposal of biosolids, including exceptional quality biosolids, in addition to, or more stringent than, the requirements in this Article. The Department shall notify the preparer, applier, or land owner of these requirements by letter and include the justification for the requirements and the length of time or applicability for the requirements.

**Historical Note**

New Section recodified from R18-13-1503 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1004. Applicator Registration, Bulk Biosolids**

- A.** Any person intending to land-apply bulk biosolids in Arizona shall submit, on a form provided by the Department, a completed "Request for Registration."
- B.** An applicator shall not engage in land application of bulk biosolids, unless the applicator has obtained a prior written acknowledgment of the Request for Registration or a supplemental request from the Department.
- C.** The Request for Registration for all biosolids, except exceptional quality biosolids, shall include:
  - 1. The name, address, and telephone number of the applicator and any agent of the applicator;
  - 2. The name and telephone number of a primary contact person who has specific knowledge of the land application activities of the applicator;
  - 3. Whether the applicator holds a NPDES or AZPDES permit, and, if so, the permit number;
  - 4. The identity of the person, if different from the applicator, including the NPDES or AZPDES permit number, who will prepare the biosolids for land application; and
  - 5. The following information, unless the information is already on file at the Department as part of an approved land application plan, for each site on which application is anticipated to take place:
    - a. The name, mailing address, and telephone number of the land owner and lessee, if any;
    - b. The physical location of the site by county;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- c. The legal description of the site, including township, range, and section, or latitude and longitude at the center of each site;
  - d. The number of acres or hectares at each site to be used;
  - e. Except for sites described in R18-9-1005(D)(2)(c), background concentrations of the pollutants listed in Table 4 of R18-9-1005 from representative soil samples;
  - f. The location of any portion of the site having a slope greater than 6%; and
  - g. Public notice. Proof of placement of a public notice announcing the potential use of the site for the application of biosolids when a site has not previously received biosolids, or when a site has not been used for land application for at least three consecutive years.
    - i. The notice shall appear at least once each week for at least two consecutive weeks in the largest newspaper in general circulation in the area in which the site is located.
    - ii. If a site is not used for land application for at least three consecutive years, the applicator shall renote the site following the process described in subsection (C)(5)(g)(i) before its reuse.
- D.** The Request for Registration for exceptional quality biosolids shall include the information in subsections (C)(1) through (C)(4).
- E.** A responsible official of the applicator shall sign the Request for Registration.
- F.** The Department shall mail a written acknowledgment of a Request for Registration or supplemental request, within 15 business days of receipt of the request.
- G.** An applicator wishing to use a site that has not been identified in a Request for Registration shall file a supplemental request with the Department before using the new site. Public notice requirements under R18-9-1004(C)(5)(g) apply.

**Historical Note**

New Section recodified from R18-13-1504 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1005. Pollutant Concentrations**

- A.** A person shall not apply biosolids with pollutant concentrations that exceed any of the ceiling concentrations established in Table 1.
- B.** A person shall not apply biosolids sold or given away in a bag or other container that are not exceptional quality biosolids to a site if any annual pollutant loading rate in Table 3 will be exceeded. A person shall determine annual application rates using the methodology established in Appendix A.
- C.** A person shall not apply bulk biosolids to a lawn or garden unless the biosolids are exceptional quality biosolids.
- D.** Unless using exceptional quality biosolids, a person shall not apply bulk biosolids to a site when:
1. The pollutant concentrations exceed the levels in Table 2, or
  2. Any cumulative pollutant loading rate in Table 4 will be exceeded. A person shall determine compliance with the site cumulative pollutant loading rates using the following:

- a. By identifying all known biosolids application events and information relevant to a site since September 13, 1979.
- b. By calculating the existing cumulative level of the pollutants established in Table 4 using actual analytical data from the application events or if actual analytical data from application events before April 1996 are not available, background concentrations determined by taking representative soil samples of the site, if it is known that the site received biosolids before April 1996.
- c. Background soil tests are not required for those sites that have not received biosolids before April 23, 1996.

**Table 1. Ceiling Concentrations**

| Pollutant  | Ceiling concentrations<br>(milligrams per kilogram) (1) |
|------------|---------------------------------------------------------|
| Arsenic    | 75.0                                                    |
| Cadmium    | 85.0                                                    |
| Chromium   | 3000.0                                                  |
| Copper     | 4300.0                                                  |
| Lead       | 840.0                                                   |
| Mercury    | 57.0                                                    |
| Molybdenum | 75.0                                                    |
| Nickel     | 420.0                                                   |
| Selenium   | 100.0                                                   |
| Zinc       | 7500.0                                                  |

(1) Dry-weight basis.

**Table 2. Monthly Average Pollutant Concentrations**

| Pollutant | Concentration limits<br>(milligrams per kilogram) (1) |
|-----------|-------------------------------------------------------|
| Arsenic   | 41.0                                                  |
| Cadmium   | 39.0                                                  |
| Copper    | 1500.0                                                |
| Lead      | 300.0                                                 |
| Mercury   | 17.0                                                  |
| Nickel    | 420.0                                                 |
| Selenium  | 100.0                                                 |
| Zinc      | 2800.0                                                |

(1) Dry-weight basis.

**Table 3. Annual Pollutant Loading Rates**

| Pollutant | Annual pollutant loading rates<br>(in kilograms per hectare) |
|-----------|--------------------------------------------------------------|
| Arsenic   | 2.0                                                          |
| Cadmium   | 1.9                                                          |
| Copper    | 75.0                                                         |
| Lead      | 15.0                                                         |
| Mercury   | 0.85                                                         |
| Nickel    | 21.0                                                         |
| Selenium  | 5.0                                                          |
| Zinc      | 140.0                                                        |



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

Table 4. Cumulative Pollutant Loading Rates

| Pollutant | Cumulative pollutant loading rates<br>(in kilograms per hectare) |
|-----------|------------------------------------------------------------------|
| Arsenic   | 41.0                                                             |
| Cadmium   | 39.0                                                             |
| Copper    | 1500.0                                                           |
| Lead      | 300.0                                                            |
| Mercury   | 17.0                                                             |
| Nickel    | 420.0                                                            |
| Selenium  | 100.0                                                            |
| Zinc      | 2800.0                                                           |

**Historical Note**

New Section recodified from R18-13-1505 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1006. Class A and Class B Pathogen Reduction Requirements**

- A.** An applicator shall ensure that all biosolids applied to land meet Class A or Class B pathogen reduction requirements at the time the biosolids are:
1. Placed on an active sewage sludge unit unless the biosolids are covered with soil or other material at the end of each operating day, or
  2. Land applied.
- B.** Biosolids that are sold or given away in a bag or other container for land application, or that are applied on a lawn or home garden, shall meet the Class A pathogen reduction requirements established in subsection (D).
- C.** Land on which biosolids with Class B pathogen reduction requirements are applied is subject to the use restrictions established in R18-9-1009.
- D.** Biosolids satisfy the Class A pathogen reduction requirements when the density of fecal coliform is less than 1000 Most Probable Number per gram of total solids (dry-weight basis), or the density of *Salmonella sp.* bacteria is less than three Most Probable Number per four grams of total solids (dry-weight basis), and any one of the following alternative pathogen treatment options is used:
1. Alternative 1. The pathogen treatment process meets one of the following time and temperature requirements:
    - a. When the percent solids of the biosolids are seven percent or greater, the temperature of the biosolids shall be held at 50° C or higher for at least 20 minutes. The temperature and time period is determined using the equation in subsection (D)(1)(b), except when small particles of the biosolids are heated by either warmed gases or an immiscible liquid;
    - b. When the percent solids of the biosolids are seven percent or greater, and small particles of the biosolids are heated by either warmed gases or an immiscible liquid, a temperature of 50° C or higher shall be held for 15 seconds or longer. The temperature and time period is determined using the following equation:

$$D = \frac{131,700,000}{10^{[0.1400t]}}$$

D = time in days, and

t = temperature in degrees Celsius;

- c. When the percent solids of the biosolids are less than seven percent, the temperature of the biosolids is 50° C or higher and the time period is 30 minutes or longer. The temperature and time period shall be determined using the following equation:

$$D = \frac{50,070,000}{10^{[0.1400t]}}$$

D = time in days, and

t = temperature in degrees Celsius; or

- d. When the percent solids of the biosolids are less than seven percent, and the time of heating is at least 15 seconds, but less than 30 minutes, the time and temperature is determined using the following equation:

$$D = \frac{131,700,000}{10^{[0.1400t]}}$$

D = time in days, and

t = temperature in degrees Celsius.

2. Alternative 2. The pathogen treatment process meets all the following parameters:
  - a. The pH of the quantity of biosolids treated is raised to 12 or higher and held at least 72 hours;
  - b. During the period that the pH is above 12, the temperature of the biosolids is held above 52° C for at least 12 hours; and
  - c. At the end of the 72-hour period during which the pH is above 12, the biosolids are air dried to achieve a percent solids in the biosolids greater than 50%.
3. Alternative 3. The following conditions are met:
  - a. The biosolids, before pathogen treatment and until the next monitoring event, have an enteric virus density less than one plaque-forming unit for four grams of total solids (dry-weight basis);
  - b. The biosolids, before pathogen treatment and until the next monitoring event, have a viable helminth ova density less than one for four grams of total solids (dry-weight basis); and
  - c. Once the density requirements in subsections (D)(3)(a) and (D)(3)(b) are consistently met after pathogen treatment and the values and ranges of the pathogen treatment process used are documented, the biosolids continue to be Class A with respect to enteric viruses and viable helminth ova when the values for the pathogen treatment process operating parameters are consistent with the previously documented values or ranges of values.
4. Alternative 4. The following requirements are met at the time the biosolids are used or disposed or at the time the biosolids are prepared for sale or given away in a bag or other container for application to the land:
  - a. The biosolids have an enteric virus density less than one plaque-forming unit for four grams of total solids (dry-weight basis), and
  - b. The biosolids have a viable helminth ova density less than one for four grams of total solids (dry-weight basis).
5. Alternative 5. Composting.



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- a. Use either the within-vessel or the static-aerated-pile composting method, maintaining the temperature of the biosolids at 55° C or higher for three days; or
  - b. Use the windrow composting method, maintaining the temperature of the biosolids at 55° C or higher for at least 15 days. The windrow shall be turned at least five times when the compost is maintained at 55° C or higher.
6. Alternative 6. Heat drying. The biosolids are dried by direct or indirect contact with hot gases to reduce the moisture content to 10% or lower by weight. During the process:
    - a. The temperature of the sewage sludge particles shall exceed 80° C, or
    - b. The wet bulb temperature of the gas as the biosolids leave the dryer shall exceed 80° C.
  7. Alternative 7. Heat treatment. The quantity of liquid biosolids treated are heated to a temperature of 180° C or higher for at least 30 minutes.
  8. Alternative 8. Thermophilic aerobic digestion. Liquid biosolids are agitated with air or oxygen to maintain aerobic conditions and the mean cell residence time of the biosolids is 10 days at 55° to 60° C.
  9. Alternative 9. Beta ray irradiation. Biosolids are irradiated with beta rays from an accelerator at dosages of at least 1.0 megarad at room temperature (approximately 20° C).
  10. Alternative 10. Gamma ray irradiation. Biosolids are irradiated with gamma rays from certain isotopes, such as <sup>60</sup>Cobalt and <sup>137</sup>Cesium at dosages of at least 1.0 megarad at room temperature (approximately 20° C).
  11. Alternative 11. Pasteurization. The temperature of the biosolids is maintained at 70° C or higher for at least 30 minutes.
  12. Alternative 12. The Director shall approve another process if the process is equivalent to a Process to Further Reduce Pathogens specified in subsections (D)(5) through (D)(11), as determined by the EPA Pathogen Equivalency Committee.
- E. Biosolids satisfy the Class B pathogen reduction requirements when the biosolids meet any one of the following options:
1. Alternative 1. The geometric mean of the density of fecal coliform in seven representative samples is less than either 2,000,000 Most Probable Number per gram of total solids (dry-weight basis), or 2,000,000 colony forming units per gram of total solids (dry-weight basis);
  2. Alternative 2. Air drying. The biosolids are dried on sand beds or paved or unpaved basins for at least three months. During at least two of the three months, the ambient average daily temperature is above 0° C;
  3. Alternative 3. Lime stabilization. Sufficient lime is added to the biosolids to raise the pH of the biosolids to 12 after at least two hours of contact;
  4. Alternative 4. Aerobic digestion. The biosolids are agitated with air or oxygen to maintain aerobic conditions for a specific mean cell residence time at a specific temperature between 40 days at 20° C and 60 days at 15° C;
  5. Alternative 5. Anaerobic digestion. The biosolids are treated in the absence of air for a specific mean cell residence time at a specific temperature between 15 days at 35° C to 55° C and 60 days at 20° C;
  6. Alternative 6. Composting. Using the within-vessel, static-aerated-pile or windrow composting methods, the temperature of the biosolids is raised to 40° C or higher for five consecutive days. For at least four hours during the five days, the temperature in the compost pile exceeds 55° C; or
  7. Alternative 7. The Director shall approve another process if it is equivalent to a Process to Significantly Reduce Pathogens specified in subsections (E)(2) through (E)(6), as determined by the EPA Pathogen Equivalency Committee.

**Historical Note**

New Section recodified from R18-13-1506 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1007. Management Practices and General Requirements**

- A. An applicator of bulk biosolids that are not exceptional quality biosolids shall comply with the following management practices at each land application site, except a site where bulk biosolids are applied for reclamation. The applicator shall not:
1. Apply bulk biosolids to soil with a pH less than 6.5 at the time of the application, unless the biosolids are treated under one of the procedures in subsections R18-9-1006(D)(2), R18-9-1006(E)(3), or R18-9-1010(A)(6), or the soil and biosolids mixture has a pH of 6.5 or higher immediately after land application;
  2. Apply bulk biosolids to land with slopes greater than 6%, unless the site is operating under an AZPDES permit or a permit issued under section 402 of the Clean Water Act (33 U.S.C. 1342);
  3. Apply bulk biosolids to land under the following conditions:
    - a. Bulk biosolids with Class A pathogen reduction. If the depth to groundwater is five feet (1.52 meters) or less;
    - b. Bulk biosolids with Class B pathogen reduction.
      - i. If the depth to groundwater is 10 feet (3.04 meters) or less; or
      - ii. To gravel, coarse or medium sands, or sands with less than 15% coarse fragments, if the depth to groundwater is 40 feet (12.2 meters) or less from the point of application of biosolids;
  4. Apply bulk biosolids to land that is 32.8 feet (10 meters) or less from navigable waters;
  5. Store or apply bulk biosolids closer than 1000 feet (305 meters) from a public or semi-public drinking water supply well or no closer than 250 feet (76.2 meters) from any other water well;
  6. Store or apply bulk biosolids within 25 feet (7.62 meters) of a public right-of-way or private property line unless the applicator receives permission to apply bulk biosolids from the land owner or lessee of the adjoining property;
  7. Apply bulk biosolids at an application rate greater than the agronomic rate of the vegetation or crop grown on the site;
  8. Apply domestic septage or any other bulk biosolids with less than 10% solids at a rate that exceeds the annual application rate, calculated in gallons per acre for a 365-day period by dividing the amount of nitrogen needed by the crop or vegetation grown on the land, in pounds per acre per 365-day period, by 0.0026;
  9. Apply bulk biosolids to land that is flooded, frozen, or snow-covered, so that the bulk biosolids enter a wetland or other navigable waters, except as provided in an AZPDES permit or a permit issued under section 402 of the Clean Water Act (33 U.S.C. 1342);

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

10. Apply any additional bulk biosolids before a crop is grown on the site if the site has received biosolids containing nitrogen at the equivalent of the agronomic rate appropriate for that crop;
  11. Exceed the irrigation needs of the crop of an application site;
  12. To minimize odors, apply bulk biosolids within 1000 feet (305 meters) of a dwelling unless the biosolids are injected or incorporated into the soil within 10 hours of being applied; or
  13. Store bulk biosolids within 1000 feet (305 meters) of a dwelling unless the applicator obtains permission from the dwelling owner or lessee to store the biosolids at a shorter distance from the dwelling. If the dwelling owner or lessee changes, the applicator shall obtain permission from the new dwelling owner or lessee to continue to store the bulk biosolids within 1000 feet of the dwelling or move the biosolids to a location at least 1000 feet from the dwelling.
- B.** If biosolids are placed in a bag or other container, the person who prepares the biosolids shall distribute a label or information sheet to the person receiving the material. This label or information sheet shall, at a minimum, contain the following information:
1. The identity and address of the person who prepared the biosolids;
  2. Instructions on the proper use of the material, including agronomic rates and an annual application rate that ensures that the annual pollutant rates established in R18-9-1005 are not exceeded; and
  3. A statement that application of biosolids to the land shall not exceed application rates described in the instructions on the label or information sheet.

**Historical Note**

New Section recodified from R18-13-1507 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1008. Management Practices, Application of Biosolids to Reclamation Sites**

- A.** An applicator of bulk biosolids that are not exceptional quality biosolids shall comply with the following management practices at each land application site where the bulk biosolids are applied for reclamation. The applicator shall not:
1. Apply bulk biosolids unless the soil and biosolids mixture has a pH of 5.0 or higher immediately after land application;
  2. Apply bulk biosolids to land with slopes greater than 6% unless:
    - a. The site is operating under an AZPDES permit or a permit issued under section 402 (33 U.S.C. 1342) or 404 (33 U.S.C. 1344) of the Clean Water Act;
    - b. The site is reclaimed as specified under A.R.S. Title 27, Chapter 5, and controls are in place to prevent runoff from leaving the application area; or
    - c. Runoff from the site does not reach navigable waters;
  3. Apply bulk biosolids to land under the following conditions:
    - a. Bulk biosolids with Class A pathogen reduction. To land if the depth to groundwater is 5 feet (1.52 meters) or less;
    - b. Bulk biosolids with Class B pathogen reduction.

- i. To land if the depth to groundwater is 10 feet (3.04 meters) or less; and
  - ii. To gravel, coarse or medium sands, or sands with less than 15% coarse fragments if the depth to groundwater is 40 feet (12.2 meters) or less from the point of application of biosolids;
4. Apply bulk biosolids to land that is 32.8 feet (10 meters) or less from navigable waters;
  5. Store or apply bulk biosolids closer than 1000 feet (305 meters) from a public or semi-public drinking water supply well, unless the applicator justifies and the Department approves a shorter distance, or apply bulk biosolids closer than 250 feet (76.2 meters) from any other water well;
  6. Store or apply bulk biosolids within 1000 feet (305 meters) of a public right-of-way or private property line unless the applicator receives permission to apply bulk biosolids from the land owner or lessee of the adjoining property;
  7. Exceed a total of 150 dry tons per acre to any portion of a reclamation site if bulk biosolids are applied;
  8. Apply bulk biosolids with less than 10% solids;
  9. Apply bulk biosolids to land that is flooded, frozen, or snow-covered so that the bulk biosolids enter a wetland or other navigable waters, except as provided in an AZPDES permit or a permit issued under section 402 (33 U.S.C. 1342) or 404 (33 U.S.C. 1344) of the Clean Water Act;
  10. Apply more water than necessary to control dust and establish vegetation; and
  11. Apply bulk biosolids within 1000 feet (305 meters) of a dwelling unless the biosolids are injected or incorporated into the soil within 10 hours of being applied.
  12. Store bulk biosolids within 1000 feet (305 meters) of a dwelling unless the applicator obtains permission from the dwelling owner or lessee to store the biosolids at a shorter distance from the dwelling. If the dwelling owner or lessee changes, the applicator shall obtain permission from the new dwelling owner or lessee to continue to store the bulk biosolids within 1000 feet of the dwelling or move the biosolids to a location at least 1000 feet from the dwelling.
- B.** The requirements of R18-9-1007(B) apply if biosolids placed in a bag or other container are used to reclaim a site.

**Historical Note**

New Section recodified from R18-13-1508 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1008 renumbered to R18-9-1009; new Section R18-9-1008 made by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1009. Site Restrictions**

- A.** The following site restrictions apply to land where biosolids, which do not meet the Class A pathogen reduction requirements established in R18-9-1006, are land-applied.
1. A person shall not:
    - a. Harvest food crop parts that touch the biosolids, or biosolids and soil mixture, but otherwise grow above the land's surface for 14 months following application;
    - b. Harvest food crop parts growing in or below the land's surface for 20 months following application if the biosolids remain unincorporated on the land's surface for four months or more;

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

- c. Harvest food crop parts growing in or below the land's surface for 38 months following application if the biosolids remain on the land's surface for less than four months before incorporation;
    - d. Harvest food, feed, and fiber crops for 30 days after application;
    - e. Graze animals on the land for 30 days after application; or
    - f. Harvest turf to be used at a public contact site or private residence for one year after application.
  - 2. A person shall restrict public access to:
    - a. Public contact sites for one year after application, and
    - b. Land with a low potential for public exposure for 30 days after application.
  - B.** If the vector attraction reduction requirement is met using the method:
    - 1. In R18-9-1010(C)(1) or R18-9-1010(C)(2), the requirements of subsection (A) apply to domestic septage applied to agricultural land, forests, or reclamation sites; or
    - 2. In R18-9-1010(C)(3), the requirements of subsection (A)(1)(a) through (A)(1)(d) apply to domestic septage applied to agricultural land, forests, or reclamation sites.
  - C.** Once application is completed at a site, the applicator shall, in writing, provide the land owner and lessee with the following information:
    - 1. The cumulative pollutant loading at the site if it is greater than or equal to 90% of the available site capacity established in Table 4 of R18-9-1005;
    - 2. Any restriction established in this Section that applies to the property and the nature of the restriction; and
    - 3. The signature of a responsible official of the applicator on this document that includes the following statement:  
 "I certify under penalty of law, that the information is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for false representations, including fines and imprisonment."
  - D.** The land owner or lessee shall provide each applicator with a signature indicating receipt of the site restriction statement.
- Historical Note**
- New Section recodified from R18-13-1509 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1009 renumbered to R18-9-1010; new Section R18-9-1009 renumbered from R18-9-1008 and amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).
- R18-9-1010. Vector Attraction Reduction**
- A.** Except as provided in subsection (B), an applicator or person who prepares biosolids shall use one of the following vector attraction reduction procedures if biosolids are land-applied:
    - 1. Reducing the mass of volatile solids by a minimum of 38% using the calculation procedures established in "Environmental Regulations and Technology -- Control of Pathogens and Vector Attraction in Sewage Sludge," EPA/625/R-92-013, published by the U.S. Environmental Protection Agency, Cincinnati, Ohio 45268, 1999 edition. This material is incorporated by reference, does not include any later amendments or editions of the incorporated matter, and is on file with the Department and the Office of the Secretary of State;
    - 2. If the 38% volatile solids reduction cannot be met for anaerobically digested biosolids the reduction can be met by digesting a portion of the previously digested material anaerobically in a laboratory in a bench-scale unit for 40 additional days at a temperature between 30° C and 37° C. Vector attraction reduction is achieved if, at the end of the 40 days, the volatile solids in the material at the beginning of the period are reduced by less than 17%;
  - 3. If the 38% volatile solids reduction cannot be met for aerobically digested biosolids, the reduction can be met by digesting a portion of the previously digested material, which has a percent solids of 2% or less, aerobically in a laboratory in a bench-scale unit for 30 additional days at 20° C. Vector attraction reduction is achieved if, at the end of the 30 days, the volatile solids in the material at the beginning of the period are reduced by less than 15%;
  - 4. Treat the biosolids in an aerobic process during which the specific oxygen uptake rate (SOUR) is equal to or less than 1.5 milligrams of oxygen per hour per gram of total solids (dry-weight basis) at 20° C;
  - 5. Treat the biosolids in an aerobic process for 14 days or longer, during which the temperature of the biosolids is higher than 40° C and the average temperature of the biosolids is higher than 45° C;
  - 6. Raising the pH of the biosolids to 12 or higher by alkali addition and, without the addition of more alkali, remain at 12 or higher for two hours and at 11.5 or higher for an additional 22 hours;
  - 7. The percent solids of the biosolids that do not contain unstabilized solids generated in a primary wastewater treatment process is equal to or greater than 75% based on the moisture content and total solids before mixing with other materials;
  - 8. The percent solids of the biosolids containing unstabilized solids generated in a primary wastewater treatment process are equal to or greater than 90% based on the moisture content and total solids before mixing with other materials;
  - 9. Injecting the biosolids below the surface of the land so that no significant amount of biosolids is present on the land surface one hour after injection. If the biosolids meet Class A pathogen reduction, injection shall occur within eight hours after being discharged from a Class A pathogen treatment process; or
  - 10. Incorporating the biosolids into the soil within six hours after application. If the biosolids meet Class A pathogen reduction, application shall occur within eight hours after being discharged from a Class A pathogen treatment process.
- B.** Biosolids that are sold or given away in a bag or other container, or are applied to a lawn or home garden, shall meet one of the vector attraction reduction alternatives established in subsections (A)(1) through (A)(8).
- C.** For domestic septage, vector attraction reduction is met by one of the following methods:
  - 1. By injecting as specified in subsection (A)(9);
  - 2. By incorporating as specified in subsection (A)(10); or
  - 3. By raising the pH of the domestic septage to 12 or higher through the addition of alkali and, without the addition of more alkali, holding the pH at 12 or higher for at least 30 minutes.
- Historical Note**
- New Section recodified from R18-13-1510 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1010 renumbered to R18-9-1011; new Section R18-9-1010 renumbered from R18-9-1009 and amended by final rulemaking at 7 A.A.R. 5879, effective



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

December 7, 2001 (Supp. 01-4).

**R18-9-1011. Transportation**

- A. A transporter of bulk biosolids into and within Arizona shall use covered trucks, trailers, rail-cars, or other vehicles that are leakproof.
- B. A transporter of bulk biosolids in liquid or semisolid form, including domestic septage, into and within Arizona shall comply with the requirements in A.A.C. R18-13-310. A transporter of bulk biosolids in solid form into and within Arizona shall comply with the requirements in A.A.C. R18-13-310.
- C. A transporter of biosolids shall clean any truck, trailer, rail-car, or other vehicle used to transport biosolids to prevent odors or insect breeding. A transporter shall clean any tank vessel used to transport commercial or industrial septage or restaurant grease-trap wastes, that is also used to haul domestic septage, before loading the domestic septage to ensure that mixing of wastes does not occur.
- D. If bulk biosolids are spilled while being transported, the transporter shall:
1. Immediately pick up any spillage, including any visibly discolored soil, unless otherwise determined by the Department on a case-by-case basis;
  2. Within 24 hours after the spill, notify the Department of the spill and submit written notification of the spill within seven days. The written notification shall include the location of the spill, the reason it occurred, the amount of biosolids spilled, and the steps taken to clean up the spill.

**Historical Note**

New Section recodified from R18-13-1511 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1011 renumbered to R18-9-1012; new Section R18-9-1011 renumbered from R18-9-1010 and amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4). A.C.C. citation corrected in subsection (B) at the request of the Department; Office file number M16-185 (Supp. 16-3).

**R18-9-1012. Self-monitoring**

- A. Except as provided in subsection (B) the person who prepares the biosolids shall conduct self-monitoring events at the frequency listed in Table 5 for the pollutants listed in R18-9-1005, the pathogen reduction in R18-9-1006 and the vector attraction reduction requirements in R18-9-1010.

**Table 5. Frequency of Self-monitoring**

| Amount of biosolids prepared (tons/metric tons per 365-day period <sup>(1)</sup> ) | Frequency                              |
|------------------------------------------------------------------------------------|----------------------------------------|
| Greater than zero but less than 319.6/290                                          | Once per year                          |
| Equal to or greater than 319.6/290 but less than 1,653/1,500                       | Once per quarter (Four times per year) |
| Equal to or greater than 1,653/1,500 but less than 16,530/15,000                   | Once per 60 days (Six times per year)  |
| Equal to or greater than 16,530/15,000                                             | Once per month (12 times per year)     |

(1) The amount of biosolids prepared in a calendar year (dry-weight basis).

- B. If biosolids are stockpiled or lagooned, the person shall sample the biosolids for pathogen and vector attraction reduction before land application. A person shall sample in a manner that is representative of the entire stockpile or lagoon.

- C. A person who prepares biosolids shall submit additional or more frequent biosolids samples, collected and analyzed during the reporting period, to the Department with the regularly-scheduled data required in subsection (A).
- D. The Department may order the person who prepares biosolids or the applicator to collect and analyze additional samples to measure pollutants of concern other than those established in Table 1 of R18-9-1005.
- E. The applicator, person who prepares biosolids, or a person collecting samples for the applicator or preparer for analysis shall obtain the samples in a manner that does not compromise the integrity of the sample, sample method, or sampling instrument and shall be representative of the quality of the biosolids being applied during the reporting period.
- F. A person responsible for sampling the biosolids shall track biosolids samples using a chain-of-custody procedure that documents each person in control of the sample from the time it was collected through the time of analysis.
- G. The person who prepares biosolids or the applicator shall ensure that the biosolids samples are analyzed as specified by the analytical methods established in 40 CFR 503.8, July 1, 2001 edition, or by the wastewater sample methods and solid, liquid, and hazardous waste sample methods established in A.A.C. R9-14-612 and R9-14-613. The person who prepares the biosolids or the applicator shall ensure that the biosolids analyses are performed at a laboratory operating in compliance with A.R.S. § 36-495 et seq. The information in 40 CFR 503.8 is incorporated by reference, does not include any later amendments or editions of the incorporated matter and is on file with the Department and the Office of the Secretary of State.
- H. The person who prepares the biosolids or the applicator shall monitor pathogen and vector attraction reduction treatment operating parameters, such as time and temperature, shall be monitored on a continual basis.
- I. An applicator shall conduct and record monitoring of each site for the management practices established in R18-9-1007 and R18-9-1008.
- J. A person shall maintain, as specified in R18-9-1013, and report to the Department as specified in R18-9-1014, all compliance measurements, including the analysis of pollutant concentrations.

**Historical Note**

New Section recodified from R18-13-1512 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1012 renumbered to R18-9-1013; new Section R18-9-1012 renumbered from R18-9-1011 and amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).

**R18-9-1013. Recordkeeping**

- A. A person who prepares biosolids shall collect and retain the following information for at least five years:
1. The date, time, and method used for each sampling activity and the identity of the person collecting the sample;
  2. The date, time, and method used for each sample analysis and the identity of the person conducting the analysis;
  3. The results of all analyses of pollutants regulated under R18-9-1005 and organic and ammonium nitrogen to comply with R18-9-1007(A)(7);
  4. The results of all pathogen density analyses and applicable descriptions of the methods used for pathogen treatment in R18-9-1006;
  5. A description of the methods used, if any, and the operating values and ranges observed in any pre-land application, vector attraction reduction activities required in R18-9-1010(A); and

## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

6. For the records described in subsections (A)(1) through (A)(5), the following certification statement signed by a responsible official of the person who prepares the biosolids:

"I certify, under penalty of law, that the pollutant analyses and the description of pathogen treatment and vector attraction reduction activities have been made under my direction and supervision and under a system designed to ensure that qualified personnel properly gather and evaluate the information used to determine whether the applicable biosolids requirements have been met. I am aware that there are significant penalties for false certification including the possibility of fine and imprisonment."

- B. An applicator of bulk biosolids, except exceptional quality biosolids, shall collect the following information for each land application site, and, except as indicated in subsection (B)(6), shall retain this information for at least five years:

1. The location of each site, by either street address or latitude and longitude;
2. The number of acres or hectares;
3. The date and time the biosolids were applied;
4. The amount of biosolids (in dry metric tons);
5. The biosolids loading rates for domestic septage and other biosolids with less than 10 percent solids in tons or kilograms of biosolids per acre or hectare and in gallons per acre and the biosolids loading rates for other biosolids in tons or kilograms of biosolids per acre or hectare;
6. The cumulative pollutant levels of each regulated pollutant (in tons or kilograms per acre or hectare). The applicator shall retain these records permanently;
7. The results of all pathogen density analyses and applicable descriptions of the methods used for pathogen treatment in R18-9-1006;
8. A description of the activities and measures used to ensure compliance with the management practices in R18-9-1007 and R18-9-1008, including information regarding the amount of nitrogen required for the crop grown on each site;
9. If vector attraction reduction was not met by the person who prepares the biosolids, a description of the vector attraction reduction activities used by the applicator to ensure compliance with the requirements in R18-9-1010;
10. A description of any applicable site restriction imposed by in R18-9-1009 if biosolids with Class B pathogen reduction have been applied and documentation that the applicator has notified the land owner and lessee of these restrictions;
11. For the records described in subsections (B)(1) through (B)(8), the following certification statement signed by a responsible official of the applicator of the biosolids:

"I certify, under penalty of law, that the information and descriptions, have been made under my direction and supervision and under a system designed to ensure that qualified personnel properly gather and evaluate the information used to determine whether the applicable biosolids requirements have been met. I am aware that there are significant penalties for false certification including the possibility of fine and imprisonment."

12. The information in subsections (A)(1) through (A)(6) if the person who prepares the biosolids is not located in this state.
- C. All records required for retention under this Section are subject to periodic inspection and copying by the Department.

- D. If there is unresolved litigation, including enforcement, concerning the activities documented by the records required in this Section, the period of record retention shall be extended pending final resolution of the litigation.

**Historical Note**

New Section recodified from R18-13-1513 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1013 renumbered to R18-9-1014; new Section R18-9-1013 renumbered from R18-9-1012 and amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1014. Reporting**

- A. A person who prepares biosolids for application shall provide the applicator with the necessary information to comply with this Article including the concentration of pollutants listed in R18-9-1005 and the concentration of nitrogen in the biosolids.
- B. A transporter shall report spills to the Department under R18-9-1011(D).
- C. A bulk applicator of biosolids other than exceptional quality biosolids shall provide the land owner and lessee of land application sites with information on the concentrations of the pollutants listed in R18-9-1005 and loading rates of biosolids applied to that site, and any applicable site restrictions under R18-9-1009.
- D. A bulk applicator of biosolids other than exceptional quality biosolids shall report to the Department if 90% or more of any cumulative pollutant loading rate has been used at a site.
- E. On or before February 19 of each year, any person land-applying bulk biosolids that are not exceptional quality biosolids shall, by letter or on a form provided by the Department, report to the Department the following applicable information for the previous calendar year:
1. The actual sites used; and
  2. For each site used, the following information:
    - a. The amount of biosolids applied (in tons or kilograms per acre or hectare);
    - b. The application loading rates (in tons or kilograms per acre or hectare, and gallons per acre for domestic septage);
    - c. The concentrations of the pollutants listed in R18-9-1005 (in milligrams per kilogram of biosolids on a dry-weight basis);
    - d. The pathogen treatment methodologies used during the year and the results; and
    - e. The vector attraction reduction methodologies used during the year and the results.
- F. On or before February 19 of each year, a person preparing biosolids in a Class I Sludge Management Facility, POTW with a design flow rate equal to or greater than one million gallons per day, or POTW that serves 10,000 people or more, that are applied to land, shall, by letter or on a form provided by the Department, report to the Department all the following applicable information regarding their activities during the previous calendar year:
1. The amount of biosolids received if the preparer purchased or received the biosolids from another preparer or source;
  2. The amount of biosolids produced (tons or kilograms);
  3. The amount of biosolids distributed;
  4. The concentrations of the pollutants listed in R18-9-1005 (in milligrams per kilogram of biosolids on a dry-weight basis);



## CHAPTER 9. DEPARTMENT OF ENVIRONMENTAL QUALITY - WATER POLLUTION CONTROL

5. The pathogen treatment methodologies used during the year, including the results; and
  6. The vector attraction reduction methodologies used during the year, including the results.
- G.** All annual self-monitoring reports shall contain the following certification statement signed by a responsible official:
- "I certify, under penalty of law, that the information and descriptions, have been made under my direction and supervision and under a system designed to ensure that qualified personnel properly gather and evaluate the information used to determine whether the applicable biosolids requirements have been met. I am aware that there are significant penalties for false certification including the possibility of fine and imprisonment."

**Historical Note**

New Section recodified from R18-13-1514 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Former Section R18-9-1014 renumbered to R18-9-1015; new Section R18-9-1014 renumbered from R18-9-1013 and amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 8 A.A.R. 4923, effective January 5, 2003 (Supp. 02-4).

**R18-9-1015. Inspection**

A person subject to this Article shall allow, during reasonable times, a representative of the Department to enter property subject to this Article, to:

1. Inspect all biosolids pathogen and vector treatment facilities, transportation vehicles, incinerators that fire sewage sludge, and land application sites to determine compliance with this Article;
2. Inspect and copy records prepared in accordance with this Article; and
3. Sample biosolids quality.

**Historical Note**

Renumbered from R18-9-1014 and amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4). Amended by final rulemaking at 21 A.A.R.

751, effective July 4, 2015 (Supp. 15-2).

**Appendix A. Procedures to Determine Annual Biosolids Application Rates**

The following procedure determines the annual biosolids application rate (ABAR) that ensures that the annual pollutant loading rates in Table 3 of R18-9-1005 are not exceeded.

1. The relationship between the annual pollutant loading rate (APLR) for a pollutant and the ABAR is shown in the following equation.

$$APLR = C \times ABAR \times 0.001$$

APLR = Annual pollutant loading rate in kilograms of biosolids, per hectare, per 365-day period;  
 C = Pollutant concentration in milligrams, per kilogram of total solids (dry-weight basis);  
 ABAR = Annual biosolids application rate in metric tons, per hectare, per 365-day period (dry-weight basis); and  
 0.001 = A conversion factor.  
 metric ton = 1.102 short tons  
 hectare = 2.471 acres

2. The ABAR is calculated using the following procedure:
  - a. Analyze a biosolids sample to determine a concentration for each of the pollutants listed in Table 3 of R18-9-1005; and
  - b. Using each of the pollutant concentrations from subsection (2)(a) and the APLRs from Table 3 of R18-9-1005, calculate a separate ABAR for each pollutant using the following equation:

$$ABAR = \frac{APLR}{C \times 0.001}$$

- c. The ABAR for biosolids is the lowest value calculated in under subsection (2)(b) for any pollutant.

**Historical Note**

New Appendix recodified from 18 A.A.C. 13, Article 15 at 7 A.A.R. 2522, effective May 24, 2001 (Supp. 01-2). Amended by final rulemaking at 7 A.A.R. 5879, effective December 7, 2001 (Supp. 01-4).