

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-86-219 ✓  
Relating to Certification of New Motor Vehicles

MITSUBISHI MOTORS CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1998 model-year Mitsubishi Motors Corporation exhaust emission control systems are certified as described below for passenger cars:

Emission Standard Category: Low-Emission Vehicle (LEV)

Fuel Type: Gasoline

Engine Family: WMTXV01.8G2G Displacement: 1.8 Liters (111.9 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

- Warm Up Three Way Catalytic Converter
- Three Way Catalytic Converter
- Heated Oxygen Sensors (two)
- Sequential Multiport Fuel Injection
- Exhaust Gas Recirculation

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The LEV certification exhaust emission standards for this engine family in grams per mile are:

| <u>Miles</u> | <u>Non-Methane Organic Gas</u> | <u>Carbon Monoxide</u> | <u>Nitrogen Oxides</u> | <u>Formaldehyde</u> | <u>Carbon Monoxide (20°F)</u> |
|--------------|--------------------------------|------------------------|------------------------|---------------------|-------------------------------|
| 50,000       | 0.075                          | 3.4                    | 0.2                    | 0.015               | 10.0                          |
| 100,000      | 0.090                          | 4.2                    | 0.3                    | 0.018               | n/a                           |

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.94

The certification exhaust emission values set forth for non-methane organic gas (NMOG) reflect application of a 0.94 RAF for 1998 model-year LEVs. The LEV certification exhaust emission values for this engine family in grams per mile are:

| <u>Miles</u> | <u>Non-Methane Organic Gas</u> | <u>Carbon Monoxide</u> | <u>Nitrogen Oxides</u> | <u>Formaldehyde</u> | <u>Carbon Monoxide (20°F)</u> |
|--------------|--------------------------------|------------------------|------------------------|---------------------|-------------------------------|
| 50,000       | 0.035                          | 0.6                    | 0.03                   | 0.0004              | 4.9                           |
| 100,000      | 0.037                          | 0.7                    | 0.04                   | 0.0004              | n/a                           |

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.


BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 23rd day of July 1997.

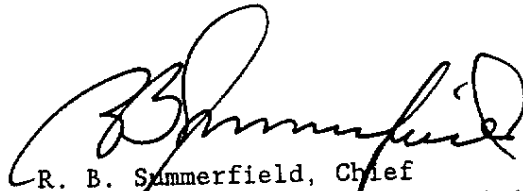

R. B. Summerfield, Chief  
Mobile Source Operations Division

17.16.02

E.O.# A-86-219

1998 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
PASSENGER CARS, LIGHT-DUTY TRUCKS

Manufacturer : Mitsubishi Motors Corporation  
Exh Engine Family : WMTXV01.8G2G(1.8C)  
Evap Engine Family : WMTXE0090A1A

All Eng Codes in Eng Fam: CA X 49S\_\_\_ 50S\_\_\_  
ORVR : Yes\_\_\_ No X  
Exh Std : CA Tier-1\_\_\_ TLEV\_\_\_ LEV X ULEV\_\_\_ SULEV\_\_\_ ;EPA Tier-0\_\_\_Tier-1\_\_\_  
In-Use Exh Std : Full in Use\_\_\_ Alt In Use X

Veh Class(es) : PC X LDT1\_\_\_ LDT2\_\_\_  
Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1)  
Fuel Type(s) : Dedicated X Flex-Fuel\_\_\_ Dual-Fuel\_\_\_ Bi-Fuel\_\_\_ Gasoline X  
Diesel CNG\_\_\_ LNG\_\_\_ LPG\_\_\_ M85\_\_\_ Other (specify)\_\_\_  
Emis Test Fuel\*\* : Indo\_\_\_ Ph2 X CNG\_\_\_ LPG\_\_\_ M85\_\_\_ Other (specify)\_\_\_  
Diesel: 13 CCR 2282\_\_\_ or 40 CFR 86.113-90\_\_\_ or -94\_\_\_  
Evaporative Emission Test Procedure: California\_\_\_ Federal X

Service Accum : Std AMA\_\_\_ Mod AMA X Mfr ADP\_\_\_ Other (specify)\_\_\_  
NMOG Test Proc : N/A\_\_\_ Std X Equiv\_\_\_  
R/L Test Proc : SHED X Pt Source\_\_\_

Engine Configuration : IL4 Displacement: 1.8 Liters/ 111.9 Cubric Inches  
Valves per Cylinder : 4 Rated HP: 111 @ 5500RPM  
Engine : Front X Mid\_\_\_ Rear\_\_\_  
Drive : FWD X RWD\_\_\_ 4WD-FT\_\_\_ 4WD-PT\_\_\_  
Exhaust ECS (eg., EGR, MFI, TC, CAC): EGR+HO2S(2)+TWC+WUTWC+(SFI)  
(use abbreviations per SAE J1930 SEP91)

Note) \*1: Cert. emission is tested by Phase-II  
Evap. emission is tested by Indolene

E.O.# A-86-219

1998 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
PASSENGER CARS, LIGHT-DUTY TRUCKS

Manufacturer : Mitsubishi Motors Corporation  
Exh Engine Family : WMTXV01.8G2G(1.8C)  
Evap Engine Family: WMTXE0090A1A

| Engine Code<br>(also list<br>CAL/FED/BOTH) | Vehicle Models<br>(if coded see<br>attachment) | Trans.<br>type<br>*1 | ETW  | DPA<br>or<br>RLHP | Ignition<br>(ECM/PCM)<br>Part No. | EGR<br>System<br>Part No.           | Catalytic<br>Converter<br>Part No.                    |
|--|--|----------------------|------|-------------------|-----------------------------------|-------------------------------------|---|
| ACM(CAL)                                   | Mitsubishi<br>Mirage                           | M5                   | 2750 | 6.4               | Distributor:<br>N/A               | Valve:<br>MD327127<br>(HC9)         | Front:<br>MR373057                                    |
| CM(CAL)                                    |  |                      | 2625 | 6.2               |                                   |                                     |   |
| ACA(CAL)                                   |  | L4                   | 2750 | 6.4               | ECM:<br>MD347223<br>(E2T69371#)   | Solenoid:<br>MR127520<br>(K5T48271) | Rear:<br>MR188788<br>(Z1)<br>or<br>MR385625<br>(2E)*2 |
| CA(CAL)                                    |  |                      | 2625 | 6.1               |                                   |                                     |   |
|  |  |                      | 2750 | 5.8               |                                   |                                     |   |
|  |  |                      | 2625 | 5.5               |                                   |                                     |   |

- \*1: M-Manual transmission  
L-Automatic transmisson with lock-up  
\*2: With Ni  
N/A: Not Applicable