

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-13-121-2

Relating to Certification of New Heavy-Duty Motor Vehicle Engines

CATERPILLAR, INC

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102 and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following 1998 model-year Caterpillar, Inc. diesel-cycle engines are certified for use in motor vehicles with a manufacturer's gross vehicle weight rating (GVWR) over 14,000 pounds:

Fuel Type: Diesel

<u>Engine Family</u>	<u>Engine Displacement Liters (Cubic Inches)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
WCPXH0729ERK	12.0 (729)	Turbocharger Charge Air Cooler Engine Control Module

Engine models and codes are listed on attachments.

The following are the certification exhaust emission standards for this engine family in grams per brake horsepower-hour:

<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulates</u>
1.3	15.5	4.0	0.10

The following are the certification exhaust emission values for this engine family in grams per brake horsepower-hour:

<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulates</u>
0.2	1.0	3.6	0.07

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).


BE IT FURTHER RESOLVED: That the aforementioned engine family has been conditionally certified subject to the following conditions:

1. Any engine which employs a defeat device shall not be covered by this Executive Order.
2. Within 150 days following the issuance of Executive Order A-13-121, the manufacturer must show cause, to the satisfaction of the Executive Officer or his designee, that the strategy for fuel injection timing, including timing during the fuel economy mode, is not a defeat device.

Engines certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachments.

Executed at El Monte, California this 25th day of March 1998.

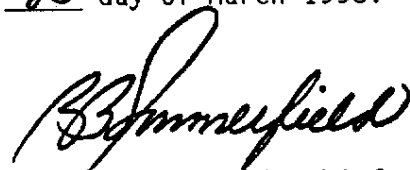

R. B. Summerfield, Chief
Mobile Source Operations Division

Manufacturer: **PERPILLAR INC.** Process: **New Submission** EO: **A-13-121-2**

A Engine Family: **WCPXH0729ERK** Manufacturer Family Name: **NA**

1. Engine Code 2. Engine Model 3. BHP @ RPM (SAE Gross) 4. Fuel Rate: mm³/stroke @ peak HP (for diesel only) 5. Fuel Rate: (lbs/hr) @ peak HP (for diesels only) 6. Torque @ RPM (SEA Gross) 7. Fuel Rate: mm³/stroke @ peak torque 8. Fuel Rate: (lbs/hr) @ peak torque 9. Emission Control Device Per SAE J1930

1. Engine Code	2. Engine Model	3. BHP @ RPM (SAE Gross)	4. Fuel Rate: mm ³ /stroke @ peak HP (for diesel only)	5. Fuel Rate: (lbs/hr) @ peak HP (for diesels only)	6. Torque @ RPM (SEA Gross)	7. Fuel Rate: mm ³ /stroke @ peak torque	8. Fuel Rate: (lbs/hr) @ peak torque	9. Emission Control Device Per SAE J1930
		fuel rates are	nominal values.	Due to product-	ion engine avgs.	these fuel rates	may change.	
1. Peak Hp	and Peak Torque							
Cert Engine	C-12	455 @ 1800	231	140.0	1650 @ 1200	292	118.0	EM, DI, TC, ECM,
2	C-12	455 @ 1800	236	142.8	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
3	C-12	430 @ 1800	221	134.2	1650 @ 1200	292	118.0	EM, D ₁ TC, ECM,
4	C-12	430 @ 1800	210	127.0	1650 @ 1200	292	118.0	EM, D ₁ TC, ECM,
5	C-12	425 @ 1800	218	132.0	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
6	C-12	425 @ 1800	218	132.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
7	C-12	425 @ 1800	218	132.0	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
8	C-12	425 @ 1800	218	132.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
9	C-12	410 @ 1800	210	127.0	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
10	C-12	410 @ 1800	210	127.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
11	C-12	395 @ 1800	201	122.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
12	C-12	410 @ 1800	210	127.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
13	C-12	410 @ 1800	210	127.0	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
14	C-12	410 @ 1800	210	127.0	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
15	C-12	410 @ 1800	210	127.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
16	C-12	405 @ 1800	208	126.0	1550 @ 1200	275	111.0	EM, D ₁ TC, ECM,
17	C-12	395 @ 1800	201	122.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
18	C-12	380 @ 1800	193	117.0	1450 @ 1200	255	103.0	EM, D ₁ TC, ECM,
19	C-12	370 @ 1800	188	114.0	1350 @ 1200	238	96.0	EM, D ₁ TC, ECM,
20	C-12	355 @ 1800	180	109.0	1350 @ 1200	238	96.0	EM, D ₁ TC, ECM,
21	C-12	355 @ 1800	180	109.0	1350 @ 1200	238	96.0	EM, D ₁ TC, ECM,

CAC