

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-13-127

Relating to Certification of New Heavy-Duty Engines and Vehicles

CATERPILLAR, INC.

Pursuant to the authority vested in the Air Resources Board at Sections 43100, 43101, and 43102 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned at Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9; and

Pursuant to the December 15, 1998 Settlement Agreement between the Air Resources Board and Caterpillar, Inc. and any modifications to the Settlement Agreement;

IT IS ORDERED AND RESOLVED: That the following 1999 model-year Caterpillar, Inc. diesel engines are certified for use in motor vehicles with a manufacturer's gross vehicle-weight-rating (GVWR) over 14,000 pounds:

Fuel Type: Diesel

<u>Engine Family</u>	<u>Displacement</u>		<u>Exhaust Emission Control Systems and Special Features</u>
	<u>Liters</u>	<u>Cubic Inches</u>	
XCPXH0729ERK	12.0	729	Turbocharger Charge Air Cooler Electronic Control Module

The engine models and codes are listed on attachments.

BE IT ORDERED AND RESOLVED: That the following are the certification exhaust emission standards for this engine family in grams per brake horsepower-hour under the Federal Test Procedure ("FTP") for Heavy-Duty Diesel Engines (Title 13, California Code of Regulations, Section 1956.8):

	<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulate Matter</u>
"FTP"	1.3	15.5	4.0	0.10

BE IT FURTHER RESOLVED: That pursuant to the Settlement Agreement and any modifications thereof, the aforementioned engine family is also subject to the following emission standards, in grams per brake horsepower-hour, under the EURO III tests in the Settlement Agreement, and a "Not-to-Exceed" nitrogen oxides emission standard of 7.0 grams per brake horsepower-hour:

	<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulate Matter</u>
"EURO III"	1.3	15.5	6.0	0.10

BE IT FURTHER RESOLVED: That the following are the certification exhaust emission values for this engine family in grams per brake horsepower-hour:

	<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulate Matter</u>
"FTP"	0.2	1.0	3.6	0.07
"EURO III"	0.1	0.4	4.8	0.04

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Sections 2035 et seq.).


BE IT FURTHER RESOLVED: That the aforementioned engine family has been conditionally certified subject to the following conditions:

1. The Settlement Agreement is in effect.
2. The Settlement Agreement has not become null and void under Settlement Agreement Paragraph 165.
3. Caterpillar., Inc. is in compliance with all applicable certification requirements of the Settlement Agreement.

Engines certified under this Executive Order must conform to all applicable California emission regulations and to all applicable terms and conditions of the Settlement Agreement.

The Bureau of Automotive Repair will be notified by copy of this order and attachments.

Executed at El Monte, California this 22nd day of December 1998.

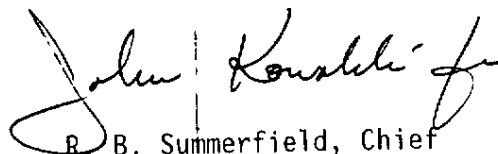

R. B. Summerfield, Chief
Mobile Source Operations Division

LARGE ENGINE MODEL SUMMARY

EO: A-13-127

Process Code: **New Submission**

Manufacturer: **CATERPILLAR INC.**

Manufacturer Family Name: **NA**

EPA Engine Family: **XCPXH0729ERK**

8. Fuel Rate:
(lb/hr)/peak torque
Device Per SAE J1930

7. Fuel Rate:
mm/stroke @ peak
torque

6. Torque @ RPM
(SEA Gross)

5. Fuel Rate:
(lb/hr) @ peak HP
(for diesels only)

4. Fuel Rate:
mm/stroke @ peak HP
(for diesels only)

3. BHP @ RPM
(SAE Gross)

1. Engine Code 2. Engine Model

Note: Peak Hp and Peak Torque	fuel rates are	nominal values.	Due to product-	ion engine avgs.	these fuel rates	may change.	9. Emission Control Device Per SAE J1930
1 - Cert Engine	C-12	231	140.0	1650 @ 1200	292	118.0	EM, DI, TC, ECM,
2	C-12	236	142.8	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
3	C-12	221	134.2	1650 @ 1200	292	118.0	EM, DI, TC, ECM,
4	C-12	210	127.0	1650 @ 1200	292	118.0	EM, DI, TC, ECM,
5	C-12	218	132.0	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
6	C-12	218	132.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
7	C-12	218	132.0	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
8	C-12	218	132.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
9	C-12	210	127.0	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
10	C-12	210	127.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
11	C-12	201	122.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
12	C-12	210	127.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
13	C-12	210	127.0	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
14	C-12	210	127.0	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
15	C-12	210	127.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
16	C-12	208	126.0	1550 @ 1200	275	111.0	EM, DI, TC, ECM,
17	C-12	201	122.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
18	C-12	193	117.0	1450 @ 1200	255	103.0	EM, DI, TC, ECM,
19	C-12	188	114.0	1350 @ 1200	238	96.0	EM, DI, TC, ECM,
20	C-12	180	109.0	1350 @ 1200	238	96.0	EM, DI, TC, ECM,
21	C-12	180	109.0	1350 @ 1200	238	96.0	EM, DI, TC, ECM,

↖ ↗