

Pursuant to the authority vested in the Air Resources Board by Sections 43013, 43018, 43101, 43102, 43104 and 43105 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following compression-ignition engine and emission control system produced by the manufacturer are certified as described below for use in off-road equipment. Production engines shall be in all material respects the same as those for which certification is granted.

MODEL YEAR	ENGINE FAMILY	DISPLACEMENT (liters)	FUEL TYPE	USEFUL LIFE (hours)
2002	2X9XL0359AAA	5.9	Diesel	8000
SPECIAL FEATURES & EMISSION CONTROL SYSTEMS			TYPICAL EQUIPMENT APPLICATION	
Direct Diesel Injection, Turbocharger			Crane, Loader, Tractor, Dozer, Pump, Compressor	

The engine models and codes are attached.

The following are the exhaust certification standards (STD), or family emission limit(s) (FEL) as applicable, and certification levels (CERT) for hydrocarbon (HC), oxides of nitrogen (NOx), or non-methane hydrocarbon plus oxides of nitrogen (NMHC+NOx), carbon monoxide (CO), and particulate matter (PM) in grams per kilowatt-hour (g/kw-hr), and the opacity-of-smoke certification standards and certification levels in percent (%) during acceleration (Accel), lugging (Lug), and the peak value from either mode (Peak) for this engine family (Title 13, California Code of Regulations, (13 CCR) Section 2423):

RATED POWER CLASS	EMISSION STANDARD CATEGORY		EXHAUST (g/kw-hr)					OPACITY (%)		
			HC	NOx	NMHC+NOx	CO	PM	ACCEL	LUG	PEAK
37 ≤ KW < 130	Tier 1	STD	N/A	9.2	N/A	N/A	N/A	20	15	50
		FEL	N/A	8.9	N/A	N/A	N/A	N/A	N/A	N/A
		CERT	--	5.7	--	--	--	3	2	5


BE IT FURTHER RESOLVED: That the family emission limit(s) (FEL) is an emission level declared by the manufacturer for use in any averaging, banking and trading program and in lieu of an emission standard for certification. It serves as the applicable emission standard for determining compliance of any engine within this engine family under 13 CCR Sections 2423 and 2427.

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the information and materials to demonstrate certification compliance with 13 CCR Section 2424 (emission control labels), and 13 CCR Sections 2425 and 2426 (emission control system warranty).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

This Executive Order is only granted to the engine family and model-year listed above. Engines in this family that are produced for any other model-year are not covered by this Executive Order.

Executed at El Monte, California on this 17th day of December 2001.

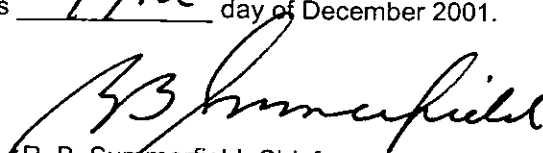

R. B. Summerfield, Chief
 Mobile Source Operations Division

Engine Model Summary Form

U-R-011-0055

ATTACHMENT B1 of 1

Manufacturer: CNH Engine Corporation, Inc.
Engine category: Nonroad Over 50 Hp
EPA Engine Family: 2X9XL0359AAA
Mfr Family Name: A402
Process Code: Running Change

1.Engine Code	2.Engine Model	3.BHP@RPM (SAE Gross)	4.Fuel Rate: mm ³ /stroke @ peak HP (for diesel only)	5.Fuel Rate: (lbs/hr) @ peak HP (for diesels only)	6.Torque @ RPM (SEA Gross)	7.Fuel Rate: mm ³ /stroke@peak torque	8.Fuel Rate: (lbs/hr)@peak torque	9.Emission Control Device Per SAE J1930
1948;FR90058	6T-590	152@2500	74	62.6	414@1600	83	44.6	DOT, TC
2071;FR90194	6T-590	137@2000	74	50.1	440@1600	87	46.9	TC
2071;FR90299	6T-590	135@2200	70	52.1	419@1600	83	44.7	TC
2071;FR90061	6T-590	135@2200	70	52.1	419@1600	83	44.7	TC
2071;FR90064	6T-590	120@2200	61	45.4	372@1600	73	39.1	TC
2071;FR90298	6T-590	120@2200	61	45.4	372@1600	73	39.1	TC
2071;FR90297	6T-590	110@2200	57	42.6	341@1600	67	36.2	TC
2071;FR90296	6T-590	101@2200	53	39.6	313@1500	60	30.6	TC
2071;FR90203	6T-590	97@2200	51	37.9	267@1700	53	30.3	TC
1948;FR90799	6T-590	152 @ 2500	73	61.7	414 @ 1600	84	45.2	TC
2071;FR90813	6T-590	120@2200	62	45.9	376@1600	75	40.6	TC
1948;FR90026	6T-590	165@2500	80	67.7	440@1600	89	47.8	TC
2071;FR90967	6T-590	99 @ 2200	53	39.6	313 @ 1500	60	30.6	TC
2071;FR91026	6T-590	99@2000	53	36.0	325@1400	62	29.2	TC