California Environmental Protection Agency Air Resources Board	JOHN DEERE POWER SYSTEMS	EXECUTIVE ORDER U-R-004-0560 New Off-Road Compression-Ignition Engines

Pursuant to the authority vested in the Air Resources Board by Sections 43013, 43018, 43101, 43102, 43104 and 43105 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-14-012;

IT IS ORDERED AND RESOLVED: That the following compression-ignition engines and emission control systems produced by the manufacturer are certified as described below for use in off-road equipment. Production engines shall be in all material respects the same as those for which certification is granted.

MODEL YEAR	ENGINE FAMILY	DISPLACEMENT (liters)	FUEL TYPE	USEFUL LIFE (hours)
2018	JJDXL06.8210	4.5, 6.8	Diesel	8000

SPECIAL FEATURES & EMISSION CONTROL SYSTEMS	TYPICAL EQUIPMENT APPLICATION
Charge Air Cooler, Oxidation Catalyst, Electronic Direct Injection, Electronic Control Module, Exhaust Gas Recirculation, Periodic Trap Oxidizer, Smoke Puff Limiter, Turbocharger	Loaders, Tractor, Dozer, Pump, Compressor, Generator Set, Other Industrial Equipment

The engine models and codes are attached.

The following are the exhaust certification standards (STD), or family emission limit(s) (FEL) as applicable, and certification levels (CERT) for non-methane hydrocarbon (NMHC), oxides of nitrogen (NOx), or non-methane hydrocarbon plus oxides of nitrogen (NMHC+NOx), carbon monoxide (CO), and particulate matter (PM) in grams per kilowatt-hour (g/kw-hr), and the opacity-of-smoke certification standards and certification levels in percent (%) during acceleration (Accel), lugging (Lug), and the peak value from either mode (Peak) for this engine family (Title 13, California Code of Regulations, (13 CCR) Section 2423):

RATED POWER CLASS	EMISSION STANDARD CATEGORY		EXHAUST (g/kw-hr)					OPACITY (%)		
			NMHC	NOx	NMHC+NOx	CO	PM	ACCEL	LUG	PEAK
75 ≤ kW < 130	Tier 4 Final / ALT 5% NOx	STD	0.19	0.40	N/A	5.0	0.02	N/A	N/A	N/A
		FEL	--	3.20	--	--	--	--	--	--
		CERT	0.000	3.10	--	0.1	0.01	--	--	--

BE IT FURTHER RESOLVED: That the family emission limit(s) (FEL) is an emission level declared by the manufacturer for use in any averaging, banking and trading program and in lieu of an emission standard for certification. It serves as the applicable emission standard for determining compliance of any engine within this engine family under 13 CCR Sections 2423 and 2427.

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the information and materials to demonstrate certification compliance with 13 CCR Section 2424 (emission control labels), and 13 CCR Sections 2425 and 2426 (emission control system warranty).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

This Executive Order is only granted to the engine family and model-year listed above. Engines in this family that are produced for any other model-year are not covered by this Executive Order.

Executed at El Monte, California on this 22 day of September 2017.

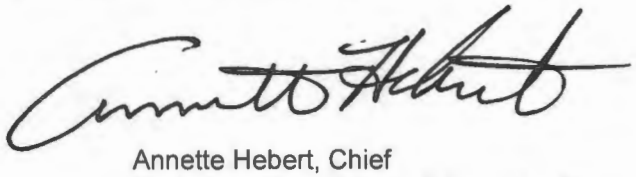

Annette Hebert, Chief
Emissions Compliance, Automotive Regulations and Science Division

Engine Model Summary Form

EO#: U-R-004-0560
Attachment: Page 1 of 1

Manufacturer: **John Deere Power Systems**
Engine category: **Nonroad CI**
EPA Engine Family: **JJDXL06.8210**
Mfr Family Name: **350HBB**
Process Code: **New Submission**

9/12/2017

1. Engine code	2. Engine Model	3. kW@RPM (SAE Gross)	4. Fuel Rate: mm/stroke@peak kW (for diesel only)	5. Fuel Rate: (kg/hr)@peak kW (for diesels only)	6. Torque (Nm) @RPM (SEA Gross)	7. Fuel Rate: mm/stroke@peak torque	8. Fuel Rate: (kW/hr)@peak torque	9. Emission Control Device Per SAE J1930
4045HPRNT7	4045	129@2400	113.8@2400	27.9@2400	670@1600	150.3@1600	24.5@1600	EGR EM EC SPL DFI TC CAC OC PTOX
4045HT069	4045	111@2200	117.5@2200	24.3@2200	482@1600	143.1@1600	22.8@1600	EM EGR EC SPL DFI TC CAC OC PTOX
6068HT089	6068	129@1900	94.6@1900	27.5@1900	768@1400	110.6@1400	23.7@1400	EGR EM EC SPL DFI TC CAC OC PTOX