

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-6-106-1
Relating to Certification of New Motor Vehicles

GENERAL MOTORS CORPORATION

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102, and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-3;

IT IS ORDERED AND RESOLVED: That General Motors Corporation exhaust emission control systems for 1977 model-year passenger cars are certified for the engine family described below:

Engine Family: 760V0

Engine: 425 CID

Transmission: 3-speed automatic

Exhaust Emission Control Systems: Air injection, Exhaust gas recirculation, Oxidation catalyst, Electronic fuel injection

Model: Cadillac

Eldorado

BE IT FURTHER RESOLVED: That this certification is contingent upon General Motors Corporation affixing a permanent catalyst overheat warning label on the driver's sun-visor of all catalyst-equipped vehicles. This label must be approved by the Executive Officer.

BE IT FURTHER RESOLVED: That this certification is also contingent upon General Motors Corporation listing in the owner's manual the operating cautions associated with a catalyst-equipped vehicle. This listing must be approved by the Executive Officer.

These vehicles are in addition to those previously certified for this engine family.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Department of Motor Vehicles, the California Highway Patrol, and the Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California, this 7 day of April, 1977.


G. C. Hass, Chief
Vehicle Emissions Control Division

Manufacturer GENERAL MOTORS CORPORATION Executive Order No. A-6 -106 Page 1

Engine Family 760V0 Engine (CID) 425 Transm. A-3

Emission Control System AI,EGR,OC +10%(A/C) Yes No

| Vehicle Models (If Coded see attachment) | Transmission | Inertia Weight | Distributor Type HEI C,V Mfgr. Part Number | Fuel System Type EFI Mfgr. Part Number | EGR System Part No. Service* | Engine Code | Tune-Up Label Ident & Page No. |
|--|--------------|--------------------|---|---|------------------------------|-------------|--------------------------------|
| 6CD47 (DeVille) Coupe 6CD69 (DeVille) Sedan 6CB69 (Brougham) | A-3 | 5000 | Delco Remy 1103297 | Bendix ECU 1611188 | 7044591 No Service | 4 | KH (below) |
| | | 4500(1) 5000(2) | | | | | |
| 6EL47 (Eldorado) | | 5500 | 1103306 | 1611190 | | 5 | KU 2 |

KH 760V0
425 CU. IN. CADILLAC DIVISION
VEHICLE EMISSION CONTROL INFORMATION
GENERAL MOTORS CORPORATION

CATALYST-A.I.R.-E.G.R. LOW ALTITUDE CERTIFICATION

WITH ENGINE AT NORMAL OPERATING TEMPERATURE, AIR CLEANER OFF, AIR CONDITIONING OFF, AND AIR LEVELING COMPRESSOR DISCONNECTED WITH THE VACUUM LINE PLUGGED, IF SO EQUIPPED, MAKE ENGINE ADJUSTMENTS AS FOLLOWS:

1. DISCONNECT AND PLUG VACUUM LINE TO PARKING BRAKE RELEASE TO PREVENT RELEASE OF PARKING BRAKE WHEN SHIFTING TRANSMISSION IN STEPS 4 AND 5.
2. SET PARKING BRAKE AND BLOCK WHEELS.
3. DISCONNECT AND PLUG DISTRIBUTOR VACUUM LINE.
4. PLACE TRANSMISSION IN "PARK" AND SET TIMING AT SPECIFIED R.P.M.
5. RECONNECT DISTRIBUTOR VACUUM LINE. PLACE TRANSMISSION IN "DRIVE" AND ADJUST THROTTLE BODY SCREW TO SPECIFIED R.P.M.
6. RECONNECT AIR LEVELING COMPRESSOR AND PARKING BRAKE RELEASE LINES.

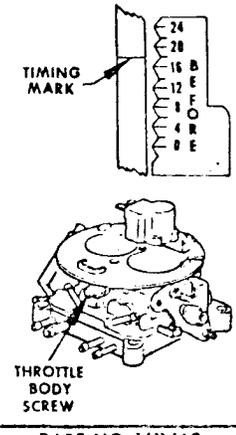
NOTE: DO NOT DEPRESS SERVICE BRAKE PEDAL WHILE SETTING IDLE SPEEDS.

SEE SERVICE MANUAL AND MAINTENANCE SCHEDULE I FOR ADDITIONAL INFORMATION.

| | |
|---------------------------------|-----------|
| TIMING (DEG. B.T.D.C. @ R.P.M.) | 18 @ 1400 |
| SPARK PLUG GAP (INCHES) | .060 |
| THROTTLE BODY SCREW (R.P.M.) | 650 |

ELECTRONIC FUEL INJECTION

NO ADJUSTMENT PROVISIONS EXIST FOR IDLE FUEL MIXTURE.



THIS VEHICLE CONFORMS TO U.S.E.P.A. AND WHERE APPLICABLE CALIFORNIA, REGULATIONS APPLICABLE TO 1977 MODEL YEAR NEW MOTOR VEHICLES PART NO. 1611462

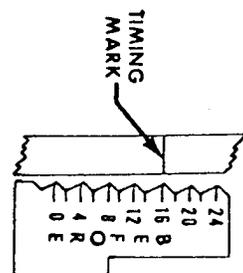
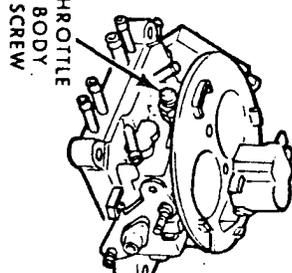
Comments (1) With aluminum hood. (2) With steel hood.
Please discard page 2 issued 101576.

Date of Issue 101576. 4500 lb. I.W.C. added by RC 76-220, tune-up label moved to page 1, page 2 discarded on 032577. Eldorado added by RC 76-108 Rev. 2 on 040477. Page 2 reinstated, transm. codes deleted 042177.

- | | | |
|------------------------|---------------------------------------|-------------------------------------|
| Abbreviations | Exhaust Emission Control System | FI-Fuel Injection |
| Distributor | AI-Air Injection | OC-Oxidation Catalyst |
| Centrifugal Advance | CAI-Catalyst Air Injection | *Service |
| V-Vacuum Advance | EFI-Electronic Fuel Injection | I-Inspect, repair/replace as needed |
| HEI-High | EGR-Exhaust Gas Recirculation | R-Replace |
| EI-Electronic Ignition | EM-Engine Modification | |
| Fuel System | EFE-Early Fuel Evaporation | |
| EFI, FI | ESAC-Electronic Spark Advance Control | |

1977 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
Passenger Cars

Manufacturer GENERAL MOTORS CORPORATION Executive Order No. A-6-106 Page 2
 Engine Family 760V0 Engine (CID) 425 Transm. A-3

| | | | |
|---|--|---|--|
| KU 760V0 CADILLAC DIVISION GENERAL MOTORS CORPORATION | VEHICLE EMISSION CONTROL INFORMATION  | CATALYST -A.I.R.-E.G.R. LOW ALTITUDE CERTIFICATION | |
| | | TIMING (DEG. B.T.D.C. @ R.P.M.) .16 @ 1400 SPARK PLUG GAP (INCHES) .060 THROTTLE BODY SCREW (R.P.M.) 650 | ELECTRONIC FUEL INJECTION NO ADJUSTMENT PROVISIONS EXIST FOR IDLE FUEL MIXTURE. |
| WITH ENGINE AT NORMAL OPERATING TEMPERATURE, AIR CLEANER OFF, AIR CONDITIONING OFF, AND AIR LEVELING COMPRESSOR DISCONNECTED WITH THE VACUUM LINE PLUGGED, IF SO EQUIPPED, MAKE ENGINE ADJUSTMENTS AS FOLLOWS: | |  | |
| 1. DISCONNECT AND PLUG VACUUM LINE TO PARKING BRAKE RELEASE TO PREVENT AUTOMATIC RELEASE OF PARKING BRAKE WHEN SHIFTING TRANSMISSION IN STEPS 4 AND 5. 2. SET PARKING BRAKE AND BLOCK WHEELS. 3. DISCONNECT AND PLUG DISTRIBUTOR VACUUM LINE. 4. PLACE TRANSMISSION IN "PARK" AND SET TIMING AT SPECIFIED R.P.M. 5. RECONNECT DISTRIBUTOR VACUUM LINE. PLACE TRANSMISSION IN "DRIVE" AND ADJUST THROTTLE BODY SCREW TO SPECIFIED R.P.M. NOTE: DO NOT DEPRESS SERVICE BRAKE PEDAL WHILE SETTING IDLE SPEEDS. 6. RECONNECT AIR LEVELING COMPRESSOR AND PARKING BRAKE RELEASE LINES. | |  | |
| SEE SERVICE MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION. THIS VEHICLE CONFORMS TO U S E P A . AND WHERE APPLICABLE CALIFORNIA, REGULATIONS APPLICABLE TO 1977 MODEL YEAR NEW MOTOR VEHICLES | | PART NO. 1613888 | |