

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-16-16  
Relating to Certification of New Motor Vehicles

TOYO KOGYO CO., LTD.

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102, and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-3;

IT IS ORDERED AND RESOLVED: That Toyo Kogyo Co., Ltd. exhaust emission control systems for 1977 model-year passenger cars are certified for the engine family described below:

Engine Family: CNAP  
Engine: 96.8 CID  
Transmission: 4 and 5-Speed Manual, 3-Speed Automatic  
Exhaust Emission Control Systems: Air Injection, Exhaust Gas Recirculation, Oxidation Catalyst

Models: Mazda 808  
Sedan  
Coupe  
Station Wagon

The following are the recommended values to be listed on the window decal required by California Assembly-Line Test Procedures for 1977 model vehicles:

<u>Engine Family</u>	<u>Hydrocarbons Grams per Mile</u>	<u>Carbon Monoxide Grams per Mile</u>	<u>Nitrogen Oxides Grams per Mile</u>
CNAP	.24	4.0	1.1


BE IT FURTHER RESOLVED: That this certification is contingent upon Toyo Kogyo Co., Ltd. affixing a permanent catalyst overheat warning label on the driver's sun-visor of all catalyst-equipped vehicles. This label must be approved by the Executive Officer.

BE IT FURTHER RESOLVED: That this certification is also contingent upon Toyo Kogyo Co., Ltd. listing in the owner's manual the operating cautions associated with a catalyst-equipped vehicle. This listing must be approved by the Executive Officer.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Department of Motor Vehicles, the California Highway Patrol, and the Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California, this 26 day of October, 1976.



G. C. Hass, Chief  
Division of Vehicle Emissions Control

Manufacturer     Toyo Kogyo     Executive Order No.     A-16-16     Page     1      
 Engine Family     CNAP     Engine (CID)     96.8     Engine Code               
 Emission Control System     AI+EGR+OC     +10%(A/C) Yes  No

Vehicle Models (If Coded see attachment)	Trans	Inertia Weight	Distributor Type 1-2V Mfgr. Part Number	Fuel System Type 1-2V Mfgr. Part Number	EGR System Part No. Service*	Tune-Up Specification (1) Basic Timing (2) Idle Mixture (3) Idle Speed
Mazda 808 Sedan Coupe St. Wagon	M-4 M-5 A-3	2500	Mitsubishi T3T06073 for manual T3T06075 for automatic	Nippon Carburetor 215282-83	3725	See label 3936 (attached )  See Page 2  1) $8^{\circ} \pm 1^{\circ}$ BTDC at Idle Speed  2) $1.5 \pm 0.5\%$  (Without Air Injection)  3) $800 \begin{matrix} +50 \\ -0 \end{matrix}$ In Neutral for Manual  $650 \begin{matrix} +50 \\ -0 \end{matrix}$ in "D" Range for Automatic

Comments

Date of Issue

**Abbreviations**

Distributor

C-Centrifugal Advance  
 V-Vacuum Advance  
 VR-Vacuum Retard  
 HEI-High Energy Ignition  
 EI-Electronic Ignition  
Fuel System  
 EFI, FI  
 nV-nVenturi Carburetor  
 VV-Variable Venturi

Exhaust Emission Control System

AI-Air Injection  
 CAI-Catalyst Air Injection  
 EFI-Electronic Fuel Injection  
 EGR-Exhaust Gas Recirculation  
 EM-Engine Modification  
 EFE-Early Fuel Evaporation  
 ESAC-Electronic Spark Advance  
         Control  
 FI-Fuel Injection

OC-Oxidation Catalyst  
 PAI-Pulse Air Injection  
 RC-Reduction Catalyst  
 TR-Thermal Reactor  
 TWC-Three Way Catalyst  
 λ-Air Fuel Ratio Sensor  
 \*Service  
 I-Inspect, repair/replace  
     as needed  
 R-Replace

VEHICLE EMISSION CONTROL INFORMATION

(3936)

MODEL : MAZDA 808 (1600)  
ENGINE DISPLACEMENT: 96.8 CU.IN.  
ENGINE FAMILY : CNAP  
EXHAUST EMISSION CONTROL TYPE : AI, CAT, EGR  
ENGINE TUNE UP SPECIFICATIONS AND ADJUSTMENTS :

- A. IDLE SPEED :  $800 \begin{smallmatrix} +50 \\ -0 \end{smallmatrix}$  RPM (NEUTRAL) FOR MANUAL TRANSMISSION  
                  :  $650 \begin{smallmatrix} +50 \\ -0 \end{smallmatrix}$  RPM (D RANGE) FOR AUTOMATIC TRANSMISSION
  - B. IGNITION TIMING :  $8 \pm 1$ ° BTDC AT ABOVE IDLE SPEED  
(WITH DIST. VACUUM LINE CONNECTED)
  - C. IDLE SPEED SETTING PROCEDURE :  
AFTER THE ENGINE IS ENOUGH WARMED UP, ADJUST THE IDLE SPEED TO SPECIFIED VALUE BY THE THROTTLE ADJUST SCREW.
  - D. IDLE AIR-FUEL MIXTURE SETTING PROCEDURE AND VALUE :  
IDLE MIXTURE : CO CONCENTRATION  $1.5 \pm 0.5$  %  
(WITHOUT AIR INJECTION)
    1. AFTER ADJUSTING THE IDLE SPEED ACCORDING TO THE ABOVE PROCEDURE, DISCONNECT AIR HOSE BETWEEN AIR PUMP AND CHECK VALVE, AND PLUG THE PORT OF CHECK VALVE.
    2. ADJUST CO CONCENTRATION TO  $1.5 \pm 0.5$  % BY USING MIXTURE ADJUST SCREW
    3. RECONNECT THE AIR HOSE.
    4. IF THE IDLE SPEED SHIFTS FROM THE SPECIFIED RPM AS THE RESULT OF THE ABOVE, REPEAT THE PROCEDURE 1 TO 3.
- NOTE(C & D): ALL ACCESSORIES SHOULD BE OFF.
- E. FAST IDLE SPEED : 2500~3500 RPM (UNDER WARM ENGINE CONDITION)
  - F. VALVE LASH (UNDER WARM ENGINE CONDITION)  
INTAKE & EXHAUST VALVE SIDE: 0.012 IN., CAM SIDE: 0.009 IN.
  - G. THROTTLE OPENER SYSTEM :  
SERVO DIAPHRAGM : THROTTLE VALVE OPENING  $1400 \pm 100$  RPM AT IDLE  
(WITHOUT VACUUM ADVANCE)  
VACUUM CONTROL VALVE : OPERATING DEPRESSION  $22.4 \pm 0.4$  IN.HG.
  - H. DASH POT (FOR MANUAL TRANSMISSION ONLY)  
ENGINE RPM AT THE MOMENT OF THROTTLE LEVER TOUCHING THE DASH POT LEVER IS  $2000 \pm 100$  RPM

FOR DETAILED MAINTENANCE INFORMATION, PLEASE REFER TO THE OWNER'S MANUAL AND SERVICE BOOK.


THE STATEMENT :

THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 1977 MODEL YEAR NEW MOTOR VEHICLES. THIS VEHICLE ALSO CONFORMS TO CALIFORNIA REGULATIONS APPLICABLE TO 1977 MODEL YEAR NEW MOTOR VEHICLES.

THIS VEHICLE IS CERTIFIED AS HAVING DEMONSTRATED CONFORMANCE WITH FEDERAL AND CALIFORNIA EMISSION STANDARDS ONLY AT ELEVATIONS EQUAL TO OR LOWER THAN 1219 METERS. (4000 FEET)

CATALYST IDENTIFICATION : CATALYST  
MAZDA Toyo Kogyo Co., Ltd.

3.9'

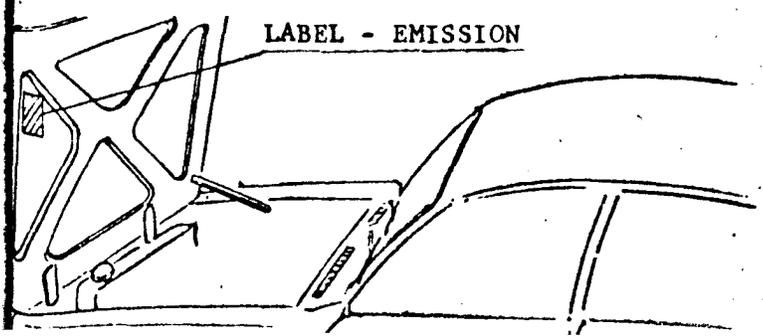

BASE COLOR - WHITE  
LETTERING FRAME } - BLACK  
& UNDERLINE

Issue Date: Aug. 12 1976		
Rev.No.	CNAPI-2	
Date	8-31-76	
PAGE IS <input type="checkbox"/> SATISFACTORY <input type="checkbox"/> UNSATISFACTORY		