

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-10-680
Relating to Certification of New Motor Vehicles

FORD MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1997 model-year Ford Motor Company exhaust emission control systems are certified as described below for passenger cars:

Emission Standard Category: Low-Emission Vehicle (LEV)

Fuel Type: Gasoline

Engine Family: VFM3.0V8G3EK Displacement: 3.0 Liters (182 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

- Dual Three Way Catalytic Converters
- Dual Heated Oxygen Sensors (two)
- Exhaust Gas Recirculation
- Secondary Air Injection
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The LEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gases</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.075	3.4	0.2	0.015	10.0
100,000	0.090	4.2	0.3	0.018	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.94

The certification exhaust emission values set forth for non-methane organic gases (NMOG) reflect application of a 0.94 RAF for 1997 model-year LEVs. The LEV certification exhaust emission values for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gases</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.059	0.9	0.1	0.0004	4.4
100,000	0.073	1.2	0.2	0.0004	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).


BE IT FURTHER RESOLVED: That the manufacturer is certifying the listed vehicle models with a partially complying on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(6.2) ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty vehicles and Engines").

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations,

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 10^d day of September 1996.

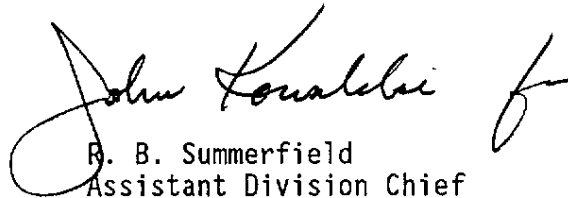

B. B. Summerfield
Assistant Division Chief
Mobile Source Division

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

Manufacturer: FORD MOTOR COMPANY Eng. Family: VFM3.0V8G3EK
 Pass Car: X (PC) Light-Duty Truck: (T1/T2) Med-Duty Vehicle: (M1/M2/M3/M4/M5)

Standards Type: LEV (Tier 0/1, AB965, TLEV, LEV, ULEV) Vehicle Type: FFV (FFV, HEV (type A/B/C))

Fuel Type: PHASE II Evaporative Family: VFM1120AYMEB

Engine Config: V-6 Liter (CID): 3.0L (182)

Engine: Front X Mid Rear Drive: FWD X RWD 4WD-FT 4WD-PT

Exhaust ECS & Special Features: (incl. CARB, MFI) TWC, HO2S, AIR, EGR, SFI
 (Use abbreviations per SAE J1930 May91)

Engine Code (Cert Std.)	Vehicle Models (if coded see attachment)	Trans. Type A-Automatic M-Manual	ETW	DPA	Ignition (ECM/PCM) Part No. -12A650-	EGR System Part No. -9D475	Catalyst Part No. -5F250
710RR05A	TAURUS SEDAN	A	3625	5.9	F7DF-XB	F7DE-BA F7DE-AA	F7DC-CB
	TAURUS S/W	A	3875	7.0*			
	SABLE SEDAN	A	3625	6.4			
	SABLE S/W	A	3875	7.0*			
710RR10A	TAURUS SEDAN	A	3625	5.9	F7DF-XC	F7DE-BA F7DE-AA	F7DC-CB
	TAURUS S/W	A	3875	7.0*			
	SABLE SEDAN	A	3625	6.4			
	SABLE S/W	A	3875	7.0*			
710RR11A	TAURUS SEDAN	A	3625	5.9	F7DF-XD	F7DE-BA F7DE-AA	F7DC-CB
	TAURUS S/W	A	3875	7.0*			
	SABLE SEDAN	A	3625	6.4			
	SABLE S/W	A	3875	7.0*			

* 7.2 WITH 31/31 PSI TIRE PRESSURE.