

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-10-718-B  
Relating to Certification of New Motor Vehicles

FORD MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That Ford Motor Company 1997 model-year exhaust emission control systems are certified as described below for medium-duty vehicles:

Fuel Type: Gasoline

Engine Family: VFM4.2J8G1EK Displacement: 4.2 Liters (255 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

- Dual Three Way Catalytic Converters (two)
- Dual Heated Oxygen Sensors (two)
- Exhaust Gas Recirculation
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The certification exhaust emission standards (in-use compliance standards in parentheses) for this engine family in grams per mile are:

| <u>Test Weight</u><br><u>(lbs.)</u> | <u>Miles</u> | <u>Non-Methane</u><br><u>Hydrocarbons</u> | <u>Carbon</u><br><u>Monoxide</u> | <u>Nitrogen</u><br><u>Oxides</u> | <u>Carbon</u><br><u>Monoxide (20°F)</u> |
|-------------------------------------|--------------|---|----------------------------------|----------------------------------|---|
| 5751-8500                           | 50,000       | 0.39 (0.49)                               | 5.0 (6.2)                        | 1.1 (1.4)                        | 12.5 (12.5)                             |
|                                     | 120,000      | 0.56 (n/a)                                | 7.3 (n/a)                        | 1.53 (n/a)                       | n/a                                     |

The certification exhaust emission values for this engine family in grams per mile are:

| <u>Test Weight</u><br><u>(lbs.)</u> | <u>Miles</u> | <u>Non-Methane</u><br><u>Hydrocarbons</u> | <u>Carbon</u><br><u>Monoxide</u> | <u>Nitrogen</u><br><u>Oxides</u> | <u>Carbon</u><br><u>Monoxide (20°F)</u> |
|-------------------------------------|--------------|---|----------------------------------|----------------------------------|---|
| 5751-8500                           | 50,000       | 0.11                                      | 1.8                              | 0.4                              | 2.8                                     |
|                                     | 120,000      | 0.12                                      | 3.1                              | 0.74                             | n/a                                     |

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That based on a compliance plan submitted by the vehicle manufacturer, the listed vehicle models are permitted alternative in-use compliance as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the submitted alternative in-use compliance plan satisfies the requirement that a maximum of 50 percent of the manufacturer's projected sales of 1997 model-year California-certified medium-duty vehicles will be subject to alternative in-use compliance as stipulated in the above-referenced standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the 50,000-mile evaporative emission standards applicable to 1980 through 1994 model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles", and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That, based on the evaporative emission phase-in compliance schedule submitted by the vehicle manufacturer, the listed vehicle models shall not be subject to the running loss and useful life standards set forth in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).


BE IT FURTHER RESOLVED: That the manufacturer is certifying the listed vehicle models with a partially complying on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(6.2) ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty vehicles and Engines").

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executive Order A-10-718 dated July 16, 1996 is superseded and replaced by Executive Order A-10-718-B.

Executed at El Monte, California this 21<sup>st</sup> day of October 1996.

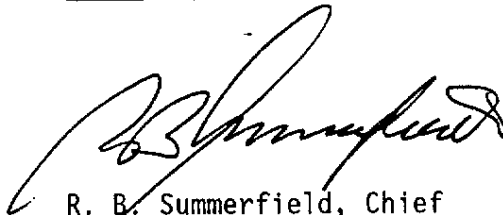

R. B. Summerfield, Chief  
Mobile Source Operations Division

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
EXHAUST/EVAPORATIVE SYSTEM & CALIFORNIA REQUIREMENTS  
PASSENGER CARS, LIGHT-DUTY AND MEDIUM-DUTY TRUCKS

Mfgr. FORD MOTOR COMPANY Exhaust Engine Family: VFM4.2J8G1EK  
 Engine Code Types: CA X 49S\_\_\_ 50S\_\_\_ Evap Emissions Family: VFM1155AYMBE  
 Exh Std: Tier-0\_\_\_ Tier-1 X TLEV\_\_\_ LEV\_\_\_ ULEV\_\_\_ ZEV\_\_\_ EPA TIER-0\_\_\_ TIER-1\_\_\_  
 Evap Std: 50K X Useful Life with R/L\_\_\_ In-Use Exh Std: Full In Use\_\_\_ Alt In Use X  
 Veh Class(es): PC\_\_\_ LDT1\_\_\_ LDT2\_\_\_ MDV1\_\_\_ MDV2\_\_\_ MDV3 X MDV4\_\_\_ MDV5\_\_\_  
 Service Accum: Mod AMA  
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1,MDV1,MDV2,MDV3,MDV4)  
 Exh Cert Fuel(s): Indo X Ph2\_\_\_ Diesel: 13 CCR 2282\_\_\_ or 40CFR 86.113-90\_\_\_ or -94\_\_\_  
 M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_  
 Fuel Type(s): Dedicated\_\_\_ Flex Fuel\_\_\_ Dual-Fuel\_\_\_  
 Gasoline X Diesel\_\_\_ M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_  
 Hybrid: Type A\_\_\_ B\_\_\_ C\_\_\_, APU Cycle (eg., Otto, Diesel, Turbine)\_\_\_  
 Engine Config V-6 Displacement: 4.2L(255) Liters (Cubic Inches)  
 Valves/Cyl: 2 Rated HP: 205 @ 4400 RPM  
 Engine: Front X Mid\_\_\_ Rear\_\_\_ Drive: Fwd\_\_\_ RWD X 4WD-FT\_\_\_ 4WD-PT\_\_\_  
 Exhaust Control System and Special Features 2TWC(2)/2HO2S(2)/EGR/SFI  
 (Use abbreviations per SAE J1930 SEP91)

| Engine Code<br>(also list<br>CA/49ST/50ST) | Vehicle Models<br>(if coded see<br>attachment) | Trans. Type<br>A-Automatic<br>M-Manual | ETW<br>or<br>Test Wt | DPA<br>or<br>RLHP | Ignition<br>(ECM/PCM)<br>Part No. | EGR<br>System<br>Part No. | Catalytic<br>Converter<br>Part No. |
|--|--|--|----------------------|-------------------|-----------------------------------|---------------------------|------------------------------------|
| 744LR00A/N                                 | E-250<br>STRIP<br>STRIP                        | "                                      | 7000<br>7000         | 26.5<br>27.9*     | F7UC-GA                           | "                         | F7UA-JA &<br>F7UA-DA               |

\* WITH AIR CONDITIONING

ENGINE FAMILY: VFM4.2J8G1EK  
ISSUED:  
REVISED: OCT 03 1996

20.09.17.02 - 3

R/C 129

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
 EXHAUST/EVAPORATIVE SYSTEM & CALIFORNIA REQUIREMENTS  
 PASSENGER CARS, LIGHT-DUTY AND MEDIUM-DUTY TRUCKS

Mfgr. FORD MOTOR COMPANY Exhaust Engine Family: VFM4.2J8G1EK  
 Engine Code Types: CA X 49S\_\_\_ 50S\_\_\_ Evap Emissions Family: VFM1155AYMBB  
 Exh Std: Tier-0\_\_\_ Tier-1 X TLEV\_\_\_ LEV\_\_\_ ULEV\_\_\_ ZEV\_\_\_ EPA TIER-0\_\_\_ TIER-1\_\_\_  
 Evap Std: 50K X Useful Life with R/L\_\_\_ In-Use Exh Std: Full In Use\_\_\_ Alt In Use X  
 Veh Class(es): PC\_\_\_ LDT1\_\_\_ LDT2\_\_\_ MDV1\_\_\_ MDV2\_\_\_ MDV3 X MDV4\_\_\_ MDV5\_\_\_  
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1,MDV1,MDV2,MDV3,MDV4)  
 Exh Cert Fuel(s): Indo X Ph2\_\_\_ Diesel: 13 CCR 2282\_\_\_ or 40CFR 86.113-90\_\_\_ or -94\_\_\_  
 M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)  
 Fuel Type(s): Dedicated\_\_\_ Flex Fuel\_\_\_ Dual-Fuel\_\_\_  
 Gasoline X Diesel\_\_\_ M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_\_\_  
 Hybrid: Type A\_\_\_ B\_\_\_ C\_\_\_, APU Cycle (eg., Otto, Diesel, Turbine)\_\_\_\_\_  
 Engine Config V-6 Displacement: 4.2L(255) Liters (Cubic Inches)  
 Valves/Cyl: 2 Rated HP: 205 @ 4400 RPM  
 Engine: Front X Mid\_\_\_ Rear\_\_\_ Drive: Fwd\_\_\_ RWD X 4WD-FT\_\_\_ 4WD-PT\_\_\_  
 Exhaust Control System and Special Features 2TWC(2)/2HO2S(2)/EGR/SFI  
 (Use abbreviations per SAE J1930 SEP91)

| Engine Code<br>(also list<br>CA/49ST/50ST | Vehicle Models<br>(if coded see<br>attachment) | Trans. Type<br>A-Automatic<br>M-Manual | ETW<br>or<br>Test Wt | DPA<br>or<br>RLHP | Ignition<br>(ECM/PCM)<br>Part No. | EGR<br>System<br>Part No. | Catalytic<br>Converter<br>Part No. |
|---|--|--|----------------------|-------------------|-----------------------------------|---------------------------|------------------------------------|
| 744LR06A/N                                | E-250<br>STRIP<br>STRIP                        | "                                      | 7000<br>7000         | 26.5<br>27.9*     | F7UC-GC                           | "                         | F7UA-JA &<br>F7UA-DA               |

\* WITH AIR CONDITIONING

ENGINE FAMILY: VFM4.2J8G1EK  
 ISSUED:  
 REVISED: OCT 03 1996

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
 EXHAUST/EVAPORATIVE SYSTEM & CALIFORNIA REQUIREMENTS  
 PASSENGER CARS, LIGHT-DUTY AND MEDIUM-DUTY TRUCKS

Mfgr. FORD MOTOR COMPANY Exhaust Engine Family: VFM4.2J8G1EK  
 Engine Code Types: CA X 49S\_\_\_ 50S\_\_\_ Evap Emissions Family: VFM1155AYMBB  
 Exh Std: Tier-0\_\_\_ Tier-1 X TLEV\_\_\_ LEV\_\_\_ ULEV\_\_\_ ZEV\_\_\_ EPA TIER-0\_\_\_ TIER-1\_\_\_  
 Evap Std: 50K X Useful Life with R/L\_\_\_ In-Use Exh Std: Full In Use. Alt In Use X  
 Veh Class(es): PC\_\_\_ LDT1\_\_\_ LDT2\_\_\_ MDV1\_\_\_ MDV2\_\_\_ MDV3 X MDV4\_\_\_ MDV5\_\_\_  
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1,MDV1,MDV2,MDV3,MDV4)  
 Exh Cert Fuel(s): Indo X Ph2\_\_\_ Diesel: 13 CCR 2282\_\_\_ or 40CFR 86.113-90\_\_\_ or -94\_\_\_  
 M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_  
 Fuel Type(s): Dedicated\_\_\_ Flex Fuel\_\_\_ Dual-Fuel\_\_\_  
 Gasoline X Diesel\_\_\_ M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_  
 Hybrid: Type A\_\_\_ B\_\_\_ C\_\_\_, APU Cycle (eg., Otto, Diesel, Turbine)\_\_\_  
 Engine Config V-6 Displacement: 4.2L(255) Liters (Cubic Inches)  
 Valves/Cyl: 2 Rated HP: 205 @ 4400 RPM  
 Engine: Front X Mid\_\_\_ Rear\_\_\_ Drive: Fwd\_\_\_ RWD X 4WD-FT\_\_\_ 4WD-PT\_\_\_  
 Exhaust Control System and Special Features TWC, HO2S, EGR, SFI  
 (Use abbreviations per SAE J1930 SEP91)

| Engine Code<br>(also list<br>CA/49ST/50ST | Vehicle Models<br>(if coded see<br>attachment) | Trans. Type<br>A-Automatic<br>M-Manual | ETW<br>or<br>Test Wt | DPA<br>or<br>RLHP | Ignition<br>(ECM/PCM)<br>Part No. | EGR<br>System<br>Part No. | Catalytic<br>Converter<br>Part No. |
|---|--|--|----------------------|-------------------|-----------------------------------|---------------------------|------------------------------------|
| 744LR10A/N                                | E-250<br>STRIP<br>STRIP                        | A                                      | 7000<br>7000         | 26.5<br>27.9*     | F7UC-GD                           | "                         | F7UA-JA &<br>F7UA-DA               |

\* WITH AIR CONDITIONING

ENGINE FAMILY: VFM4.2J8G1EK  
 ISSUED:  
 REVISED: **JAN 24 1997**

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
 EXHAUST/EVAPORATIVE SYSTEM & CALIFORNIA REQUIREMENTS  
 PASSENGER CARS, LIGHT-DUTY AND MEDIUM-DUTY TRUCKS

Mfgr. FORD MOTOR COMPANY Exhaust Engine Family: VFM4.2J8G1EK  
 Engine Code Types: CA X 49S\_\_\_ 50S\_\_\_ Evap Emissions Family: VFM1155AYMBB  
 Exh Std: Tier-0\_\_\_ Tier-1 X TLEV\_\_\_ LEV\_\_\_ ULEV\_\_\_ ZEV\_\_\_ EPA TIER-0\_\_\_ TIER-1\_\_\_  
 Evap Std: 50K X Useful Life with R/L\_\_\_ In-Use Exh Std: Full In Use \_\_\_ Alt In Use X  
 Veh Class(es): PC\_\_\_ LDT1\_\_\_ LDT2\_\_\_ MDV1\_\_\_ MDV2\_\_\_ MDV3 X MDV4\_\_\_ MDV5\_\_\_  
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1,MDV1,MDV2,MDV3,MDV4)  
 Exh Cert Fuel(s): Indo X Ph2\_\_\_ Diesel: 13 CCR 2282\_\_\_ or 40CFR 86.113-90\_\_\_ or -94\_\_\_  
 M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_  
 Fuel Type(s): Dedicated\_\_\_ Flex Fuel\_\_\_ Dual-Fuel\_\_\_  
 Gasoline X Diesel\_\_\_ M85\_\_\_ CNG\_\_\_ LPG\_\_\_ Other (specify)\_\_\_  
 Hybrid: Type A\_\_\_ B\_\_\_ C\_\_\_, APU Cycle (eg., Otto, Diesel, Turbine)\_\_\_  
 Engine Config V-6 Displacement: 4.2L(255) Liters (Cubic Inches)  
 Valves/Cyl: 2 Rated HP: 205 @ 4400 RPM  
 Engine: Front X Mid\_\_\_ Rear\_\_\_ Drive: Fwd\_\_\_ RWD X 4WD-FT\_\_\_ 4WD-PT\_\_\_  
 Exhaust Control System and Special Features 2TWC(2)HO2S(2)EGR,SFL  
 (Use abbreviations per SAE J1930 SEP91)

| Engine Code<br>(also list<br>CA/49ST/50ST | Vehicle Models<br>(if coded see<br>attachment) | Trans. Type<br>A-Automatic<br>M-Manual | ETW<br>or<br>Test Wt | DPA<br>or<br>RLHP | Ignition<br>(ECM/PCM)<br>Part No. | EGR<br>System<br>Part No. | Catalytic<br>Converter<br>Part No. |
|---|--|--|----------------------|-------------------|-----------------------------------|---------------------------|------------------------------------|
| 744MR00N                                  | E-250<br>SVL                                   | A                                      | 6500                 | 15.5              | F7UC-LA                           | "                         | F7UA-JA &<br>F7UA-DA               |
| 744MR06N                                  | E-250<br>SVL                                   | "                                      | 6500                 | 15.5              | F7UC-LC                           | "                         | "                                  |
| 744MR10N                                  | E-250<br>SVL                                   | "                                      | 6500                 | 15.5              | F7UC-LD                           | "                         | "                                  |

\* WITH AIR CONDITIONING

ENGINE FAMILY: VFM4.2J8G1EK  
 ISSUED:  
 REVISED: JAN 20 1997

20.09.17.02 - 7