

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-3-179
Relating to Certification of New Motor Vehicles

DAIMLER-BENZ AG

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1999 model-year Daimler-Benz AG exhaust emission control systems are certified as described below for passenger cars:

Emission Standard Category: Transitional Low-Emission Vehicle (TLEV)

Fuel Type: Gasoline

Engine Family: XMBXV05.0GND Displacement: 4.2 Liters (256 Cubic Inches)
5.0 Liters (303 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

- Dual Three Way Catalytic Converters
- Dual Warm Up Three Way Catalytic Converters
- Dual Heated Oxygen Sensors (two)
- Secondary Air Injection
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The TLEV certification exhaust emission standards for this engine family in grams per mile are:

| <u>Miles</u> | <u>Non-Methane Organic Gases</u> | <u>Carbon Monoxide</u> | <u>Nitrogen Oxides</u> | <u>Formaldehyde</u> | <u>Carbon Monoxide (20°F)</u> |
|--------------|----------------------------------|------------------------|------------------------|---------------------|-------------------------------|
| 50,000 | 0.125 | 3.4 | 0.4 | 0.015 | 10.0 |
| 100,000 | 0.156 | 4.2 | 0.6 | 0.018 | n/a |

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.98

The certification exhaust emission values set forth for non-methane organic gases (NMOG) reflect application of a 0.98 RAF for 1999 model-year TLEVs. The TLEV certification exhaust emission values for this engine family in grams per mile are:

| <u>Miles</u> | <u>Non-Methane Organic Gases</u> | <u>Carbon Monoxide</u> | <u>Nitrogen Oxides</u> | <u>Formaldehyde</u> | <u>Carbon Monoxide (20°F)</u> |
|--------------|--------------------------------------|----------------------------|----------------------------|---------------------|-----------------------------------|
| 50,000 | 0.052 | 0.5 | 0.2 | 0.001 | 3.8 |
| 100,000 | 0.057 | 0.8 | 0.2 | 0.002 | n/a |

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

E IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

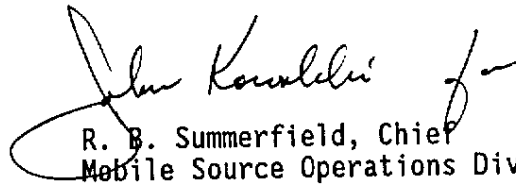
BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 25th day of February 1998.


R. B. Summerfield, Chief
Mobile Source Operations Division

**1999 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES**

Manufacturer: Daimler-Benz Exh. Eng Family: XMBXV05.0GND Evap. Family: XMBXE0155NYZ
 All Eng Codes in Eng Fam: CA 49S 50S X AB965 ORVR Yes No X
 Exh Std: CA Tier-1 TLEV X LEV ULEV SULEV US EPA Tier-1 X
 Veh Class(es): PC X LDT1 LDT2 MDV1 MDV2 MDV3 MDV4 MDV5
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)
 Fuel Type(s): Dedicated ✓ Flex-Fuel Dual-Fuel Bi-Fuel Gasoline X Diesel
 CNG LNG LPG M85 Other (specify)
 Exh. Emiss Test Fuel(s): Indo CBG X CNG LPG M85 Other (specify)
 Diesel: 13 CCR 2282 40 CFR 86.113-90 40 CFR 86.113-94
 Evaporative Emission Test Procedure: California Federal X
 Service Accum: Std AMA Mod AMA X Mfr ADP Other (specify)
 NMOG Test Procedure: N/A Std X Equip R/L Test Proc. SHED X Pt Source

 Engine Configuration: V-8 Displacement: 4.2 / 5.0 Liters 256 / 303 Cubic Inches
 Valves per Cylinder: 4 Rated HP: 275 / 315 5700 / 5600 RPM
 Engine: Front X Mid Rear Drive: FWD RWD X 4WD-FT 4WD-PT
 Exhaust ECS (eg., MFI, EGR, TC, CAC): SFI / AIR / 2 HO2S(2) / 2 WU-TWC / 2 TWC
 (use abbreviations per SAE J1930 JUN93)

| Engine Code (also list CA/49ST/50ST) | Vehicle Models (if coded see attachment) | Trans. Type (A 4, M 5 etc) | ETW or Test Wt | DPA or RLHP | Ignition (ECM/PCM) Part No. | EGR System Part No. | Catalytic Converter Part No. |
|--|--|----------------------------------|----------------------|-------------------|-----------------------------------|---------------------------|---|
| M 119-42-2 | S 420 | L 5 | 5 000 | 8.9 | A 021 545 23 32 | --- | A 140 490 38 36 (underhood) A 140 490 34 36 (underfloor) |
| M 119-50-2 | S 500 | L 5 | 5 000 | 8.9 | A 021 545 24 32 | --- | A 140 490 38 36 (underhood) A 140 490 34 36 (underfloor) |
| M 119-50-2 | CL 500 | L 5 | 5 000 | 7.8 | A 021 545 24 32 | --- | A 140 490 38 36 (underhood) A 140 490 34 36 (underfloor) |

Date Issued:

zonV50gnd2.pm5-b6

Revisions: