

File

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-10-850
Relating to Certification of New Motor Vehicles

FORD MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1999 model-year Ford Motor Company exhaust emission control systems are certified as described below for medium-duty vehicles:

Emission Standard Category: Low-Emission Vehicle (LEV)

Fuel Type (Certification Fuel): Gasoline (Indolene)

Engine Family: XFMXA05.4JGN Displacement: 5.4 Liters (326 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

- Dual Three Way Catalytic Converters (two)
- Dual Heated Oxygen Sensors (two)
- Exhaust Gas Recirculation
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The non-methane organic gas (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) LEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Test Weight</u> <u>(lbs.)</u>	<u>Miles</u>	<u>NMOG</u>	<u>CO</u>	<u>NOx</u>	<u>HCHO</u>	<u>CO (20°F)</u>
5751-8500	50,000	0.195	5.0	0.6	0.022	12.5
	120,000	0.280	7.3	0.9	0.032	n/a

The LEV certification exhaust emission values for this engine family in grams per mile are:

<u>Test Weight</u> <u>(lbs.)</u>	<u>Miles</u>	<u>NMOG</u>	<u>CO</u>	<u>NOx</u>	<u>HCHO</u>	<u>CO (20°F)</u>
5751-8500	50,000	0.109	0.9	0.2	0.001	4.1
	120,000	0.142	1.2	0.2	0.001	n/a

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the medium-duty vehicle phase-in requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles" (Title 13, California Code of Regulations, Section 1960.1(h)(2)).

BE IT FURTHER RESOLVED: That under the submitted medium-duty vehicle phase-in compliance plan, if the manufacturer incurs "Vehicle Equivalent Debits" for the aforementioned model year due to the manufacturer's failure to produce and deliver for sale in California the equivalent quantity of medium-duty vehicles certified to low-emission vehicle and/or ultra-low-emission vehicle exhaust emission standards required by the above-referenced standards and test procedures, all "Vehicle Equivalent Debits" incurred by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

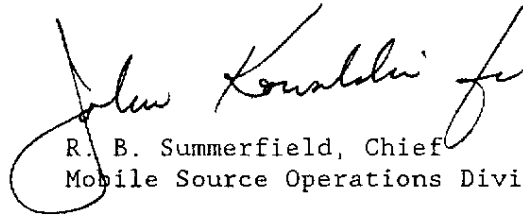
BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 20th day of August 1998.


R. B. Summerfield, Chief
Mobile Source Operations Division

1999 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer Ford Motor Company Exh. Eng. Fam.: XFMXA05.4JGN Evap. Fam.: XFMXE0155BBG
 Engine Code Types: CA XXX 49S 50S ORVR: Yes No XXX
 Exhaust Std: CA Tier-1 TLEV LEV XXX ULEV ZEV U.S. EPA TIER-1
 Vehicle Class(es): PC LDT1 LDT2 MDV1 MDV2 MDV3 XXX MDV4 MDV5
 Single Cert Std for Multi-Class Eng Fam: (specify: N/A,LDT1,MDV1,MDV2,MDV3,MDV4)
 Exhaust Emiss. Test Fuel: Indolene Clear XXX CBG Fuel Type: Gasoline XXX
 Evaporative Emission Test Procedure: California Federal XXX
 Service Accumulation: Std AMA Mod AMA Mfr ADP XXX Other
 NMOG Test Procedure: N/A Std XXX Equiv R/L Test Procedure: SHED Pt.Source XXX
 Engine Configuration V-8 Displacement: 5.4 L 326 Cubic Inches
 Valves/Cyl: 04 Rated HP: 300 @ 5000 RPM
 Engine: Front XXX Mid Rear Drive: Fwd RWD XXX 4WD-FT X 4WD-PT

Exhaust Control System and Special Features EGR/SFI/2TWC(2)/2HO2S(2)
 (Use abbreviations per SAE J1930 SEP91)

EngineCode (California)	Vehicle Models	Trans.		Ignition Part No {PCM}	EGR System Part No	Catalytic Converter Part No
		A-Auto	M-Man			
9WXABAAA		A4		XL1F-HA	F75E-CA	(LH)XL34-5E214-GB (RH)XL34-5G218-GC
	Navigator 4x2		6000	14.3		
	Navigator 4x4		6500	16.4 (with P245 tires) 16.1 (with P255 tires)		(LH)XL34-53214-HB (RH)XL34-5G218-HC