

Pelt

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-6-923  
Relating to Certification of New Motor Vehicles

GENERAL MOTORS CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following exhaust and evaporative emission control systems produced by the manufacturer are certified as described below:

Model Year: 2000

Vehicle Type: 5751-8500 Pound Test Weight Medium-Duty Vehicle

Exhaust Emission Standard Category: Low-Emission Vehicle (LEV)

Fuel Type: Gasoline

Test Group: YGMXA05.7185

Engine Displacement: 5.7 Liters

Evaporative Family (Evap) 1: YGMXE0111908  
2: YGMXE0111911  
3: YGMXE0133913

Special Features and Exhaust Emission Control Systems (ECS):

Sequential Multiport Fuel Injection  
Dual Three Way Catalytic Converters  
Secondary Air Injection  
Exhaust Gas Recirculation  
Dual Heated Oxygen Sensors (two)

Models Covered:

Evap 1:

Chevrolet G1500/G2500 Express 2WD, G1500/G2500 Van 2WD; GMC G1500/G2500 Savana 2WD Cargo, G1500/G2500 Savana Passenger

Evap 2:

Chevrolet K1500 Tahoe 4WD; GMC K1500 Yukon 4WD; Cadillac Escalade 4WD

Evap 3:

Chevrolet C1500 Suburban 2WD, K1500 Suburban 4WD; GMC C1500 Suburban 2WD, K1500 Suburban 4WD

The exhaust certification emission levels and standards, in grams per mile, of non-methane organic gases (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) for the listed vehicle models are as follows. The NMOG exhaust certification emission levels include application of the reactivity adjustment factor (RAF) as specified.

The evaporative hydrocarbon (HC) certification emission levels and standards for three-day diurnal plus hot soak (3D) and two-day diurnal plus hot soak (2D) in grams per test, running loss (RL) in grams per mile, and onboard refueling vapor recovery (ORVR) in grams per gallon of fuel dispensed, for the listed vehicle models are as follows.

<u>Type of Emissions</u>	<u>Miles</u>	<u>Certification Level</u>	<u>Certification Standards</u>
<u>EXHAUST @ NMOG RAF = 0.94</u>			
..... NMOG	50,000	0.118	0.195
..... NMOG	120,000	0.143	0.280
..... CO	50,000	2.7	5.0
..... CO	120,000	3.4	7.3
..... NOx	50,000	0.4	0.6
..... NOx	120,000	0.6	0.9
..... NOx (highway)	50,000	0.2	1.2
..... NOx (highway)	120,000	0.3	1.8
..... HCHO	50,000	0.003	0.022
..... HCHO	120,000	0.004	0.032
..... CO (20°F)	50,000	5.5	12.5
..... NMOG (50°F)	4,000	0.195	0.390
..... CO (50°F)	4,000	3.4	5.0
..... NOx (50°F)	4,000	0.2	0.6
..... HCHO (50°F)	4,000	0.002	0.044
<u>EVAPORATIVE</u>			
HC-2D	120,000	Evap 1/2 1.2 / Evap 3 1.1	Evap 2 1.4 / Evap 1 & 3 3.0 / Evap 2 2.5
HC-3D	120,000	1.3 / 0.8	1.3 / 2.5 / 2.0
HC-RL	120,000	0.00 / 0.00	0.00 / 0.05 / 0.05
HC-ORVR	120,000	n/a / n/a	n/a / n/a / n/a

BE IT FURTHER RESOLVED: That the manufacturer has optionally applied for certification of the listed vehicle models in accordance to the test procedures set forth in "California Exhaust Emission Standards and Test Procedures for 2001 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles," as approved by the Air Resources Board on November 5, 1998. Manufacturers choosing this option must comply with all provisions under these test procedures.

BE IT FURTHER RESOLVED: That the listed vehicle models are conditionally certified in accordance to the above-referenced standards and test procedures. This certification is conditional on such standards and test procedures becoming effective by November 1, 1999. If such standards and test procedures do not become effective by November 1, 1999, the manufacturer shall, within 45 days after being notified, submit additional information including data from the second emission-data vehicle, vehicle emission control and smog index label, emission control system warranty statement, etc. to demonstrate compliance with the certification requirements in effect at the time of execution of this Executive Order. Failure to submit the required information within the specified time shall cause the vehicles sold under this Executive Order to be deemed uncertified, and the manufacturer to assume full responsibilities for these vehicles.

BE IT FURTHER RESOLVED: That any "Vehicle Equivalent Debit" in the manufacturer's medium-duty vehicle phase-in compliance plan shall be equalized as required by the standards and test procedures.


BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1).

BE IT FURTHER RESOLVED: That for the listed vehicle models, the manufacturer has attested to compliance with the following California emission regulations and requirements. Vehicles certified under this Executive Order shall conform to all applicable California emission regulations and requirements.

- Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks (Title 13, California Code of Regulations, Section 2235).
- Motor Vehicle Emission Control and Smog Index Label Specifications (Title 13, California Code of Regulations, Section 1965).
- Emission Control System Warranty (Title 13, California Code of Regulations, Sections 2035 et seq.).
- High-Altitude Requirements and California Inspection and Maintenance Emission Standards (California Exhaust Emission Standards and Test Procedures for 2001 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles).

The Bureau of Automotive Repair will be notified by copy of this order.

Executed at El Monte, California this 18<sup>th</sup> day of February 1999.

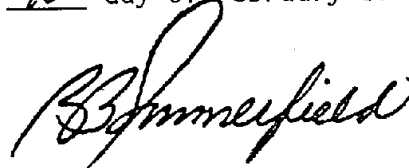

R. B. Summerfield, Chief  
Mobile Source Operations Division