

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-254-62
Relating to Certification of New Motor Vehicles

HYUNDAI MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 2000 model-year Hyundai Motor Company exhaust emission control systems are certified as described below for passenger cars:

Emission Standard Category: Transitional Low-Emission Vehicle (TLEV)

Fuel Type (Certification Fuel): Gasoline (Indolene)

Engine Family: YHYXV02.5G2S Displacement: 2.5 Liters (152.1 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

- Three Way Catalytic Converter
- Dual Heated Oxygen Sensors (two)
- Sequential Multiport Fuel Injection
- Dual Warm Up Three Way Catalytic Converters

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The TLEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gases</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.125	3.4	0.4	0.015	10.0
100,000	0.156	4.2	0.6	0.018	n/a

The TLEV certification exhaust emission values for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gases</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.047	0.6	0.1	0.001	3.9
100,000	0.057	0.8	0.1	0.002	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the "California Refueling Emission Standards and Test Procedures for 1998 and Subsequent Model Motor Vehicles," Title 13, California Code of Regulations, Section 1978, and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).


BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 8th day of September 1999.

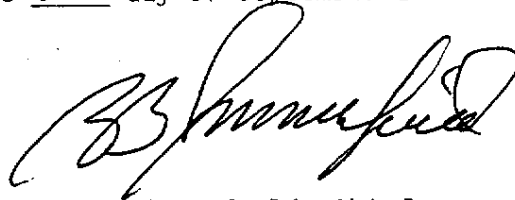

R. B. Summerfield, Chief
Mobile Source Operations Division

2000 MODEL-YEAR AIR RESOURCES SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer : HYUNDAI MOTOR CO. Exh Eng Fam : YHYXV02.5G2S Evap Fam : YHYXR0150PEE
 All Eng Codes in Eng Fam : CA ___ 49S ___ 50S X AB965 ORVR : YES X NO ___
 Exh Std : CA Tier-1 ___ TLEV X LEV ___ ULEV ___ ZEV ___ ; US EPA Tier-1 ___
 Evap Std : 100K X Useful life with R/L X In-Use Exh Std : Full In Use X Alt In Use ___
 Veh Class(es) : PC X LDT1 ___ LDT2 ___ MDV1 ___ MDV2 ___ MDV3 ___ MDV4 ___ MDV5 ___
 Single Cert Std for Multi-Class Eng Fam : N/A (specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)
 Fuel Type(s) : Dedicated X Flex-Fuel ___ Dual-Fuel ___ Bi-Fuel ___ Gasoline X Diesel ___
 CNG ___ LNG ___ LPG ___ M85 ___ Other (specify) ___
 Emiss Test Fuel(s) : Indo X PH2 ___ CNG ___ LPG ___ M85 ___ Other (specify) ___
 Diesel : 13 CCR 2282 ___ 40 CFR 86.113-90 ___ 40 CFR 86.113-94 ___
 Evaporative Emission Test Procedure : California ___ Federal X ___
 Service Accum : Std AMA X Mod AMA ___ Mfr ADV ___ OTHER (SPECIFY) ___
 NMOG Test procedure : N/A ___ Std X Equiv ___ R/L Test Proc : SHED X Pt Source ___
 Hybrid : Type A ___ B ___ C ___ , APU Cycle (e.g., Otto, Diesel, Turbine) ___
 Engine Configuration : V-6 Displacement : 2.5 / ___ Liters 152.1 / ___ Cubic Inches
 Valves Per Cylinder : 4 Rated HP : 163 @ 6,000 RPM
 Engine : Front X Mid ___ Rear ___ Drive : FWD X RWD ___ 4WD-FT ___ 4WD-PT ___
 Exhaust ECS (e.g., MFI EGR., TC, CAC, : 2HO2S(2) + 2WU-TWC + TWC + SEI ___
 (use abbreviations per SAE J1930 JUN 93)

Eng. Code (list CA/ 49ST/50ST)	Veh. Models (If Coded see Attachment)	Trans. Type : L-Auto. M-Man.	Equiv. Test Weight	DPA or RLHP	Ign. Sys. (ECM/PCM) part No.	EGR System Part No.	Catalyst Part No.
ASM5-F /SM5-F (50ST)	SONATA	M5	3500	6.1	39109-37001 39109-37011 39109-37021 39109-37031	N/A	28510-37152(Frt) 28510-37162(Frt) 28950-38750(Rr)
ASL4-E /SL4-E (50ST)		L4	3500	6.6	↑	↑	↑

Issued : 5-15-99
Revised :