

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-6-165
Relating to Certification of New Motor Vehicle Engines

GENERAL MOTORS CORPORATION

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102, and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-3;

IT IS ORDERED AND RESOLVED: That the following General Motors Corporation 1980 model-year gasoline engines are certified for use in motor vehicles with a manufacturer's gross vehicle weight rating greater than 8500 pounds:

<u>Engine Family</u>	<u>Displacement Cubic Inches</u>	<u>Exhaust Emission Control Systems (Special Features)</u>
GM 112	292	Air Injection
GM 113	350, 400	Air Injection
GM 114	366, 427, 454	Air Injection
GM 115	454	Air Injection

Engine Models and Codes as listed on attachments.

Section 43200, Part 5, Division 26 of the California Health and Safety Code requires that the engine manufacturer furnish a decal with each engine sold or delivered to a vehicle manufacturer. The decal shall display the applicable model year heavy-duty engine exhaust emission standards and the following certification emission values:

<u>Engine Family</u>	<u>Hydrocarbons gm/bhp-hr</u>	<u>Carbon Monoxide gm/bhp-hr</u>	<u>Hydrocarbons + Nitrogen Oxides gm/bhp-hr</u>
GM 112	0.1	16	5.6
GM 113	0.5	19	5.5
GM 114	0.3	18	5.6
GM 115	0.5	21	5.4

BE IT FURTHER RESOLVED: That General Motors Corporation has provided to the Executive Officer all material required to demonstrate certification compliance with the Board's emission control system warranty regulations (Title 13, California Administrative Code, Section 2036).

GENERAL MOTORS CORPORATION

EXECUTIVE ORDER A-6-165
(Page 2 of 2)

Engines certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 3rd day of August, 1979.


K. D. Drachand, Acting Chief
Mobile Source Control Division

1980 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

Manufacturer GENERAL MOTORS CORPORATION Executive Order No. A-6-165 Page 1

Engine Family GM 112,113,114,115 Engine (CID) 292, 350/400, 366/427/454, 454

ABBREVIATIONS

Ignition System

CA-Centrifugal Advance
EEC-Electronic Engine Control
EI-Electronic Ignition
ESAC-Electronic Spark Advance
Control
VA-Vacuum Advance
VR-Vacuum Retard

Fuel System

EFI, MFI
nV-nVenturi Carburetor
VV-Variable Venturi

Exhaust Emissions Control System

AI-Air Injection
CL-Closed Loop
EGR-Exhaust Gas Recirculation
EM-Engine Modification
OC-Oxidation Catalyst
PAI-Pulse Air Injection
TR-Thermal Reactor
TWC-Three Way Catalyst

Special Features

CCAV-Combustion
Chamber Air
Valve
EFI-Electronic
Fuel
Injection
MFI-Mechanical
Fuel
Injection
TC-Turbo Charged

1980 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
HEAVY-DUTY GASOLINE ENGINES

Manufacturer GENERAL MOTORS CORPORATION Page 2
Engine Family GM 112 CID-Type 292-L6 Eng. Code _____
ECS(Special Features) AI

Engine Model (Engine Code)	Ignition System EI, CA, VA	Fuel System 1V	EGR Valve	Label Ident.	
	Delco Remy Distrib. Part Number	Rochester Carb. Part Number	Part Number	Part No. Code	Page No.
L25 (3)	1110753	17080309 17080359	None	14015410 XK	6

Date of Issue - 080379. Carb. PN 17080009 deleted, to correct error, on 092479.

1980 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET HEAVY-DUTY GASOLINE ENGINES

Manufacturer GENERAL MOTORS CORPORATIONPage 3Engine Family GM 113CID-Type 350/400 - V8Eng. Code ECS(Special Features) AI

Engine Model (Engine Code) CID	Ignition System EI	Fuel System	EGR Valve	Label Ident.	
	Delco Remy Distrib. Part Number(Adv.)	Roch./Bay City Carb. Part Number	Part Number	Part No. Code	Page No.
LF5 (8) 350	1103378 (CA)	17080420 17080424 2V	None	2052402 LF5/NB4	6
LF5 (9) 350		17080423 2V			
LT9 (11) 350	1103420 (CA/VA)	17080513 17080515 17080507 4V		14020655 WF	7
LE4 (12) 400		17080529 17080511 4V			

Date of Issue - 080379. Carb. PN 17080120, 126, 127 & 129 deleted, to correct errors, on 092479. Carburetors 17080507 & 511 added to EC 11 & 12 by letter MH-OP076, on 112679.

1980 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET HEAVY-DUTY GASOLINE ENGINES

Manufacturer GENERAL MOTORS CORPORATION Page 4

Engine Family GM 114 CID-Type 366/427/454-V8

ECS(Special Features) AI

Engine Model (Engine Code)	Ignition System EI, CA Delco-Remy Distrib. Part Number	Fuel System 4V Holley Carb. Part Number	EGR Valve Part Number	Label Ident.	
				Part No. Code	Page No.
L86 (7) 366	1103377	2047671 2047672	None	2052408 L86/NB4	8
L43 (8) 427		2047680 2047684		2052406 L43/NB4	8
L42 (9) 454		2047687		2052412 L42/NB4	9

Date of Issue - 080379.

1980 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
HEAVY-DUTY GASOLINE ENGINES

Manufacturer GENERAL MOTORS CORPORATION Page 5
Engine Family GM 115 CID-Type 454-V8 Eng. Code _____
ECS(Special Features) AI

Engine Model (Engine Code)	Ignition System EI, CA, VA	Fuel System 4V	EGR Valve	Label Ident.	
	Delco Remy Distrib. Part Number	Rochester Carb. Part Number	Part Number	Part No. Code	Page No.
LE8 (2)	1103376	17080512	None	14015420 XY	9

Date of Issue - 080379. Carb. PN 17080212 deleted, to correct error, on 092479.

1980 AIR RESOURCES BOARD SUPPLEMENT DATA SHEET

Manufacturer: General Motors Corporation

Executive Order No. A-6-165 Pg. 6

XX

ENGINE EXHAUST EMISSION CONTROL INFORMATION

GENERAL MOTORS CORPORATION




SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE, CHOKE FULL OPEN, AIR CLEANER INSTALLED AND AIR CONDITIONING OFF. PUT TRANSMISSION IN PARK OR NEUTRAL FOR ALL SETTINGS. (1) DISCONNECT AND PLUG VACUUM HOSE AT DISTRIBUTOR. SET CONTROL THING AT IDLE RPM. UNPLUG AND RECONNECT VACUUM HOSE AT DISTRIBUTOR. (2) DISCONNECT AND PLUG CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE AT VAPOR CANISTER. (3) ADJUST IDLE MIXTURE BY LEAN DROP PROCEDURE IF REQUIRED. (4) ADJUST IDLE SPEED TO SPECIFIED RPM. (5) ADJUST THROTTLE RETURN CONTROL SPEED TO SPECIFIED RPM. (6) ADJUST FAST IDLE SPEED WITH LEVER ON HIGH STEP OF CAM. (7) UNPLUG AND RECONNECT CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE TO VAPOR CANISTER.



ENGINE FAMILY	ENG. DISP.	EMISSION CONTROL	FAST IDLE RPM	SPARK PLUG GAP (IN.)	LEAN DROP IDLE MIXTURE RPM	THROTTLE RETURN CONTROL RPM	VALVE LASH	HYD.
112	4.8 LITER	AIR	700	0.035	2400	775-700	1500	HYD.

DATE OF MANUFACTURE FOR THIS ENGINE IS NOTED ON OTHER ENGINE EXHAUST EMISSION CONTROL INFORMATION LABEL.
NOTE: IDLE MIXTURE SCREW IS PRESET AND CAPPED AT FACTORY. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING LEAN DROP METHOD PER SERVICE MANUAL.
SEE SERVICE MANUAL. MAINTENANCE SCHEDULE AND EMISSION HOSE ROUTING DIAGRAM FOR ADDITIONAL INFORMATION. FUEL REQUIREMENTS - USE 91 OCTANE OR HIGHER VAPOR CANISTER.

THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS APPLICABLE TO 1980 MODEL YEAR NEW HEAVY-DUTY GASOLINE ENGINES.
PT. NO. 14015410
PRINTED IN U.S.A.

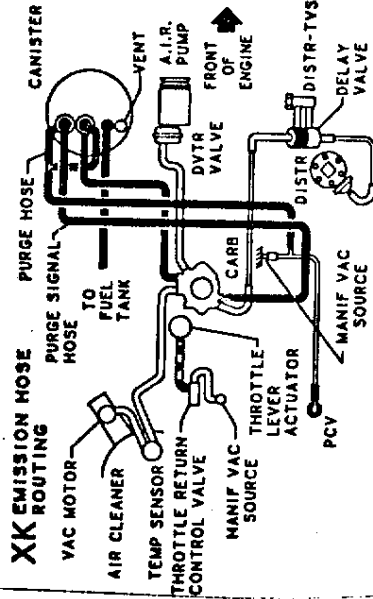

LF5/NB4

ENGINE EXHAUST EMISSION CONTROL INFORMATION
GENERAL MOTORS CORPORATION



A. I. R. SYSTEM

VACUUM HOSE ROUTING

SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE, CHOKE FULL OPEN, AIR CLEANER INSTALLED, TRANSMISSION IN NEUTRAL, AND AIR CONDITIONING ON, IF EQUIPPED.


1. SET TIMING WITH ENGINE RUNNING AT 700 RPM OR LESS.
2. ADJUST IDLE SPEED (SOLENOID ENERGIZED, IF EQUIPPED) TO OBTAIN SPECIFIED IDLE RPM.
3. ADJUST THROTTLE RETURN CONTROL (TRC) SPEED TO SPECIFIED TRC RPM.

NOTE: IDLE MIXTURE SCREWS ARE PRESET AND CAPPED AT FACTORY. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING LEAN DROP METHOD DESCRIBED IN SERVICE MANUAL.

LITER DISPL	SPARK PLUG TYPE	SPARK PLUG GAP	GM 113 FAMILY
5.7	R44T	0.045 IN	5.7
700	TRC RPM WITH GOV	1400	700
1500	TRC RPM NON GOV	1500	1500
4" BTDC	TIMING WITH GOV	2" BTDC	4" BTDC
HYD.	VALVE LASH	HYD.	HYD.
750	LEAN DROP RPM	750	750

FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER

SEE SERVICE MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION.

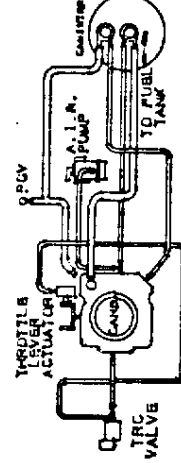

FRONT OF ENGINE

PRINTED IN U.S.A. THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS PART NO 2052402

Issued: 080379.

E.O. No. A-6-165
E.Fam. 112,113,114,115
S.D. Sheet 6

1980 AIR RESOURCES BOARD SUPPLEMENT DATA SHEET

Manufacturer: General Motors Corporation

Executive Order No. A-6-165

Pg 7

WF

ENGINE EXHAUST EMISSION CONTROL INFORMATION

GENERAL MOTORS CORPORATION


SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE. CHOKE FULL OPEN. AIR CLEANER INSTALLED AND AIR CONDITIONING OFF. PUT TRANSMISSION IN PARK OR NEUTRAL FOR ALL SETTINGS. (1) DISCONNECT AND PLUG VACUUM HOSE AT DISTRIBUTOR. SET IGNITION TIMING AT IDLE RPM. UNPLUG AND RECONNECT VACUUM HOSE AT DISTRIBUTOR. (2) DISCONNECT AND PLUG CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE AT VAPOR CANISTER. (3) ADJUST IDLE SPEED TO SPECIFIED RPM. (4) ADJUST THROTTLE RETURN CONTROL SPEED TO SPECIFIED RPM. (5) ADJUST FAST IDLE SPEED WITH LEVER ON HIGH STEP OF CAM. (6) UNPLUG AND RECONNECT CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE TO VAPOR CANISTER.

ENGINE FAMILY	ENG. DISP.	EMISSION CONTROL	FAST IDLE RPM	TIMING	SPARK PLUG GAP (IN.)	THROTTLE RETURN CONTROL RPM	VALVE LASH
113	5.7 LITER	AIR	700	6° BTC	0.045	1500	HYD.

DATE OF MANUFACTURE FOR THIS ENGINE IS NOTED ON OTHER ENGINE EXHAUST EMISSION CONTROL INFORMATION LABEL. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING THE BEST IDLE MIXTURE METHOD PER SERVICE MANUAL. SEE SERVICE MANUAL, MAINTENANCE SCHEDULE AND EMISSION HOSE ROUTING DIAGRAM FOR ADDITIONAL INFORMATION. FUEL REQUIREMENTS - USE 91 OCTANE OR HIGHER.

THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS APPLICABLE TO 1980 MODEL YEAR NEW HEAVY-DUTY GASOLINE ENGINES.

PT. NO. 14020655
PRINTED IN U.S.A.

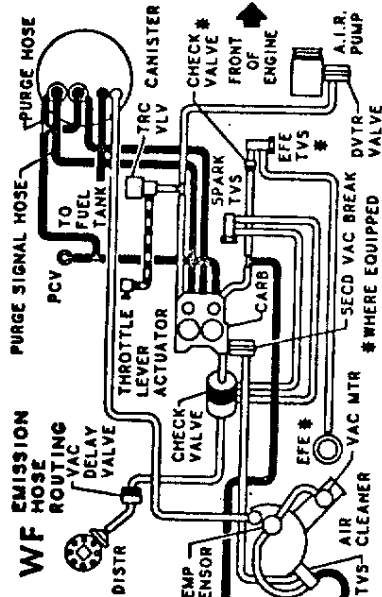

WJ

ENGINE EXHAUST EMISSION CONTROL INFORMATION

GENERAL MOTORS CORPORATION


SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE. CHOKE FULL OPEN. AIR CLEANER INSTALLED AND AIR CONDITIONING OFF. PUT TRANSMISSION IN PARK OR NEUTRAL FOR ALL SETTINGS. (1) DISCONNECT AND PLUG VACUUM HOSE AT DISTRIBUTOR. SET IGNITION TIMING AT IDLE RPM. UNPLUG AND RECONNECT VACUUM HOSE AT DISTRIBUTOR. (2) DISCONNECT AND PLUG CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE AT VAPOR CANISTER. (3) ADJUST IDLE SPEED TO SPECIFIED RPM. (4) ADJUST THROTTLE RETURN CONTROL SPEED TO SPECIFIED RPM. (5) ADJUST FAST IDLE SPEED WITH LEVER ON HIGH STEP OF CAM. (6) UNPLUG AND RECONNECT CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE TO VAPOR CANISTER.

ENGINE FAMILY	ENG. DISP.	EMISSION CONTROL	FAST IDLE RPM	TIMING	SPARK PLUG GAP (IN.)	THROTTLE RETURN CONTROL RPM	VALVE LASH
113	6.0 LITER	AIR	700	6° BTC	0.045	1500	HYD.

DATE OF MANUFACTURE FOR THIS ENGINE IS NOTED ON OTHER ENGINE EXHAUST EMISSION CONTROL INFORMATION LABEL. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING THE BEST IDLE MIXTURE METHOD PER SERVICE MANUAL. SEE SERVICE MANUAL, MAINTENANCE SCHEDULE AND EMISSION HOSE ROUTING DIAGRAM FOR ADDITIONAL INFORMATION. FUEL REQUIREMENTS - USE 91 OCTANE OR HIGHER.

THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS APPLICABLE TO 1980 MODEL YEAR NEW HEAVY-DUTY GASOLINE ENGINES.


PT. NO. 14020657
PRINTED IN U.S.A.

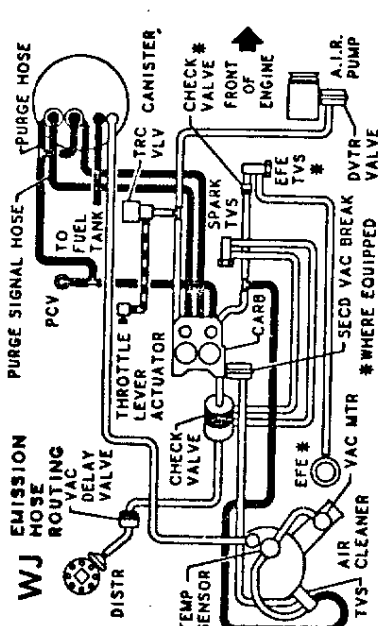


E.O. No. A-6-165
E.Fam. 112, 113, 114, 115
S.D. Sheet 7

1980 AIR RESOURCES BOARD SUPPLEMENT DATA SHEET

Manufacturer: General Motors Corporation Executive Order No. A-6-165 Pg. 8

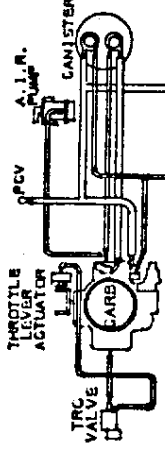L86/NB4	ENGINE EXHAUST EMISSION CONTROL INFORMATION GENERAL MOTORS CORPORATION 	A. I. R. SYSTEM <table border="1"> <tr> <td colspan="2">GM 114 FAMILY</td> </tr> <tr> <td>LITER DISPL</td> <td>6.0</td> </tr> <tr> <td>SPARK PLUG TYPE</td> <td>R43T</td> </tr> <tr> <td>SPARK PLUG GAP</td> <td>0.045 IN</td> </tr> <tr> <td>IDLE RPM</td> <td>700</td> </tr> <tr> <td>TRC RPM</td> <td>1400</td> </tr> <tr> <td>TIMING</td> <td>8° BTDC</td> </tr> <tr> <td>VALVE LASH</td> <td>HYD.</td> </tr> <tr> <td>FAST IDLE RPM</td> <td>2200</td> </tr> <tr> <td colspan="2">FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER</td> </tr> </table> SEE SERVICE MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION.	GM 114 FAMILY		LITER DISPL	6.0	SPARK PLUG TYPE	R43T	SPARK PLUG GAP	0.045 IN	IDLE RPM	700	TRC RPM	1400	TIMING	8° BTDC	VALVE LASH	HYD.	FAST IDLE RPM	2200	FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER	
GM 114 FAMILY																						
LITER DISPL	6.0																					
SPARK PLUG TYPE	R43T																					
SPARK PLUG GAP	0.045 IN																					
IDLE RPM	700																					
TRC RPM	1400																					
TIMING	8° BTDC																					
VALVE LASH	HYD.																					
FAST IDLE RPM	2200																					
FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER																						
SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE. CHOKE FULL OPEN, AIR CLEANER INSTALLED, TRANSMISSION IN NEUTRAL, AND AIR CONDITIONING OFF. 1. SET TIMING WITH ENGINE RUNNING AT 700 RPM OR LESS. 2. ADJUST IDLE SPEED (SOLENOID ENERGIZED) TO SPECIFIED IDLE RPM. 3. ADJUST THROTTLE RETURN CONTROL (TRC) SPEED TO SPECIFIED TRC RPM. 4. ADJUST FAST IDLE SPEED WITH LEVER ON HIGHEST PORTION OF CHOKE CAM. NOTE: IDLE MIXTURE SCREWS ARE PRESET AND CAPPED AT FACTORY. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING METHOD DESCRIBED IN SERVICE MANUAL.		VACUUM HOSE ROUTING  FRONT OF ENGINE →																				
DATE OF MANUFACTURE <table border="1"> <tr> <td>YEAR 1980</td> <td>MONTH 1 2 3 4 5 6 7</td> <td>DAY 8 9 10 11 12</td> </tr> </table>		YEAR 1980	MONTH 1 2 3 4 5 6 7	DAY 8 9 10 11 12	DATE OF MANUFACTURE <table border="1"> <tr> <td>YEAR 1979</td> <td>MONTH 7 8 9</td> <td>DAY 10 11 12</td> </tr> </table>	YEAR 1979	MONTH 7 8 9	DAY 10 11 12														
YEAR 1980	MONTH 1 2 3 4 5 6 7	DAY 8 9 10 11 12																				
YEAR 1979	MONTH 7 8 9	DAY 10 11 12																				

PRINTED IN U.S.A. THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS PART NO 2052408 APPLICABLE TO 1980 MODEL YEAR GASOLINE FUELED HEAVY DUTY ENGINES.

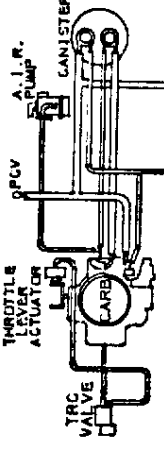L43/NB4	ENGINE EXHAUST EMISSION CONTROL INFORMATION GENERAL MOTORS CORPORATION 	A. I. R. SYSTEM <table border="1"> <tr> <td colspan="2">GM 114 FAMILY</td> </tr> <tr> <td>LITER DISPL</td> <td>7.0</td> </tr> <tr> <td>SPARK PLUG TYPE</td> <td>R42T</td> </tr> <tr> <td>SPARK PLUG GAP</td> <td>0.045 IN</td> </tr> <tr> <td>IDLE RPM</td> <td>700</td> </tr> <tr> <td>TRC RPM</td> <td>1400</td> </tr> <tr> <td>TIMING</td> <td>8° BTDC</td> </tr> <tr> <td>VALVE LASH</td> <td>HYD.</td> </tr> <tr> <td>FAST IDLE RPM</td> <td>2200</td> </tr> <tr> <td colspan="2">FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER</td> </tr> </table> SEE SERVICE MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION.	GM 114 FAMILY		LITER DISPL	7.0	SPARK PLUG TYPE	R42T	SPARK PLUG GAP	0.045 IN	IDLE RPM	700	TRC RPM	1400	TIMING	8° BTDC	VALVE LASH	HYD.	FAST IDLE RPM	2200	FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER	
GM 114 FAMILY																						
LITER DISPL	7.0																					
SPARK PLUG TYPE	R42T																					
SPARK PLUG GAP	0.045 IN																					
IDLE RPM	700																					
TRC RPM	1400																					
TIMING	8° BTDC																					
VALVE LASH	HYD.																					
FAST IDLE RPM	2200																					
FUEL REQUIREMENTS: USE 91 OCTANE OR HIGHER																						
SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE. CHOKE FULL OPEN, AIR CLEANER INSTALLED, TRANSMISSION IN NEUTRAL, AND AIR CONDITIONING OFF. 1. SET TIMING WITH ENGINE RUNNING AT 700 RPM OR LESS. 2. ADJUST IDLE SPEED (SOLENOID ENERGIZED) TO SPECIFIED IDLE RPM. 3. ADJUST THROTTLE RETURN CONTROL (TRC) SPEED TO SPECIFIED TRC RPM. 4. ADJUST FAST IDLE SPEED WITH LEVER ON HIGHEST PORTION OF CHOKE CAM. NOTE: IDLE MIXTURE SCREWS ARE PRESET AND CAPPED AT FACTORY. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING METHOD DESCRIBED IN SERVICE MANUAL.		VACUUM HOSE ROUTING  FRONT OF ENGINE →																				
DATE OF MANUFACTURE <table border="1"> <tr> <td>YEAR 1980</td> <td>MONTH 1 2 3 4 5 6 7</td> <td>DAY 8 9 10 11 12</td> </tr> </table>		YEAR 1980	MONTH 1 2 3 4 5 6 7	DAY 8 9 10 11 12	DATE OF MANUFACTURE <table border="1"> <tr> <td>YEAR 1979</td> <td>MONTH 7 8 9</td> <td>DAY 10 11 12</td> </tr> </table>	YEAR 1979	MONTH 7 8 9	DAY 10 11 12														
YEAR 1980	MONTH 1 2 3 4 5 6 7	DAY 8 9 10 11 12																				
YEAR 1979	MONTH 7 8 9	DAY 10 11 12																				

PRINTED IN U.S.A. THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS PART NO 2052408 APPLICABLE TO 1980 MODEL YEAR GASOLINE FUELED HEAVY DUTY ENGINES.

1980 AIR RESOURCES BOARD SUPPLEMENT DATA SHEET

Manufacturer: General Motors Corporation

Executive Order No. A-6-165

Pg. 9

L42/NB4	ENGINE EXHAUST EMISSION CONTROL INFORMATION GENERAL MOTORS CORPORATION	GM	A. I. R. SYSTEM	VACUUM HOSE ROUTING																
SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE, CHOKE FULL OPEN, AIR CLEANER INSTALLED, TRANSMISSION IN NEUTRAL, AND AIR CONDITIONING OFF. 1. SET TIMING WITH ENGINE RUNNING AT 700 RPM OR LESS. 2. ADJUST IDLE STOP (SOLENOID ENERGIZED) TO OBTAIN SPECIFIED IDLE RPM 3. ADJUST THROTTLE RETURN CONTROL (TRC) SPEED TO SPECIFIED TRC RPM. 4. ADJUST FAST IDLE SPEED WITH LEVER ON HIGHEST PORTION OF CHOKE CAM. NOTE: IDLE MIXTURE SCREWS ARE PRESET AND CAPPED AT FACTORY. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING METHOD DESCRIBED IN SERVICE MANUAL.			GM 114 FAMILY <table border="1"> <tr> <td>LITER DISPL</td> <td>7.4</td> </tr> <tr> <td>SPARK PLUG TYPE</td> <td>R42T</td> </tr> <tr> <td>SPARK PLUG GAP</td> <td>0.045 IN</td> </tr> <tr> <td>IDLE RPM</td> <td>700</td> </tr> <tr> <td>TRC RPM</td> <td>1400</td> </tr> <tr> <td>TIMING</td> <td>8° BTDC</td> </tr> <tr> <td>VALVE LASH</td> <td>HYD.</td> </tr> <tr> <td>FAST IDLE RPM</td> <td>2200</td> </tr> </table> FUEL REQUIREMENTS: USE 81 OCTANE OR HIGHER SEE SERVICE MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION.	LITER DISPL	7.4	SPARK PLUG TYPE	R42T	SPARK PLUG GAP	0.045 IN	IDLE RPM	700	TRC RPM	1400	TIMING	8° BTDC	VALVE LASH	HYD.	FAST IDLE RPM	2200	
LITER DISPL	7.4																			
SPARK PLUG TYPE	R42T																			
SPARK PLUG GAP	0.045 IN																			
IDLE RPM	700																			
TRC RPM	1400																			
TIMING	8° BTDC																			
VALVE LASH	HYD.																			
FAST IDLE RPM	2200																			
PRINTED IN U.S.A. THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS PART NO 2052412 APPLICABLE TO 1980 MODEL YEAR GASOLINE FUELED HEAVY DUTY ENGINES.																				

XY

ENGINE EXHAUST EMISSION CONTROL INFORMATION

GENERAL MOTORS CORPORATION

SET PARKING BRAKE AND BLOCK DRIVE WHEELS. MAKE ADJUSTMENTS WITH ENGINE AT NORMAL OPERATING TEMPERATURE. CHOKE FULL OPEN. AIR CLEANER INSTALLED, AND AIR CONDITIONING OFF. PUT TRANSMISSION IN PARK OR NEUTRAL FOR ALL SETTINGS. (1) DISCONNECT AND PLUG VACUUM HOSE AT DISTRIBUTOR. SET IGNITION TIMING AT IDLE RPM. UNPLUG AND RECONNECT VACUUM HOSE AT DISTRIBUTOR. (2) DISCONNECT AND PLUG CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE AT VAPOR CANISTER. (3) ADJUST IDLE SPEED TO SPECIFIED RPM. (4) ADJUST THROTTLE RETURN CONTROL SPEED TO SPECIFIED RPM. (5) ADJUST FAST IDLE SPEED WITH LEVER ON HIGH STEP OF CAM. (6) UNPLUG AND RECONNECT CANISTER PURGE HOSE AND CANISTER PURGE SIGNAL HOSE TO VAPOR CANISTER.

ENGINE FAMILY	ENG. DISP	EMISSION CONTROL	IDLE RPM	TIMING	FAST IDLE RPM	SPARK PLUG GAP (IN.)	THROTTLE RETURN CONTROL RPM	VALVE LASH
'115	7.4 LITER	AIR	700	4° BTDC	1900	0.045	1500	HYD.


DATE OF MANUFACTURE FOR THIS ENGINE IS NOTED ON OTHER ENGINE EXHAUST EMISSION CONTROL INFORMATION LABEL.

NOTE: IDLE MIXTURE SCREWS ARE PRESET AND SEALED AT FACTORY. IF MAJOR ADJUSTMENT IS REQUIRED, MIXTURE MAY BE RESET USING THE BEST IDLE MIXTURE METHOD PER SERVICE MANUAL.

SEE SERVICE MANUAL, MAINTENANCE SCHEDULE AND EMISSION HOSE ROUTING DIAGRAM FOR ADDITIONAL INFORMATION. FUEL REQUIREMENTS - USE 91 OCTANE OR HIGHER

THIS ENGINE CONFORMS TO U.S. EPA AND CALIFORNIA REGULATIONS APPLICABLE TO 1980 MODEL YEAR NEW HEAVY-DUTY GASOLINE ENGINES

PT. NO. 14015420
PRINTED IN U.S.A.

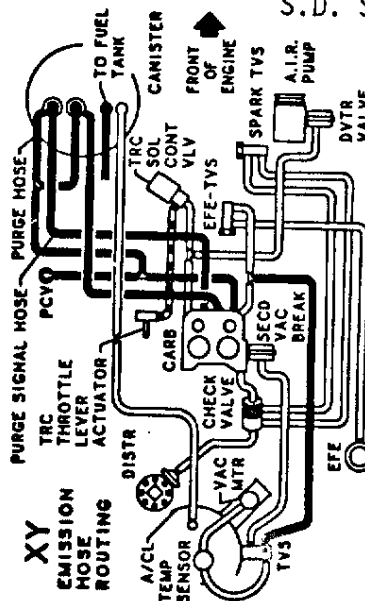

E.O. No. A-6-165
E.Fam. 112,113,114,115
S.D. Sheet 9