


**Health Risk Assessment for the
Union Pacific Railroad
City of Industry Railyard**



**Stationary Source Division
April 18, 2008**

This page left intentionally blank

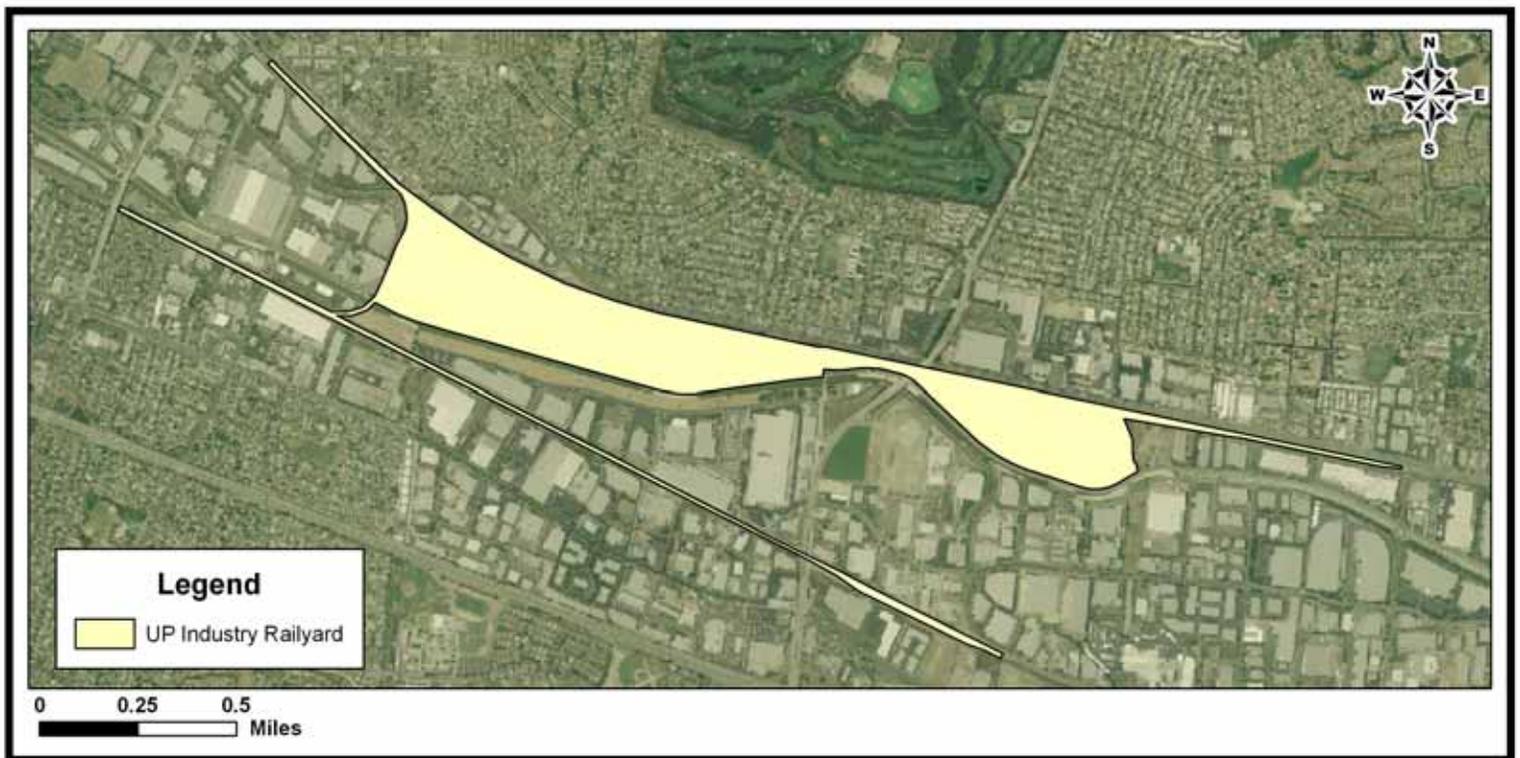

Health Risk Assessment for the Union Pacific City of Industry Railyard

Principal Author

Stephen Cutts, P.E.

Contributing Authors

Stationary Source Division:

Eugene Yang, Ph.D., P.E.

Hector Castaneda

Planning and Technical Support Division:

Nicole Dolney

Beth Schwehr

Anthony Servin, P.E.

Stephen Zelinka

Reviewed by

ARB Executive Office:

Michael H. Scheible, Deputy Executive Officer

ARB Stationary Source Division:

Robert D. Fletcher, Chief, Stationary Source Division

Dean C. Simeroth, Chief, Criteria Pollutants Branch

Harold Holmes, Manager, Engineering Evaluation Section

The staff of the Air Resources Board has prepared this report. Publication does not signify that the contents reflect the views and policies of the Air Resources Board, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

This page left intentionally blank

Acknowledgements

Air Resources Board staff extends its appreciation to the representatives of Union Pacific Railroad and their consultants, Sierra Research and Air Quality Management Consulting, for preparing the railyard emissions inventory data and spatial allocation of emissions.

Union Pacific Railroad:

Lanny Schmid, Jon Germer, Brock Nelson, James Diel.

Sierra Research:

Gary Rubenstein; Brenda Douglass; Eric Walther, Ph.D.

Air Quality Management Consulting:

Robert G. Ireson, Ph.D.

This page left intentionally blank

Table of Contents

I.	INTRODUCTION	1
A.	WHY IS ARB CONCERNED ABOUT DIESEL PM EMISSIONS?	1
B.	WHY EVALUATE DIESEL PM EMISSIONS AT THE UP CITY OF INDUSTRY RAILYARD?	2
C.	WHAT ARE HEALTH RISK ASSESSMENTS (HRAs)?	2
D.	WHO PREPARED THE UP CITY OF INDUSTRY RAILYARD HRA?.....	4
E.	HOW IS THIS REPORT STRUCTURED?	5
II.	SUMMARY	7
A.	GENERAL DESCRIPTION OF THE UP CITY OF INDUSTRY RAILYARD	7
B.	WHAT ARE THE PRIMARY OPERATIONS AT THE UP CITY OF INDUSTRY RAILYARD?	8
C.	WHAT ARE THE DIESEL PM EMISSIONS IN AND AROUND THE UP CITY OF INDUSTRY RAILYARD?.....	9
	1. <i>Railyard</i>	11
	2. <i>Surrounding Sources</i>	13
D.	WHAT ARE THE POTENTIAL CANCER RISKS FROM THE UP CITY OF INDUSTRY RAILYARD?.....	15
E.	WHAT ARE THE ESTIMATED NON-CANCER CHRONIC RISKS NEAR THE UP CITY OF INDUSTRY RAILYARD?	21
F.	WHAT ARE THE ESTIMATED HEALTH RISKS FROM OFF-SITE EMISSIONS?.....	22
G.	CAN STUDY ESTIMATES BE VERIFIED BY AIR MONITORING?	26
H.	WHAT ACTIVITIES ARE UNDERWAY TO REDUCE DIESEL PM EMISSIONS AND PUBLIC HEALTH RISKS?	26
III.	UP CITY OF INDUSTRY RAILYARD DIESEL PM EMISSIONS	31
A.	ON-SITE UP CITY OF INDUSTRY RAILYARD DIESEL PM EMISSIONS SUMMARY	31
	1. <i>Locomotives</i>	35
	2. <i>Cargo Handling Equipment</i>	36
	3. <i>On-Road Diesel-Fueled Trucks</i>	39
	4. <i>Transport Refrigeration Units and Reefer Cars</i>	40
	5. <i>Other Sources</i>	41
B.	CURRENT AVAILABLE DIESEL FUEL REGULATIONS AND THEIR BENEFITS TO THE RAILYARDS.....	41
	1. <i>California Air Resources Board (CARB) Diesel Fuel Specifications</i>	41
	2. <i>U.S. EPA On-Road Diesel Fuel Specifications</i>	42
	3. <i>U.S. EPA Non-Road Diesel Fuel Specifications</i>	42
	4. <i>What are the Current Properties of In-Use Diesel Fuel?</i>	43
	5. <i>Diesel Fuels Used by California-Based Locomotives</i>	44

6.	<i>What are the Potential Overall Benefits from the Use of Lower Sulfur Diesel Fuels?</i>	46
C.	OFF-SITE DIESEL PM EMISSIONS SUMMARY	46
1.	<i>Mobile Sources</i>	47
2.	<i>Stationary Sources</i>	48
3.	<i>Non-Diesel PM Toxic Air Contaminants</i>	48
IV.	AIR DISPERSION MODELING FOR THE UP CITY OF INDUSTRY RAILYARD	51
A.	AIR DISPERSION MODEL SELECTION.....	51
B.	SOURCE CHARACTERIZATION AND PARAMETERS	51
C.	METEOROLOGICAL DATA	52
D.	MODEL RECEPTORS.....	55
E.	BUILDING WAKE EFFECTS.....	58
F.	MODEL INPUTS	59
V.	HEALTH RISK ASSESSMENT OF THE UP CITY OF INDUSTRY RAILYARD	61
A.	ARB RAILYARD HEALTH RISK ASSESSMENT GUIDELINES	61
B.	EXPOSURE ASSESSMENT.....	62
C.	RISK CHARACTERIZATION	65
1.	<i>Risk Characterization Associated with On-Site Emissions</i>	66
a)	Potential Cancer Risk	66
b)	Potential Non-Cancer Chronic Risk	71
c)	Potential Non-Cancer Acute Risk	73
2.	<i>Risk Characterization Associated with Off-Site Emissions</i>	74
3.	<i>Risks to Sensitive Receptors</i>	77
D.	UNCERTAINTIES AND LIMITATIONS	78
1.	<i>Emission Inventory</i>	78
2.	<i>Air Dispersion Modeling</i>	80
3.	<i>Risk Assessment</i>	81

LIST OF TABLES

Table II-1: Comparison of Diesel PM Emissions from Eighteen Railyards (Tons Per Year).....	10
Table II-2: UP City of Industry Railyard and Surrounding Areas Diesel PM Emissions.....	12
Table II-3: Potency Weighted Estimated Toxic Emissions from Significant Off-Site Stationary Sources Surrounding UP City of Industry Railyard.....	15
Table II-4: Emissions of Major Toxic Air Contaminants from Use of Gasoline in the South Coast Air Basin.....	15
Table II-5: Equivalent Potential Cancer Risk Levels for 70-, 40-, 30-, and 9-Year Exposure Durations.....	19
Table II-6: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels (Assumes a 70-Year Exposure).....	20
Table II-7: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels from Off-Site Emissions Near the UP City of Industry Railyard.....	22
Table III-1: UP City of Industry Railyard Activities.....	32
Table III-2: Summary of UP City of Industry Railyard Diesel PM Emissions.....	34
Table III-3: Diesel PM Emissions by Locomotive Operations at the UP City of Industry Railyard.....	36
Table III-4: Diesel PM Emissions for Cargo Handling Equipment at the UP City of Industry Railyard.....	38
Table III-5: Diesel PM Emissions for Light, Medium, and Heavy Heavy-Duty On-Road Trucks Within the UP City of Industry Railyard.....	39
Table III-6: Diesel PM Emissions from Other Sources at the UP City of Industry Railyard.....	40
Table III-7: California Diesel Fuel Standards.....	42
Table III-8: U.S. EPA Diesel Fuel Standards.....	43
Table III-9: Average 1999 Properties of Reformulated Diesel Fuel.....	44
Table III-10: Off-Site Mobile Source Diesel PM Emissions by Freeway Near the UP City of Industry Railyard.....	47
Table III-11: Off-Site Mobile Source Diesel PM Emissions by Vehicle Type Near the UP City of Industry Railyard.....	48
Table III-12: Potency Weighted Estimated Toxic Emissions from Significant Off-Site Stationary Sources Surrounding UP City of Industry Railyard.....	49
Table III-13: Emissions of Major Toxic Air Contaminants from Use of Gasoline in the South Coast Air Basin.....	50
Table V-1: Potency Weighted Estimated Toxic Emissions from Significant Off-Site Stationary Sources Surrounding UP City of Industry Railyard.....	64
Table V-2: Emissions of Major Toxic Air Contaminants from Use of Gasoline in the South Coast Air Basin.....	64
Table V-3: Equivalent Potential Cancer Risk Levels for 70-, 40-, 30-, and 9-Year Exposure Durations.....	70
Table V-4: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels.....	71

Table V-5: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels from Off-Site Emissions Near the UP City of Industry Railyard.....	77
Table V-6: Estimated Number of Sensitive Receptors in Various Levels of Cancer Risks Associated with On-Site Diesel PM Emissions	78

LIST OF FIGURES

Figure II-1: UP City of Industry Railyard and Surrounding Areas	8
Figure II-2: Estimated Near-Source Cancer Risk (Chances per Million People) From the UP City of Industry Railyard	18
Figure II-3: Comparison of Estimated Potential Cancer Risks from the UP City of Industry Railyard and the Regional Background Risk Levels	21
Figure II-4: Estimated Regional Cancer Risk (Chances per Million People) From the UP City of Industry Railyard	24
Figure II-5: Estimated Cancer Risk Near the UP City of Industry Railyard (Off-Site)	25
Figure III-1: UP City of Industry Railyard Diesel PM Emission Source Locations.....	33
Figure IV-1: Wind Rose for UP City of Industry Railyard	54
Figure IV-2: Wind Class Frequency Distribution for UP City of Industry Railyard.....	55
Figure IV-3: Fine and Medium Grid Receptor Networks Air Dispersion Modeling for UP City of Industry Railyard	57
Figure IV-4: Coarse Grid Receptor Networks Air Dispersion Modeling for UP City of Industry Railyard.....	58
Figure V-1: Estimated Near-Source Cancer Risk (Chances per Million People) From the UP City of Industry Railyard	68
Figure V-2: Estimated Regional Cancer Risk (Chances per Million People) From the UP City of Industry Railyard	69
Figure V-3: Estimated Non-Cancer Chronic Risk Health Hazard Index From the UP City of Industry Railyard.....	73
Figure V-4: Estimated Cancer Risk near the UP City of Industry Railyard (Off-Site).....	75
Figure V-5: Estimated Non-Cancer Chronic Risk Levels From Off-Site Emissions Near the UP City of Industry Railyard.....	76

APPENDICES

- A. METHODOLOGY FOR ESTIMATING OFF-SITE DIESEL PM MOBILE SOURCE EMISSIONS**
- B. METHODOLOGY FOR ESTIMATING OFF-SITE DIESEL PM STATIONARY SOURCE EMISSIONS**
- C. IMPACTS FROM OFF-SITE DIESEL PM EMISSION SOURCES**
- D. TABLE OF LOCOMOTIVE DIESEL PM EMISSION FACTORS**
- E. SPATIAL ALLOCATIONS OF MAJOR DIESEL PM EMISSION SOURCES AT UP CITY OF INDUSTRY RAILYARD**
- F. AERMOD MODEL SENSITIVITY ANALYSIS OF METEOROLOGICAL DATA (ONE-YEAR VS. FIVE-YEAR DATA)**

This page left intentionally blank

I. INTRODUCTION

The California Air Resources Board (ARB or Board) conducted a health risk assessment to evaluate the impacts associated with toxic air contaminants emitted in and around Union Pacific Railroad's (UP) City of Industry Railyard located in City of Industry, California. The study focused on the railyard property emissions from locomotives, on-road heavy-duty trucks, cargo handling equipment, and other vehicles and off-road equipment used to move bulk cargo such as forklifts. Also evaluated were mobile and stationary sources with significant emissions within a one-mile distance of the railyard.

A. Why is ARB concerned about diesel PM emissions?

In 1998, ARB identified particulate matter from diesel exhaust (diesel PM) as a toxic air contaminant based on its potential to cause cancer and other adverse health problems, including respiratory illnesses and increased risk of heart disease. Subsequent research has shown that diesel PM contributes to premature death¹ (ARB, 2002). Exposure to diesel PM is a health hazard, particularly to children, whose lungs are still developing; and the elderly, who may have other serious health problems. In addition, the diesel PM particles are very small. By mass, approximately 94% of these particles are less than 2.5 microns in diameter (PM_{2.5}). Because of their size, diesel PM particles are readily respirable, and can penetrate deep into the lung and enter the bloodstream, carrying with them an array of toxins. Population-based studies in hundreds of cities in the U.S. and around the world demonstrate a strong link between elevated PM levels and premature deaths (Pope et al., 1995, 2002, and 2004; Krewski et al., 2000), increased hospitalizations for respiratory and cardiovascular causes, asthma and other lower respiratory symptoms, acute bronchitis, work loss days, and minor restricted activity days (ARB, 2006e).

Diesel PM emissions are the dominant toxic air contaminants in and around a railyard facility. Statewide, diesel PM accounts for about 70% of the estimated potential ambient air toxic cancer risks, based on an analysis conducted by ARB staff in 2000 (ARB, 2000). That analysis also indicated that residents in the South Coast Air Basin (SCAB) had higher estimates of risk than elsewhere in the State. These findings are consistent with the preliminary findings reported in a recently released draft report, *Multiple Air Toxics Exposure Study in the South Coast Air Basin* (SCAQMD, 2008). This study reported that diesel PM emissions have decreased, but are still the major contributor to air toxics risk in the SCAB, accounting for over 80% of the total risk from air toxics in the region. The higher percentage contribution, over the previously reported 70%, reflects the fact that there has been a proportionally greater reduction in other air toxics, such as benzene and 1,3-butadiene. Based on scientific research findings and the dominance of diesel PM emissions, the health impacts in this study primarily focus on the risks from the diesel PM emissions.

¹ Premature Death: as defined by U.S. Centers for Disease Control and Prevention's *Years of Potential Life Lost*, any life ended before age 75 is considered premature death.

B. Why evaluate diesel PM emissions at the UP City of Industry Railyard?

In 2005, the ARB entered into a statewide railroad pollution reduction agreement (Agreement) with Union Pacific Railroad Company (UP) and BNSF Railway Company (BNSF) (ARB, 2005). This Agreement was developed to implement near-term measures to reduce diesel PM emissions in and around California railyards by approximately 20%.

The Agreement requires that health risk assessments (HRAs) be prepared for each of the 17 major or designated railyards in the State. The Agreement requires the railyard HRAs to be prepared based on the experience in preparing the UP Roseville Railyard HRA study in 2004, and the ARB *Health Risk Assessment Guidance for Railyard and Intermodal Facilities* that the ARB staff developed in 2006 (see <http://www.arb.ca.gov/railyard/hra/hra.htm>) (ARB, 2006d). UP City of Industry Railyard is one of the designated railyards subject to the Agreement and the HRA requirements.

C. What are Health Risk Assessments (HRAs)?

An exposure assessment is an analysis of the amount (concentration in the air) of a pollutant that a person is exposed to for a specific time period. This information is used in a risk assessment to evaluate the potential for a pollutant to cause cancer or other health effects. An HRA uses mathematical models to evaluate the health impacts from exposure to certain chemical or toxic air contaminants released from a facility or found in the air. HRAs provide information to estimate potential long term cancer and non-cancer health risks. HRAs do not gather information or health data on specific individuals, but are estimates for the potential health impacts on a population at large.

An HRA consists of three major components: the air pollution emission inventory, the air dispersion modeling, and an assessment of associated health risks. The air pollution emission inventory provides an understanding of how the air toxics are generated and emitted. The air dispersion modeling takes the emission inventory and meteorological data such as temperature and wind speed/direction as its inputs, and then uses a computer model to predict the distributions of air toxics in the air. Based on this information, an assessment of the potential health risks of the air toxics to an exposed population is performed. The results are expressed in a number of ways as summarized below.

- For potential cancer health effects, the risk is usually expressed as the number of chances in a population of a million people. The number may be stated as “10 in a million” or “10 chances per million”. The methodology used to estimate the potential cancer risks is consistent with the Tier-1 analysis of *Air Toxics Hot Spots Program Risk Assessment Guidelines* (OEHHA, 2003). A Tier-1 analysis assumes that an individual is exposed to an annual average concentration of a given pollutant continuously for 70 years. The length of time that an individual is exposed to a given air concentration is proportional to the risk. During childhood, the impact from

exposure to a given air concentration is greater. Exposure durations of 30 years or 9 years may also be evaluated as supplemental information to present the range of cancer risk based on residency period.

- For non-cancer health effects, a reference exposure level² is used to predict if there will be certain identified adverse health effects, such as lung irritation, liver damage, or birth defects. These adverse health effects may happen after chronic (long-term) or acute (short-term) exposure. To calculate a non-cancer health risk number, the reference exposure level is compared to the concentration that a person is exposed to, and a hazard index is calculated. Typically, the greater the hazard index is above 1, the greater the potential for possible adverse health effects. If the hazard index is less than 1, it is an indicator that adverse effects are less likely to happen.
- For premature deaths linked to diesel PM emissions in the South Coast Air Basin, ARB staff estimated about 1,300 premature deaths per year due to diesel exhaust exposure in 2000 (ARB Research Division, and Lloyd and Cackette, 2001). The total diesel PM emissions from all sources in the South Coast Air Basin are estimated at 7,750 tons for the year 2005 (ARB, 2006a). The UP City of Industry Railyard diesel PM emissions, on the other hand, are an estimated 10.9 tons for the year 2005, about 0.1% of the total air basin diesel PM emissions. For comparison with another major source of diesel PM emissions in South Coast Air Basin, the diesel PM emissions from the Ports of Los Angeles and Long Beach combined are estimated at 1,760 tons per year, resulting in an estimated 29 premature deaths per year (ARB, 2006b).

The potential cancer risk from a given carcinogen estimated from the health risk assessment is expressed as the incremental number of potential cancer cases that could be developed per million people, assuming the population is exposed to the carcinogen at a constant annual average concentration over a presumed 70-year lifetime. For example, if the cancer risk were estimated to be 100 chances per million, the probability of an individual developing cancer would not be expected to exceed 100 chances in a million. If a population (e.g., one million people) were exposed to the same potential cancer risk (e.g., 100 chances per million), then statistics would predict that no more than 100 of those million people exposed would be likely to develop cancer from a lifetime of exposure (i.e., 70 years) to diesel PM emissions from a facility.

² The reference exposure level for diesel PM is essentially the U.S. EPA Reference Concentration first developed in the early 1990s based on histological changes in the lungs of rats. Since the identification of diesel PM as a toxic air contaminant, California has evaluated the latest literature on particulate matter health effects to set the Ambient Air Quality Standard. Diesel PM is a component of particulate matter. Health effects from particulate matter in humans include illness and death from cardiovascular and respiratory disease, and exacerbation of asthma and other respiratory illnesses. Additionally, a body of literature has been published, largely after the identification of diesel PM as a toxic air contaminant and adoption of the reference exposure level, which shows that diesel PM can enhance allergic responses in humans and animals. Thus, it should be noted that the reference exposure level does not reflect adverse impacts of particulate matter on cardiovascular and respiratory disease and deaths, exacerbation of asthma, and enhancement of allergic response.

The HRA is a complex process that is based on current knowledge and a number of assumptions. However, there is a certain extent of uncertainty associated with the process of risk assessment. The uncertainty arises from lack of data in many areas, necessitating the use of assumptions. The assumptions used in the assessment are often designed to be conservative on the side of health protection in order to avoid underestimation of risk to the public. As indicated by the Office of Environmental Health Hazard Assessment (OEHHA) Guidelines, the Tier-1 evaluation is useful in comparing risks among a number of facilities and similar sources. Thus, the risk estimates should not be interpreted as a literal prediction of disease incidence in the affected communities, but more as a tool for comparison of the relative risk between one facility and another. Therefore, risk assessment results are best used for comparing potential risks to target levels to determine the level of mitigation needed. They are also an effective tool for determining the impact a particular control strategy will have on reducing risks.

D. Who prepared the UP City of Industry Railyard HRA?

Under the Agreement, ARB worked with affected local air quality management districts, communities, cities, counties, and the two railroads to develop two guideline documents for performing the health risk assessments. The two documents, entitled *ARB Rail Yard Emissions Inventory Methodology* (ARB, 2006c), and *ARB Health Risk Assessment Guidance for Railyard and Intermodal Facilities* (ARB, 2006d), provide guidelines for the identification, modeling, and evaluation of the toxic air contaminants from designated railyards throughout California.

The railroads and their designated consultants (i.e., Sierra Research and Air Quality Management Consulting for the UP City of Industry Railyard) were responsible for developing the emission inventories and performing the air dispersion modeling for operations that occur within each of the designated railyards. The base year of the analysis is 2005.

ARB staff was responsible for reviewing and approving the railroads' submittals, identifying significant sources of emissions near the railyards, modeling the impacts of those sources, and preparing the railyard health risk assessments. ARB staff was also responsible for releasing the draft HRAs to the public for comment and presenting them at community meetings. After reviewing public comment on the draft HRAs, ARB staff made revisions as necessary and appropriate, and is now presenting the HRAs in final form.

Ultimately, the information derived from the railyard HRAs is to be used to help identify the most effective mitigation measures that could be implemented to further reduce railyard emissions and public health risks.

E. How is this report structured?

The next chapter provides a summary of the UP City of Industry Railyard operations, emissions, air dispersion modeling, and health risk assessment results. Following the summary, the third chapter presents the details of the UP City of Industry Railyard emission inventories. After that, the fourth chapter explains how the air dispersion modeling was conducted, and the fifth chapter provides the detailed health risk assessment for the UP City of Industry Railyard. The appendices present the technical supporting documents for the analyses discussed in the main body of the report.

This page left intentionally blank

II. SUMMARY

Below is a summary of the Union Pacific Railroad's (UP) City of Industry Railyard operations, emissions, air dispersion modeling, and health risk assessment results.

A. General Description of the UP City of Industry Railyard

The UP City of Industry Railyard is located at 17225 East Arenth Avenue, in the City of Industry, California. The railyard covers a narrow area of approximately 2.8 miles in length (tracks and train push back areas extend both east and west of the main railyard), and approximately one-quarter of a mile wide. South Azusa Avenue bisects the railyard, with the railyard's main area to the west. The land use on the north side of the railyard is mostly residential. The nearest residences are approximately 55 feet north of the railyard boundary. There are a number of truck distribution centers and other commercial/industrial facilities located to the west, south, and east of the railyard. There is a residential area, including an elementary school, approximately one-third mile to the southwest.

The railyard proper includes several distinct areas. The area west of South Azusa Avenue includes the Bowl⁴ (used for some arriving and departing trains as well as classification), a set of tracks for arriving and departing trains (known as the "A" Yard), and the intermodal tracks for unloading and loading of containers. The Marne Yard, east of South Azusa Avenue, contains several parallel sets of tracks for originating trains, and classification (train building). In addition, two main lines are connected to the railyard: the Alhambra Subdivision mainline, which runs along the north side of the Yard; and the Los Angeles Subdivision main line, approximately ½ mile to the south of the Yard. In addition to the UP City of Industry Railyard itself, there is another small yard known as the Azusa Yard, which is located adjacent to the Los Angeles Subdivision main line east of South Azusa Avenue. Activities in the Azusa Yard are limited to local trains operating out of the main UP City of Industry Railyard, which serve customers to the east and west along the Los Angeles Subdivision.


The UP City of Industry Railyard is located about 14 miles east of downtown Los Angeles (see Figure II-1). There is one major freeway within one mile of the railyard, State Route 60 (SR-60), about 4,000 feet to the south.

About 11 miles east of the UP City of Industry Railyard is the UP Commerce Railyard, which was evaluated in a separate HRA.

⁴ A "bowl" is traditionally a large number of parallel tracks used for classification. Railcars are pushed over a "hump" (a raised section of track), separated from one another, and allowed to roll by gravity into the appropriate track within the bowl. The UP City of Industry Railyard no longer uses the Bowl in this manner. All train breaking and building activities are handled by flat switching (moving sections of cars using yard switcher engines).

Facilities within the railyard include classification tracks, a gate complex for inbound and outbound intermodal truck traffic, intermodal loading and unloading tracks, a crane maintenance shop, and various buildings and facilities supporting railroad and contractor operations. The railyard also has a wastewater treatment plant. Equipment at the wastewater treatment plant includes two oil/water separators, various pumps, and storage tanks.

Figure II-1: UP City of Industry Railyard and Surrounding Areas

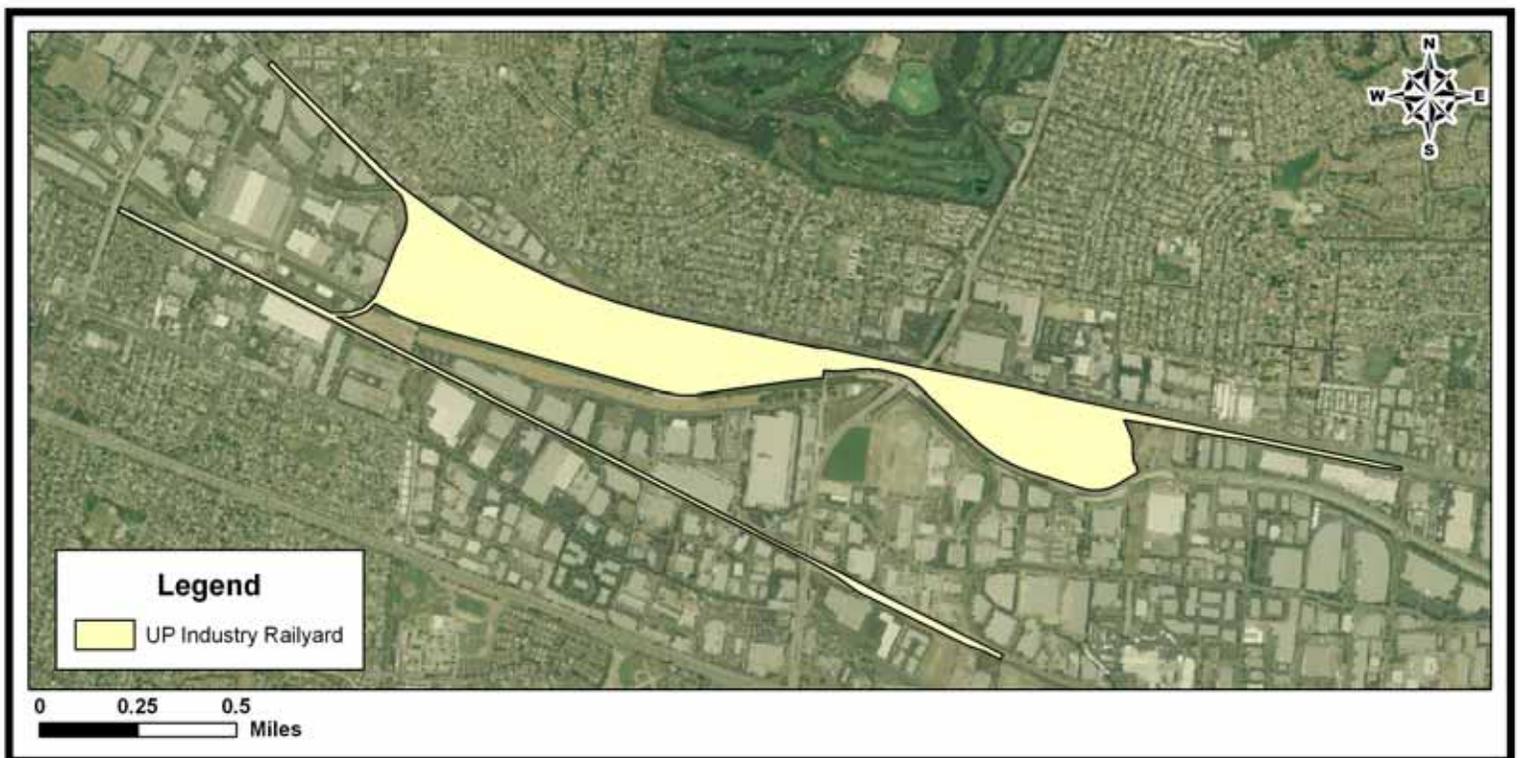

B. What are the Primary Operations at the UP City of Industry Railyard?

The UP City of Industry Railyard is both a domestic intermodal container handling facility and a classification⁵ yard for manifest (mixed freight) trains. Incoming trains terminate on various tracks within the yard. Yard switchers then move sections of cars to various locations within the Yard, as needed. Sections of manifest train cars are moved and reconnected to others to build new outbound trains. Intermodal cars are moved to the intermodal loading/unloading tracks where containers are removed from and placed on the cars.

⁵ A classification yard receives trains, breaks them into sections, and reconnects them to make new trains for the rail cars ultimate destinations.

Activities at the railyard include receiving inbound trains, switching cars, loading and unloading intermodal trains, storing intermodal containers and chassis, building and departing outbound trains, and repairing freight cars and intermodal containers/chassis. UP operates yard switcher locomotives within the City of Industry to support many of these activities.

There is no locomotive servicing facility at the UP City of Industry Railyard. However, a limited amount of locomotive servicing does occur in the Marne Yard. This activity consists primarily of refueling of locomotives from trucks (known as “direct to locomotive” or DTL fueling), with some minor maintenance and repairs. The railyard also includes a bypassing main line with freight and passenger train traffic that is not handled in the Yard.

A variety of heavy heavy-duty diesel-fueled drayage trucks are used to pick up and deliver cargo containers. The heavy heavy-duty diesel-fueled trucks logged approximately 478,000 vehicle miles traveled within the railyard in 2005, or about 1,300 vehicle miles traveled average per day within the railyard. There are also ten heavy-duty diesel-fueled yard trucks (one light, two medium, and seven heavy) used to support railyard activities: they logged about 117,000 vehicle miles traveled within the railyard in 2005, or about 320 vehicle miles traveled on average per day within the railyard.

C. What are the diesel PM emissions in and around the UP City of Industry Railyard?

In 2005, the combined diesel PM emissions from the UP City of Industry Railyard (on-site emissions) and other significant emission sources within a one-mile distance (off-site emissions) are estimated at about 38.5 tons per year. Off-site sources and activities – not generally related to activities at the railyard – within a one mile distance from the railyard account for 27.6 tons per year of diesel PM emissions, or 72% of the combined on-site and off-site diesel PM emissions. The UP City of Industry Railyard diesel PM emissions are estimated at about 10.9 tons per year, which accounts for about 28% of the combined on-site and off-site diesel PM emissions.

To provide a perspective on the railyard diesel PM emissions, Table II-1 summarizes three major diesel PM source categories (for the year 2005) within all designated railyards subject to the health risk assessments under the 2005 Agreement.

**Table II-1: Comparison of Diesel PM Emissions from Eighteen Railyards
(Tons Per Year)**

Railyard	Locomotive	Cargo Handling Equipment	On-Road Trucks	Others (Off-Road Equipment, TRUs, Stationary Sources, etc.)	Total[§]
BNSF Barstow	27.1	0.03	0.04	0.75	27.9
BNSF San Bernardino	10.6	3.7	4.4	3.4	22.0
BNSF San Diego	1.6	N/A	0.007	0.04	1.7
UP ICTF/Dolores	9.8	4.4	7.5	2.0	23.7
UP Colton	16.3	N/A	0.2	0.05	16.5
UP Oakland	3.9	2.0	1.9	3.4	11.2
UP City of Industry	5.9	2.8	2.0	0.3	10.9
UP Roseville*	25.1*	N/A	N/A	N/A	25.1
BNSF Hobart	5.9	4.2	10.1	3.7	23.9
UP Commerce	4.9	4.8	2.0	0.4	12.1
UP LATC	3.2	2.7	1.0	0.5	7.3
UP Stockton	6.5	N/A	0.2	0.2	6.9
UP Mira Loma	4.4	N/A	0.2	0.2	4.9
BNSF Richmond	3.3	0.3	0.5	0.6	4.7
BNSF Stockton	3.6	N/A	N/A	0.02	3.6
BNSF Commerce Eastern	0.6	0.4	1.1	1.0	3.1
BNSF Sheila	2.2	N/A	N/A	0.4	2.7
BNSF Watson	1.9	N/A	<0.01	0.04	1.9
Statewide Railyard Total	136.8	25.3	31.1	17.0	210.1[§]
Statewide Railyard Percent	65%	12%	15%	8%	100%

* The UP Roseville Health Risk Assessment (ARB, 2004a) was based on 1999-2000 emission estimate, only locomotive diesel PM emissions were reported in that study. The actual emissions were estimated at a range of 22.1 to 25.1 tons per year.

§ Numbers may not add precisely due to rounding.

1. Railyard

The UP City of Industry Railyard emission sources include, but are not limited to, locomotives, cargo handling equipment, on-road diesel-fueled trucks, and transport refrigeration units and refrigerated railcars (reefer cars). The facility operates 24 hours a day, 365 days a year. The UP City of Industry Railyard emissions were calculated on a source-specific and facility-wide basis for the 2005 baseline year. The future growth in emissions at the UP City of Industry facility is not incorporated in the HRA emission inventory, but will be included as part of the mitigation emission reduction efforts. The methodology used to calculate the diesel PM and other toxic air contaminant emissions is based on the ARB *Rail Yard Emissions Inventory Methodology* (ARB, 2006c).

Railyard diesel PM emissions are summarized in Table II-2. Locomotive operations are responsible for an estimated 5.87 tons per year, or about 54%, of the UP City of Industry Railyard diesel PM emissions. The locomotive diesel PM emissions are primarily due to yard operations by switch locomotives, comprising about 3.29 tons per year of diesel PM emissions. Line haul locomotives account for 2.57 tons per year of locomotive diesel PM emissions, with 2.06 tons per year from arriving and departing trains and about 0.51 tons per year due to through trains and various power moves. Service and load testing account for less than 0.1% of diesel PM emissions, at about 0.01 tons per year.

The remaining approximately 46% of the UP City of Industry Railyard diesel PM emissions are generated by a variety of other sources including cargo handling equipment (about 25%), on-road trucks (about 18%), and transport refrigeration units and reefer cars (about 2%).

Table II-2: UP City of Industry Railyard and Surrounding Areas Diesel PM Emissions

DIESEL PM EMISSION SOURCES	UP City of Industry Railyard		Within 1 Mile	
	Tons ⁺ Per Year	Percent ⁺ of Total	Tons Per Year	Percent of Total
LOCOMOTIVES	5.87	54%	-	-
- Switch Locomotives	3.29	30%	-	-
- Line Haul Locomotives	2.57	24%	-	-
- Arriving and Departing Trains	2.06	19%	-	-
- Through Trains and Through Power Moves*	0.51	5%	-	-
- Service and Load Testing	0.01	<0.1%	-	-
CARGO HANDLING EQUIPMENT	2.77	25%	-	-
ON-ROAD TRUCKS	1.96	18%	-	-
OTHER (Transport Refrigeration Units and Reefer Cars)	0.27	2%	-	-
OFF-SITE MOBILE SOURCES (e.g., trucks, etc.)	-	-	27.6	100%
OFF-SITE STATIONARY SOURCES (e.g., refineries, power plants, etc.)	-	-	-	-
TOTAL	10.9	100%	27.6	100%

* Power Moves: trains with locomotives, whose objective is to either move locomotives to where they are needed, or to take malfunctioning units to service facilities.

⁺ Tonnages and percentages do not add precisely due to rounding.

Diesel PM is not the only toxic air contaminant emitted at the UP City of Industry Railyard. Relatively small amounts of toxic air contaminants are emitted from the railyard's wastewater treatment plant. Equipment at the wastewater treatment plant includes two oil/water separators, various pumps, and storage tanks. Operation of the oil/water separators results in fugitive emissions of volatile organic compounds. The detailed emission inventories for these toxic air contaminants are presented in the *Toxic Air Contaminant Emissions Inventory and Dispersion Modeling Report for the City of Industry, Los Angeles, California* submitted by Sierra Research in 2007 (hereafter Sierra Research Report). The total amount of these toxic air contaminant emissions is about 7 pounds per year, compared to 10.9 tons per year of diesel PM emissions in the railyard.

Other than diesel PM, benzene is the only toxic air contaminant among the top five cancer risk contributors, and is estimated at about 0.2 pounds per year. Calculation of potency weighted estimated toxic emissions for the on-site toxic air contaminants (see a similar analysis for off-site toxic air contaminants in Table II-3) shows a potential cancer risk level of less than a millionth of the cancer risk level for diesel PM (0.000009 vs. 10.9 tons per year). Hence, only diesel PM emissions are presented in the on-site emission analysis.

2. Surrounding Sources

ARB staff also evaluated significant mobile and stationary sources of diesel PM emissions within a one-mile distance of the UP City of Industry Railyard. A one-mile distance was chosen because a previous study of diesel PM emissions in the UP Roseville Railyard (ARB, 2004a) indicated that potential cancer risk associated with on-site diesel PM emissions is substantially reduced beyond a one-mile distance from the railyard. Diesel PM emissions from sources operating around the railyard are summarized in Table II-2.

ARB staff analyzed the significant off-site emission sources based on two categories: mobile and stationary. For the off-site mobile on-road sources, the analysis focused on on-road heavy-duty diesel trucks, as these are the primary source of diesel PM from the on-road vehicle fleet.

ARB staff estimated mobile emissions based on roadway specific vehicle activity data and allocated them to individual **roadway links**. All roadway links within a one-mile distance from UP City of Industry Railyard are included in the analysis. The estimates do not include the diesel PM emissions generated by idling of heavy-duty trucks, and off-road equipment. As the available activity data are limited, individual sources such as truck distribution centers and warehouses are not evaluated individually, but their truck traffic related to these facilities is reflected in the roadway link traffic activities. Because the off-site mobile sources have only focused on the on-road diesel emissions, the exclusion of extended idling and off-road equipment may result in an underestimation of off-site mobile sources emissions.

Roadway link: is defined as a discrete section of roadway with unique estimates for the fleet specific population and average speed and is classified as a freeway, ramp, major arterial, minor arterial, collector, or centroid connector.

Off-site diesel PM emissions are predominantly generated by mobile sources which, at 27.6 tons per year, provide 72% of the combined on-site and off-site diesel PM emissions. The majority of the off-site diesel PM emissions are from diesel-fueled heavy heavy-duty trucks traveling on the SR-60 Freeway.

The off-site stationary diesel PM emissions are about 0.02 tons per year. These emissions are based on the California Emission Inventory Development and Reporting System (CEIDARS) database, which contains information reported by the local air districts for stationary sources within their jurisdiction. The CEIDARS facilities whose locations fell within a one-mile distance of the UP City of Industry Railyard are selected. Diesel PM emissions are estimated from stationary internal combustion engines burning diesel fuel, operating at stationary sources reported in CEIDARS. The off-site stationary source diesel PM emissions are de minimis. Hence, they are not included in this analysis.

ARB staff also evaluated other toxic air contaminant emissions around the UP City of Industry Railyard. Within a one-mile distance of the railyard, 24 stationary toxic air contaminant sources are identified. For the year 2005, the total emissions of toxic air

contaminants other than diesel PM emitted from stationary sources within a one-mile distance from the railyard are estimated at about 13.0 tons per year. Sixty toxic air contaminant species are identified among these emissions, in which ammonia, xylene, and toluene are three major contributors with emissions estimated at 6.4, 1.2, and 1.2 tons per year, respectively.

Not all of these toxic air contaminants are identified as carcinogens. According to ARB's *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles* (ARB, 2000), diesel PM, 1,3-butadiene, benzene, carbon tetrachloride, and formaldehyde are defined as the top five cancer risk contributors, based on ambient concentrations. These toxic air contaminants account for 95% of the State's estimated potential cancer risk levels. This study also concluded that diesel PM contributes over 70% of the State's estimated potential cancer risk levels, significantly higher than other toxic air contaminants (ARB, 2000). Among the off-site toxic air contaminant emissions for the UP City of Industry Railyard, the top five cancer risk contributors (without diesel PM) are estimated at about 0.74 tons per year.

The Office of Environmental Health Hazard Assessment (OEHHA) has estimated an inhalation **cancer potency factor** for individual chemicals and some chemical mixtures such as whole diesel exhaust. Diesel PM contains many individual cancer-causing chemicals. The individual cancer-causing chemicals are not separately evaluated so as to avoid double counting. The four compounds listed here are given a weighting factor by comparing each compound's cancer potency factor to the diesel PM cancer potency factor. This factor is multiplied by the estimated emissions for that compound, which gives the potency weighted estimated toxic emissions as shown in Table II-3. As can be seen in Table II-3, the potency weighted toxic emissions for these toxic air contaminants are de minimis, at about 0.02 tons per year. Hence, they are not included in this analysis.

Cancer potency factors are expressed as the 95% upper confidence limit of excess cancer cases occurring in an exposed population assuming continuous lifetime exposure to a substance at a dose of one milligram per kilogram of body weight, and are expressed in units of $(\text{mg}/\text{kg}\text{-day})^{-1}$.

In addition, ARB staff evaluated the potential cancer risk levels caused by the use of gasoline in the South Coast Air Basin. Table II-4 shows the emissions of four major carcinogenic toxic air contaminants from South Coast Air Basin gasoline sources in 2005 (ARB, 2006a). As indicated in Table II-4, the potency weighted emissions of these four toxic air contaminants from all types of gasoline sources are estimated at about 816 tons per year, or about 11% of diesel PM emissions in the South Coast Air Basin. If only gasoline-powered vehicles are considered, the potency weighted emissions of these four toxic air contaminants are estimated at about 438 tons per year, or about 6% of diesel PM emissions in the Basin. Hence, gasoline-powered vehicular sources are not included in the analysis.

Table II-3: Potency Weighted Estimated Toxic Emissions from Significant Off-Site Stationary Sources Surrounding UP City of Industry Railyard

Compound	Cancer Potency Factor	Weighted Factor	Estimated Emissions (Tons Per Year)	Potency Weighted Estimated Toxic Emissions (Tons Per Year)
Diesel PM	1.1	1	0.02	0.02
1,3-Butadiene	0.6	0.55	0.004	0.002
Benzene	0.1	0.09	0.01	0.0009
Carbon Tetrachloride	0.15	0.14	0.0005	0.00007
Formaldehyde	0.021	0.02	0.73	0.015
Total (non-diesel PM)	-	-	0.74	0.02

Table II-4: Emissions of Major Toxic Air Contaminants from Use of Gasoline in the South Coast Air Basin

Compound	Toxic Air Contaminant Emissions (Tons Per Year)			
	From All Sources	Potency Weighted*	From Gasoline Vehicles	Potency Weighted*
<i>Diesel PM</i>	7,446	7,446	-	-
1,3-Butadiene	695	382	420	231
Benzene	3,606	325	2,026	182
Formaldehyde	4,623	92	1,069	21
Acetaldehyde	1,743	17	314	3
Total (non-diesel PM)	10,668	816	3,829	438

*Based on cancer potency weighted factors.

D. What are the potential cancer risks from the UP City of Industry Railyard?

As discussed previously, ARB developed the *Health Risk Assessment Guidance for Railyard and Intermodal Facilities* (ARB, 2006d) to help ensure that the methodologies used in each railyard HRA meet the requirements in the ARB / Railroad Statewide Agreement. The railyard HRA follows *The Air Toxics Hot Spots Program Risk Assessment Guidelines* (OEHHA, 2003) published by the Office of Environmental Health Hazard Assessment, and is consistent with the *Roseville Railyard Study* (ARB, 2004a) performed by ARB staff.

The U.S. EPA's newly approved state-of-science air dispersion model AERMOD (American Meteorological Society / EPA Regulatory Model Improvement Committee **MODEL**) is used in the ARB health risk assessments. One of the critical inputs required for the air dispersion modeling is meteorological data, such as wind direction and wind speed. These parameters determine where and how the pollutants will be transported.

The UP City of Industry Railyard does not monitor meteorological variables on site. Wind speed, wind direction, temperature, and cloud cover data from the Ontario International Airport were used for this project. Although the Ontario International Airport is approximately 18 miles east-northeast of the UP City of Industry Railyard, the dominant effect of the elevated terrain to the north was judged to be sufficiently important for airflow patterns that Ontario surface winds would be most representative of conditions at the railyard. The selection of Ontario International Airport for surface winds data was largely dependent on the limited availability of data. There are several SCAQMD surface stations in the general vicinity of the railyard for which historical (1981) data are available, but only in a form usable in AERMOD's predecessor, ISCST3.

The potential cancer risks associated with the estimated 2005 diesel PM emissions are displayed in **isopleths**. For this analysis, ARB staff elected to present the cancer risk isopleths focusing on risk levels of 10, 25, 50, 100, and 250 in a million. Figure II-2 (See Page 18) and Figure II-4 (See Page 24) present these isopleths: Figure II-2 focuses on the near source risk levels, while Figure II-4 focuses on the more regional impacts. In each figure, the risk isopleths are overlaid onto a satellite image of the area surrounding the UP City of Industry Railyard, to better illustrate the land use (residential, commercial, industrial, or mixed use) of these impacted areas.

An **isopleth** is a line drawn on a map through all point of equal value of some definable quantity; in this case, cancer risk.

The OEHHA Guidelines specify that, for health risk assessments, the cancer risk for the maximum exposure at the point of maximum impact be reported. The point of maximum impact (PMI), which is defined as a location or the receptor point with the highest cancer risk level outside of the facility boundary, with or without residential exposure, is predicted to be located at the north side of the railyard fenceline, in the city of La Puente (see Figure II-2). The PMI is downwind of the high emission density areas for the prevailing westerly-southwesterly wind, where yard operations due to cargo handling, switching activity, and locomotive idling generate about 75% of facility-wide diesel PM emissions (see the emission allocation in Appendix E).

The cancer risk at the PMI is estimated to be about 480 chances in a million. The land use in the vicinity of the point of maximum impact is residential. The potential cancer risk of maximally exposed individual resident (MEIR) or maximum individual cancer risk (MICR) is estimated at about 450 chances in a million.


As indicated by the *Roseville Railyard Study* (ARB, 2004a), the location of the PMI may vary depending upon the settings of the model inputs and parameters, such as meteorological data set or emission allocations in the railyard. Therefore, given the

estimated emissions, modeling settings, and the assumptions applied to the risk assessment, there are great uncertainties associated with the estimation of the point of maximum impact (PMI) location and maximum individual cancer risk (MICR). These indications should not be interpreted as a literal prediction of disease incidence, but more as a tool for comparison. In addition, the estimated point of maximum impact location and maximum individual cancer risk value may not be replicated by air monitoring.

ARB staff also conducted a comparison of cancer risks estimated at the PMI versus MICR, and the differences of facility-wide diesel PM emissions between the UP and BNSF railyards. The ratios of cancer risks at the PMI or MICR to the diesel PM emissions do not suggest that one railroad's facilities have statistically higher cancer risk than the other railroad's or vice versa. Rather, the differences are primarily due to emission spatial distributions from individual operations among railyards.

At the UP City of Industry Railyard property boundaries, the estimated cancer risk generally ranges from about 100 to 250 in a million. As shown in Figure II-2, within about a half mile of the UP City of Industry Railyard boundaries, the estimated cancer risks lowers to about 50 in a million, and within a mile of the railyard boundary the estimated cancer risks are lowered to 25 in a million. At about two miles from the UP City of Industry Railyard, as Figure II-4 indicates, the estimated cancer risks are about 10 in a million.

**Figure II-2: Estimated Near-Source
Cancer Risk (Chances per Million People)
From the UP City of Industry Railyard**

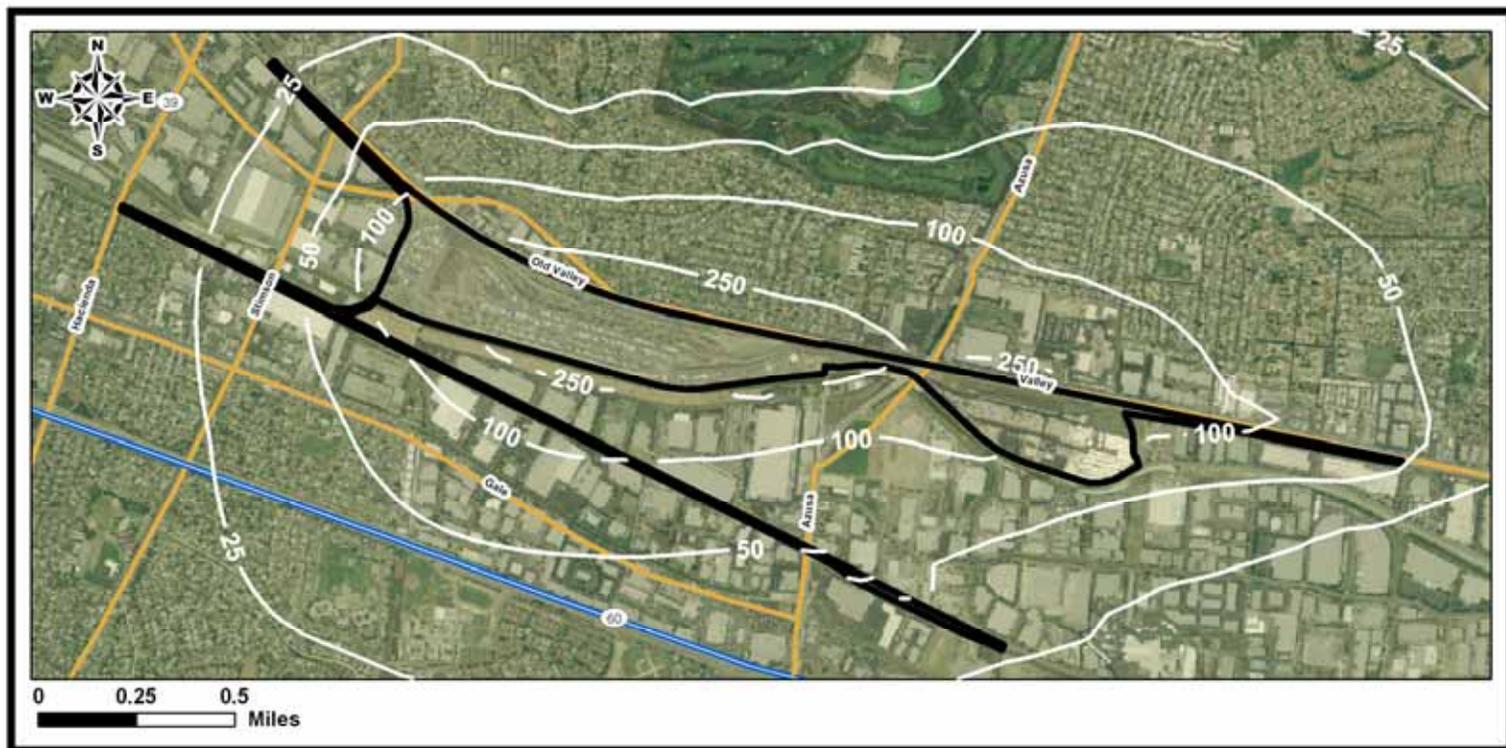

The OEHHA Guidelines recommend a 70-year lifetime exposure duration to evaluate the potential cancer risks for residents. Shorter exposure durations of 30 years and 9 years are also recommended for residents and school-age children, respectively, as a supplement. These three exposure durations – 70 years, 30 years, and 9 years – all assume exposure for 24 hours a day, and 7 days a week. It is important to note that children, for physiological as well as behavioral reasons, have higher rates of exposure than adults on a per unit body weight basis (OEHHA, 2003).

To evaluate the potential cancer risks for workers, the OEHHA Guidelines recommend that a 40-year exposure duration be used, assuming workers have a different breathing rate ($149 \text{ L kg}^{-1} \text{ day}^{-1}$) and exposure for an 8-hour workday, five days a week, 245 days a year.

Table II-5 shows the equivalent risk levels of 70- and 30-year exposure durations for exposed residents; and 40- and 9-year exposure durations for workers and school-age children, respectively. As Table II-5 shows, the 10 in a million isopleth line in Figure II-4 would become 4 in a million for exposed population with a shorter residency of 30

years, 2.5 in a million for exposed school-age children, and 2 in a million for off-site workers.

To conservatively communicate the risks, ARB staff presents the estimated cancer risk isopleths all based on a 70-year resident exposure duration, even for those impacted industrial areas where no resident lives.

Table II-5: Equivalent Potential Cancer Risk Levels for 70-, 40-, 30-, and 9-Year Exposure Durations

Exposure Duration (Years)	Equivalent Risk Level (Chance in a Million)				
	10	25	50	100	250
70	10	25	50	100	250
30	4	11	21	43	107
9 [‡]	2.5	6.3	12.5	25	62.5
40 [*]	2	5	10	20	50

[‡] Exposure duration for school-age children, age 0-9.

^{*} Exposure duration for off-site workers: work schedule of 8 hours a day, 5 days a week, 245 days a year.


The more populated areas near the UP City of Industry Railyard are located northwest, northeast, and southwest of the railyard. Areas located southeast are predominantly industrial-commercial. Based on the 2000 U.S. Census Bureau's data, the zone of impact of the estimated risks above 10 chances in a million levels encompasses approximately 8,300 acres where about 91,000 residents live. Table II-6 presents the exposed population and area coverage size for various impacted zones of cancer risks.

Table II-6: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels (Assumes a 70-Year Exposure)

Estimated Risk (Per Million)	Estimated Impacted Area (Acres)	Estimated Exposure (Population)
10 - 25	5,400	57,000
26 - 50	1,600	18,000
51 - 100	850	10,000
101 - 250	400	5,600
> 250	48	780
> 10	8,300	91,000

It is important to understand that these risk levels represent the predicted risks (due to the UP City of Industry Railyard diesel PM emissions) above the existing background risk levels. For the broader South Coast Air Basin, the estimated average regional background risk level is estimated to be about 1,000 in a million caused by all toxic air pollutants in 2000 (ARB, 2006a). Figure II-3 provides a comparison of the predicted average potential cancer risks in various isopleths to the regional background risk level from diesel PM emissions. For example, in the 101 – 250 per million risk range, the average potential cancer risk above the regional background is about 400 in a million. Therefore, residents living in that area would have a potential cancer risk of about 1,200 in a million.

Figure II-3: Comparison of Estimated Potential Cancer Risks from the UP City of Industry Railyard and the Regional Background Risk Levels

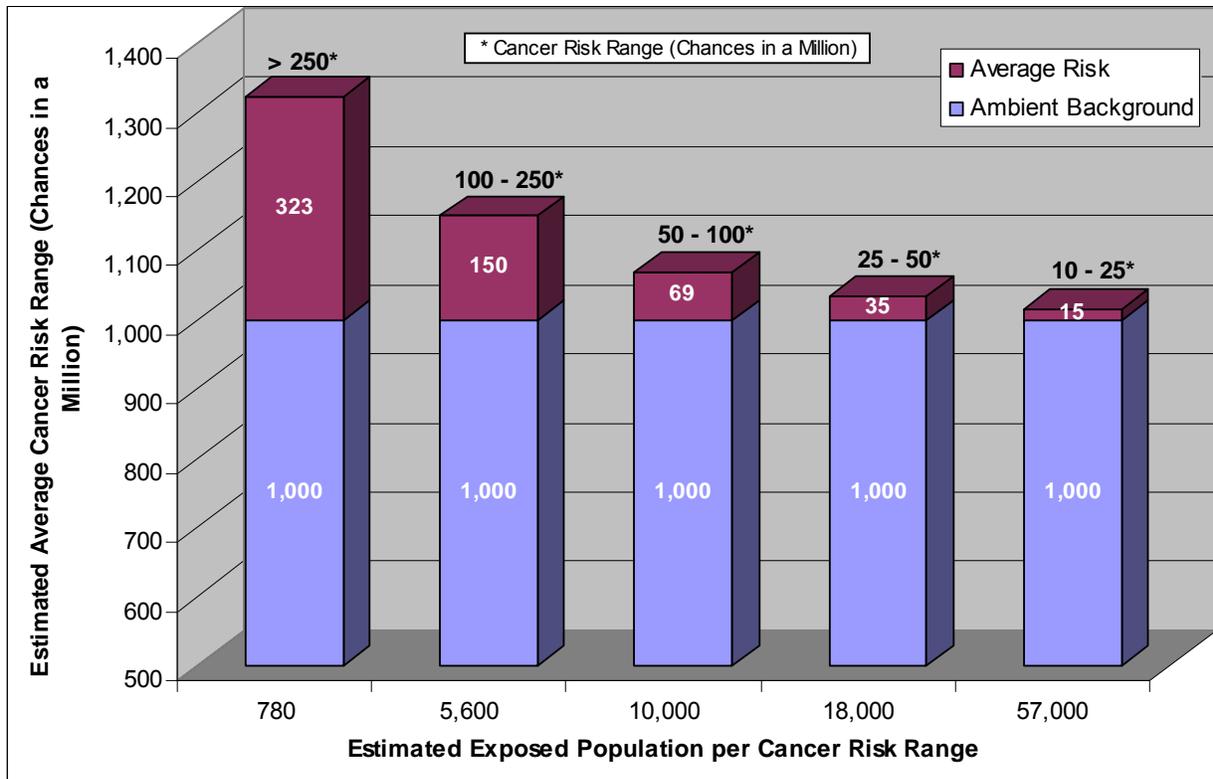

E. What are the estimated non-cancer chronic risks near the UP City of Industry Railyard?

The potential non-cancer chronic risk health hazard index levels from the estimated diesel PM emissions from the UP City of Industry Railyard are estimated to be about 0.20. According to OEHHA Guidelines (OEHHA, 2003), these levels indicate that the potential non-cancer chronic public health risks are less likely to happen.

Due to the uncertainties in the toxicological and epidemiological studies, diesel PM as a whole was not assigned a short-term acute reference exposure level. It is only the specific compounds of diesel exhaust (e.g., acrolein) that independently have potential acute effects (such as irritation of the eyes and respiratory tract), and an assigned acute reference exposure level. However, acrolein is a chemically reactive and unstable compound, and easily reacts with a variety of chemical compounds in the atmosphere. Compared to the other compounds in diesel exhaust, the concentration of acrolein has a much lower chance of reaching a distant off-site receptor. More importantly, given the multitude of activities ongoing at facilities as complex as railyards, there is a much higher level of uncertainty associated with maximum hourly-specific emission data, which are essential for assessing acute risk. Therefore, non-cancer acute risk is not

addressed quantitatively in this study. From a risk management perspective, ARB staff believes it is reasonable to focus on diesel PM cancer risk because it is the predominant risk driver, and the most effective parameter to evaluate risk reduction actions. Moreover, actions to reduce diesel PM will also reduce non-cancer risks.

F. What are the estimated health risks from off-site emissions?

ARB staff evaluated the health impacts from off-site pollution sources near the UP City of Industry Railyard using the U.S. EPA-approved AERMOD dispersion model. Specifically, off-site mobile diesel PM emission sources located within a one-mile distance from the railyard were included. Diesel PM off-site emissions used in the off-site modeling runs consisted of 27.6 tons per year from roadways, representing emissions for 2005. Diesel PM emissions from stationary sources were de minimis. The estimated potential cancer risks associated with off-site diesel PM emissions are illustrated in Figure II-5 (See Page 25). As indicated in Figure II-5, the zone of impact of estimated cancer risks associated with off-site diesel PM emissions is larger than that of the UP City of Industry Railyard.

Based on the 2000 U.S. Census Bureau’s data, the zone of impact of the estimated potential cancer risks above 10 chances in a million associated with off-site diesel PM emissions encompasses approximately 32,000 acres, where about 230,000 residents live. For comparison with the UP City of Industry Railyard health risks, the same level of potential cancer risks (more than 10 chances in a million) associated with railyard diesel PM emissions covers about 8,300 acres where approximately 91,000 residents live. Table II-7 presents the exposed population and area coverage size for various impacted zones of cancer risks associated with off-site diesel PM emissions.

Table II-7: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels from Off-Site Emissions Near the UP City of Industry Railyard

Estimated Risk (Per Million)	Estimated Impacted Area (Acres)	Estimated Exposure (Population)
10 - 25	19,000	110,000
26 - 50	6,200	71,000
51 - 100	3,300	30,000
101 - 250	2,700	16,000
> 250	430	1,600
> 10	32,000	230,000

This page left intentionally blank

Figure II-4: Estimated Regional Cancer Risk (Chances per Million People) From the UP City of Industry Railyard


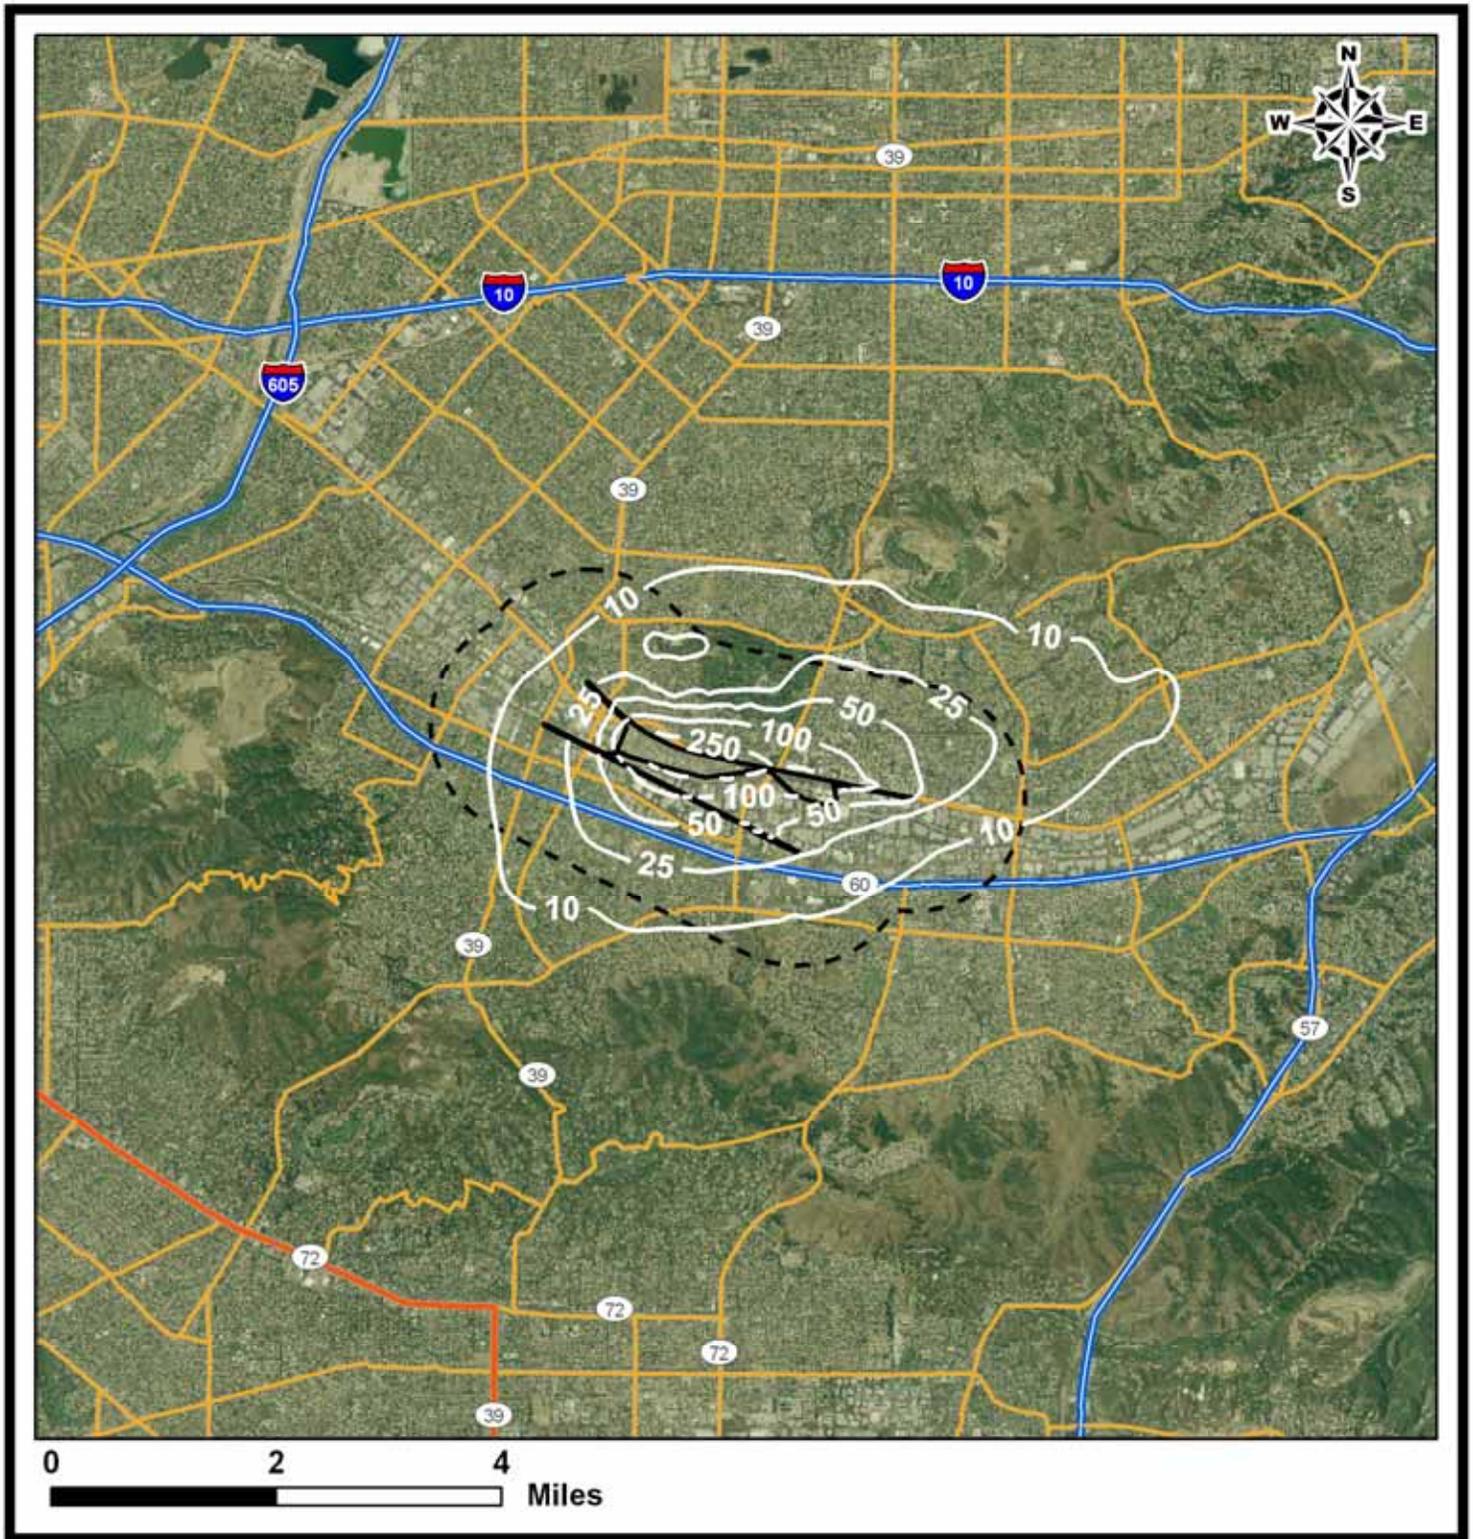


Figure II-5: Estimated Cancer Risk
Near the UP City of Industry
Railyard (Off-Site)

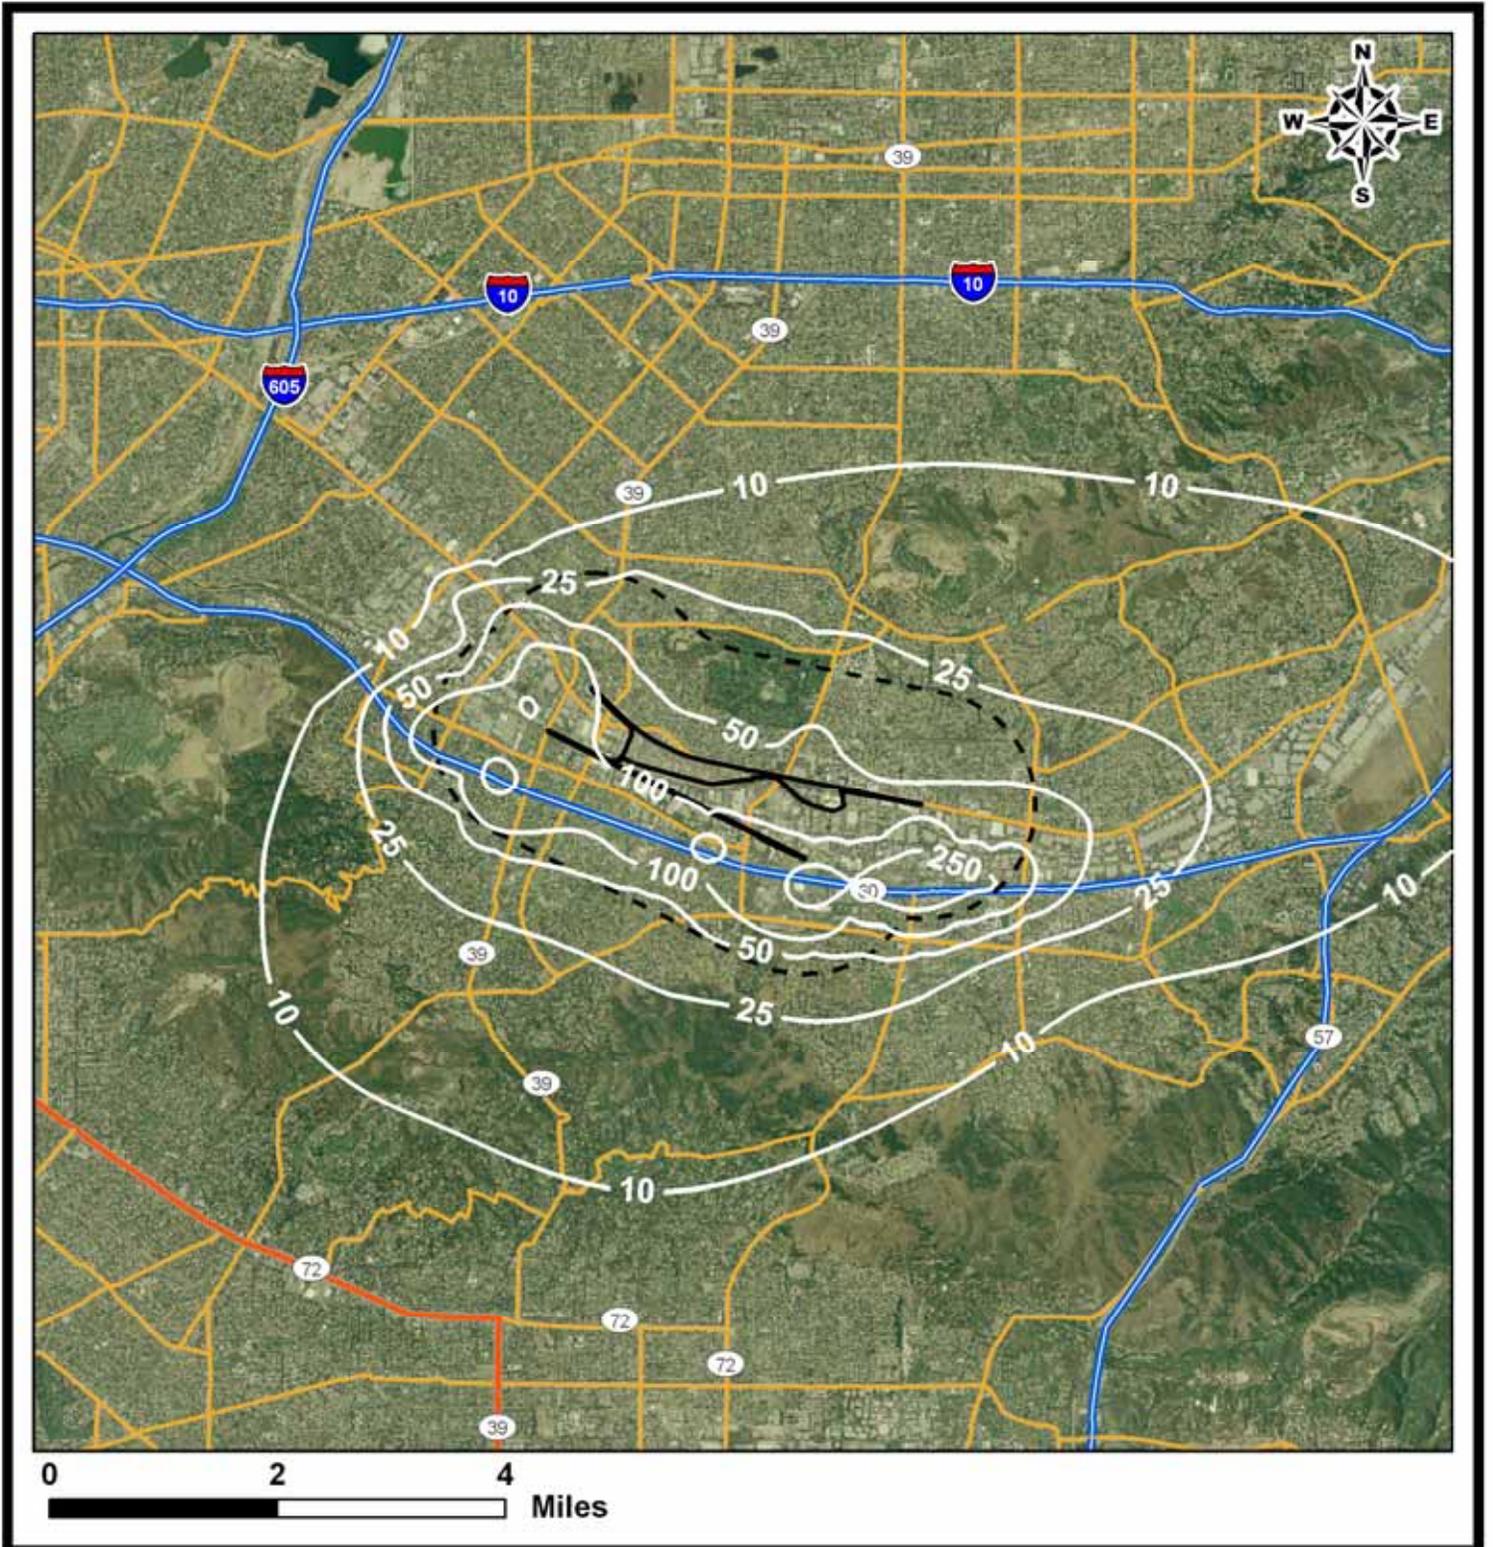

G. Can study estimates be verified by air monitoring?

Currently, there is no approved specific measurement technique for directly monitoring diesel PM emissions in the ambient air. This does not preclude the use of an ambient monitoring program to measure general air quality trends in a region. Since cancer risk is based on an annual average concentration, a minimum of a year of monitoring data would generally be needed.

H. What activities are underway to reduce diesel PM emissions and public health risks?

The Air Resources Board (ARB) has developed a comprehensive approach to reduce locomotive and railyard emissions through a combination of voluntary agreements, ARB and United States Environmental Protection Agency (U.S. EPA) regulations, funding programs, and early replacement of California's line haul and yard locomotive fleets. The information presented below summarizes California's key locomotive and rail yard air pollution control measures and strategies.

South Coast Locomotive NO_x Fleet Average Agreement (1998): Signed in 1998 between ARB and both Union Pacific Railroad (UP) and BNSF Railway (BNSF), it requires the locomotive fleets that operate in the South Coast Air Quality Management District (SCAQMD) to meet, on average, U.S. EPA's Tier 2 locomotive emissions standards by 2010. Tier 2 locomotives became commercially available in 2005 and provide a 65% reduction in oxides of nitrogen (NO_x) and 50% reduction in diesel particulate matter (PM) emissions. This Agreement will provide locomotive fleet benefits in southern California 20 years earlier than the rest of the country.

Statewide Railroad Agreement (2005): ARB and both UP and BNSF signed a voluntary statewide agreement in 2005 which does not change any federal, state, or local authorities to regulate railroads. The Agreement has resulted in measures that have achieved a 20% reduction in locomotive diesel PM emissions in and around rail yards since its adoption in June 2005. The measures in the Agreement include:

- Phasing out of non-essential idling on all locomotives without idle reduction devices (60 minute limit – fully implemented);
- Installing idle reduction devices on 99% of the 450 California-based locomotives by June 30, 2008 (15 minute limit – 95% implemented);
- Identifying and expeditiously repair locomotives with excessive smoke and ensure that at least 99% of the locomotives operating in California pass smoke inspections (fully implemented);
- Requiring all locomotives that fuel in the state use at least 80% federal or California ultra low sulfur (15 parts per million) diesel fuel by January 1, 2007 (six years prior to federal requirement – fully implemented);
- Preparing new health risk assessments for 16 major railyards, based on the UP Roseville Railyard Health Risk Assessment (completed in 2004) and OEHHA Guidelines (nine of 16 finalized in November 2007); and

- Identifying and implementing future feasible mitigation measures based on the results of the railyard health risk assessments.

ARB Diesel Fuel Regulations Extended to Intrastate Locomotives (2007): This regulation, approved in 2004, requires intrastate locomotives that operate 90% of the time in the state to use only California ultra low sulfur (15 parts per million) diesel fuel. CARB diesel's lower aromatics provide on average a 6% reduction in NO_x and 14% reduction in diesel PM emissions as compared to U.S. EPA ultra low sulfur on-road diesel fuel. ARB staff estimates that there are 250 intrastate locomotives currently operating in the South Coast Air Basin, and CARB diesel fuel will reduce these locomotive emissions by up to 30 tons per year for diesel PM and 300 tons per year for NO_x. The regulation took effect on January 1, 2007.

ARB Cargo Handling Equipment Regulations (2007): This regulation, approved in 2005, requires the control of emissions from more than 4,000 pieces of mobile cargo handling equipment, such as yard trucks and forklifts that operate at ports and intermodal rail yards. Implementation of this regulation will reduce diesel PM by approximately 40% in 2010 and 65% in 2015, and NO_x emissions by approximately 25% in 2010 and 50% in 2015. This regulation is expected to reduce diesel PM and NO_x emissions by up to 80% by 2020. The regulation took effect on January 1, 2007.

Heavy-Duty Diesel New Trucks Regulations: ARB and the U.S. EPA both have adopted emission standards for 2007 and subsequent model year heavy-duty diesel engines. These standards represent a 90% reduction of NO_x emissions, 72% reduction of non-methane hydrocarbon emissions, and a 90% reduction of PM emissions compared to the 2004 model year emission standards. The ARB adopted similar emission standards and test procedures to reduce emissions from 2007 and subsequent model year heavy-duty diesel engines and vehicles. These stringent emission standards will reduce NO_x and diesel PM emissions statewide from on-road heavy diesel trucks by approximately 50 and 3 tons per day, respectively, in 2010; by 140 and 6 tons per day, respectively, in 2015; and by 210 and 8 tons per day, respectively, in 2020.

ARB Statewide Diesel Truck and Bus Regulation: The ARB is developing a regulation to reduce diesel PM, NO_x, and greenhouse gas emissions from on-road heavy-duty diesel-fueled vehicles. This measure will cover long and short haul truck-tractors, construction related trucks, wholesale and retail goods transport trucks, tanker trucks, package and household goods transport trucks, and most other diesel-powered trucks and buses with a gross vehicle weight rating of 14,000 pounds or greater (shuttle buses of all sizes will also be included). The goals of this effort are: (a) by 2014, emissions are to be no higher than a 2007 model year engine with a diesel particulate filter, and (b) by 2021, emissions are to be no higher than a 2010 model year engine. With the implementation of the proposed measure, California's emissions from this sector could be reduced by about 70%, and NO_x emissions by up to 35% in 2014. This measure is scheduled for ARB Board consideration in October 2008.

ARB Regulation to Control Emissions from In-Use On-Road Diesel-Fueled Heavy-Duty Drayage Trucks at Ports and Intermodal Railyard Facilities: The ARB developed a port truck fleet modernization program that will reduce diesel PM by 86% by 2010, and NO_x by 56% by 2014, as compared to the 2007 baseline. There are an estimated 20,000 drayage trucks operating at California's ports and intermodal railyards. These trucks are a significant source of air pollution, with about 3 tons per day of diesel PM and 61 tons per day of NO_x in 2007. Drayage trucks also often operate in close proximity to communities. This regulation will result in significant reductions in exposure and potential cancer risks to residents that live near ports, railyards, and the major roadways. The ARB approved the regulation in December 2007.

ARB Tier 4 Off-Road Diesel-Fueled New Engine Emission Standards: In 2004, the ARB and U.S. EPA adopted a fourth phase of emission standards (Tier 4). New off-road engines are now required to meet aftertreatment-based exhaust standards for particulate matter (PM) and NO_x starting in 2011. The Tier 4 standards will achieve over a 90% reduction over current levels by 2020, putting off-road engines on a virtual emission par with on-road heavy duty engines.

Transport Refrigeration Unit (TRU) Airborne Toxics Control Measure (ATCM): This airborne toxics control measure is applicable to refrigeration systems powered by integral internal combustion engines designed to control the environment of temperature sensitive products that are transported in trucks, trailers, railcars, and shipping containers. Transport refrigeration units may be capable of both cooling and heating. Estimates show that diesel PM emissions for transport refrigeration units and transport refrigeration unit gen-set engines will be reduced by approximately 65% in 2010 and 92% in 2020. California's air quality will also experience benefits from reduced NO_x emissions and reduced HC emissions. The transport refrigeration unit air toxics control measure is designed to use a phased approach over about 15 years to reduce the diesel PM emissions from in-use transport refrigeration unit and transport refrigeration unit generator set engines that operate in California. The TRU ATCM was approved on February 26, 2004 and became effective on December 10, 2004. Compliance dates for meeting in-use performance standards will be phased in, beginning December 31, 2008, and will extend out in time from there.

U.S. EPA Locomotive Emission Standards: Under the Federal Clean Air Act, U.S. EPA has sole authority to adopt and enforce locomotive emission standards. Under U.S. EPA's rules, this preemption also extends to the remanufacturing of existing locomotives. In April 2007, U.S. EPA released a proposed locomotive rulemaking that would reduce Tier 0 locomotive NO_x emissions by 20% and Tier 0-3 remanufacture and new standards to reduce PM by 50%. The ARB is relying on U.S. EPA to expeditiously require the introduction of the next generation or Tier 4 locomotive emission standards that require Tier 4 locomotives built with diesel particulate filters and selective catalytic reduction. Combined, these exhaust aftertreatment devices are expected to provide up to a 90% reduction in NO_x and PM emissions beginning in 2015. The final U.S. EPA locomotive regulations were released on March 14, 2008.

ARB Goods Movement Emission Reduction Plan (GMERP): Approved in 2006, this plan forecasts goods movement emissions growth and impacts. It contains a comprehensive list of proposed strategies to reduce emissions from ships, trains, and trucks and to maintain and improve upon air quality. The strategies in the plan, if fully implemented, would reduce locomotive NO_x and diesel PM emissions by up to 85% by 2020.

California Yard Locomotive Replacement Program: One locomotive strategy being pursued is to replace California's older yard locomotives that operate in and around railyards statewide. Yard locomotives represent about 5% of the statewide locomotive NO_x and diesel PM emissions, but often occur in railyards located in densely populated urban centers. Multiple nonroad engine (gen-set) and electric-hybrid yard locomotives have demonstrated they can reduce NO_x and diesel PM emissions by up to 90% as compared to existing locomotives. As of 2008, UP has deployed 60 gen-set and 12 electric hybrid yard locomotives in southern California. BNSF has been operating four liquefied natural gas (LNG) yard locomotives in downtown Los Angeles since the mid-1990s. UP and BNSF have ordered more gen-set locomotives for use in northern California in 2008.

This page left intentionally blank

III. UP CITY OF INDUSTRY RAILYARD DIESEL PM EMISSIONS

In this chapter, we provide a summary of the diesel particulate matter (PM) emissions inventory for the Union Pacific Railroad's (UP) City of Industry Railyard.

For the year 2005, the combined diesel PM emissions from the UP City of Industry Railyard (on-site emissions) and significant non-railyard emission sources within a one-mile distance (off-site emissions) are estimated at 38.5 tons per year. Estimated off-site diesel PM emissions account for about 27.6 tons per year, or about 72% of the total combined on-site and off-site diesel PM emissions. The UP City of Industry Railyard diesel PM emissions are estimated at about 10.9 tons per year, or about 28% of the total combined on-site and off-site diesel PM emissions.

A. On-Site UP City of Industry Railyard Diesel PM Emissions Summary

The UP City of Industry Railyard activity data and emission inventories were provided by the Union Pacific Railroad and its consultants, Sierra Research and Air Quality Management Consulting. The methodology used to calculate the diesel PM and other toxic air contaminant emissions is based on the ARB *Rail Yard Emissions Inventory Methodology* (ARB, 2006c). Detailed calculation methodologies and resulting emission factors are included in the Sierra Research Report (see ARB website <http://www.arb.ca.gov/railyard/hra/hra.htm>)

The UP City of Industry Railyard is both a domestic intermodal container handling facility and a classification yard for manifest (mixed freight) trains. Incoming trains terminate on various tracks within the railyard. Yard switchers then move sections of cars to various locations within the railyard, as needed. Sections of manifest train cars are moved and reconnected to others to build new outbound trains. Intermodal cars are moved to the intermodal loading/unloading tracks where containers are removed from and placed on the cars.

Activities at the railyard include receiving inbound trains, switching cars, loading and unloading intermodal trains, storing intermodal containers and chassis, building and departing outbound trains, and repairing freight cars and intermodal containers/chassis. UP operates yard switcher locomotives within the City of Industry to support many of these activities.


Facilities within the railyard include classification tracks, a gate complex for inbound and outbound intermodal truck traffic, intermodal loading and unloading tracks, a crane maintenance shop, and various buildings and facilities supporting railroad and contractor operations. The railyard also has a wastewater treatment plant. Equipment at the wastewater treatment plant includes two oil/water separators, various pumps, and storage tanks.

To characterize diesel PM emissions from on-site sources, they are allocated into eleven different areas based on specific activities. The railyard areas of operations are summarized in Table III-1, and shown in Figure III-1. The detailed schematic and descriptions of the areas and activities are also presented in the Sierra Research Report.

Table III-1: UP City of Industry Railyard Activities

Area	Description
Intermodal Gate	Heavy heavy-duty diesel-fueled truck idling and traveling.
Los Angeles Sub	Through trains.
Unloading Tracks	Top picks and Rubber Tire Gantry (RTG) cranes are used to unload containers and place on cars.
"A" Yard	Arriving and departing trains.
Azusa Yard	Local trains operating out of the main railyard.
Marne Yard	Originating trains and train classification.
Alhambra Sub	Through trains.
Trailer Parking	Heavy heavy-duty diesel-fueled truck idling and traveling.
Chassis Stacking	Stacking of container chassis.
Crane Maintenance	Maintenance of various types of cranes
Bowl	Train classification, as well as some arriving and departing trains.

Figure III-1: UP City of Industry Railyard Diesel PM Emission Source Locations

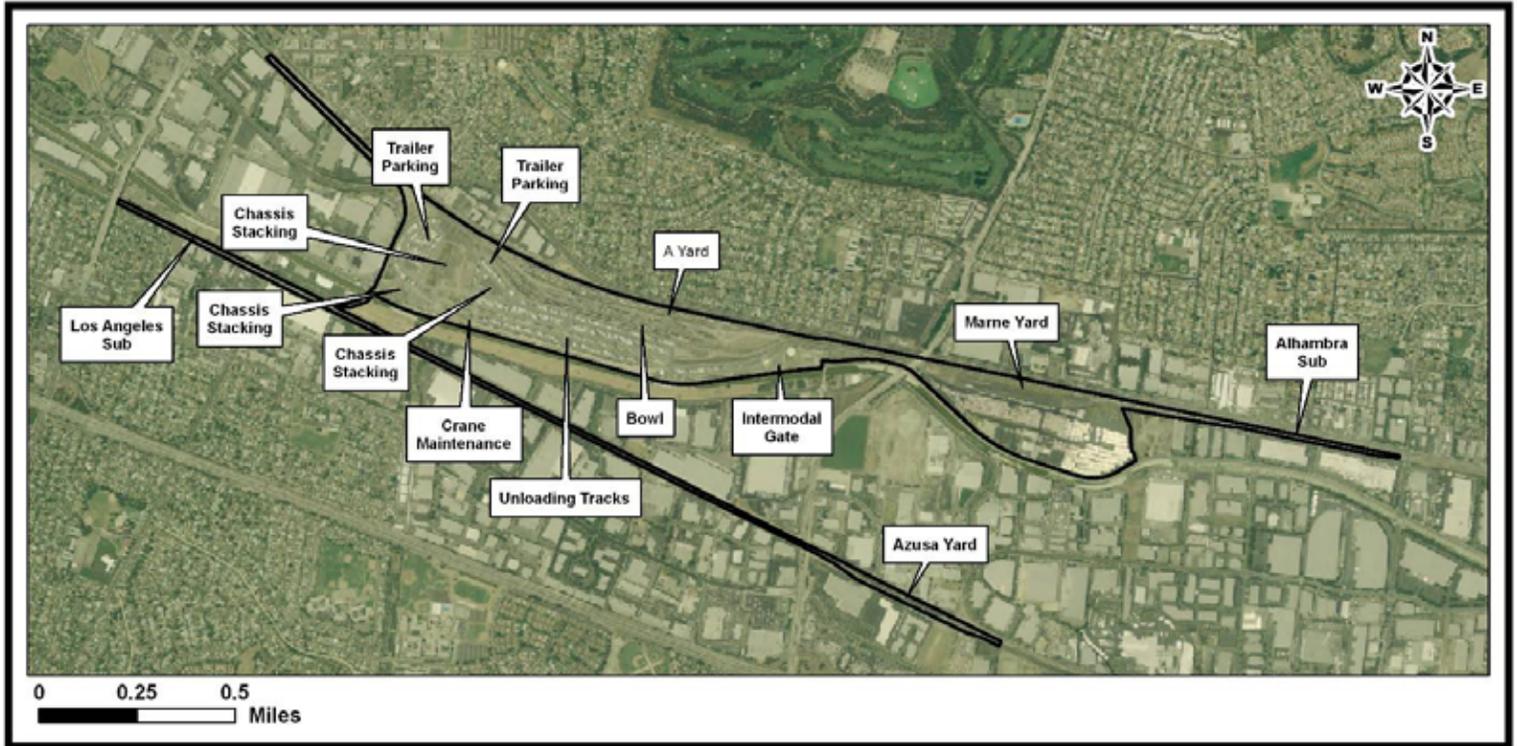

With the data provided by UP and the methodology described in the Sierra Research Report, the diesel PM emissions are calculated for the UP City of Industry Railyard at about 10.9 tons per year for the year 2005. As shown in Table III-2, emissions from locomotives comprise more than half of the total emissions, at 5.87 tons per year. The next highest percentage is from cargo handling equipment, at 25% (2.77 tons per year). On-road trucks produce about a fifth of the total emissions, at 1.96 tons per year. Transport refrigeration units and refrigerated freight railcars (reefer cars) generate about 2%, at 0.27 tons per year.

Table III-2: Summary of UP City of Industry Railyard Diesel PM Emissions

Source	Diesel PM Emissions in 2005	
	Tons Per Year	Percent of Total ⁺
Locomotives	5.87	54%
<i>Switch Locomotives</i>	3.29	30%
<i>Line Haul Locomotives</i>	2.57	24%
<i>Arriving and Departing Trains</i>	2.06	19%
<i>Through Trains and Through Power Moves</i>	0.51	5%
<i>Service and Load Testing</i>	0.01	<0.1%
Cargo Handling Equipment	2.77	25%
On-Road Trucks**	1.96	18%
Other Sources (Transport Refrigeration Units and Reefer Cars)	0.27	2%
Total	10.9	100%

⁺Percentages do not add to 100% due to rounding.

^{**} For further detail on railyard versus off-site on-road truck emissions, see Section C.

Diesel PM is not the only toxic air contaminant emitted at the UP City of Industry Railyard. Relatively small amounts of toxic air contaminants are emitted from the railyard's wastewater treatment plant. The detailed emission inventories for these toxic air contaminants are presented in the Sierra Research Report. The total amount of these toxic air contaminant emissions is about 7 pounds per year, compared to 10.9 tons per year of diesel PM emissions in the railyard.

According to ARB's *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles* (ARB, 2000), diesel PM, 1,3-butadiene, benzene, carbon tetrachloride, and formaldehyde are defined as the top five cancer risk contributors, based on ambient concentrations. These toxic air contaminants account for 95% of the State's estimated potential cancer risk levels. Other than diesel PM, benzene is the only toxic air contaminant among the top five cancer risk contributors, and is estimated at about 0.2 pounds per year. Calculation of potency weighted estimated toxic emissions for the on-site toxic air contaminants (see a similar analysis for off-site toxic air contaminants in Table III-12) shows a potential cancer risk level of less than a millionth of the cancer risk level for diesel PM (0.000009 vs. 10.9 tons per year). Hence, only diesel PM emissions are presented in the on-site emission analysis.

1. Locomotives

Locomotives are the largest diesel PM emission source at the UP City of Industry Railyard. Locomotives contribute about 5.87 tons per year, or about 54% of the total railyard diesel PM emissions.

As shown in Table III-3, the highest percentage of locomotive diesel PM emissions result from switch locomotives conducting railyard operations, accounting for a little more than half of the total locomotive diesel PM emissions (3.29 tons per year). Line haul locomotives generate 2.57 tons per year of diesel PM emissions, with arriving and departing trains at about 2.06 tons per year, and through trains and various power moves (e.g., moving to other yards for fueling) at about 0.51 tons per year. Service and load testing only produce about 0.01 tons per year of diesel PM emissions.

Temporal emission profiles are estimated for each activity based on hourly locomotive counts. The profiles developed account for hourly (diurnal) and seasonal temporal variations and are reflected in the air dispersion modeling to capture operational variations.

The locomotive diesel PM emission factors used in this study are based on those of the *Roseville Railyard Study* (ARB, 2004a), and have been adjusted according to 2005 fuel sulfur levels provided by UP. The adjustment factors are linear in sulfur content, allowing emission rates for a specific mixture of California and non-road fuels to be calculated as a weighted average of the emission rates for each of the fuels. Adjustment factors were developed and used to prepare tables of emission factors for two different fuel sulfur levels, 221 ppm for California diesel fuel and 2,639 for non-California diesel fuel. This is discussed in further detail in Section III.B.5.

The results are shown in two tables in Appendix D. Table III-3 presents the summary of diesel PM emissions from locomotive operation activities.

**Table III-3: Diesel PM Emissions by Locomotive Operations
at the UP City of Industry Railyard**

Activity	Diesel PM Emissions in 2005	
	Tons Per Year	Percent of Total
Switch Locomotives	3.29	56%
Line Haul Locomotives	2.57	44%
<i>Arriving and Departing Trains</i>	2.06	35%
<i>Through Trains and Through Power Moves</i>	0.51	9%
Service and Load Testing	0.01	<0.2%
Total	5.87	100%

The ARB has developed an integrated approach to reduce statewide locomotive emissions through a combination of voluntary agreements, ARB and U.S. EPA regulations, incentive funding programs, and early replacement of California’s line haul and yard locomotive fleets. The detailed approach has been discussed in Chapter 2. Replacement of existing switch locomotives with ultra low emitting locomotives, such as gen-set or electric hybrid, could reduce switch locomotive emissions by up to 90%. This could reduce UP City of Industry emissions by up to 3 tons per year, or about 27% of total railyard emissions. Therefore, in the future, the UP City of Industry Railyard will benefit from these mitigation measures, with diesel PM emissions from locomotives being gradually reduced as the locomotive fleet turns over.

2. Cargo Handling Equipment

Cargo handling equipment[#] is the second largest diesel PM emission source at the UP City of Industry Railyard. The diesel PM emissions from cargo handling equipment

[#] According to Title 13, Section 2479 of the California Code of Regulations, *Cargo Handling Equipment* means any off-road, self-propelled vehicle or equipment used at a port or intermodal rail yard to lift or move container, bulk, or liquid cargo carried by ship, train, or another vehicle, or used to perform maintenance and repair activities that are routinely scheduled or that are due to predictable process upsets. Equipment includes, but is not limited to, mobile cranes, rubber-tired gantry cranes, yard trucks, top handlers, side handlers, reach stackers, forklifts, loaders, sweepers, aerial lifts, excavators, and dozers.

were estimated at 2.77 tons in the year 2005, a quarter of the total diesel PM emissions from the UP City of Industry Railyard.

Cargo handling equipment is used to load, unload, and move cargo containers at the UP City of Industry Railyard. Additionally, cargo handling equipment is used for non-cargo-related activities at the railyard, such as locomotive maintenance, handling of parts and company material, derailments, etc. Six types of equipment are included in cargo handling equipment: chassis stackers, rubber tire gantry cranes, top picks, yard trucks, forklifts, and backhoes.

- Chassis stackers are used to stack chassis.
- Rubber tire gantry cranes are very large cargo container handlers that have lifting equipment mounted on a cross-beam supported on vertical legs which run on rubber tires.
- Top picks are also known as top handlers. Top picks are another common type of cargo handling equipment. A top pick is a large truck-like vehicle with an overhead beam which locks onto the top of containers in a single stack.
- Yard trucks are also known as yard hostlers. It is the most common type of cargo handling equipment. A yard hostler is very similar to an on-road truck tractor, but is designed to move cargo containers within the railyard.
- Forklifts are industry trucks used to hoist and transport materials by means of one or more steel forks inserted under the load.
- Backhoes are industry trucks used to hoist and transport materials by means of buckets used to carry the load.

The cargo handling equipment diesel PM emissions in the UP City of Industry Railyard are estimated using the latest version of ARB OFFROAD model. As indicated in Table III-4, about 57% of cargo handling equipment diesel PM emissions are due to the yard tractors, at about 1.57 tons per year. The nine 2005 model year yard tractors are responsible for 32% of all cargo handling equipment diesel PM emissions in 2005. The next highest emission source is the four rubber tire gantry cranes, at about 26% (0.72 tons per year). The two top picks produce about 9% of total cargo handling equipment diesel PM emissions, at about 0.25 tons per year. The remaining 8% is divided among the chassis stacker, the backhoe, and the five forklifts. Additional details of calculations or estimations are presented in the Sierra Research Report.

**Table III-4: Diesel PM Emissions for Cargo Handling Equipment
at the UP City of Industry Railyard**

Equipment Type	Model Year	Number of Units	Diesel PM in 2005 (Tons Per Year)	Percent of Total Cargo Handling Equipment Emissions*
Yard Tractor	2003	2	0.32	12%
Yard Tractor	2004	3	0.37	13%
Yard Tractor	2005	9	0.88	32%
Rubber Tire Gantry Crane	1984	1	0.00	<1%
Rubber Tire Gantry Crane	1991	1	0.42	15%
Rubber Tire Gantry Crane	1991	1	0.21	8%
Rubber Tire Gantry Crane	2004	1	0.09	3%
Top Pick	1977	1	0.15	5%
Top Pick	1995	1	0.10	4%
Chassis Stacker	1999	1	0.08	3%
Backhoe	All ^{††}	1	0.07	3%
Forklift	1989	1	0.01	<1%
Forklift	1997	2	0.04	1%
Forklift	1999	1	0.02	<1%
Forklift	2005	1	0.01	<1%
Total			2.77	100%

* Percentages do not add up to 100% due to rounding.

^{††} Equipment specifications for the backhoe could not be found. Therefore, a fleet average model year and engine horsepower were assumed for this unit.

In December 2005, ARB adopted a new regulation for cargo handling equipment to reduce diesel PM and NO_x emissions beginning in 2007. Implementation of this regulation will reduce diesel PM emissions by approximately 40% in 2010 and 65% in 2015, and NO_x emissions by approximately 25% in 2010 and 50% in 2015. The regulation, when fully implemented, is expected to cumulatively reduce diesel PM and NO_x emissions from all cargo handling equipment in the State by up to 80% by 2020 (ARB, 2006e). As a result, starting in 2007, the UP City of Industry Railyard will benefit from these emissions mitigation measures, with diesel PM emissions from cargo handling equipment gradually being reduced as cargo handling equipment fleets turn over.

3. On-Road Diesel-Fueled Trucks

On-road trucks contribute about 18% of the total railyard diesel PM emissions, at about 1.96 tons per year. As shown in Table III-5, about 90% of the on-road truck diesel PM emissions come from heavy heavy-duty drayage trucks. The emissions for the yard heavy-duty diesel-fueled trucks are about 0.19 tons per year, and are produced by one light heavy-duty truck, two medium heavy-duty trucks, and seven heavy heavy-duty trucks. Overall, more on-road truck emissions are due to traveling, outweighing idling emissions by more than three to one. Additional details of calculations or estimations are presented in the Sierra Research Report.

Table III-5: Diesel PM Emissions for Light, Medium, and Heavy Heavy-Duty On-Road Trucks Within the UP City of Industry Railyard

Source	Diesel PM Emissions in 2005 (Tons Per Year)		
	Traveling	Idling	Total
One Light Heavy-Duty 1 ^{‡‡} , Two Medium Heavy-Duty ^{§§} , and Seven Heavy Heavy-Duty ^{***} Diesel-Fueled Yard Trucks	0.19	0.00	0.19
Heavy Heavy-Duty Diesel-Fueled Drayage Trucks	1.30	0.47	1.77
Total	1.49	0.47	1.96
Percent of Total On-Road Truck Emissions	76%	24%	100%

^{‡‡} Light Heavy-Duty 1: Gross Vehicle Weight Rating: 8,501 to 10,000 lbs
^{§§} Medium Heavy-Duty: Gross Vehicle Weight Rating 14,001 to 33,000 lbs
^{***} Heavy Heavy-Duty: Gross Vehicle Weight Rating: 33,001 lbs or more

There are also heavy heavy-duty diesel-fueled trucks delivering diesel fuel and various oils to the UP City of Industry Railyard. However, in 2005 the delivery trucks made a total of eight trips, totaling 7.36 vehicle miles traveled, so their diesel PM emissions were negligible.

An ARB regulation to modernize port and intermodal railyard drayage trucks is estimated to reduce diesel PM emissions by 86% by 2010, and NO_x by 56% by 2014, as compared to the 2007 baseline.

In January 2001, the U.S. EPA promulgated a Final Rule for emission standards for 2007 and subsequent model year heavy-duty diesel engines (66 FR 5002, January 18, 2001). These emission standards represent a 90% reduction of oxides of nitrogen emissions, 72% reduction of non-methane hydrocarbon emissions, and 90% reduction of particulate matter emissions compared to the 2004 model year emission standards. Therefore, starting in 2007, the UP City of Industry Railyard will benefit from these mitigation measures, with diesel PM emissions from heavy-duty diesel-fueled trucks being gradually reduced as truck fleets turn over.

4. Transport Refrigeration Units and Reefer Cars

Transport refrigeration units and refrigerated railcars (reefer cars) are used to transport perishable and frozen goods. Transport refrigeration units and reefer cars are transferred in and out of the railyard and are temporarily stored at the railyard. As shown in Table III-6, diesel PM emissions from transport refrigeration units and reefer cars are estimated at 0.27 tons per year, or about 2% of total railyard diesel PM emissions.

The transport refrigeration units produce about 67% of total diesel PM emissions from other sources, at 0.18 tons per year, with the remainder of 0.09 tons per year due to reefer cars. The detailed methodology is discussed in the Sierra Research Report.

Table III-6: Diesel PM Emissions from Other Sources at the UP City of Industry Railyard

Equipment Type	Diesel PM Emissions in 2005 (Tons Per Year)	Percent of Total Other Emissions
Transport Refrigeration Units	0.18	67%
Reefer Car	0.09	33%
Total	0.27	100%

In November 2004, ARB adopted a new regulation: *Airborne Toxic Control Measure for In-Use Diesel-Fueled Transport Refrigeration Units, Transport Refrigeration Unit*

Generator Sets and Facilities Where Transport Refrigeration Units Operate. This regulation applies to all transport refrigeration units in California, including those coming into California from out-of-state. It requires in-use transport refrigeration units and transport refrigeration unit generator set engines to meet specific diesel PM emissions that vary by horsepower range and engine model year, starting December 31, 2008 for engine model years 2001 or older. ARB staff estimates that diesel PM emissions for transport refrigeration units and transport refrigeration unit generator set engines will be reduced by approximately 65% by 2010 and 92% by 2020. Therefore, starting in 2009, the UP City of Industry Railyard will benefit from these mitigation measures as diesel PM emissions from transport refrigeration units are gradually reduced as their fleets turn over.

5. Other Sources

There was also a 134 horsepower emergency generator and a 150 horsepower air compressor at the UP City of Industry Railyard. However:

- The emergency generator was operated for only 20 hours in 2005, and had estimated diesel PM emissions of 6 pounds per year.
- The air compressor was operated for only 104 hours in 2005, and had estimated diesel PM emissions of less than 1 pound per year.

The emissions from the emergency generator and air compressor are de minimis. As a result, this equipment will not be included in this inventory nor in the air dispersion modeling analysis.

B. Current Available Diesel Fuel Regulations and Their Benefits to the Railyards

1. California Air Resources Board (CARB) Diesel Fuel Specifications

The original California diesel fuel specifications were approved by the Board in 1988 and limited sulfur and aromatic contents. The requirements for “CARB diesel,” which became applicable in October 1993, consisted of two basic elements:

- A limit of 500 parts per million by weight (ppmw) on sulfur content to reduce emissions of both sulfur dioxide and directly emitted PM.
- A limit on aromatic hydrocarbon content of 10% by volume for large refiners and 20% for small refiners to reduce emissions of both PM and NO_x.

At a July 2003 hearing, the Board approved changes to the California diesel fuel regulations that, among other things, lowered the maximum allowable sulfur levels in California diesel fuel to 15 ppmw beginning in June 2006. ARB's specifications for sulfur and aromatic hydrocarbons are shown in Table III-7.

Table III-7: California Diesel Fuel Standards

Implementation Date	Maximum Sulfur Level (ppmw)	Aromatics Level (% by Volume)	Cetane Index
1993	500	10	N/A
2006	15	10	N/A

The regulation limiting aromatic hydrocarbons also includes a provision that enables producers and importers to comply with the regulation by qualifying a set of alternative specifications of their own choosing. The alternative formulation must be shown, through emissions testing, to provide emission benefits equivalent to that obtained with a 10% aromatic standard (or in the case of small refiners, the 20% standard). Most refiners have taken advantage of the regulation's flexibility to produce alternative diesel formulations that provide the required emission reduction benefits at a lower cost.

2. U.S. EPA On-Road Diesel Fuel Specifications

The United States Environmental Protection Agency (U.S. EPA) established separate diesel fuel specifications for on-road diesel fuel and off-road (non-road) diesel fuel. The former U.S. EPA diesel fuel standards were applicable in October 1993. The U.S. EPA regulations prohibited the sale or supply of diesel fuel for use in on-road motor vehicles, unless the diesel fuel had a sulfur content no greater than 500 ppmw. In addition, the regulation required on-road motor-vehicle diesel fuel to have a cetane index of at least 40 or have an aromatic hydrocarbon content of no greater than 35% by volume (vol. %). On-road motor-vehicle diesel fuel sold or supplied in the United States, except in Alaska, must comply with these requirements. Diesel fuel, not intended for on-road motor-vehicle use, must contain dye Solvent Red 164.

On January 18, 2001, the U.S. EPA published a final rule which specified that, beginning June 1, 2006, refiners must begin producing highway diesel fuel that meets a maximum sulfur standard of 15 ppmw for all diesel-fueled on-road vehicles. The current U.S. EPA on-road diesel fuel standard is shown in Table III-8.

3. U.S. EPA Non-Road Diesel Fuel Specifications

Until recently, fuel supplied to outside of California was allowed a sulfur content of up to 5,000 ppmw. However, in 2004, the U.S. EPA published a strengthened rule for the control of emissions from non-road diesel engines and fuel. The U.S. EPA rulemaking requires that sulfur levels for non-road diesel fuel be ultimately reduced from current

uncontrolled levels of 5,000 ppmw to 15 ppmw. An interim cap of 500 ppmw is contained in the rule: beginning June 1, 2007, refiners were required to produce non-road, locomotive, and marine diesel fuel that meets a maximum sulfur level of 500 ppmw. This did not include diesel fuel for stationary sources. In 2010, non-road diesel fuel will be required to meet the 15 ppmw standard except for locomotives and marine vessels. In 2012, non-road diesel fuel used in locomotives and marine applications must meet the 15 ppmw standard. The non-road diesel fuel standards are shown in Table III-8.

Table III-8: U.S. EPA Diesel Fuel Standards

Applicability	Implementation Date	Maximum Sulfur Level (ppmw)	Aromatics Maximum (% by Volume)	Cetane Index (Minimum)
On-Road	2006	15	35	40
Non-Road *	1993	5,000	35	40
Non-Road *	2007	500	35	40
Non-Road, <i>excluding loco/marine</i> *	2010	15	35	40
Non-Road, <i>loco/marine</i> *	2012	15	35	40

* Non-road diesel fuels must comply with ASTM No. 2 diesel fuel specifications for aromatics and cetane.

4. What are the Current Properties of In-Use Diesel Fuel?

Table III-9 shows average values for in-use levels of sulfur and four other properties for motor vehicle diesel fuel sold in California after the California and Federal diesel fuel regulations became effective in 1993. The corresponding national averages are shown for the same properties for on-road diesel fuel only since the U.S. EPA sulfur standard does not apply to off-road or non-vehicular diesel fuel. Non-road diesel fuel sulfur levels have been recorded as about 3,000 ppmw in-use, and aromatics levels have been recorded at about 35% by volume in-use.

Table III-9: Average 1999 Properties of Reformulated Diesel Fuel

Property	California	U.S.⁽¹⁾
Sulfur, ppmw	10 ⁽²⁾	10 ⁽²⁾
Aromatics, vol.%	19	35
Cetane No.	50	45
Polynuclear Aromatic Hydrocarbons, wt.%	3	NA
Nitrogen, ppmw	150	110

1 U.S. EPA, December 2000.

2 Based on margin to comply with 15 ppmw sulfur standards in June 2006.

5. Diesel Fuels Used by California-Based Locomotives

In November 2004, the ARB Board approved a regulation which extended the CARB diesel fuel requirements to intrastate locomotives (those operating 90% or more of the time in California) effective on January 1, 2007. UP and BNSF agreed in the 2005 railroad Agreement to dispense only CARB diesel or U.S. EPA on-road diesel fuels to a minimum of 80% of interstate locomotives that fuel in California beginning on January 1, 2007.

Line haul locomotives have a range of about 800 to 1,200 miles between fuelings. BNSF locomotives typically fuel at Belen, New Mexico before traveling to Barstow, California and UP locomotives typically fuel at Rawlins, Wyoming or Salt Lake City, Utah before traveling to Roseville in northern California or Colton in southern California. These major out-of-state railroad facilities have the option to use Federal non-road diesel fuels for the refueling of line haul locomotives. When these out-of-state line haul locomotives arrive in California, they typically have about 10% remaining volume of diesel fuel relative to their tank capacity.

UP surveyed each of the California fueling centers, and major interstate fueling centers to California, to estimate the average diesel fuel properties for locomotives for the railyard health risk assessments. In 2005, Chevron was UP's principal supplier of diesel fuel. Chevron's California refineries produced only one grade ("low sulfur diesel" or LSD) in 2005. Quarterly average sulfur content for these refineries ranged from 59 ppm to 400 ppm, with an average of 221 ppm. This value is assumed to be representative of California fuel used by UP (Sierra Research Report). Non-California diesel fuel for 2005 is estimated to have a sulfur content of 2,639 ppm, based on the estimated 49-state

average fuel sulfur content used by the U.S. Environmental Protection Agency in its 2004 regulatory impact analysis (U.S. EPA, 2004c).

According to UP, the UP interstate locomotives were fueled out of state before they entered the California borders. However, data of the detailed diesel deliveries within and outside of California were not available in 2005. Trains arriving and terminating at California railyards (with the exception of local trains) used fuel produced outside of California, and arrive with remaining fuel in their tanks at 10% of capacity. On arrival, locomotives were refueled with California diesel fuel, resulting in a mixture of 90% CARB and 10% non-CARB fuel: this mixture is representative of fuel on departing trains as well as trains undergoing load testing (if conducted at a specific yard). For through trains by-passing UP railyards, an average composition of 50-50 split was applied to account for CARB-EPA and non-California diesel fuel used. Therefore, UP estimated different fuel sulfur levels based on the average fractions of California fuel being used: 221 parts per million (ppm) for yard operations, 463 ppm for arriving and departing trains, 1,430 ppm for through trains, and 2,639 ppm for terminating trains.

The U.S. EPA on-road and CARB on- and off-road diesel ultra low sulfur specifications (15 ppmw) went into effect on June 1, 2006. The CARB diesel fuel requirements for intrastate locomotives went into effect on January 1, 2007. The U.S. EPA non-road diesel fuel sulfur limit dropped from 5,000 ppmw to 500 ppmw on June 1, 2007. In 2012, the non-road diesel fuel limits for locomotives and marine vessels will drop from 500 ppmw to 15 ppmw.

The NO_x emission benefits associated with the use of CARB diesel compared to U.S. EPA on-road and non-road diesel fuels are due to the CARB aromatic hydrocarbon limit of 10% by volume or an emission equivalent alternative formulation limit. ARB staff estimates that use of CARB diesel provides a 6% reduction in NO_x and a 14% reduction in particulate matter emissions compared with the use of U.S. EPA on-road and non-road diesel fuels. In addition, CARB diesel fuel will provide over a 95% reduction in fuel sulfur levels in 2007 compared to U.S. EPA non-road diesel fuel. This reduction in diesel fuel sulfur levels will provide oxides of sulfur (SO_x) emission reductions, and additional PM emission reductions by reducing indirect (secondary formation) PM emissions formed from SO_x.

In addition, the ARB, UP and BNSF entered into an agreement in 2005, which included a provision requiring that at least 80% of the interstate locomotives be fueled with either CARB diesel or U.S. EPA on-road ultra low sulfur diesel fuel by January 1, 2007. Both the CARB diesel fuel regulation for intrastate locomotives and the 2005 Railroad Agreement for interstate locomotives require the use of ultra low sulfur diesel fuel in 2007, five years earlier than the U.S. EPA non-road diesel fuel regulations for locomotives in 2012.

6. What are the Potential Overall Benefits from the Use of Lower Sulfur Diesel Fuels?

Both the U.S. EPA and CARB diesel fuels had sulfur levels lowered from 500 ppmw to 15 ppmw on June 1, 2006. Under the prior sulfur specification of 500 ppmw, CARB diesel fuel in-use sulfur levels averaged around 140 ppmw versus U.S. EPA on-road sulfur levels of about 350 ppmw. With the 2006 implementation of the 15 ppmw sulfur levels, in-use levels for both CARB diesel and U.S. EPA on-road now average about 10 ppmw.

Sulfur oxides and particulate sulfate are emitted in direct proportion to the sulfur content of diesel fuel. Reducing the sulfur content of diesel fuel from the California's statewide average of 140 ppmw to less than 10 ppmw would reduce sulfur oxide emissions by about 90%, or by about 6.4 tons per day from 2000 levels. Direct diesel PM emissions would be reduced by about 4%, or about 0.6 tons per year in 2010 for engines not equipped with advanced particulate emissions control technologies. U.S. EPA on-road lower sulfur diesel fuel would provide similar levels of sulfur oxide and direct diesel PM emission reductions.

The emissions reductions would be obtained with low sulfur diesel used in mobile on-road and off-road engines, portable engines, and those stationary engines required by district regulations to use CARB diesel. In addition, NO_x emissions would be reduced by 7%, or about 80 tons per year for those engines not currently using CARB diesel, assumed to be about 10% of the stationary engine inventory and including off-road mobile sources such as interstate locomotives.

The lower sulfur diesel makes much more significant emissions reductions possible by enabling the effective use of advanced emission control technologies on new and retrofitted diesel engines. With these new technologies, emissions of diesel PM and NO_x can be reduced by up to 90%. Significant reductions of non-methane hydrocarbons and carbon monoxide can also be achieved with these control devices.

C. Off-Site Diesel PM Emissions Summary

ARB staff analyzes the significant off-site emission sources based on two categories: mobile and stationary. The off-site emissions are estimated for the sources within a one-mile distance from the boundary of the UP City of Industry Railyard.

1. Mobile Sources

For the off-site mobile sources, the analysis focused on on-road heavy-duty diesel trucks, as they are the primary source of diesel PM from the on-road vehicle fleet. ARB staff estimated mobile emissions based on roadway specific vehicle activity data and allocated them to individual **roadway links**. All roadway links within a one-mile distance from the UP City of Industry Railyard are included in the analysis. The estimates do not include the diesel PM emissions generated by idling of heavy-duty trucks. Off-road equipment is not included in the analysis. Individual sources such as local truck distribution centers and warehouses were not evaluated due to insufficient activity data, but their truck traffic related to these facilities is reflected in the roadway link traffic activities.

Roadway link: is defined as a discrete section of roadway with unique estimates for the fleet specific population and average speed and is classified as a freeway, ramp, major arterial, minor arterial, collector, or centroid connector.

Within a one-mile distance from the UP City of Industry Railyard, off-site diesel PM emissions are predominantly generated by mobile sources, at approximately 27.6 tons per year. As shown in Table III-10, about 17.1 tons per year of the off-site mobile diesel PM emissions, 62% of the total, is from diesel-fueled trucks traveling on the one major freeway within one mile of the UP City of Industry Railyard: SR-60. The remaining 10.5 tons per year of off-site mobile diesel PM emissions, 38% of the total, is from diesel-fueled trucks traveling on local streets.

The diesel PM off-site mobile source emissions are estimated based on the local traffic flow, and calculated by different classifications of truck gross vehicle weights, as shown in Table III-11. In 2005, the total diesel PM emissions was estimated at about 27.6 tons per year with 84% from heavy heavy-duty and medium heavy-duty trucks. The two classifications account for about 13.0 and 10.2 tons per year, respectively. The methodology for mobile diesel PM emission estimation is presented in Appendix A.

Table III-10: Off-Site Mobile Source Diesel PM Emissions by Freeway Near the UP City of Industry Railyard

Sources	Diesel PM Emissions	
	Tons Per Year	Percent of Total
SR-60 Freeway	17.1	62%
Local Streets	10.5	38%
TOTAL	27.6	100%

Table III-11: Off-Site Mobile Source Diesel PM Emissions by Vehicle Type Near the UP City of Industry Railyard

Vehicle Type	Gross Vehicle Weight (Pounds)	Diesel PM Emissions	
		Tons Per Year*	Percent of Total
Light Heavy-Duty	8,501 – 14,000	4.4	16%
Medium Heavy-Duty	14,001 – 33,000	10.0	36%
Heavy Heavy-Duty	> 33,000	13.2	48%
TOTAL		27.6	100%

2. Stationary Sources

Emissions from off-site stationary source facilities are identified using the California Emission Inventory Development and Reporting System (CEIDARS) database, which contains information reported by the local air districts for stationary sources within their jurisdiction. The CEIDARS facilities whose locations fell within a one-mile distance of the UP City of Industry Railyard are selected. Diesel PM emissions are estimated from stationary internal combustion engines burning diesel fuel, operating at stationary sources reported in CEIDARS.

Within one mile of the UP City of Industry Railyard boundary, the diesel PM emissions from off-site stationary sources are de minimis, at about 0.02 tons per year. Hence, they are not included in this analysis.

3. Non-Diesel PM Toxic Air Contaminants

ARB staff also evaluated other toxic air contaminant emissions around the UP City of Industry Railyard. Within a one-mile distance of the railyard, 24 stationary toxic air contaminant sources were identified. For the year 2005, the total emissions of toxic air contaminants other than diesel PM emitted from stationary sources within a one-mile distance from the railyard are estimated at about 13.0 tons per year. Sixty toxic air contaminant species are identified among these emissions, in which ammonia, xylenes, and toluene are three major contributors with emissions estimated at 6.4, 1.2, and 1.2 tons per year, respectively.

Not all of these toxic air contaminants are identified as carcinogens. According to ARB's *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles* (ARB, 2000), diesel PM, 1,3-butadiene, benzene, carbon tetrachloride, and formaldehyde are defined as the top five cancer risk contributors,

based on ambient concentrations. These toxic air contaminants account for 95% of the State's estimated potential cancer risk levels. This study also concluded that diesel PM contributes over 70% of the State's estimated potential cancer risk levels, significantly higher than other toxic air contaminants (ARB, 2000). Among the off-site toxic air contaminant emissions for the UP City of Industry Railyard, the top five cancer risk contributors (without diesel PM) are estimated at about 0.74 tons per year.

The Office of Environmental Health Hazard Assessment (OEHHA) has estimated an inhalation **cancer potency factor** for individual chemicals and some chemical mixtures such as whole diesel exhaust. Diesel PM contains many individual cancer-causing chemicals. The individual cancer-causing chemicals are not separately evaluated so as to avoid double counting. The four compounds listed here are given a weighting factor by comparing each compound's cancer potency factor to the diesel PM cancer potency factor. This factor is multiplied by the estimated emissions for that compound, which gives the potency weighted estimated toxic emissions as shown in Table III-12. As can be seen, the potency weighted toxic emissions for these toxic air contaminants are de minimis, at about 0.02 tons per year. Hence, they are not included in the analysis.

Cancer potency factors are expressed as the 95% upper confidence limit of excess cancer cases occurring in an exposed population assuming continuous lifetime exposure to a substance at a dose of one milligram per kilogram of body weight, and are expressed in units of (mg/kg-day)⁻¹.

Table III-12: Potency Weighted Estimated Toxic Emissions from Significant Off-Site Stationary Sources Surrounding UP City of Industry Railyard

Compound	Cancer Potency Factor	Weighted Factor	Estimated Emissions (Tons Per Year)	Potency Weighted Estimated Toxic Emissions (Tons Per Year)
Diesel PM	1.1	1	0.02	0.02
1,3-Butadiene	0.6	0.55	0.004	0.002
Benzene	0.1	0.09	0.01	0.0009
Carbon Tetrachloride	0.15	0.14	0.0005	0.00007
Formaldehyde	0.021	0.02	0.73	0.015
Total (non-diesel PM)	-	-	0.74	0.02

The detailed methodology of off-site stationary source emissions is presented in Appendix B.

In addition, ARB staff evaluated the potential cancer risk levels caused by the use of gasoline in the South Coast Air Basin. Table III-13 shows the emissions of four major carcinogenic toxic air contaminants from South Coast Air Basin gasoline sources in

2005 (ARB, 2006a). As indicated in Table III-13, the potency weighted emissions of these four toxic air contaminants from all types of gasoline sources are estimated at about 816 tons per year, or about 11% of diesel PM emissions in the South Coast Air Basin. If only gasoline-powered vehicles are considered, the potency weighted emissions of these four toxic air contaminants are estimated at about 438 tons per year, or about 6% of diesel PM emissions in the Basin. Hence, gasoline-powered vehicular sources are not included in the analysis.

Table III-13: Emissions of Major Toxic Air Contaminants from Use of Gasoline in the South Coast Air Basin

Compound	Toxic Air Contaminant Emissions (Tons Per Year)			
	From All Sources	Potency Weighted*	From Gasoline Vehicles	Potency Weighted*
<i>Diesel PM</i>	7,446	7,446	-	-
1,3-Butadiene	695	382	420	231
Benzene	3,606	325	2,026	182
Formaldehyde	4,623	92	1,069	21
Acetaldehyde	1,743	17	314	3
Total (non-diesel PM)	10,668	816	3,829	438

*Based on cancer potency weighted factors.

IV. AIR DISPERSION MODELING FOR THE UP CITY OF INDUSTRY RAILYARD

In this chapter, ARB staff presents the air dispersion modeling performed to estimate the transport and dispersion of diesel PM emissions resulting from the sources in and around the Union Pacific Railroad's (UP) City of Industry Railyard. A description of the air quality modeling parameters is listed, including air dispersion model selection, emission source characterizations, meteorological data, model receptor network, and building wake effects. ARB staff also describes model input preparation and output presentation.

A. Air Dispersion Model Selection

Air dispersion models are often used to simulate atmospheric processes for applications where the spatial scale is in the tens of meters to the tens of kilometers. Selection of air dispersion models depends on many factors, such as characteristics of emission sources (point, area, volume, or line), the type of terrain (flat or complex) at the emission source locations, and source-receptor relationships. For the UP City of Industry Railyard, ARB staff selected the U.S. EPA's newly approved air dispersion model AERMOD to estimate the impacts associated with diesel PM emissions in and around the railyard. AERMOD stands for American Meteorological Society / Environmental Protection Agency Regulatory Model Improvement Committee (**AERMIC) MODEL**. It is a state-of-science air dispersion model and is a replacement for its predecessor, the U.S. EPA Industrial Source Complex air dispersion model.

AERMOD has become a U.S. EPA regulatory dispersion model specified by the *U.S. EPA Guideline for Air Quality Methods* (40 CFR Part 51, Appendix W) (U.S. EPA, 2005). AERMOD is also the recommended model in the *ARB Health Risk Assessment Guidance for Railyard and Intermodal Facilities* (ARB, 2006d).

AERMOD is a steady-state plume model that incorporates current concepts about air dispersion based on planetary boundary layer turbulence structure and scaling concepts, including treatment of both surface and elevated sources, and both simple and complex terrain. These approaches have been designed to be physically realistic and relatively simple to implement.

B. Source Characterization and Parameters

The emission sources from the locomotives and other diesel PM sources at the UP City of Industry Railyard are characterized by source types, as required by the ARB Guidelines (ARB, 2006e). Emission sources were treated as either point or volume sources in the dispersion modeling. Point source treatment includes calculated plume rise based on source stack dimensions and exhaust parameters, and hour-by-hour meteorological conditions; volume source treatment includes user-specified release height and initial horizontal and vertical dispersion. Larger stationary emission sources (e.g., idling locomotives and cranes where present) were treated as a series of point

sources within their areas of operation. Spacing between sources was selected based on the magnitude of emissions and the proximity to off-site receptors. Smaller and moving sources (e.g., idling and moving trucks, and moving locomotives) were treated as a series of volume sources. Source spacing and initial dispersion coefficients for volume sources were also selected based on the magnitude of the emissions and the proximity to off-site receptors.

The emission rates for individual locomotives are a function of locomotive makes, notch setting, activity time, duration, and operating location. Emission source parameters for locomotive model classifications at the yard include emission source height, diameter, exhaust temperature, and exhaust velocity. Detailed information on the emission source parameters is presented in the Sierra Research Report. BNSF assumed more specific temperatures and stack heights from their switchers and line haul locomotives fleets. UP used data from the *Roseville Railyard Study* (ARB, 2004a), based on the most prevalent locomotive model of switchers and line hauls, to parameterize locomotive emission settings. In total, the UP and BNSF assumptions on the locomotive emission parameters are slightly different; however, both are within reasonable ranges according to their activities. The slight differences in stack height have an insignificant impact on predicted air concentrations, within 2%, based on a sensitivity analysis conducted by ARB staff.

For the stationary locomotives, the locations of individual locomotive emission sources used for the model inputs were determined based on the detailed locomotive distribution and activity information provided by UP. The emissions from all other stationary sources are simulated as a series of point sources.

C. Meteorological Data

In order to run AERMOD, the following hourly surface meteorological data are required: wind speed, wind direction, ambient temperature, and opaque cloud cover. In addition, the daily upper air sounding data need to be provided (U.S. EPA, 2004b).

These meteorological variables are important to describe the air dispersion in the atmosphere. The wind speed determines how rapidly the pollutant emissions are diluted and influences the rise of emission plume in the air, thus affecting downwind concentrations of pollutants. Wind direction determines where pollutants will be transported. The difference of ambient temperature and the emission releasing temperature from sources determines the initial buoyancy of emissions. In general, the greater the temperature difference, the higher the plume rise. The opaque cloud cover and upper air sounding data are used in calculations to determine other important dispersion parameters. These include atmospheric stability (a measure of turbulence and the rate at which pollutants disperse laterally and vertically) and mixing height (the vertical depth of the atmosphere within which dispersion occurs). The greater the mixing height is, the larger the volume of atmosphere is available to dilute the pollutant concentration.

The meteorological data used in the model are selected on the basis of representativeness. Representativeness is determined primarily on whether the wind speed/direction distributions and atmospheric stability estimates generated through the use of a particular meteorological station (or set of stations) are expected to mimic those actually occurring at a location where such data are not available. Typically, the key factors for determining representativeness are proximity of the meteorological station and the presence or absence of nearby terrain features that might alter airflow patterns.

The UP City of Industry Railyard does not monitor meteorological variables on site. Wind speed, wind direction, temperature, and cloud cover data from the Ontario International Airport were used for this project. Although the Ontario International Airport is approximately 18 miles east of the UP City of Industry Railyard, the dominant effect of the elevated terrain to the north was judged to be sufficiently important for airflow patterns that Ontario surface winds would be most representative of conditions at the railyard. The selection of Ontario International Airport for surface winds data was largely dependent on the limited availability of data from other stations for the same years for which upper air data were available. There are several SCAQMD surface stations in the general vicinity of the railyard for which historical (1981) data are available, but only in a form usable in AERMOD's predecessor, ISCST3.

AERMET, the meteorological preprocessor for AERMOD, required (at a minimum) data from one surface National Weather Service (NWS) station and one upper air NWS station. Ontario International Airport was used for surface data, and the Miramar Marine Corps NWS Air Station in San Diego was used for upper air data. Missing hourly surface data from Ontario International Airport were replaced by the last previous values available in the same dataset.

According to ARB railyard health risk assessment guidelines (ARB, 2006d), five years of meteorological data are recommended to be used in the air toxic health risk assessment. Surface parameters supplied to the model were specified for the area surrounding the surface meteorological monitoring site as recommended by AERMOD and the ARB *Health Risk Assessment Guidance for Railyard and Intermodal Facilities* (ARB, 2006d). Eleven years worth of meteorological data from Ontario International Airport, for years 1990 through 2000, were processed with AERMET to assure that an adequate number of years of acceptable data completeness and quality would be available for AERMOD modeling. The meteorological data from 1999 were selected for the railyard dispersion modeling because it was one of the two years recorded after the anemometer height was adjusted, and it was the year with the most conservative (i.e., largest) distances of impact from a specified source (Sierra Research Report).

It is expected that year-to-year variability would not cause significant differences in the modeled health impacts, and hence would justify needing to subject the full set of receptors to only one year of meteorological data. This conclusion is based on modeling sensitivity analyses that were carried out by ARB staff using five years of meteorological data for the Stockton area (See Appendix F). The five annual average concentration patterns were compared with one another and with the average predictions for the full five-year period. Differences between these were found to be

negligible in terms of spatial concentration patterns, locations of highest concentrations, and absolute concentrations. Therefore, whether five-year or one-year meteorological data are used, the modeling results show similar estimated exposures and potential cancer risks surrounding the railyard facility.

Figure IV-1 presents the wind rose and Figure IV-2 provides the wind class frequency distributions for the meteorological data used in UP City of Industry Railyard air dispersion modeling. The prevailing wind over the modeling domain is from the west-southwest.

Wind rose: a rose-like shape plot that depicts wind speed and direction patterns to illustrate prevailing wind conditions.

Figure IV-1: Wind Rose for UP City of Industry Railyard


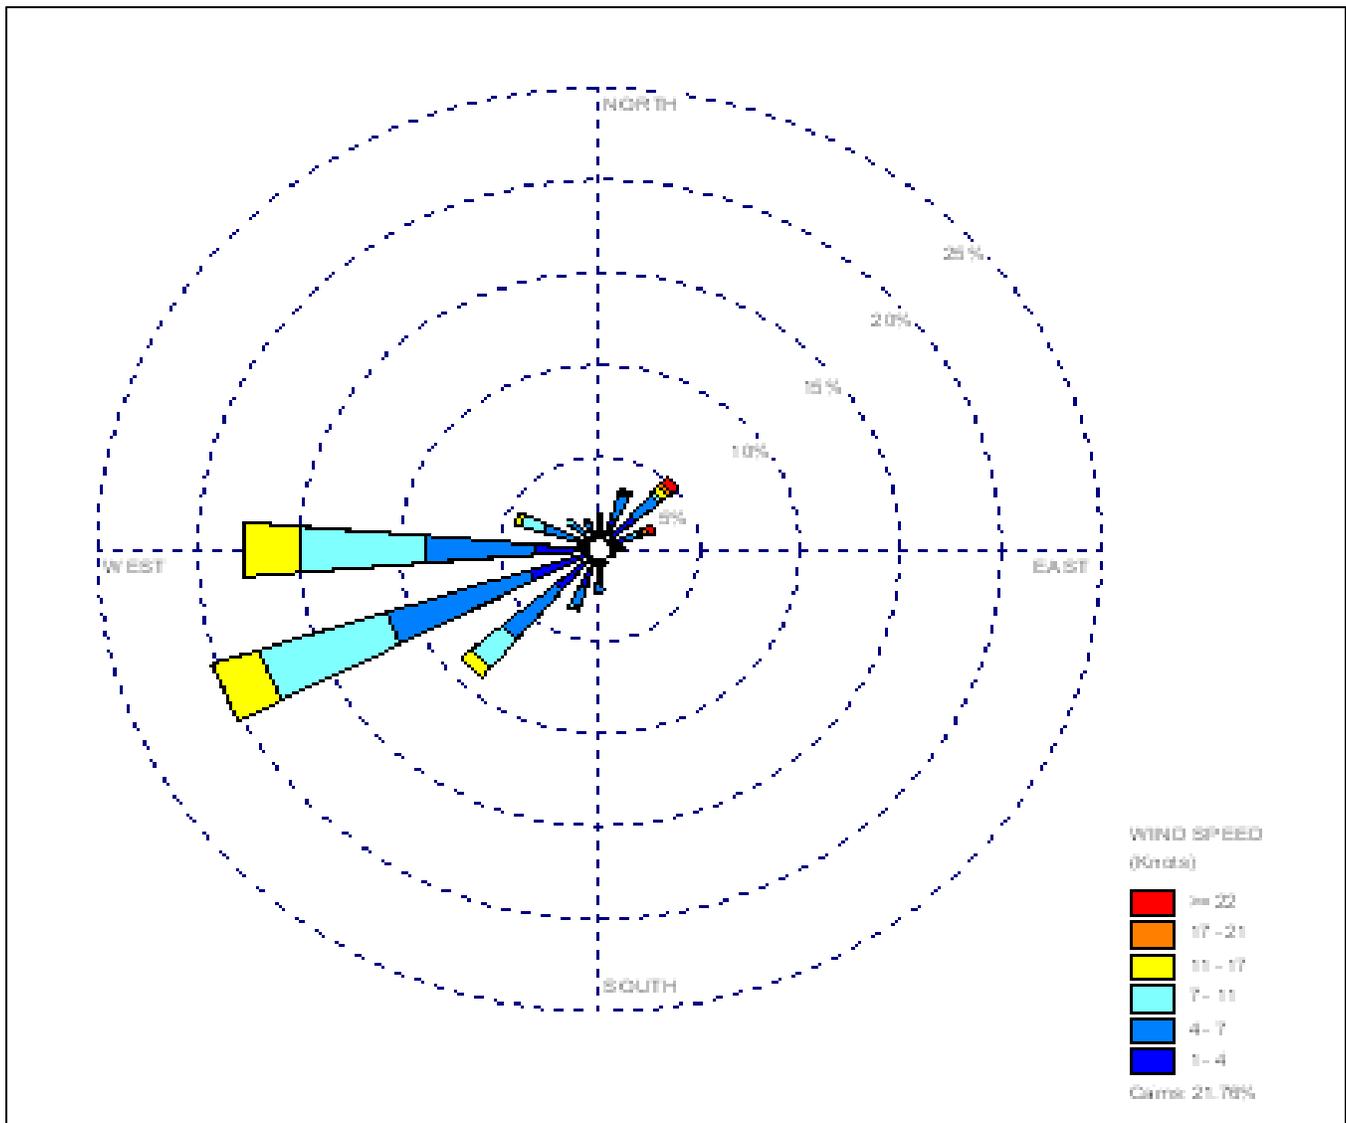


Figure IV-2: Wind Class Frequency Distribution for UP City of Industry Railyard

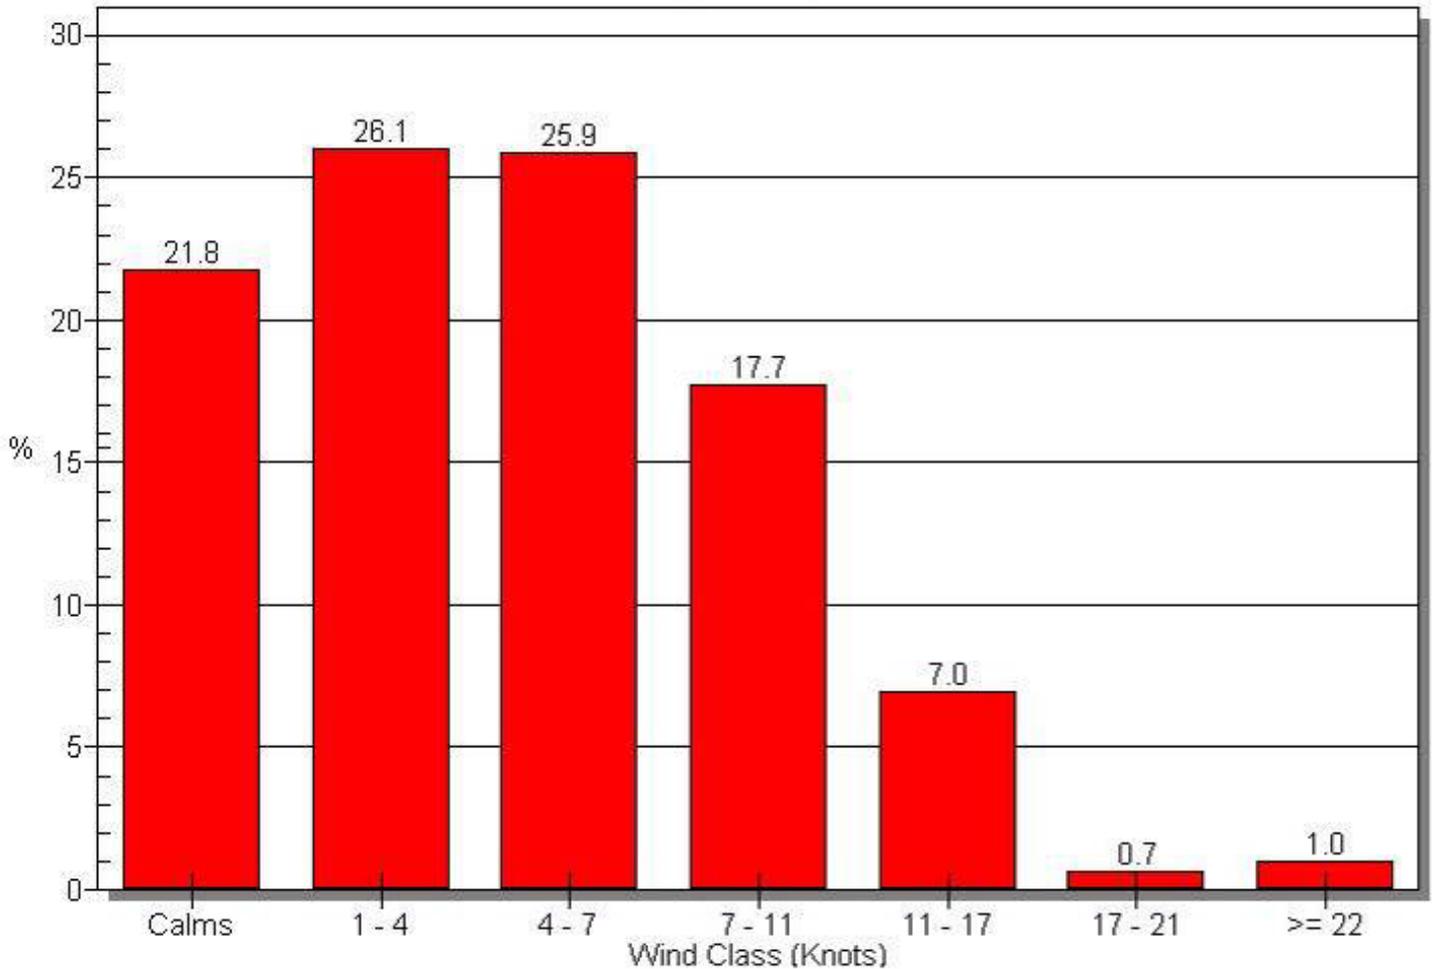

The detailed procedures for meteorological data preparation and quality control are described in the Sierra Research Report.


D. Model Receptors

Model receptors are the locations where concentrations are estimated by the model. In this study, a Cartesian grid receptor network is used, in which an array of points is identified by their x (east-west) and y (north-south) coordinates. This receptor network is capable of identifying the emission sources within the railyard with respect to the receptors in the nearby residential areas.


According to the ARB *Health Risk Assessment Guidance for Railyard and Intermodal Facilities* (ARB, 2006d), the modeling domain is defined as a 20 km x 20 km (km: kilometers) region, which covers the railyard in the center of the domain and extends to the surrounding areas. To better characterize different dispersive levels of concentrations from the railyard, four different modeling grid structures were defined. The *ARB Guidance* requires coarse and fine modeling receptor grids, in which the Cartesian receptor networks used in model simulations include a fine grid with spacing of 50 meters surrounding the UP City of Industry Railyard for modeling within 300 meters of the fence line. Two medium-fine grids are used from 300 meters to 1 km from the fence line: a 100 meter grid is used from 300 meters to 600 meters, and a 200 meter grid is used from 600 meters to 1 km. A coarse receptor grid with spacing of 500 meters is used throughout the rest of the modeling domain (i.e., more than 1 km from the fence line).

Figure IV-2 shows the fine and medium grid receptor networks, and Figure IV-3 shows the coarse grid receptor networks, used in air dispersion modeling for the UP City of Industry Railyard.

**Figure IV-3: Fine and Medium Grid Receptor Networks
Air Dispersion Modeling for UP City of Industry Railyard**

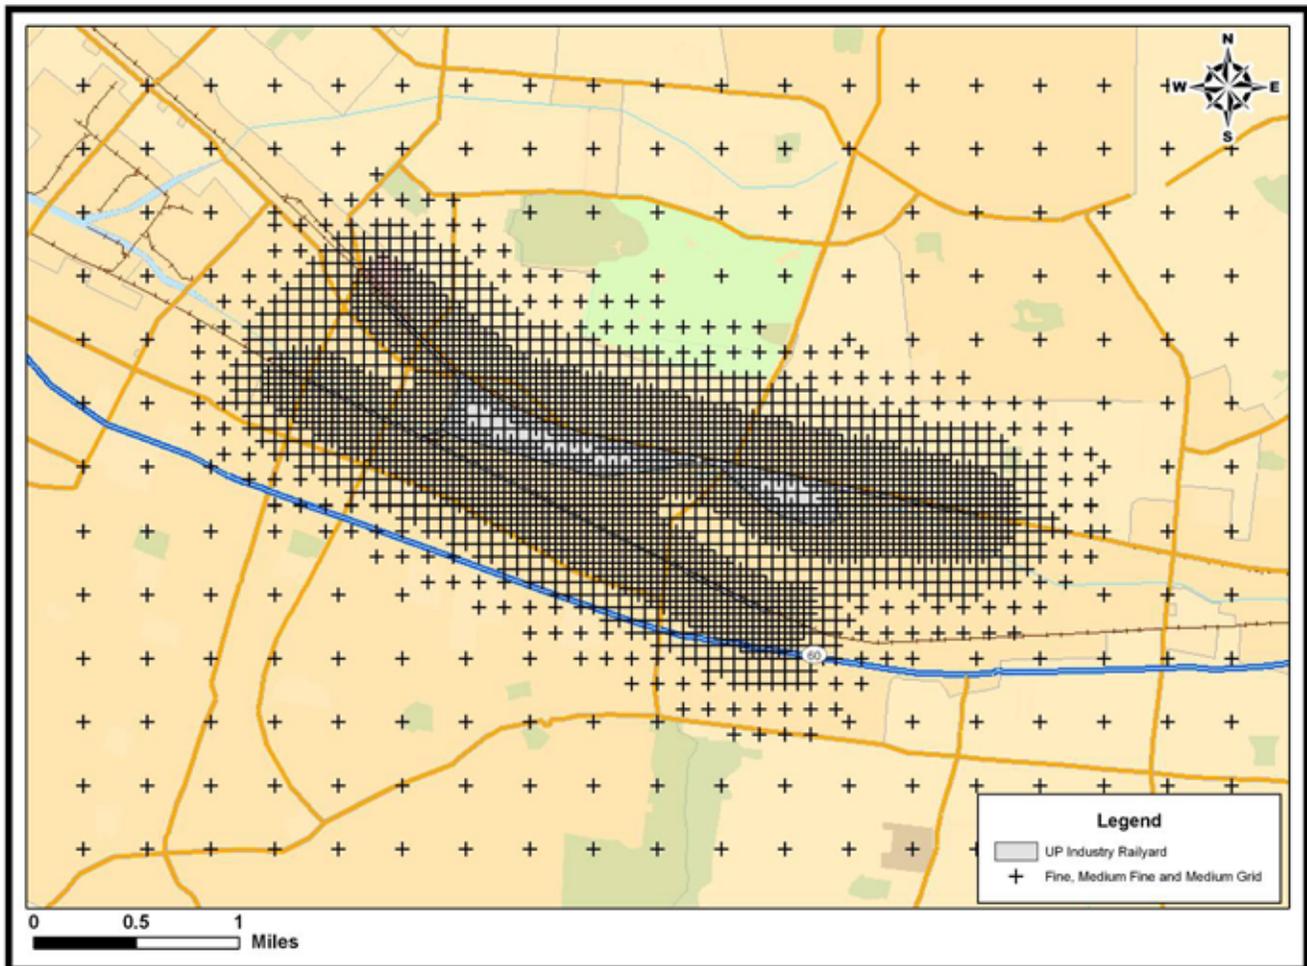

**Figure IV-4: Coarse Grid Receptor Networks
Air Dispersion Modeling for
UP City of Industry Railyard**

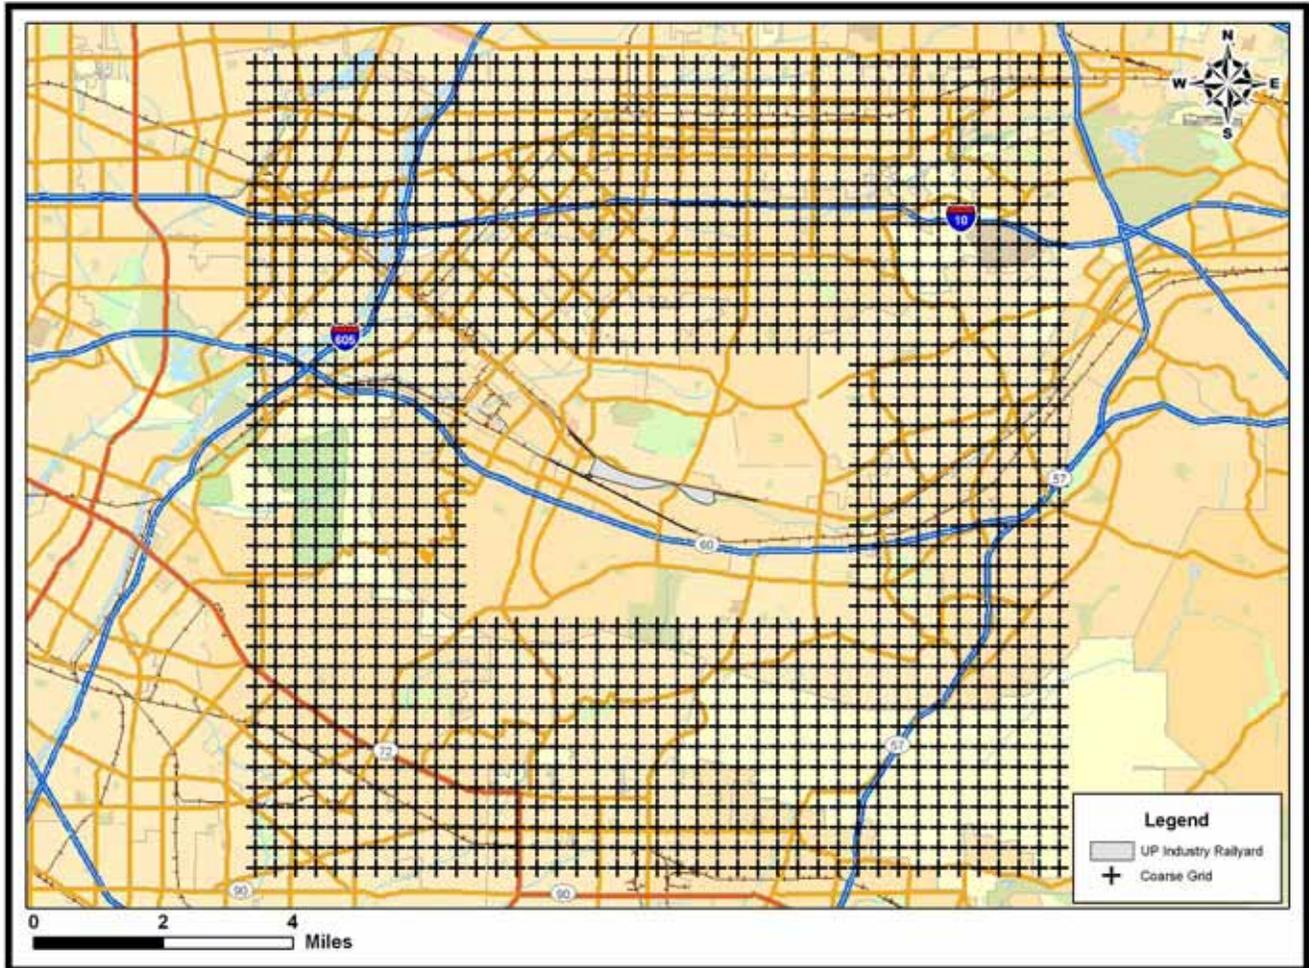

E. Building Wake Effects

If pollutant emissions are released at or below the “Good Engineering Practice” height as defined by EPA Guidance (U.S. EPA, 2004a), the plume dispersion may be affected by surrounding facility buildings and structures. The aerodynamic wakes and eddies produced by the buildings or structures may cause pollutant emissions to be mixed more rapidly to the ground, causing elevated ground level concentrations. The AERMOD model has the *Plume Rise Model Enhancements* option to account for potential building-induced aerodynamic downwash effects. Although UP included building wake effects in their modeling analyses, BNSF conducted a sensitivity analysis and found that the building wake effect has an insignificant impact on the diesel PM air concentrations of the railyard (ENVIRON, 2006). Detailed treatment of building wake effects is documented in the air dispersion modeling report by the Sierra Research, Inc.

F. Model Inputs

AERMOD requires four types of basic implementation inputs: control, source, meteorological, and receptor. Control inputs are required to specify the global model options for the model run. Source inputs require source identification and source type (point or volume). Each source type requires specific parameters to define the source. The required inputs for a point source are emission rate, release height, emission source diameter, exhaust exit temperature, and exhaust exit velocity.

Meteorological and receptor inputs have been discussed in Sections C and D. The requirements and the format of input files to AERMOD are documented in the user's guide of AERMOD (U.S. EPA, 2004b). The model input files for this study are provided in the Sierra Research Report.

This page left intentionally blank

V. HEALTH RISK ASSESSMENT OF THE UP CITY OF INDUSTRY RAILYARD

In this chapter, we discuss how we characterize potential cancer and non-cancer risks associated with exposure to toxic air contaminants, especially diesel PM, emitted within and surrounding the UP City of Industry Railyard. In addition, the detailed health risk assessment results are presented, and the associated uncertainties are discussed qualitatively.

A. ARB Railyard Health Risk Assessment Guidelines

The UP City of Industry Railyard Health Risk Assessment (HRA) follows *The Air Toxics Hot Spots Program Risk Assessment Guidelines* published by the Office of Environmental Health Hazard Assessment (OEHHA), and is consistent with the *Roseville Railyard Study* (ARB, 2004a) performed by ARB staff. The OEHHA Guidelines outline a tiered approach to risk assessment, providing risk assessors with flexibility and allowing for consideration of site-specific differences:

- Tier 1: a standard point-estimate approach that uses a combination of the average and high-end point-estimates.
- Tier 2: utilizes site-specific information for risk assessment when site-specific information is available and is more representative than the Tier 1 point-estimates.
- Tier 3: a stochastic approach for exposure assessment when the data distribution is available.
- Tier 4: also a stochastic approach, but allows for utilization of site-specific data distribution.

The HRA is based on the yard specific emission inventory and air dispersion modeling predictions. The OEHHA Guidelines recommend that all health hazard risk assessments adopt a Tier-1 evaluation for the Hot Spots Program, even if other approaches are also presented. Two point-estimates of breathing rates in Tier-1 methodology are used in this HRA, one representing an average and the other representing a high-end value based on the probability distribution of breathing rate. The average and high-end of point-estimates are defined as 65th percentile and 95th percentile from the distributions identified in the OEHHA Guidelines (OEHHA, 2000). In 2004, ARB recommended the interim use of the 80th percentile value (the midpoint value of the 65th and 95th percentile breathing rates referred as an estimate of central tendency) as the minimum value for risk management decisions at residential receptors for the breathing intake (ARB, 2004b). The 80th percentile corresponds to a breathing rate of 302 liters / kilogram-day (302 L / kg-day) from the probability distribution function. As

Percentile: Any one of the points dividing a distribution of values into parts each of which contain 1/100 of the values. For example, the 65th percentile breathing rate is a value such that the breathing rates from 65% of population are less or equal to it.

indicated by the OEHHA Guidelines, the Tier-1 evaluation is useful in comparing risks among a number of facilities and similar sources.

The ARB has also developed the *Health Risk Assessment Guidance for Railyard and Intermodal Facilities* (ARB, 2006d) to help ensure that the air dispersion modeling and health risk assessment performed for each railyard meet the OEHHA Guidelines.

B. Exposure Assessment

Exposure assessment is a comprehensive process that integrates and evaluates many variables. Three process components have been identified to have significant impacts on the results of a health risk assessment – emissions, meteorological conditions, and exposure duration of nearby residents. The emissions have a linear effect on the risk levels, given meteorological conditions and defined exposure duration. Meteorological conditions can also have a critical impact on the resultant ambient concentration of a toxic pollutant, with higher concentrations found along the predominant wind direction and under calm wind conditions. An individual's proximity to the emission plume, how long he or she breathes the emissions (exposure duration), and the individual's breathing rate play key roles in determining potential risk. The longer the exposure time for an individual, the greater the estimated potential risk for the individual. The risk assessment adopted in this study generally assumes that the receptors will be exposed to the same toxic levels for 24 hours per day for 70 years. If a receptor is exposed for a shorter period of time to a given pollutant concentration of diesel PM, the cancer risk will proportionately decrease. Children have a greater risk than adults because they have greater exposure on a per unit body weight basis, and also because of other factors.

Diesel PM is not the only toxic air contaminant emitted from the UP City of Industry Railyard. Relatively small amounts of toxic air contaminants are emitted from a wastewater treatment plant. The total amount of these toxic air contaminant emissions is about 7 pounds per year, compared to 10.9 tons per year of diesel PM emissions in the railyard.

Other than diesel PM, benzene is the only toxic air contaminant among the top five cancer risk contributors, and is estimated at about 0.2 pounds per year. Calculation of potency weighted estimated toxic emissions for the on-site toxic air contaminants (see a similar analysis for off-site toxic air contaminants in Table V-1) shows a potential cancer risk level of less than a millionth of the cancer risk level for diesel PM (0.000007 vs. 10.9 tons per year). Hence, only diesel PM emissions are presented in the on-site emission analysis. Detailed emission inventories and analysis are provided in Sierra Research Report.

ARB staff also evaluated other toxic air contaminant emissions around the UP City of Industry Railyard. Within a one-mile distance of the railyard, 24 stationary toxic air contaminant sources were identified. For the year 2005, the total emissions of toxic air contaminants other than diesel PM emitted from stationary sources within a one-mile distance from the railyard are estimated at about 13.0 tons per year. Sixty toxic air contaminant species are identified among these emissions, in which ammonia, xylene,

and toluene are three major contributors with emissions estimated at 6.4, 1.2, and 1.2 tons per year, respectively.

Not all of these toxic air contaminants are identified as carcinogens. According to ARB's *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles* (ARB, 2000), diesel PM, 1,3-butadiene, benzene, carbon tetrachloride, and formaldehyde are defined as the top five cancer risk contributors, based on ambient concentrations. These toxic air contaminants account for 95% of the State's estimated potential cancer risk levels. This study also concluded that diesel PM contributes over 70% of the State's estimated potential cancer risk levels, significantly higher than other toxic air contaminants (ARB, 2000). Among the off-site toxic air contaminant emissions for the UP City of Industry Railyard, the top five cancer risk contributors (without diesel PM) are estimated at about 0.74 tons per year.

The Office of Environmental Health Hazard Assessment (OEHHA) has estimated an inhalation **cancer potency factor** for individual chemicals and some chemical mixtures such as whole diesel exhaust. Diesel PM contains many individual cancer-causing chemicals. The individual cancer-causing chemicals are not separately evaluated so as to avoid double counting. The four compounds listed here – 1,3-butadiene, benzene, carbon tetrachloride, and formaldehyde – are given a weighting factor by comparing each compound's cancer potency factor to the diesel PM cancer potency factor. This factor is multiplied by the estimated emissions for that compound, which gives the potency weighted estimated toxic emissions as shown in Table V-1. As can be seen, the potency weighted estimated toxic emissions for these toxic air contaminants are de minimis, at about 0.02 tons per year, and are therefore not included in this report. Detailed results and analysis are presented in the Sierra Research Report and Appendix B. Hence, the health impacts in this study primarily focus on the risks from the diesel PM emissions.

Cancer potency factors are expressed as the 95% upper confidence limit of excess cancer cases occurring in an exposed population assuming continuous lifetime exposure to a substance at a dose of one milligram per kilogram of body weight, and are expressed in units of $(\text{mg}/\text{kg}\cdot\text{day})^{-1}$.

Table V-1: Potency Weighted Estimated Toxic Emissions from Significant Off-Site Stationary Sources Surrounding UP City of Industry Railyard

Compound	Cancer Potency Factor	Weighted Factor	Estimated Emissions (Tons Per Year)	Potency Weighted Estimated Toxic Emissions (Tons Per Year)
Diesel PM	1.1	1	0.02	0.02
1,3-Butadiene	0.6	0.55	0.004	0.002
Benzene	0.1	0.09	0.01	0.0009
Carbon Tetrachloride	0.15	0.14	0.0005	0.00007
Formaldehyde	0.021	0.02	0.73	0.015
Total (non-diesel PM)	-	-	0.74	0.02

In addition, ARB staff evaluated the potential cancer risk levels caused by the use of gasoline in the South Coast Air Basin. Table V-2 shows the emissions of four major carcinogenic toxic air contaminants from South Coast Air Basin gasoline sources in 2005 (ARB, 2006a). As indicated in Table V-2, the potency weighted emissions of these four toxic air contaminants from all types of gasoline sources are estimated at about 816 tons per year, or about 11% of diesel PM emissions in the South Coast Air Basin. If only gasoline-powered vehicles are considered, the potency weighted emissions of these four toxic air contaminants are estimated at about 438 tons per year, or about 6% of diesel PM emissions in the Basin. Hence, gasoline-powered vehicular sources are not included in the analysis.

Table V-2: Emissions of Major Toxic Air Contaminants from Use of Gasoline in the South Coast Air Basin

Compound	Toxic Air Contaminant Emissions (Tons Per Year)			
	From All Sources	Potency Weighted*	From Gasoline Vehicles	Potency Weighted*
<i>Diesel PM</i>	7,446	7,446	-	-
1,3-Butadiene	695	382	420	231
Benzene	3,606	325	2,026	182
Formaldehyde	4,623	92	1,069	21
Acetaldehyde	1,743	17	314	3
Total (non-diesel PM)	10,668	816	3,829	438

*Based on cancer potency weighted factors.

The relationship between a given level of exposure to diesel PM and the cancer risk is estimated by using the diesel PM cancer potency factor. A description of how the diesel cancer potency factor was derived can be found in the document entitled *Proposed Identification of Diesel Exhaust as a Toxic Air Contaminant* (ARB, 1998); and a shorter description can be found in the *Air Toxics Hot Spot Program Risk Assessment Guidelines, Part II, Technical Support Document for Describing Available Cancer Potency Factors* (OEHHA, 2002). The use of the diesel PM cancer potency factor for assessing cancer risk is described in the OEHHA Guidelines (OEHHA, 2003). The potential cancer risk is estimated by multiplying the inhalation dose by the cancer potency factor of diesel PM, i.e., $1.1(\text{mg}/\text{kg}\cdot\text{day})^{-1}$.

C. Risk Characterization

Risk characterization is defined as the process of obtaining a quantitative estimate of risk. The risk characterization process integrates the results of air dispersion modeling and relevant toxicity data (e.g., diesel PM cancer potential factor) to estimate potential cancer or non-cancer health effects associated with air contaminant exposure.

Exposures to pollutants that were originally emitted into the air can also occur in different pathways as a result of breathing, dermal contact, ingestion of contaminated produce, and ingestion of fish that have taken up contaminants from water bodies. These exposures can all contribute to an individual's health risk. However, diesel PM risk is evaluated by the inhalation pathway only in this study because the risk contributions by other pathways of exposure are insignificant relative to the inhalation pathway. It should be noted that the background or ambient diesel PM concentrations are not incorporated into the risk quantification in this study. Therefore, the estimated potential health risk in the study should be viewed as the risk level above the risk due to background impacts.

Because the risk characterization is an integrated process from a series of procedures, the overall associated uncertainties are also linked to the uncertainty from each procedural component. Additional details and associated uncertainty on the risk characterization are provided in the OEHHA Guidelines (OEHHA, 2003), and discussed in Section D.

In the following sections, the predicted cancer and non-cancer risk levels resulting from on-site and off-site emissions are presented.

1. **Risk Characterization Associated with On-Site Emissions**

a) *Potential Cancer Risk*

The potential cancer risks levels associated with the estimated diesel PM emissions at the UP City of Industry Railyard are displayed by **isopleths**, based on the 80th percentile breathing rate and 70-year exposure duration for residents. In this study, ARB staff elected to present the cancer risk isopleths focusing on risk levels of 10, 25, 50, 100, and 250 in a million. Figure V-1 and Figure V-2 present these isopleths. Figure V-1 focuses on the near source risk levels; Figure V-2 illustrates the more regional impacts. In each figure, the risk isopleths are overlaid onto a satellite image of the City of Industry area surrounding the UP City of Industry Railyard, to better illustrate the land use (residential, commercial, industrial, or mixed use) of these impacted areas.

An **isopleth** is a line drawn on a map through all points of equal value of some definable quantity; in this case, cancer risk.

The OEHHA Guidelines specify that, for health risk assessments, the cancer risk for the maximum exposure at the point of maximum impact be reported. The point of maximum impact (PMI), which is defined as a location or the receptor point with the highest cancer risk level outside of the facility boundary, with or without residential exposure, was estimated to be located on the north side of the railyard fence line, in the city of La Puente. The PMI is downwind of the high emission density areas for the prevailing westerly-southwesterly wind, where yard operations due to cargo handling, switching activity, and locomotive idling generate about 75% of facility-wide diesel PM emissions (see the emission allocation in Appendix E).

The cancer risk at the PMI is estimated to be about 480 chances in a million. The land use in the vicinity of the point of maximum impact is residential. The potential cancer risk of maximally exposed individual resident (MEIR) or maximum individual cancer risk (MICR) is estimated at about 450 chances in a million. The land use in the vicinity of the point of maximum impact is residential use.

As indicated by the *Roseville Railyard Study* (ARB, 2004a), the location of the PMI may vary depending upon the settings of the model inputs and parameters, such as meteorological data set or emission allocations in the railyard. Therefore, given the estimated emissions, modeling settings, and the assumptions applied to the risk assessment, there are great uncertainties associated with the estimation of point of maximum impact (PMI) and maximum individual cancer risk (MICR). These indications should not be interpreted as a literal prediction of disease incidence, but more as a tool for comparison. In addition, the estimated point of maximum impact location and maximum individual cancer risk value may not be replicated by air monitoring.


ARB staff also conducted a comparison of cancer risks estimated at the PMI versus MICR, and the differences of facility-wide diesel PM emissions between the UP and BNSF railyards. The ratios of cancer risks at the PMI or MICR to the diesel PM

emissions do not suggest that one railroad's facilities have statistically higher cancer risk than the other railroad's or vice versa. Rather, the differences are primarily due to emission spatial distributions from individual operations among railyards.


Figure V-2 shows the risk isopleths superimposed on a map that covers part of the City of Industry, where the railyard is located. In this scenario, the modeling condition (i.e., 80th percentile breathing rate) represents 80% confidence that the cancer risk associated with exposure to diesel PM from on-site emissions at the Yard will not exceed this level. In the upwind direction, the risk contour of 250 in a million extends about 100 yards from the railyard boundary. In the downwind direction, the risk contour of 250 in a million extends about 200 yards from the railyard boundary. The area with predicted cancer risk levels in excess of 250 in a million is estimated to be about 1.5 miles by 0.4 mile. The potential risk of 100 in a million in the predominant wind direction can extend 0.4 mile from the railyard boundary for the 80th percentile breathing rates. The area with predicted cancer risk level in excess of 10 in a million is about 6 miles by 3.5 miles.

It is important to understand that these risk levels represent the predicted risks (due to the UP City of Industry Railyard diesel PM emissions) above the existing background risk levels. For the broader South Coast Air Basin, the estimated regional background risk level is estimated to be about 720 in a million caused by diesel PM and about 1,000 in a million caused by all toxic air pollutants in the year 2000 (ARB, 2006a).

**Figure V-1: Estimated Near-Source
Cancer Risk (Chances per Million People)
From the UP City of Industry Railyard**

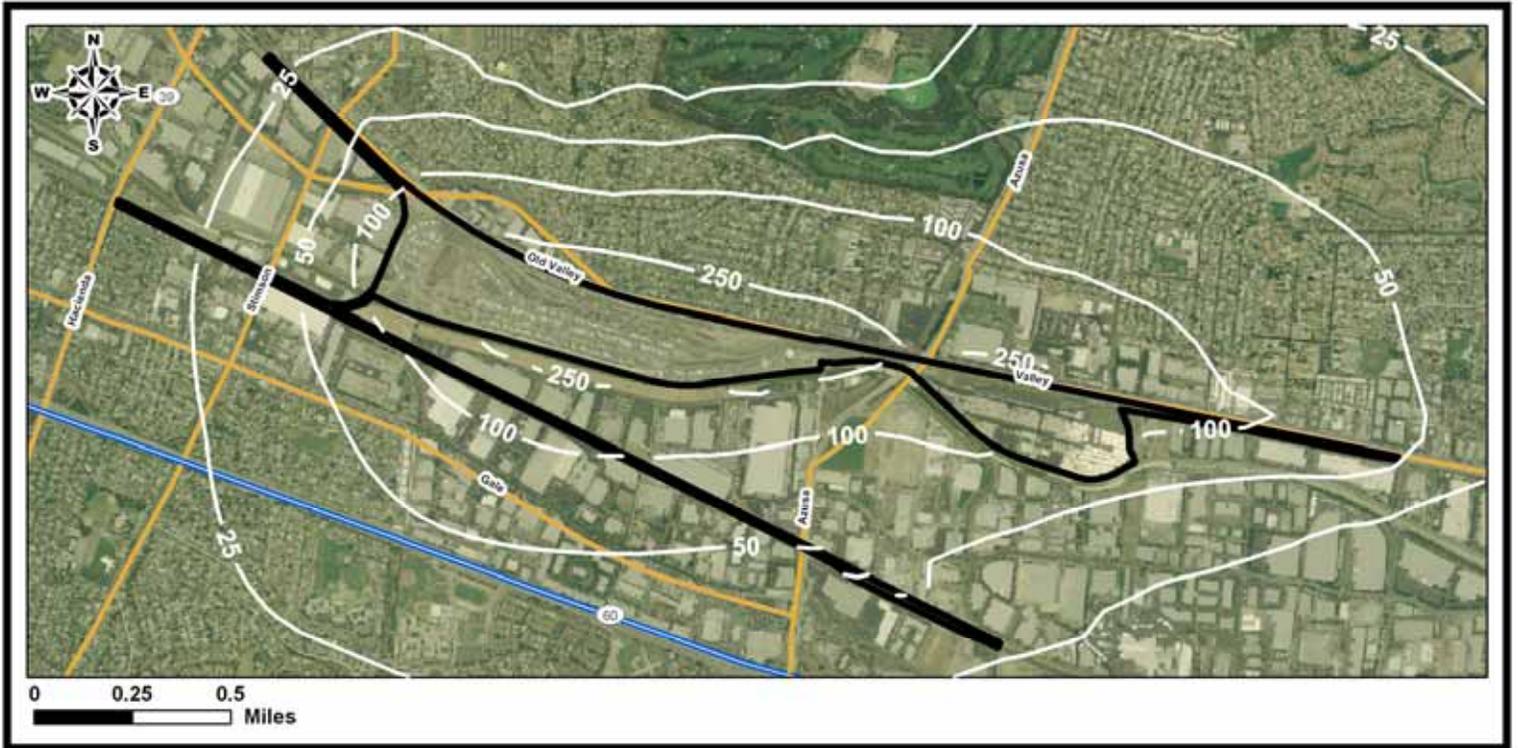

**Figure V-2: Estimated Regional Cancer Risk (Chances per Million People)
From the UP City of Industry Railyard**

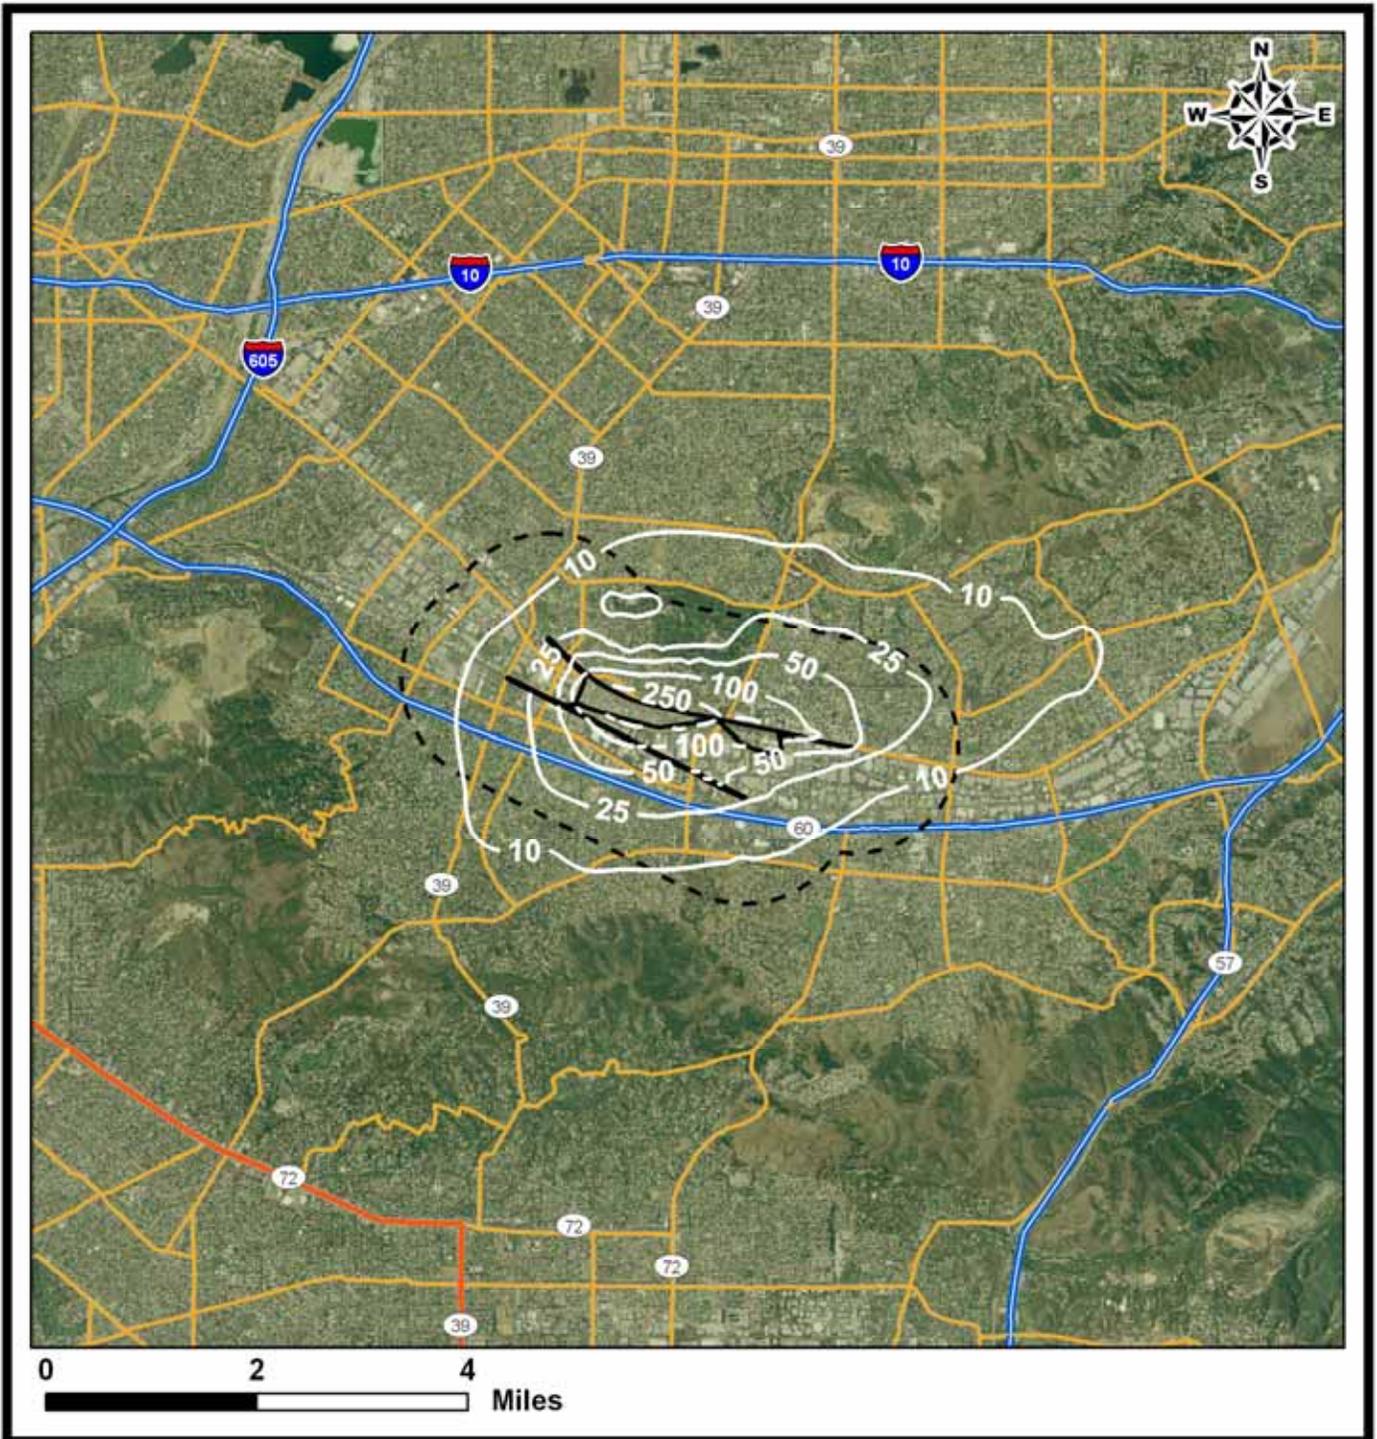

The OEHHA Guidelines recommend a 70-year lifetime exposure duration to evaluate the potential cancer risks for residents. Shorter exposure durations of 30 years and 9 years are also recommended for residents and school-age children, respectively, as a supplement. These three exposure durations – 70 years, 30 years, and 9 years – all assume exposure for 24 hours a day, and 7 days a week. It is important to note that children, for physiological as well as behavioral reasons, have higher rates of exposure than adults on a per unit body weight basis (OEHHA, 2003).

To evaluate the potential cancer risks for workers, the OEHHA Guidelines recommend that a 40-year exposure duration be used, assuming workers have a different breathing rate ($149 \text{ L kg}^{-1} \text{ day}^{-1}$) and exposure for an 8-hour workday, five days a week, 245 days a year.

Table V-3 shows the equivalent risk levels of 70- and 30-year exposure durations for exposed residents; and 40- and 9-year exposure durations for workers and school-age children, respectively. As Table V-3 shows, the 10 in a million isopleth line in Figure V-2 would become 4 in a million for exposed population with a shorter residency of 30 years, 2.5 in a million for exposed school-age children, and 2 in a million for off-site workers.

To conservatively communicate the risks, ARB staff presents the estimated cancer risk isopleths all based on a 70-year resident exposure duration, even for those impacted industrial areas where no resident lives.

Table V-3: Equivalent Potential Cancer Risk Levels for 70-, 40-, 30-, and 9-Year Exposure Durations

Exposure Duration (Years)	Equivalent Risk Level (Chance in a Million)				
	10	25	50	100	250
70	10	25	50	100	250
30	4	11	21	43	107
9 [‡]	2.5	6.3	12.5	25	62.5
40 [*]	2	5	10	20	50

[‡] Exposure duration for school-age children, age 0-9.

^{*} Exposure duration for off-site workers: work schedule of 8 hours a day, 5 days a week, 245 days a year.

The more populated areas near the UP City of Industry Railyard are located northwest, southwest, and northeast of the railyard. Areas located east, south, and west are predominantly industrial-commercial. Based on the 2000 U.S. Census Bureau's data, the zone of impact of the estimated risks above 10 chances in a million levels encompasses approximately 8,300 acres where about 91,000 residents live. Table V-4 presents the exposed population and area coverage size for various impacted zones of cancer risks.

Table V-4: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels

Estimated Risk (Per Million)	Estimated Impacted Area (Acres)	Estimated Exposure (Population)
10 - 25	5,400	57,000
26 - 50	1,600	18,000
51 - 100	850	10,000
101 - 250	400	5,600
> 250	48	780
> 10	8,300	91,000

b) Potential Non-Cancer Chronic Risk

The quantitative relationship between the amount of exposure to a substance and the incidence or occurrence of an adverse health impact is called the dose-response assessment. According to the OEHHA Guidelines (OEHHA, 2003), dose-response information for non-carcinogens is presented in the form of reference exposure levels. OEHHA has developed chronic reference exposure levels for assessing non-cancer health impacts from long-term exposure.

A chronic reference exposure level is a concentration level, expressed in units of micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) for inhalation exposure, at or below which no adverse health effects are anticipated following long-term exposure. Long-term exposure for these purposes has been defined as 12% of a lifetime, or about eight years for humans (OEHHA, 2003).

The methodology for developing chronic reference exposure levels is fundamentally the same as that used by U.S. EPA in developing the inhalation reference concentrations and oral reference doses. Chronic reference exposure levels are frequently calculated by dividing the no observed adverse effect level or lowest observed adverse effect levels in human or animal studies by uncertainty factors (OEHHA, 2003).

A substantial number of epidemiologic studies have found a strong association between exposure to ambient particulate matter and adverse health effects. For diesel PM, OEHHA has determined a chronic reference exposure level of $5 \mu\text{g}/\text{m}^3$, with the respiratory system as the hazard index target (OEHHA, 2003).

It should be emphasized that exceeding the chronic reference exposure level does not necessarily indicate that an adverse health impact will occur. However, levels of exposure above the reference exposure level have an increasing but undefined

probability of resulting in an adverse health impact, particularly in sensitive individuals (e.g., depending on the toxicant, the very young, the elderly, pregnant women, and those with acute or chronic illnesses).

The significance of exceeding the reference exposure level is dependent on the seriousness of the health endpoint, the strength and interpretation of the health studies, the magnitude of combined safety factors, and other considerations (OEHHA, 2003).


It is important to note that reference exposure level for diesel PM is essentially the U.S. EPA Reference Concentration first developed in the early 1990s based on histological changes in the lungs of rats. Since the identification of diesel PM as a toxic air contaminant, California has evaluated the latest literature on particulate matter health effects to set the Ambient Air Quality Standard. Diesel PM is a component of particulate matter. Health effects from particulate matter in humans include illness and death from cardiovascular and respiratory disease, and exacerbation of asthma and other respiratory illnesses. Additionally, a body of literature has been published, largely after the identification of diesel PM as a toxic air contaminant and adoption of the reference exposure level, which shows that diesel PM can enhance allergic responses in humans and animals. Thus, it should be noted that the reference exposure level does not reflect adverse impacts of particulate matter on cardiovascular and respiratory disease and deaths, exacerbation of asthma, and enhancement of allergic response.

The hazard index is then calculated by taking the annual average diesel PM concentration, and dividing by the chronic reference exposure level of $5 \mu\text{g}/\text{m}^3$. A hazard index value of 1 or greater indicates an exceedance of the chronic reference exposure level.

As part of this study, ARB staff conducted an analysis of the potential non-cancer health impacts associated with exposures to the model-predicted levels of directly emitted diesel PM from on-site sources within the modeling domain. The hazard index values are calculated, and then plotted as a series of isopleths in Figure V-3. As can be seen, the hazard index is ~ 0.20 at the railyard boundary, and <0.1 around the vicinity of the railyard. According to the OEHHA Guidelines (OEHHA, 2003), these levels indicate that the potential non-cancer chronic public health risks are less likely to happen.

Figure V-3 presents the spatial distribution of estimated non-cancer chronic risks by health hazard index isopleths that range from 0.01 to 0.20 around the yard facility. The zone of impact where non-cancer chronic health hazard indices are above 0.01 is an estimated area of 8,300 acres.

Figure V-3: Estimated Non-Cancer Chronic Risk Health Hazard Index From the UP City of Industry Railyard

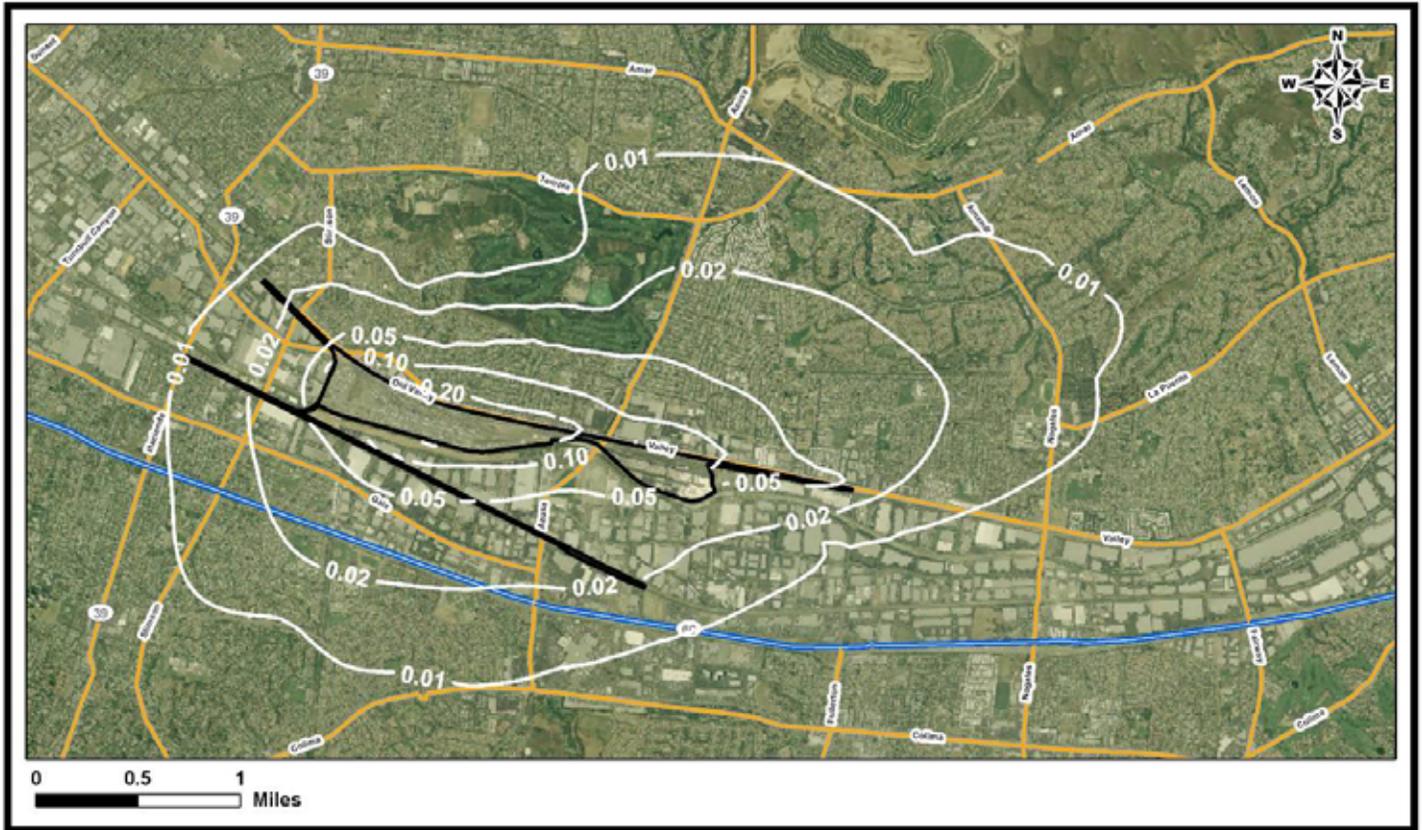

c) Potential Non-Cancer Acute Risk

According to the OEHHA Guidelines, an acute reference exposure level is an exposure that is not likely to cause adverse health effects in a human population, including sensitive subgroups, exposed to that concentration for the specified exposure duration (generally one hour) on an intermittent basis. Non-cancer acute risk characterization involves calculating the maximum potential health impacts, based on short-term acute exposure and reference exposure levels. Non-cancer acute impacts for a single pollutant are estimated by calculating a hazard index.

Due to the uncertainties in the toxicological and epidemiological studies, diesel PM as a whole was not assigned a short-term acute reference exposure level. It is only specific compounds of diesel exhaust (e.g., acrolein) that independently have potential acute effects (such as irritation of the eyes and respiratory tract), and an assigned acute reference exposure level. However, acrolein is primarily used as a chemical intermediate in the manufacture of adhesives and paper. It has also been found as a byproduct of any burning process, such as fire, and tobacco smoke. Acrolein is a

chemically reactive and unstable compound, and easily reacts with a variety of chemical compounds in the atmosphere. Compared to the other compounds in the diesel exhaust, the concentration of acrolein has a much lower chance of reaching a distant off-site receptor. More importantly, given the multitude of activities ongoing at facilities as complex as railyards, there are much higher levels of uncertainties associated with hourly-specific emission data and hourly model-estimated peak concentrations for short-term exposure, which are essential to assess acute risk. Therefore, non-cancer acute risk is not addressed quantitatively in this study. From a risk management perspective, ARB staff believes it is reasonable to focus on diesel PM cancer risk because it is the predominant risk driver, and the most effective parameter to evaluate risk reduction actions. Moreover, actions to reduce diesel PM will also reduce non-cancer risks.

2. *Risk Characterization Associated with Off-Site Emissions*

ARB staff evaluated the impacts from off-site pollution sources near the UP City of Industry Railyard using the U.S. EPA-approved AERMOD dispersion model. Specifically, off-site mobile and stationary diesel PM emission sources located within a one-mile distance from the railyard were included. Diesel PM off-site emissions used in the off-site modeling runs consisted of about 27.6 tons per year from roadways, representing emissions for 2005. Diesel PM emissions from stationary facilities were de minimis. The diesel PM emissions from the UP City of Industry Railyard are not analyzed in the off-site air dispersion modeling. The same meteorological data and coarse receptor grid system used for on-site air dispersion modeling was used for the off-site modeling runs. The estimated potential cancer risks and non-cancer chronic health hazard index associated with off-site diesel PM emissions are illustrated in Figure V-4 and Figure V-5. As indicated in Figure V-4, the zone of impacts of estimated cancer risks associated with off-site diesel PM emissions is larger than that for the on-site diesel PM emissions.

Based on the 2000 U.S. Census Bureau's data, the zone of impact of the estimated potential cancer risks above 10 chances in a million levels associated with off-site diesel PM emissions encompasses approximately 32,000 acres where about 230,000 residents live. For comparison with the UP City of Industry Railyard health risks, the same level of potential cancer risks (more than 10 chances in a million) associated with railyard diesel PM emissions covers about 8,300 acres where approximately 91,000 residents live.

Figure V-4: Estimated Cancer Risk near the UP City of Industry Railyard (Off-Site)

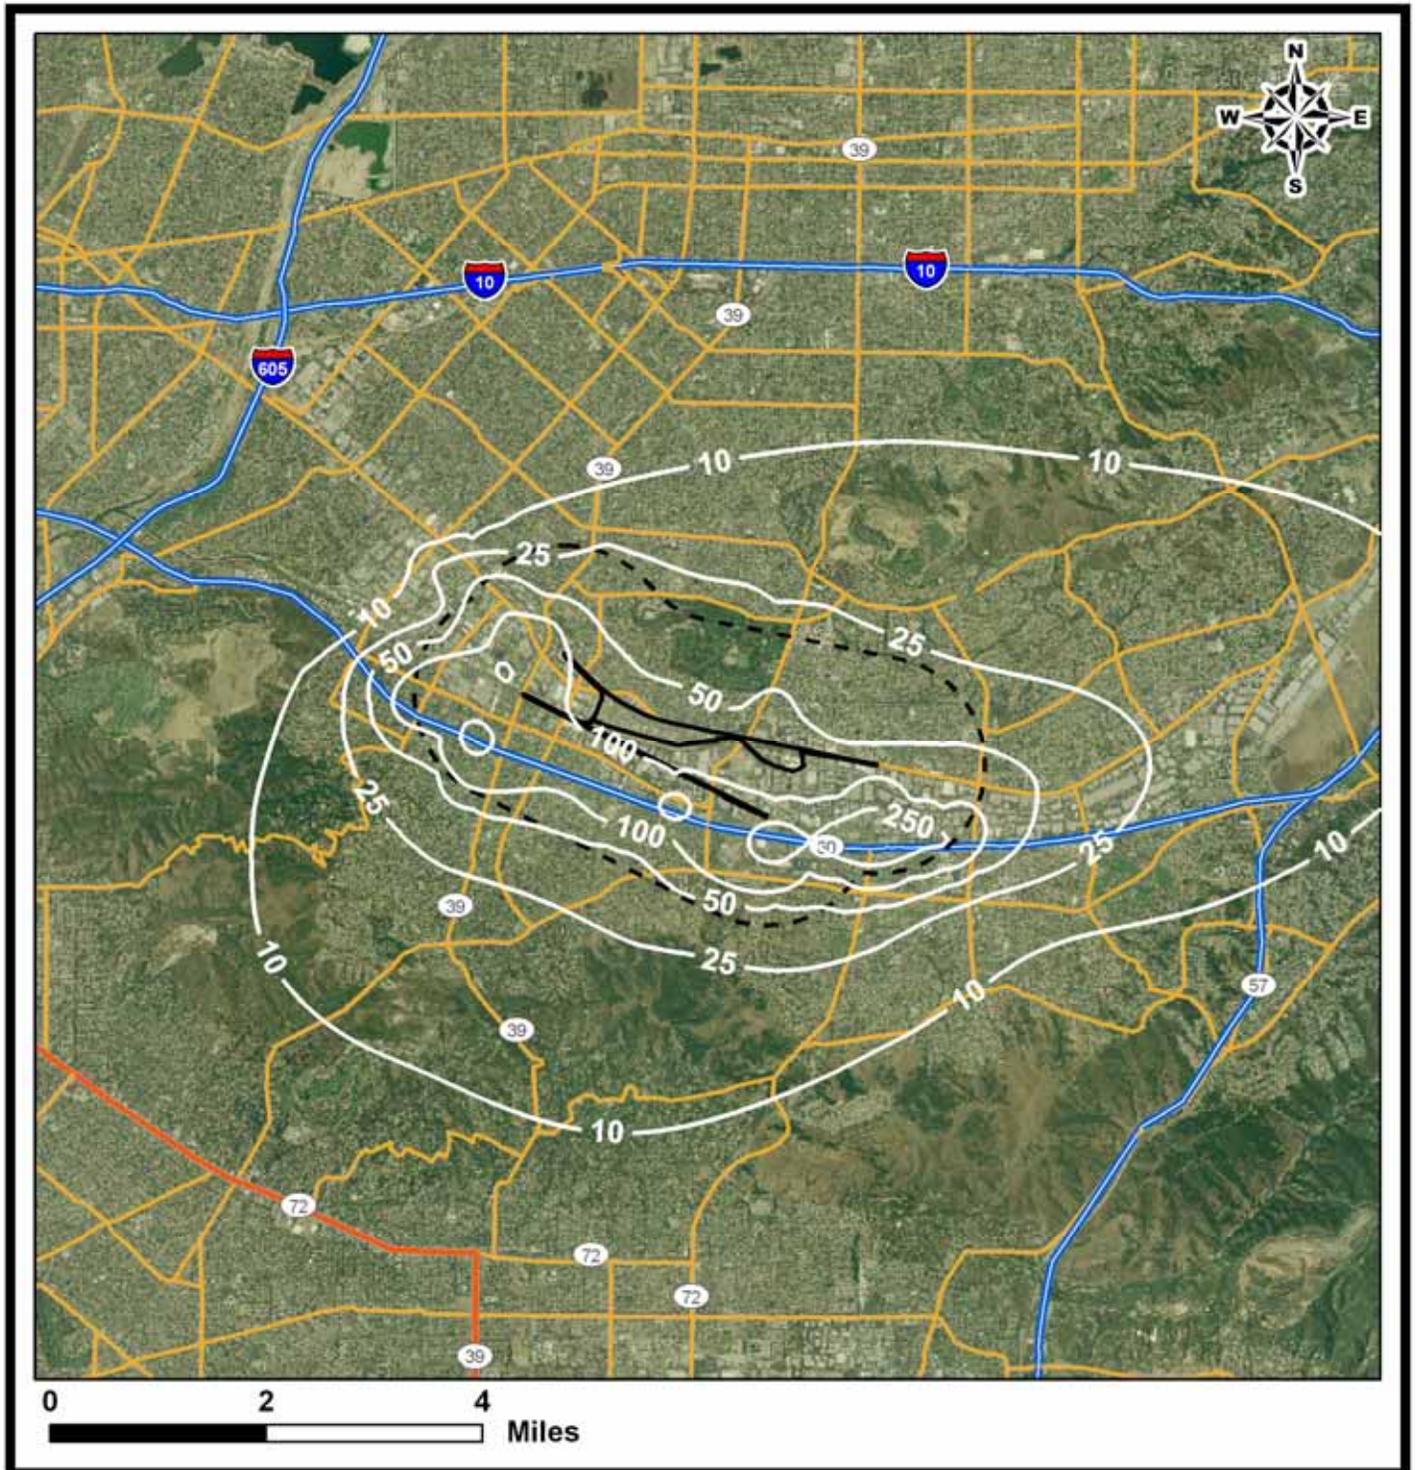


Figure V-5: Estimated Non-Cancer Chronic Risk Levels From Off-Site Emissions Near the UP City of Industry Railyard

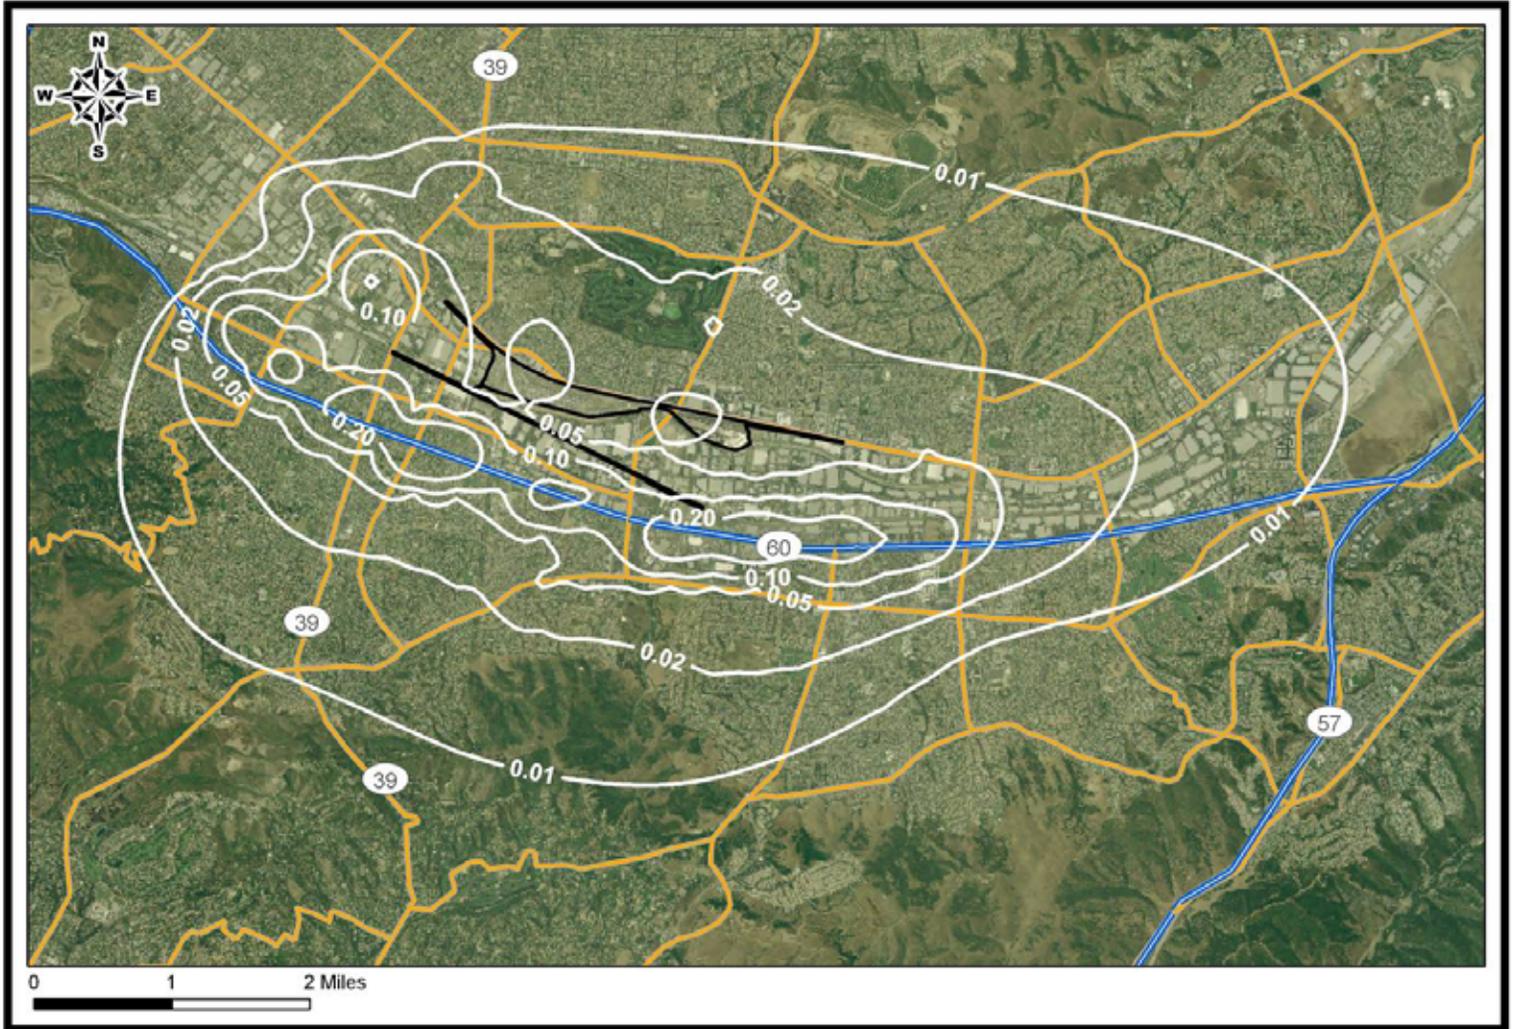


Table V-5 presents the exposed population and area coverage size for various impacted zones of cancer risks associated with off-site diesel PM emissions.

Table V-5: Estimated Impacted Areas and Exposed Population Associated with Different Cancer Risk Levels from Off-Site Emissions Near the UP City of Industry Railyard

Estimated Risk (Per Million)	Estimated Impacted Area (Acres)	Estimated Exposure (Population)
10 - 25	19,000	110,000
26 - 50	6,200	71,000
51 - 100	3,300	30,000
101 - 250	2,700	16,000
>250	430	1,600
> 10	32,000	230,000

Detailed calculations and methodologies used in off-site air dispersion modeling are presented in Appendix C.

3. Risks to Sensitive Receptors

Individuals may be more sensitive to toxic exposures than the general population. These sensitive populations are identified as school-age children and seniors. The sensitive receptors include schools, hospitals, day-care centers and elder care facilities. There are 31 sensitive receptors within a one-mile distance of the UP City of Industry Railyard, including 22 schools, 6 pre-schools / child care centers, and 3 hospitals / medical centers. The cancer risks for these sensitive receptors are subjective to 40- or 9-year (school-age children) exposure assessment according to the OEHHA Guidelines. Table V-6 summarizes the estimated cancer risk levels associated with diesel PM emission from the UP City of Industry Railyard for 70-, 40-, and 9-year exposure duration.

Table V-6: Estimated Number of Sensitive Receptors in Various Levels of Cancer Risks Associated with On-Site Diesel PM Emissions

Estimated Cancer Risk (Chance in a Million)	70-Year Exposure	40-Year Exposure	9-Year Exposure
> 100	3	0	0
>50 – 100	6	0	0
>25 – 50	9	3	1
>10 – 25	6	5	3
0 - 10	7	23	27

D. Uncertainties and Limitations

Risk assessment is a complex procedure which requires the integration of many variables and assumptions. The estimated diesel PM concentrations and risk levels produced by a risk assessment are based on several assumptions, many of which are designed to be health protective so that potential risks to individual are not underestimated.

As described previously, the health risk assessment consists of three components: (1) emission inventory, (2) air dispersion modeling, and (3) risk assessment. Each component has a certain degree of uncertainty associated with its estimation and prediction due to the assumptions made. Therefore, there are uncertainties and limitations with the results.

The following subsections describe the specific sources of uncertainties in each component. In combination, these various factors may result in potential uncertainties in the location and magnitude of predicted concentrations, as well as the potential health effects actually associated with a particular level of exposure.

1. Emission Inventory

The emission rate often is considered to be proportional to the type and magnitude of the activity at a source, e.g., the operation. Ideally, emissions from a source can be calculated on the basis of measured concentrations of the pollutant in the sources and emission strengths, e.g., a continuous emission monitor. This approach can be very

costly and time consuming and is not often used for the emission estimation. Instead, emissions are usually estimated by the operation activities or fuel consumption and associated emission factors, based usually on source tests.

The uncertainties of emission estimates may be attributed to many factors such as a lack of information for variability of locomotive engine type, throttle setting, level of maintenance, operation time, and emission factor estimates. Quantifying individual uncertainties is a complex process and may in itself introduce unpredictable uncertainties.^{†††}

For locomotive sources at the UP City of Industry Railyard, the activity rates include primarily the number of engines in operation and the time spent in different power settings. The methodology used for the locomotive emissions is based on these facility-specific activity data. The number of engines operating in the facility is generally well-tallied by UP's electronic monitoring of locomotives entering and leaving the railyard. However, the monitoring under certain circumstances may produce duplicate readings that can result in overestimates of locomotive activity. In addition to recorded activity data, surveys and communications with facility personnel, and correlations from other existing data (e.g., from the *Roseville Railyard Study* (ARB, 2004a)), all were used to verify the emission estimations in the emission inventory.

Uncertainties also exist in estimates of the engine time in mode. Idling is typically the most significant operational mode, but locomotive event recorder data cannot distinguish when an engine is on or off during periods when the locomotive is in the idling notch. As a result, a professional judgment is applied to distinguish between these two modes. While the current operations may not be precisely known, control measures already being implemented are expected to result in reduced activity levels and lower emissions than are estimated here for future years.

As discussed previously, emission factors are often used for emission estimates according to different operating cycles. The *Roseville Railyard Study* (ARB, 2004a) developed representative diesel PM emission factors for locomotives in different duty cycles. To reduce the possible variability of the locomotive population and the uncertainty from assumptions, the emission factors are updated in the study to cover a wide range of locomotive fleet in the State (see Appendix D). The fuel usage in the

^{†††} Tier-1 methodology is a conservative point approach but suitable for the scope of the current HRAs, given the condition and lack of probability data. The Tier-1 approach used in the HRAs is consistent with the previous health risk analyses performed by ARB, the *Roseville Railyard Study* (ARB, 2004a) and the *Diesel Particulate Matter Exposure Assessment Study for the Ports of Los Angeles and Long Beach, Final Report* (ARB, 2006b). By recognizing associated uncertainties or variability, the HRAs have qualitatively discussed the limitations and caveats of possible underestimation and overestimation in emission inventory and modeling predictions because of assumptions and simplifications. The discussion provides an additional reference for HRA results, even though quantitative uncertainty bounds are unavailable. Most importantly, it is not practical to characterize and quantify the uncertainty of estimated health risks without the support of robust scientific data and actual probability distribution functions of model variables. An attempt to incorporate subjective judgments with uncertainty analyses can lead to misinterpretation of HRA findings.

locomotives in 2005 is calculated from UP's annual fuel consumption database. These critical updates for locomotive emission inventory have established the most representative locomotive emission factors for the study.

For non-locomotive emissions, uncertainty associated with vehicles and equipment at the railyard facility also exists because the duty cycles (i.e., engine load demanded) are less well-characterized. Default estimates of the duty cycle parameters may not accurately reflect the typical duty demanded from these vehicles and equipment at any particular site. In addition, national and state regulations have targeted these sources for emission reductions. Implementation of these rules and fleet turnover to newer engines meeting more strict standards should significantly reduce emissions at these rail sites in future years. However, the effects of these regulations have not been incorporated in the emission estimates, so estimated emissions are greater than those expected for future years at the same activity level.

2. *Air Dispersion Modeling*

An air dispersion model is derived from atmospheric diffusion theory with assumptions or, alternatively, by solution of the atmospheric-diffusion equation assuming simplified forms of effective diffusivity. Within the limits of the simplifications involved in its derivation, the model-associated uncertainties are vulnerably propagated into its downstream applications.

Model uncertainty may stem from data gaps that are filled by the use of assumptions. Uncertainty is often considered as a measure of the incompleteness of one's knowledge or information about a variate whose true value could be established if a perfect measurement is available. The structure of mathematical models employed to represent scenarios and phenomena of interest is often a key source of model uncertainty, due to the fact that models are often only a simplified representation of a real-world system, such as the limitation of model formulation, the parameterization of a complex processes, and the approximation of numerical calculations. These uncertainties are inherent and exclusively caused by the model's inability to represent a complex aerodynamic process. An air dispersion model usually uses simplified atmospheric conditions to simulate pollutant transport in the air, and these conditions become inputs to the models (e.g., the use of non site-specific meteorological data, uniform wind speed over the simulating domain, use of surface parameters for the meteorological station as opposed to the railyard, substitution of missing meteorological data, and simplified emission source representation). There are also other physical dynamics in the transport process, such as the small-scale turbulent flow in the air, which are not characterized by the air dispersion models. As a result of the simplified representation of real-world physics, deviations in pollutant concentrations predicted by the models may occur due to the introduced uncertainty sources.

The other type of uncertainty is referred as reducible uncertainty, a result of uncertainties associated with input parameters of the known conditions, which include source characteristics and meteorological inputs. However, the uncertainties in air dispersion models have been improved over the years because of better

representations in the model structure. In 2006, the U.S. EPA modeling guidance was updated to replace the Industrial Source Complex model with AERMOD as a recommended regulatory air dispersion model for determining single source and source complex. Many updated formulations have been incorporated into the model structure from its predecessor for better predictions from the air dispersion process. Nevertheless, quantifying overall uncertainty of model predictions is infeasible due to the associated uncertainties described above, and is beyond the scope of this study.

3. Risk Assessment

The toxicity of toxic air contaminants is often established by available epidemiological studies, or, where data from humans are not available, the use of data from animal studies. The diesel PM cancer potency factor is based on long-term study of railyard workers exposed to diesel exhaust at concentrations approximately ten times typical ambient exposures (OEHHA, 2003). The differences within human populations usually cannot be easily quantified and incorporated into risk assessments. Factors including metabolism, target site sensitivity, diet, immunological responses, and genetics may influence the response to toxicants. In addition, the human population is much more diverse both genetically and culturally (e.g., lifestyle, diet) than inbred experimental animals. The intraspecies variability among humans is expected to be much greater than in laboratory animals. Adjustment for tumors at multiple sites induced by some carcinogens could result in a higher potency. Other uncertainties arise (1) in the assumptions underlying the dose-response model used, and (2) in extrapolating from large experimental doses, where, for example, other toxic effects may compromise the assessment of carcinogenic potential due to much smaller environmental doses. Also, only single tumor sites induced by a substance are usually considered. When epidemiological data are used to generate a carcinogenic potency, less uncertainty is involved in the extrapolation from workplace exposures to environmental exposures. However, children, whose hematological, nervous, endocrine, and immune systems are still developing and who may be more sensitive to the effects of carcinogens, are not included in the worker population and risk estimates based on occupational epidemiological data are more uncertain for children than adults.

Human exposures to diesel PM are based on limited availability of data and are mostly derived based on estimates of emissions and duration of exposure. Different epidemiological studies also suggest somewhat different levels of risk. When the Scientific Review Panel identified diesel PM as a toxic air contaminant (ARB, 1998), the panel members endorsed a range of inhalation cancer potency factors [1.3×10^{-4} to $2.4 \times 10^{-3} (\mu\text{g}/\text{m}^3)^{-1}$] and a risk factor of $3 \times 10^{-4} (\mu\text{g}/\text{m}^3)^{-1}$, as a reasonable estimate of the unit risk. From the unit risk factor an inhalation cancer potency factor of $1.1 (\text{mg}/\text{kg}\text{-day})^{-1}$ can be calculated, which is used in the study. There are many epidemiological studies that support the finding that diesel exhaust exposure elevates relative risk for lung cancer. However, the quantification of each uncertainty applied in the estimate of cancer potency is very difficult and can be itself uncertain

This study adopts the standard Tier 1 approach recommended by OEHHA for exposure and risk assessment. A Tier 1 approach is an end-point estimate methodology without

the consideration of site-specific data distributions. It also assumes that an individual is exposed to an annual average concentration of a pollutant continuously for a specific time period. OEHHA recommends the lifetime 70-year exposure duration with a 24-hour per day exposure be used for determining residential cancer risks. This will ensure a person residing in the vicinity of a facility for a lifetime will be included in the evaluation of risk posed by the facility. Lifetime 70-year exposure is a conservative estimate, but is the historical benchmark for comparing facility impacts on receptors and for evaluating the effectiveness of air pollution control measures.

Although it is not likely that most people will reside at a single residence for 70 years, it is common that people will spend their entire lives in a major urban area. While residing in urban areas, it is very possible to be exposed to the emissions of another facility at the next residence. In order to help ensure that people do not accumulate an excess unacceptable cancer risk from cumulative exposure to stationary facilities at multiple residences, the 70-year exposure duration is used for risk management decisions. However, if a facility is notifying the public regarding health risk, it is a useful indication for a person who has resided in his or her current residence for less than 70 years to know that the calculated estimate of his or her cancer risk is less than that calculated for a 70-year risk (OEHHA, 2003). It is important that the risk estimates generated in this study not be interpreted as the expected rates of disease in the exposed population, but rather as estimates of potential risk. Risk assessment is best viewed as a comparative tool rather than a literal prediction of diesel incidence in a community.

Moreover, since the Tier-1 methodology is used in the study for the health risk assessment, the results have been limited to deterministic estimates based on conservative inputs. For example, an 80th percentile breathing rate approach is used to represent a 70-year lifetime inhalation that tends toward the high end for the general population. Moreover, the results based on the Tier-1 estimates do not provide an indication of the magnitude of uncertainty surrounding the quantities estimated, nor an insight into the key sources of underlying uncertainty.

REFERENCES

- ARB, 1998. For the "Proposed Identification of Diesel Exhaust as a Toxic Air Contaminant". April, 1998
- ARB, 2000. Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles, Staff Report. October, 2000.
- ARB, 2002. Public Hearing to Consider Amendments to the Ambient Air Quality Standards for Particulate Matter and Sulfates, Staff Report. May, 2002.
- ARB, 2004a. Roseville Railyard Study. October, 2004.
- ARB, 2004b. ARB Recommended Interim Risk Management Policy for Inhalation-Based Residential Cancer Risk. March, 2004.
<http://www.arb.ca.gov/toxics/harp/rmpolicyfaq.htm>
- ARB, 2005. ARB/Railroad Statewide Agreement: Particulate Emissions Reduction Program at the California Rail Yards. Sacramento, CA. June, 2005.
- ARB, 2006a. The California Almanac of Emission & Air Quality, 2006 edition.
- ARB, 2006b. Diesel Particulate Matter Exposure Assessment Study for the Ports of Los Angeles and Long Beach, Final Report. April, 2006.
- ARB, 2006c. ARB Rail Yard Emissions Inventory Methodology. July, 2006.
- ARB, 2006d. ARB Health Risk Assessment Guidance for Railyard and Intermodal Facilities. July, 2006.
- ARB, 2006e. Emission Reduction Plan for Ports and Goods Movement in California. March, 2006.
- ENVIRON, 2006. Air Dispersion Modeling Assessment of Air Toxic Emissions from BNSF Los Angeles/Hobart Railyard, Report No. 06-12910J5B. Emeryville, CA. November, 2006.
- Krewski et al., 2000. *Reanalysis of the Harvard Six Cities Study and the American Cancer Society Study of Particulate Air Pollution and Mortality. Special Report*, Health Effects Institute: Cambridge, Massachusetts.
- Lloyd, A.C., Cackette, T.A., 2001. Diesel Engines: Environmental Impact and Control. *Journal of Air & Waste Management Association*, **51**, pp. 809-847.

OEHHA, 2000. Air Toxics Hot Spot Program Risk Assessment Guidelines: Part IV- Technical Support Document for Exposure Analysis and Stochastic Analysis. Office of Environmental Health Hazard Assessment. September, 2000.

OEHHA, 2002. Air Toxics Hot Spot Program Risk Assessment Guidelines: Part II- Technical Support Document for Describing Available Cancer Potency Factors. Office of Environmental Health Hazard Assessment. December, 2002.

OEHHA, 2003. Air Toxics Hot Spots Program Risk Assessment Guidelines: The Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessments. Office of Environmental Health Hazard Assessment. August, 2003.

Pope et al., 1995. Particulate Air Pollution as a Predictor of Mortality in a Prospective Study of U.S. Adults; *American Journal of Respiratory and Critical Care Medicine*. 1995, 151, 669-674.

Pope et al., 2002. Lung Cancer, Cardiopulmonary Mortality, and Long-Term Exposure to Fine Particulate Air Pollution, *J. Am. Med. Assoc.*, **287**, pp. 1132-1141.

Pope et al., 2004. Cardiovascular Mortality and Long-term Exposure to Particulate Air Pollution: Epidemiological Evidence of General Pathophysiological Pathways of Disease; *Circulation* 2004, 109, 71-77.

Sierra Research, 2007. Draft Toxic Air Contaminant Emissions Inventory and Dispersion Modeling Report for the City of Industry, Los Angeles, California. Sacramento, CA. November, 2007. <http://www.arb.ca.gov/railyard/hra/hra.htm>

SCAQMD, 2008. Multiple Air Toxics Exposure Study in the South Coast Air Basin (MATES-III), Draft Report. January, 2008.

U.S. EPA, 2004a. User's Guide for the AMS/EPA Regulatory Model – AERMOD. Report No. EPA-454/B-03-001. Office of Air Quality Planning and Standards. Emissions Monitoring and Analysis Division, Research Triangle Park, NC. September, 2004.

U.S. EPA, 2004b. User's Guide for the AERMOD Meteorological Preprocessor. Report No. EPA-454/B-03-002. Office of Air Quality Planning and Standards. Emissions Monitoring and Analysis Division, Research Triangle Park, NC. September, 2004.

U.S. EPA, 2004c. Final Regulatory Impact Analysis: Control of Emissions from Non-Road Diesel Engines. U.S. EPA 420-R-04-007. Office of Air Quality Planning and Standards, Assessment and Standards Division, Research Triangle Park, NC.

U.S. EPA, 2005. Federal Register, Part III, 40 CFR Part 51, Vol. 70, No. 216, November 9, 2005.

APPENDIX A

**METHODOLOGY FOR ESTIMATING OFF-SITE DIESEL PM MOBILE SOURCE
EMISSIONS**

INTRODUCTION

This assessment includes on-road mobile emissions from all heavy-duty diesel truck running exhaust as it is the primary source of diesel particulate emissions within the on-road vehicle fleet. Traditionally, on-road mobile emission inventories are generated at the county scale using California's emission factor model EMFAC and then allocated to large grid cells using the Direct Travel Impact Model. To enhance the spatial resolution, ARB staff estimated emissions based on roadway specific vehicle activity data and allocated them to individual roadway links. All roadway links within a 2-mile buffer of the combined Commerce yards and all links within a 1-mile buffer of all other yards are included in this assessment. This inventory does not include emissions generated by idling of heavy-duty trucks or any off-road equipment outside the railyards.

As more work has been done to understand transportation modeling and forecasting, access to local scale vehicle activity data has increased. For example, the various Metropolitan Planning Organizations (MPOs) are mandated by the Federal government to maintain a regional transportation plan and a regional transportation improvement plan. These reports assess the impact the travel growth and assess various transportation improvement plans⁺⁺⁺. Planning is based on travel activity results from Transportation Demand Models that forecast traffic volumes and other characteristics of the transportation system. Currently, more than a dozen MPOs as well as the California Department of Transportation (Caltrans) maintain transportation demand models.

Through a system of mathematical equations, Transportation Demand Models estimate vehicle population and activity estimates such as speed and vehicle miles traveled based on data about population, employment, surveys, income, roadway and transit networks, and transportation costs. The activity is then assigned a spatial and temporal distribution by allocating them to roadway links and time periods. A roadway link is defined as a discrete section of roadway with unique estimates for the fleet specific population and average speed and is classified as a freeway, ramp, major arterial, minor arterial, collector, or centroid connector. Link-based emission inventory development utilizes these enhanced spatial data and fleet and pollutant specific emission factors to estimate emissions at the neighborhood scale.

METHODOLOGY

The methodology for estimating emissions from on-road mobile sources outside the railyards was broken into four main processes and described below. The first step involves gathering vehicle activity data specific to each link on the roadway network. Each link contains 24 hours worth of activity data including vehicle miles traveled, vehicle type, and speed. The activity is then apportioned to the various heavy-duty diesel truck types (Table 1) where speed-specific vehicle miles traveled is then matched to an emission factor from EMFAC to estimate total emissions from each vehicle type for each hour of the day. The working draft of EMFAC, rather than EMFAC2007, was used for this assessment because at the time this project was underway EMFAC2007

⁺⁺⁺ Southern California Association of Governments Transportation Modeling, <http://www.scag.ca.gov/modeling/> (Accessed January 2007).

was not completed. The working draft of EMFAC, however, contains nearly all the revisions in EMFAC2007 that would affect these calculations.

Table A-1: Heavy-Duty Truck Categories

Class	Description	Weight (GVW)	Abbreviation	Technology Group
T4	Light Heavy-Duty Diesel Trucks	8,501-10,000	LHDDT1	DIESEL
T5	Light Heavy-Duty Diesel Trucks	10,001-14,000	LHDDT2	DIESEL
T6	Medium Heavy-Duty Diesel Trucks	14,001-33,000	MHDDT	DIESEL
T7	Heavy Heavy-Duty Diesel Trucks	33,001+	HHDDT	DIESEL

Step 1: Obtain Link-Specific Activity Data

The link specific activity data for heavy-duty trucks necessary to estimate emissions are speed and vehicle miles traveled, where vehicle miles traveled is a product of vehicle volume (population) and link length. Link activity for Ventura, Los Angeles, Orange, and more than 90% of Riverside and San Bernardino counties are provided by the Southern California Association of Governments' Heavy-Duty Truck Transportation Demand Model. Heavy-duty truck activity is modeled using truck specific data, commodity flows and goods movement data. The Southern California Association of Governments, however, is the only MPO with a heavy-duty truck model. The remaining counties under the railyard study are covered by the Integrated Transportation Network developed by Alpine Geophysics^{§§§}. The Integrated Transportation Network was developed by stitching together MPO transportation networks and the Caltrans statewide transportation network. Link specific truck activity from the Integrated Transportation Network is estimated as a fraction of the total traffic on the links and is based on the fraction of trucks within each county as it is estimated in EMFAC.

The product of truck volume and link length is referred to as vehicle miles traveled (VMT) and has units of miles. Transportation demand models provide total VMT for each link without further classification into the various heavy-duty truck weight and fuel type classifications. Therefore, in order to assess the emissions only from heavy-duty diesel trucks, the total heavy-duty truck VMT is multiplied by the fraction of trucks that are diesel. Once the total diesel VMT is calculated, the heavy-duty truck diesel VMT is multiplied by the fraction of trucks that make up the four weight classifications. The fuel and weight fractions are specific to each county and are derived from total VMT for each weight and fuel class in EMFAC for each county. The data are then compiled into an activity matrix (Table 2) composed of a link identification code, hour of the day, speed,

^{§§§} Wilkinson, James (Alpine Geophysics); et al. "Development of the California Integrated Transportation Network (ITN)," Alpine Geophysics – Atmospheric and Hydrologic Sciences, La Honda, CA (2004). http://www.arb.ca.gov/airways/CCOS/docs/III3_0402_Jun06_fr.pdf

light heavy-duty diesel 1 truck (LHDDT1) VMT, light heavy-duty diesel 2 truck (LHDDT2) VMT, medium heavy-duty diesel truck (MHDDT) VMT, and heavy heavy-duty diesel truck (HHDDT) VMT.

Table A-2: Activity Matrix Example

LINKID	Hour	Speed (mph)	LHDDT1 VMT (miles)	LHDDT2 VMT (miles)	MHDDT VMT (miles)	HHDDT VMT (miles)
49761	12	45	0.37	0.48	3.17	5.51
49761	3	45	0.14	0.18	1.16	2.00
49761	3	35	0.16	0.21	1.37	2.38
50234	4	55	0.19	0.26	1.68	2.92

Step 2: Derive Gram per Mile Emission Factors

The second step of the emission inventory process involves developing emission factors for all source categories for a specified time period, emission type, and pollutant. Running exhaust emission factors based on vehicle type, fuel type, and speed were developed from the Emfac mode of EMFAC. These are composite emission factors based on the model year distribution for each county and provided in units of grams of emissions per mile traveled. Finally, a matrix of emission factors by speed and vehicle type was assembled for each county for light heavy-duty diesel trucks 1 and 2 (LHDDT1 and LHDDT2), medium heavy-duty diesel trucks (MHDDT) and heavy heavy-duty diesel trucks (HHDDT). The following is an example of such a matrix (Table 3):

Table A-3: Emission Factor Matrix Example

Speed (mph)	Diesel PM Emission Factors (g/mile)			
	LHD1 DSL	LHD2 DSL	MHD DSL	HHDD DSL
12	0.101	0.145	0.631	2.371
20	0.072	0.105	0.455	1.277
45	0.037	0.054	0.235	0.728
60	0.033	0.047	0.206	1.095

Step 3: Calculate Emissions

Diesel particulate matter (PM) emission factors are provided as grams per mile specific to each speed and heavy-duty truck type (see table above). To estimate emissions, the activity for each diesel heavy-duty truck type was matched to the corresponding

emission factor (EF). For example, a 0.25 mile long link at 3 am in the morning has 8 heavy heavy-duty diesel trucks (HHDDTs) traveling at 45 miles per hour. This equates to a VMT of 2.00 miles (8 trucks*0.25 miles). EMFAC has provided a gram per mile emission factor for HHDDT traveling at 45 mph in Los Angeles County as 0.728 grams diesel PM / mile. In order to estimate total emissions from HHDDTs on that link during that hour of the day the following calculation is made:

$$TotalEmissions(grams) = EF \cdot (Volume \cdot LinkLength) = EF \cdot VMT$$

$$TotalEmissions(grams) = EF \cdot VMT = 0.728 \frac{grams}{mile} \cdot 2.00miles = 1.45 grams$$

The steps outlined above and in Steps 1 and 2 can be represented with this single equation that provides an emissions total for each link for each hour of the day.

$$Emissions = VMT_{link} \cdot \sum_{i,j} Fraction_{i,j} \cdot EF_{i,j}$$

where

- Emissions – the total emissions in grams for each link
- i = represents the individual diesel heavy-duty truck types (LHDDT1, LHDDT2 – light heavy-duty diesel trucks 1 and 2; MHDDT – medium heavy-duty diesel truck; and HHDDT – heavy heavy-duty diesel truck)
- j – represent the hours of the day (hours 1-24)
- VMT_{Link} - total VMT for that link for all heavy-duty trucks (gasoline and diesel)
- Fraction = the fraction of the VMT that is attributable to each diesel heavy-duty truck type The fraction is estimated based on VMT estimates in EMFAC:
Example: VMT_{MHDDT}/VMT_{all heavy-duty trucks (gasoline & diesel)}
- EF = the heavy-duty diesel truck emission factors. The emission factor is vehicle type and speed specific and is thus matched according to the link specific activity parameters.

From this expression, diesel particulate matter emissions are provided for each link and for each hour of the day. Finally, emissions are summed for all links for all hours of the day to provide a total daily emission inventory.

Step 4: QA/QC – Quality Assurance/Quality Control

To assure that the total emissions were calculated correctly, the total emissions (grams) were divided by the total diesel VMT to estimate a composite diesel gram per mile emission factor. This back-calculated emission factor was checked against emission factors in EMFAC. In addition, where possible, heavy-duty truck gate counts provided for the railyards were checked against traffic volumes on the links residing by the gates.

LIMITATIONS AND CAVEATS

ARB staff made several important assumptions in developing this inventory. While these assumptions are appropriate at the county level they may be less appropriate for the particular areas modeled in this assessment. For example, the county specific

default model year distribution within EMFAC and vehicle type VMT fractions were assumed to be applicable for all links within the domain modeled. In the vicinity of significant heavy heavy-duty truck trip generators, it is reasonable to expect that surrounding links will also have higher heavy heavy-duty truck fractions. In these cases, using EMFAC county vehicle mix fractions may underestimate the total diesel particulate emissions from on-road heavy duty trucks. In this inventory, EMFAC county defaults were employed as there is insufficient data available to assess the vehicle mix fractions surrounding the railyards.

Travel demand model results are checked by comparing actual traffic counts on links where the majority of vehicle travel takes place. Therefore, there will be greater uncertainty associated with activity from minor arterials, collectors, and centroid connectors than from higher volume freeways. Data based strictly on actual traffic counts for each street would provide better activity estimates, but unfortunately very little data is available for such an analysis. While links representing freeways are accurately allocated spatially, the allocation of neighborhood streets and other minor roads are not as well represented.

The emissions inventory developed for this study only included diesel particulate matter emissions from running exhaust as it is the primary diesel source from on-road mobile sources. Emissions from other modes such as off-road equipment, extended idling, starts, and off-road equipment outside the rail yards were excluded. Vehicle activity from distribution centers, rail yards and ports, however, are included as they are captured on the roadway network by the travel demand models.

APPENDIX B

**METHODOLOGY FOR ESTIMATING OFF-SITE DIESEL PM STATIONARY SOURCE
EMISSIONS**

Emissions from off-site stationary source facilities were identified using the California Emission Inventory Development and Reporting System (CEIDARS) database, which contains information reported by the local air districts for stationary sources within their jurisdiction.

Geographic information system (GIS) mapping tools were used to create a one-mile buffer zone outside the property boundary footprint reported for each railyard. The CEIDARS facilities whose latitude/longitude coordinates fell within the one-mile buffer zone were selected.

The reported criteria pollutants in CEIDARS include carbon monoxide, nitrogen oxides, sulfur oxides, total organic gases, and particulate matter (PM). The reported toxic pollutants include the substances and facilities covered by the Air Toxics "Hot Spots" (AB 2588) program. Diesel exhaust particulate matter (diesel PM) was estimated from stationary internal combustion engines burning diesel fuel, operating at stationary sources reported in CEIDARS. Diesel PM emissions were derived from the reported criteria pollutant PM that is ten microns or less in diameter (criteria pollutant PM₁₀) emitted from these engines. In a few cases, diesel exhaust PM was reported explicitly under the "Hot Spots" reporting provisions as a toxic pollutant, but generally the criteria pollutant PM₁₀ reported at diesel internal combustion engines was more comprehensive than the toxics inventory, and was, therefore, the primary source of data regarding diesel PM emissions.

The CEIDARS emissions represent annual average emission totals from routine operations at stationary sources. For the current analysis, the annual emissions were converted to grams per second, as required for modeling inputs for cancer and chronic non-cancer risk evaluation, by assuming uniform temporal operation during the year. (The available, reported emission data for acute, maximum hourly operations were insufficient to support estimation of acute, maximum hour exposures).

The CEIDARS 2004 database year was used to provide the most recent data available for stationary sources. Data for emissions, location coordinates, and stack/release characteristics were taken from data reported by the local air districts in the 2004 CEIDARS database wherever available. However, because microscale modeling requires extensive information at the detailed device and stack level that has not been routinely reported, historically, by many air districts, much of the stack/release information is not in CEIDARS. Gaps in the reported data were addressed in the following ways. Where latitude/longitude coordinates were not reported for the stack/release locations, prior year databases were first searched for valid coordinates, which provided some additional data. If no other data were available, then the coordinates reported for the overall facility were applied to the stack locations. Where parameters were not complete for the stack/release characteristics (i.e., height, diameter, gas temperature and velocity), prior year databases were first searched for valid data. If no reported parameters were available, then U.S. EPA stack defaults from the Emissions Modeling System for Hazardous Air Pollutants (EMS-HAP) program were assigned. The U.S. EPA stack defaults are assigned based on the Source Classification Code (SCC) or Standard Industrial Classification (SIC) code of the operation. If an applicable U.S. EPA default was not available, then a final generic

default was applied. To ensure that the microscale modeling results would be health-protective, the generic release parameters assumed relatively low height and buoyancy. Two generic defaults were used. First, if the emitting process was identifiable as a vent or other fugitive-type release, the default parameters assigned were a height of five feet, diameter of two feet, temperature of 100 degrees Fahrenheit, and velocity of 25 feet per second. For all remaining unspecified and unassigned releases, the final generic default parameters assigned were a height of twenty feet, diameter of two feet, temperature of 100 degrees Fahrenheit, and velocity of 25 feet per second. All English units used in the CEIDARS database were converted to metric units for use in the microscale modeling input files.

This page left intentionally blank

APPENDIX C

IMPACTS FROM OFF-SITE DIESEL PM EMISSION SOURCES

Impacts from off-site pollution sources near the UP City of Industry Railyard facility were modeled using the USEPA-approved AERMOD dispersion model version 04300. Specifically, off-site mobile and stationary diesel PM emission sources located out to a distance of one mile from the perimeter of the UP City of Industry Railyard were included. Other emission sources that were located immediately beyond the one-mile zone from the facility, such as a high-volume freeway, have the potential to impact receptors in the modeling grid, but were not considered.

To facilitate modeling of these off-site emission sources, the information summarized in Table 1 was provided by external sources.

Table 1: Data Provided by Others for Off-Site Emission Source Modeling

Type of Data	Description	Data Source
Emission Estimates	Off-site diesel PM emissions for 2005 Mobile Sources: 27.6 TPY diesel PM Stationary Sources: 0.02 TPY diesel PM	PTSD/MSAB
Receptor Grid	41x41 Cartesian grid covering 400 km ² with uniform spacing of 500 meters. Grid origin: (404000, 3754000) in UTM Zone 11.	Sierra Research
Meteorological Data	AERMET-Processed data for 1999 <i>Surface:</i> Ontario International Airport <i>Upper Air:</i> San Diego Miramar	Sierra Research
Surface Data	<i>Albedo: Not provided*</i> <i>Bowen Ratio: Not provided*</i> <i>Surface Roughness: Not provided*</i>	Sierra Research

*Surface parameters were defined by the consultants during the AERMET meteorological pre-processing. However, only the AERMET model-ready output files, which do not contain these parameters, were provided by Sierra Research.

The spatial and temporal emissions provided for these sources were converted into the appropriate AERMOD ready files. The off-site emissions were modeled using the same coarse receptor grid and meteorological data used by the consultants for their railyard model runs, as indicated in the table above.

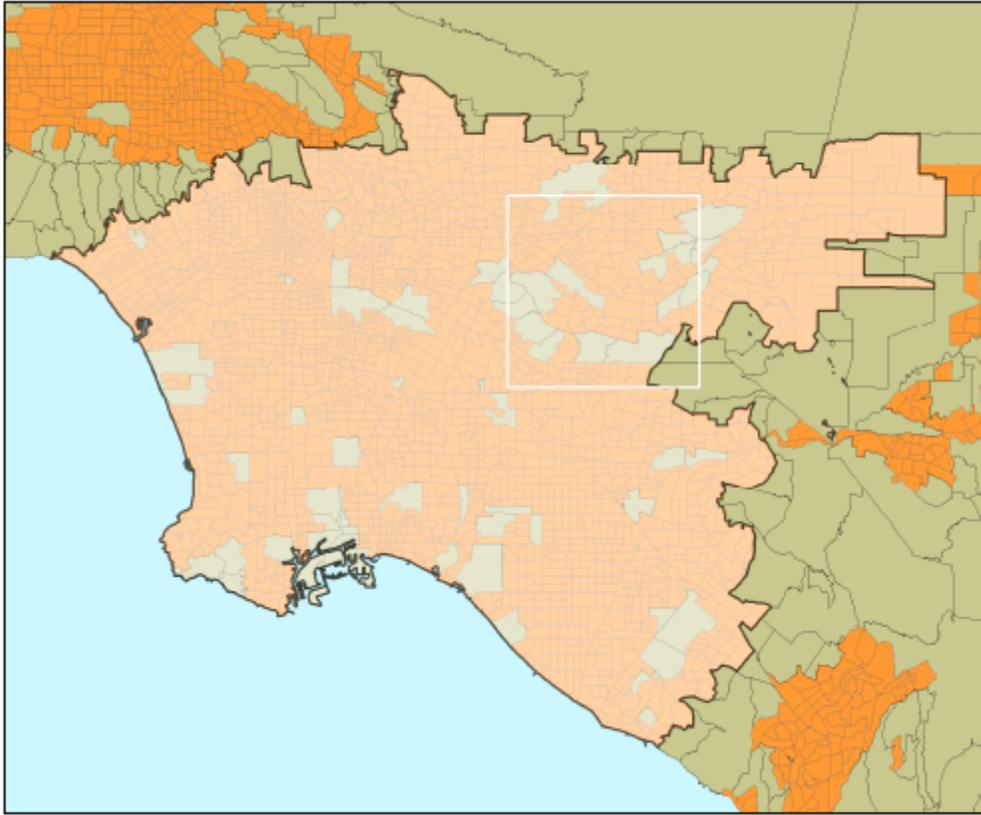


Figure 2: UP City of Industry Railyard Urban Population: Orange (dark if printed in black and white) denotes areas with at least 750 people/km². The highlighted region is the contiguous urban area used for modeling purposes.

AERMOD requires an estimate of the urban population for urban source modeling. The urban population parameter was determined by estimating the area of continuous urban features as defined by the model guidelines (AERMOD Implementation Guide September 27, 2005). According to the guidelines, areas with a population of at least 750 people per square kilometer are considered urban. The UP City of Industry Railyard model domain is in a region with considerable urbanization. The continuous urban area selected can be seen in Figure 2. The population in this selected area is 10,024,124.

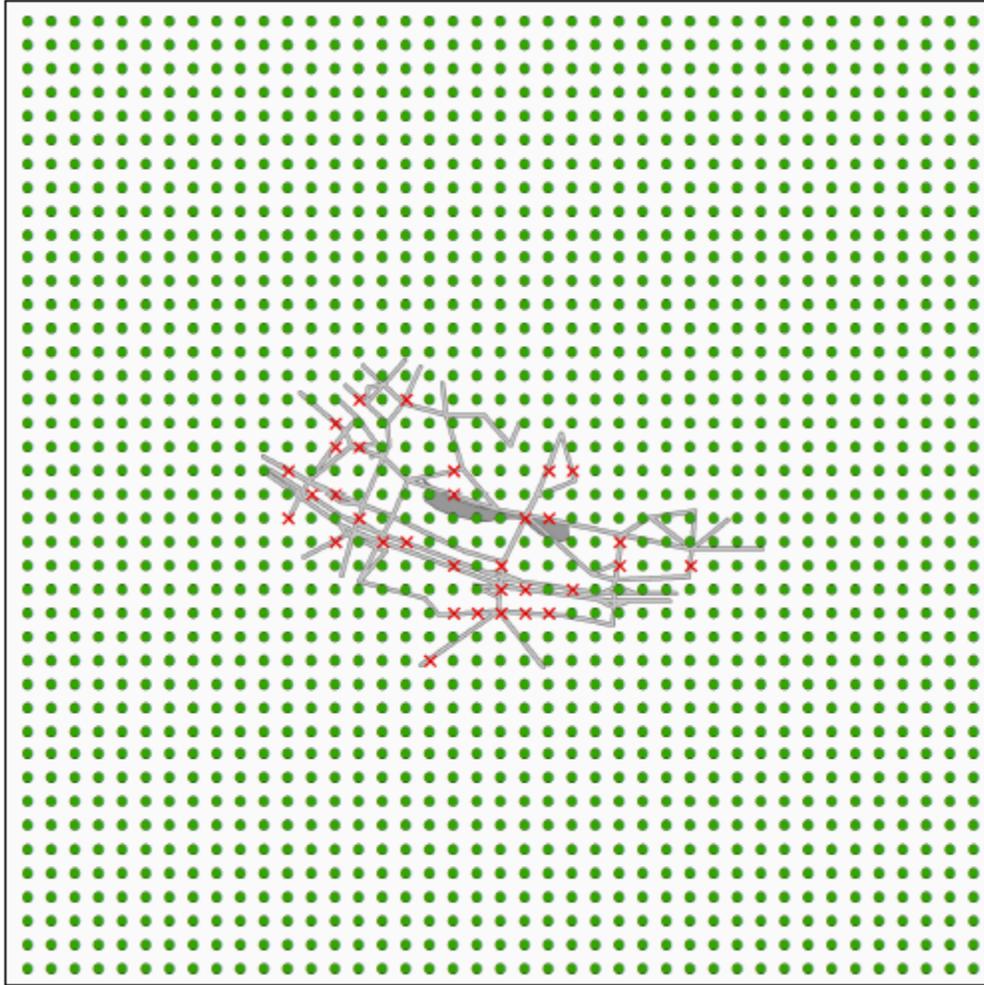


Figure 3: UP City of Industry Railyard receptor network including off-site sources and rail facility

The off-site stationary and on-road emission sources used in the UP City of Industry Railyard model runs are plotted along with the receptor network in Figure 3. These sources do not represent all stationary and roadway sources within the domain, but rather a subset made up of those roadways and facilities within one mile of the perimeter of the railyard facility. Diesel PM off-site emissions used in the offsite modeling runs consisted of 27.6 tons per year from roadways and 0.02 tons per year from stationary facilities, representing emissions for 2005. Roadway emissions were simulated as AERMOD area sources with an aspect ratio of no greater than 100 to 1, with a width of 7.3 meters and a release height of 4.15 meters.

As indicated above, Figure 3 illustrates a 20 km x 20 km gridded receptor field with uniform 500 meter spacing of receptors that are plotted as “●”. Because a uniform grid sometimes places receptors on a roadway, those within 35 meters of a roadway were omitted. The basis for this is that these receptors are likely to fall on the roadway surface, versus a dwelling or workplace, and have high model-estimated concentrations, which could skew average concentration isopleths. Locations where receptors were removed are displayed as an “x” in Figure 3. After removal, 1648 of the original 1681 receptors remained.

The same meteorological data used by Sierra Research were used for the offsite modeling runs. The data were compiled by Environ from the Ontario International Airport (34.06°N, 117.61°W). Upper air data for the same time period were obtained from the San Diego Miramar upper air station (32.833°N, 117.117°W). The model runs used one year of meteorological data from 1999.

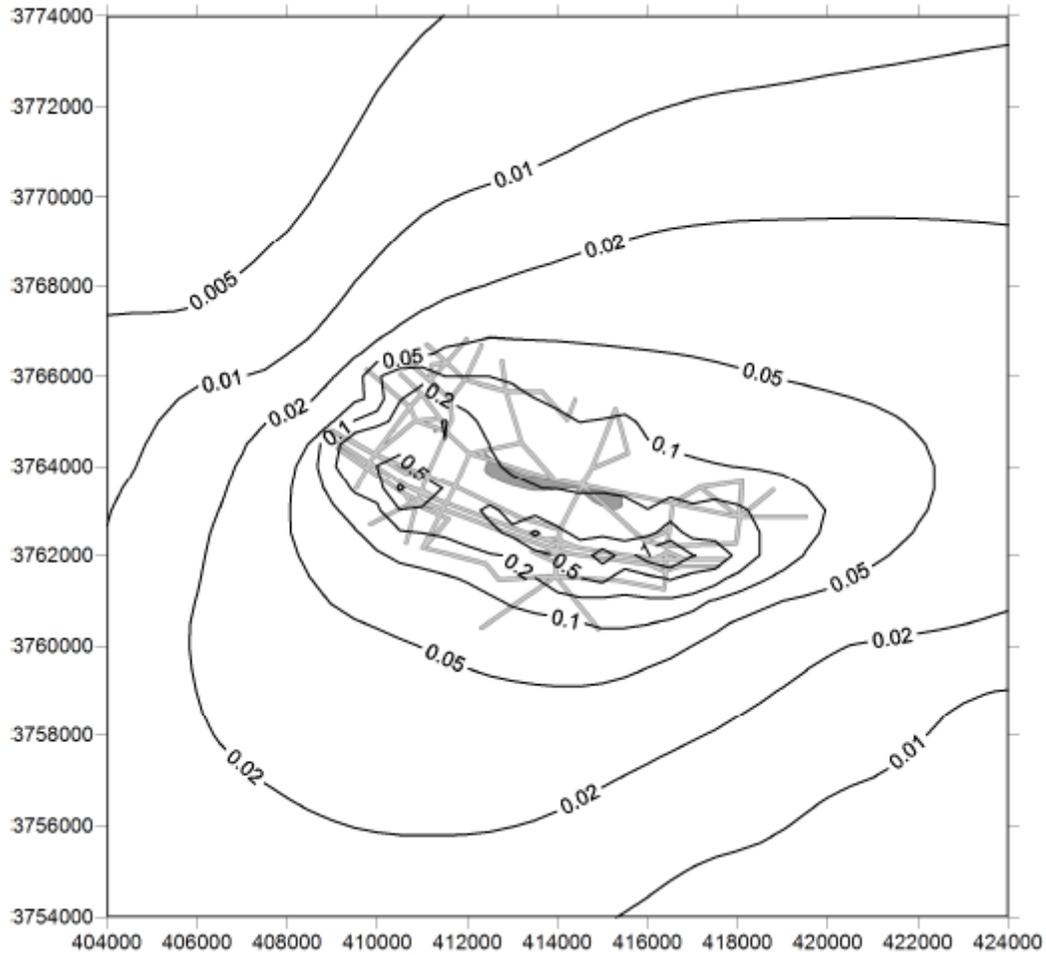


Figure 4: UP City of Industry Railyard off-site sources and railyard with modeled annual average concentrations from off-site sources in $\mu\text{g}/\text{m}^3$

Figure 4 shows annual average diesel PM concentrations from the off-site emissions. Highest values occur near major freeways; the five highest concentrations at a receptor and their locations are provided in Table 2.

X	Y	Mobile	Stationary	Total Off-site
416500	3762000	1.578	0.0000	1.578
415000	3762000	1.257	0.0000	1.257
416000	3762000	1.243	0.0000	1.243
413500	3762500	1.096	0.0001	1.096
410500	3763500	1.080	0.0003	1.080

Table 2: UP City of Industry Railyard maximum annual concentrations in $\mu\text{g}/\text{m}^3$

This page left intentionally blank

APPENDIX D

TABLES OF LOCOMOTIVE DIESEL PM EMISSION FACTORS

**Locomotive Diesel PM Emission Factors (g/hr)
Adjusted for Fuel Sulfur Content of 221 ppm**

Model Group	Tier	Throttle Setting										Source ¹
		Idle	DB	N1	N2	N3	N4	N5	N6	N7	N8	
Switchers	N	31.0	56.0	23.0	76.0	129.2	140.6	173.3	272.7	315.6	409.1	EPA RSD ¹
GP-3x	N	38.0	72.0	31.0	110.0	174.1	187.5	230.2	369.1	423.5	555.1	EPA RSD ¹
GP-4x	N	47.9	80.0	35.7	134.3	211.9	228.6	289.7	488.5	584.2	749.9	EPA RSD ¹
GP-50	N	26.0	64.1	51.3	142.5	282.3	275.2	339.6	587.7	663.5	847.2	EPA RSD ¹
GP-60	N	48.6	98.5	48.7	131.7	266.3	264.8	323.5	571.6	680.2	859.8	EPA RSD ¹
GP-60	0	21.1	25.4	37.6	75.5	224.1	311.5	446.4	641.6	1029.9	1205.1	SwRI ² (KCS733)
SD-7x	N	24.0	4.8	41.0	65.7	146.8	215.0	276.8	331.8	434.7	538.0	SwRI ³
SD-7x	0	14.8	15.1	36.8	61.1	215.7	335.9	388.6	766.8	932.1	1009.6	GM EMD ⁴
SD-7x	1	29.2	31.8	37.1	66.2	205.3	261.7	376.5	631.4	716.4	774.0	SwRI ⁵ (NS2630)
SD-7x	2	55.4	59.5	38.3	134.2	254.4	265.7	289.0	488.2	614.7	643.0	SwRI ⁵ (UP8353)
SD-90	0	61.1	108.5	50.1	99.1	239.5	374.7	484.1	291.5	236.1	852.4	GM EMD ⁴
Dash 7	N	65.0	180.5	108.2	121.2	306.9	292.4	297.5	255.3	249.0	307.7	EPA RSD ¹
Dash 8	0	37.0	147.5	86.0	133.1	248.7	261.6	294.1	318.5	347.1	450.7	GE ⁴
Dash 9	N	32.1	53.9	54.2	108.1	187.7	258.0	332.5	373.2	359.5	517.0	SwRI 2000
Dash 9	0	33.8	50.7	56.1	117.4	195.7	235.4	552.7	489.3	449.6	415.1	Average of GE & SwRI ⁶
Dash 9	1	16.9	88.4	62.1	140.2	259.5	342.2	380.4	443.5	402.7	570.0	SwRI ² (CSXT595)
Dash 9	2	7.7	42.0	69.3	145.8	259.8	325.7	363.6	356.7	379.7	445.1	SwRI ² (BNSF 7736)
C60-A	0	71.0	83.9	68.6	78.6	237.2	208.9	247.7	265.5	168.6	265.7	GE ⁴ (UP7555)

- Notes:
1. EPA Regulatory Support Document, *Locomotive Emissions Regulation, Appendix B*, 12/17/1997, as tabulated by ARB and ENVIRON.
 2. Base emission rates provided by ENVIRON as part of the BNSF analyses for the Railyard MOU (Personal communication from Chris Lindhjem to R. Ireson, 2006) based on data produced in the AAR/SwRI Exhaust Plume Study (Personal communication from Steve Fritz to C. Lindhjem, 2006).
 3. SwRI final report *Emissions Measurements – Locomotives* by Steve Fritz, August 1995.
 4. Manufacturers' emissions test data as tabulated by ARB.
 5. Base SD-70 emission rates taken from data produced in the AAR/SwRI Exhaust Plume Study (Personal communication from Steve Fritz to R. Ireson, 2006).
 6. Average of manufacturer's emissions test data as tabulated by ARB and data from the AAR/SwRI Exhaust Plume Study, tabulated and calculated by ENVIRON.

**Locomotive Diesel PM Emission Factors (g/hr)
Adjusted for Fuel Sulfur Content of 2,639 ppm**

Model Group	Tier	Throttle Setting										Source ¹
		Idle	DB	N1	N2	N3	N4	N5	N6	N7	N8	
Switchers	N	31.0	56.0	23.0	76.0	136.9	156.6	197.4	303.4	341.2	442.9	EPA RSD ¹
GP-3x	N	38.0	72.0	31.0	110.0	184.5	208.8	262.2	410.8	457.9	601.1	EPA RSD ¹
GP-4x	N	47.9	80.0	35.7	134.3	224.5	254.6	330.0	543.7	631.6	812.1	EPA RSD ¹
GP-50	N	26.0	64.1	51.3	142.5	299.0	306.5	386.9	653.9	717.3	917.4	EPA RSD ¹
GP-60	N	48.6	98.5	48.7	131.7	282.1	294.9	368.5	636.1	735.4	931.0	EPA RSD ¹
GP-60	0	21.1	25.4	37.6	75.5	237.4	346.9	508.5	714.0	1113.4	1304.9	SwRI ² (KCS733)
SD-7x	N	24.0	4.8	41.0	65.7	155.5	239.4	315.4	369.2	469.9	582.6	SwRI ³
SD-7x	0	14.8	15.1	36.8	61.1	228.5	374.1	442.7	853.3	1007.8	1093.2	GM EMD ⁴
SD-7x	1	29.2	31.8	37.1	66.2	217.5	291.5	428.9	702.6	774.5	838.1	SwRI ⁵ (NS2630)
SD-7x	2	55.4	59.5	38.3	134.2	269.4	295.9	329.2	543.3	664.6	696.2	SwRI ⁵ (UP8353)
SD-90	0	61.1	108.5	50.1	99.1	253.7	417.3	551.5	324.4	255.3	923.1	GM EMD ⁴
Dash 7	N	65.0	180.5	108.2	121.2	352.7	323.1	327.1	293.7	325.3	405.4	EPA RSD ¹
Dash 8	0	37.0	147.5	86.0	133.1	285.9	289.1	323.3	366.4	453.5	593.8	GE ⁴
Dash 9	N	32.1	53.9	54.2	108.1	215.7	285.1	365.6	429.3	469.7	681.2	SwRI 2000
Dash 9	0	33.8	50.7	56.1	117.4	224.9	260.1	607.7	562.9	587.4	546.9	Average of GE & SwRI ⁶
Dash 9	1	16.9	88.4	62.1	140.2	298.2	378.1	418.3	510.2	526.2	751.1	SwRI ² (CSXT595)
Dash 9	2	7.7	42.0	69.3	145.8	298.5	359.9	399.8	410.4	496.1	586.4	SwRI ² (BNSF 7736)
C60-A	0	71.0	83.9	68.6	78.6	272.6	230.8	272.3	305.4	220.3	350.1	GE ⁴ (UP7555)

- Notes:
1. EPA Regulatory Support Document, *Locomotive Emissions Regulation, Appendix B*, 12/17/1997, as tabulated by ARB and ENVIRON.
 2. Base emission rates provided by ENVIRON as part of the BNSF analyses for the Railyard MOU (Personal communication from Chris Lindhjem to R. Ireson, 2006) based on data produced in the AAR/SwRI Exhaust Plume Study (Personal communication from Steve Fritz to C. Lindhjem, 2006).
 3. SwRI final report *Emissions Measurements – Locomotives* by Steve Fritz, August 1995.
 4. Manufacturers' emissions test data as tabulated by ARB.
 5. Base SD-70 emission rates taken from data produced in the AAR/SwRI Exhaust Plume Study (Personal communication from Steve Fritz to R. Ireson, 2006).
 6. Average of manufacturer's emissions test data as tabulated by ARB and data from the AAR/SwRI Exhaust Plume Study, tabulated and calculated by ENVIRON.

This page left intentionally blank


APPENDIX E

**SPATIAL ALLOCATIONS OF MAJOR DIESEL PM EMISSION SOURCES AT
UP CITY OF INDUSTRY RAILYARD**

This appendix is provided as a visual aid to understand where significant sources of diesel PM are generated within the UP City of Industry Railyard.

According to the emission inventory for UP City of Industry Railyard, about 75% of diesel PM emissions occur within the large interior area west of South Azusa Avenue. This area is where the bulk of the cargo handling, switching activity, and locomotive idling occurs:

Figure 1: Facility-wide Diesel PM Emissions at UP City of Industry Railyard

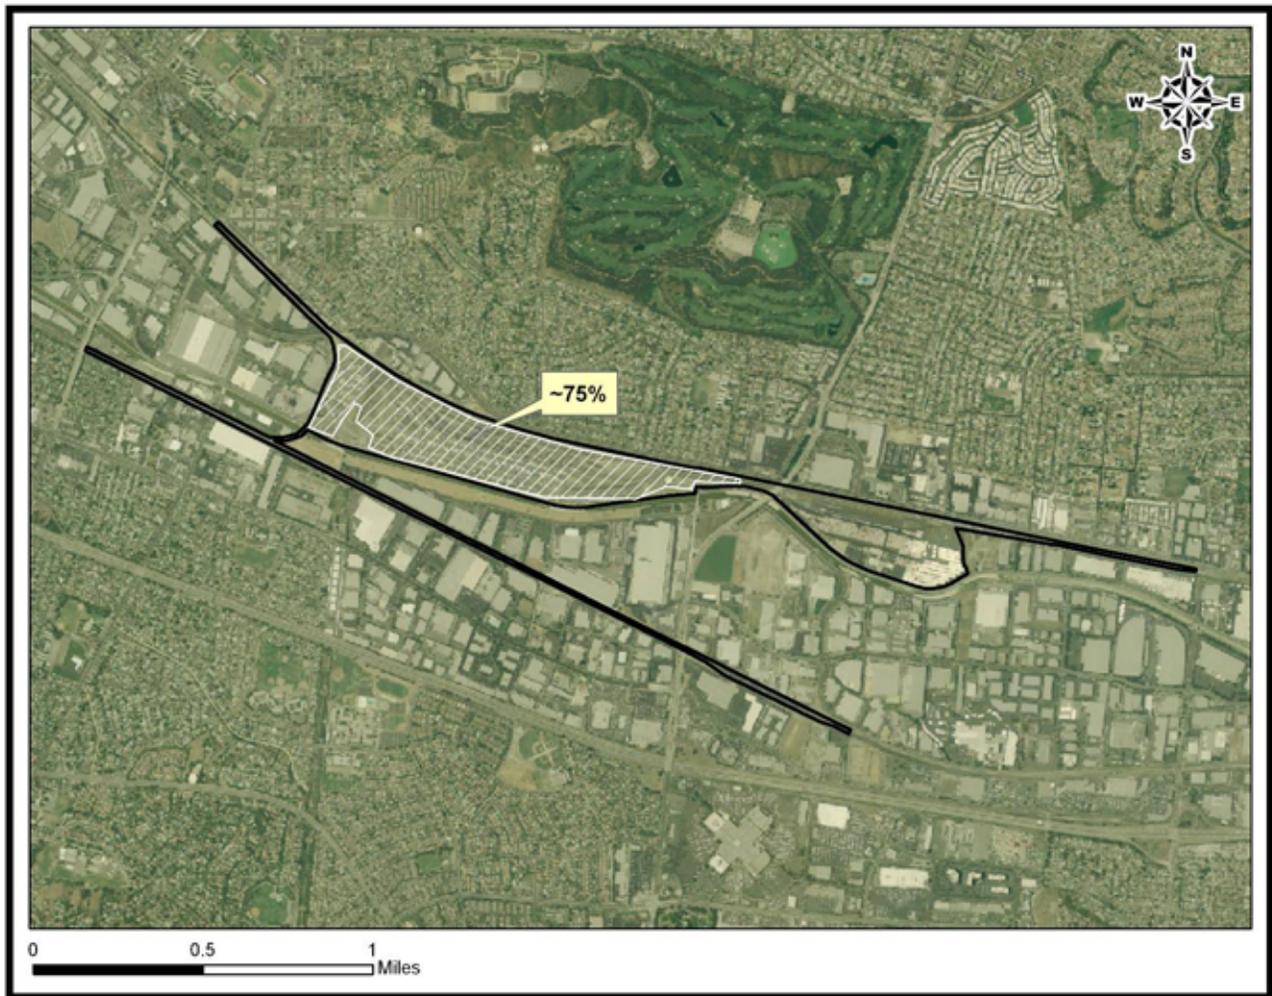

According to the emission inventory for the UP City of Industry Railyard, about 54% of facility-wide diesel PM emissions are from the locomotives. Figure 2 shows the spatial allocation for locomotive emissions by locomotive type and activity. According to the emission inventory for the UP City of Industry Railyard, 56% of locomotive diesel PM emissions are due to switch locomotives (*switchers* in Figure 2), and 44% of locomotive emissions are due to line haul locomotives (*locomotives* in Figure 2).

Figure 2: Spatial Allocation of Locomotive Diesel PM Emissions at UP City of Industry Railyard


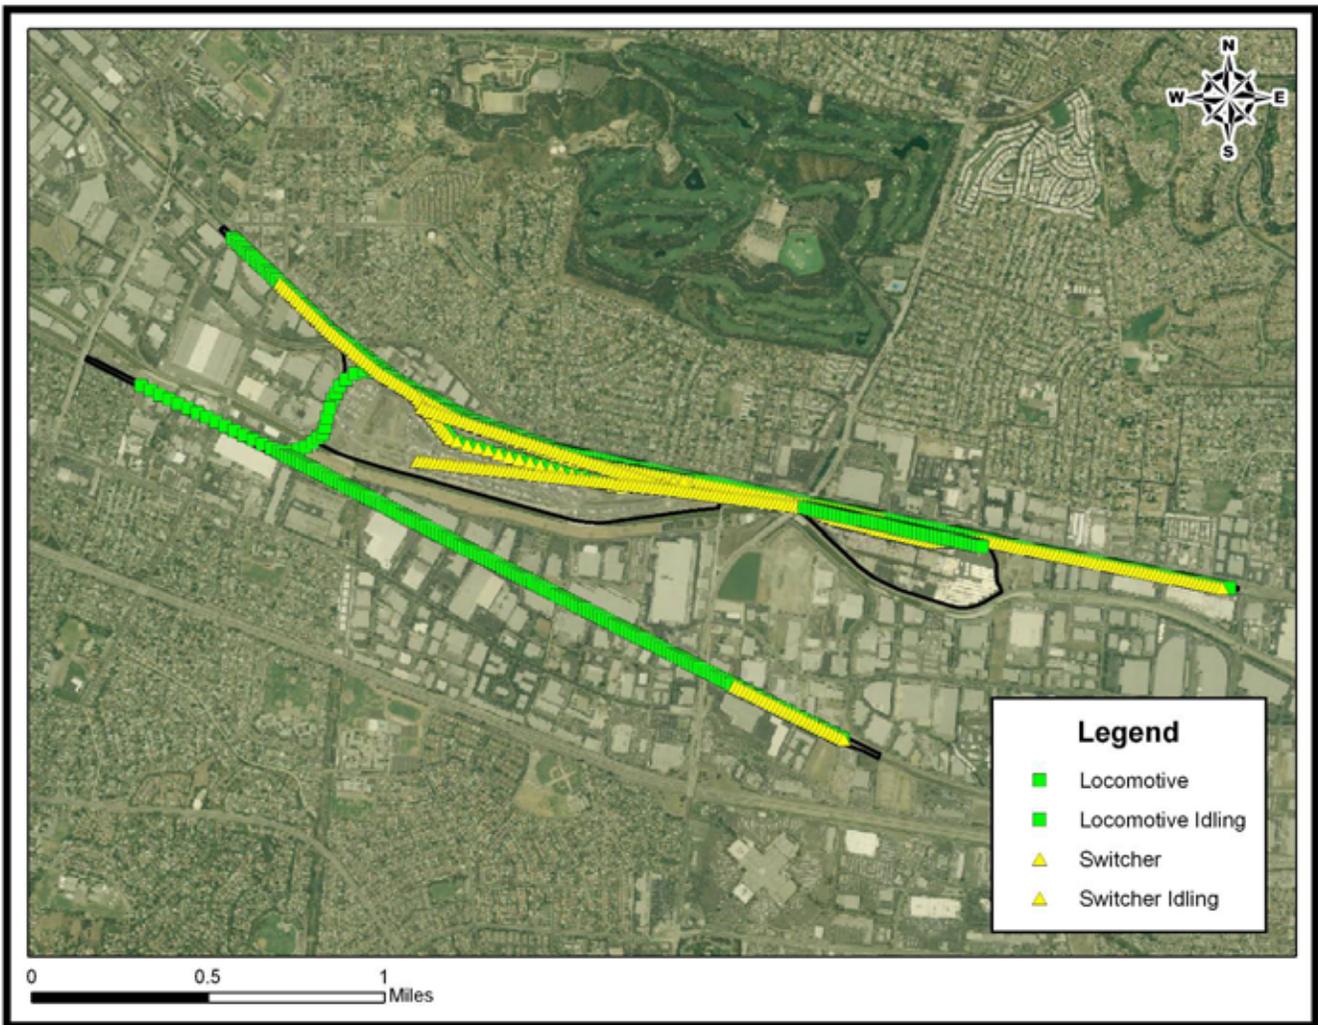


Figure 3 shows the spatial allocation for cargo handling equipment (CHE) emissions by CHE type. According to the emission inventory for the UP City of Industry Railyard, about 25% of facility-wide diesel PM emissions are from the cargo handling equipment. Shown below is the spatial allocation for the chassis stacker, crane, top picks, and yard hostlers (yard tractors), which combined total about 95% of the cargo handling equipment emissions. The backhoe and the forklifts constitute the other 5% of total cargo handling equipment emissions, and are not included in the spatial allocation.


Figure 3: Spatial Allocation of Cargo Handling Equipment Diesel PM Emissions at UP City of Industry Railyard

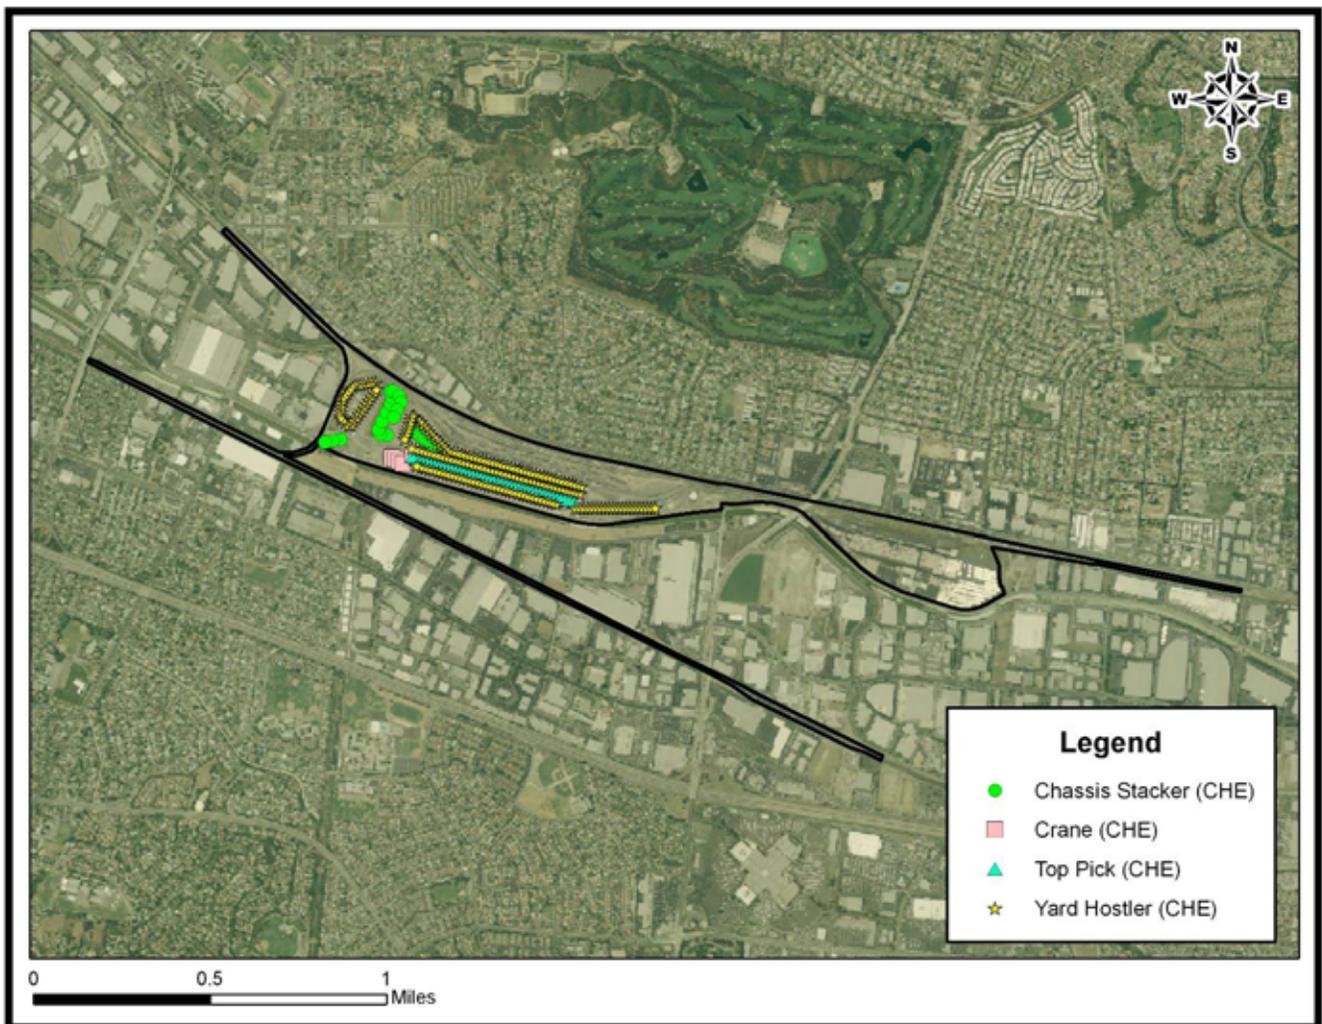

APPENDIX F

**AERMOD MODEL SENSITIVITY ANALYSIS OF METEOROLOGICAL DATA
(ONE-YEAR VS. FIVE-YEAR DATA)**

**Figure 8. AERMOD's Simulated Diesel PM Concentrations
(Due to On-site and Off-site Diesel PM Emissions)
Around UP Stockton Railyard Using One-year Meteorological Data**

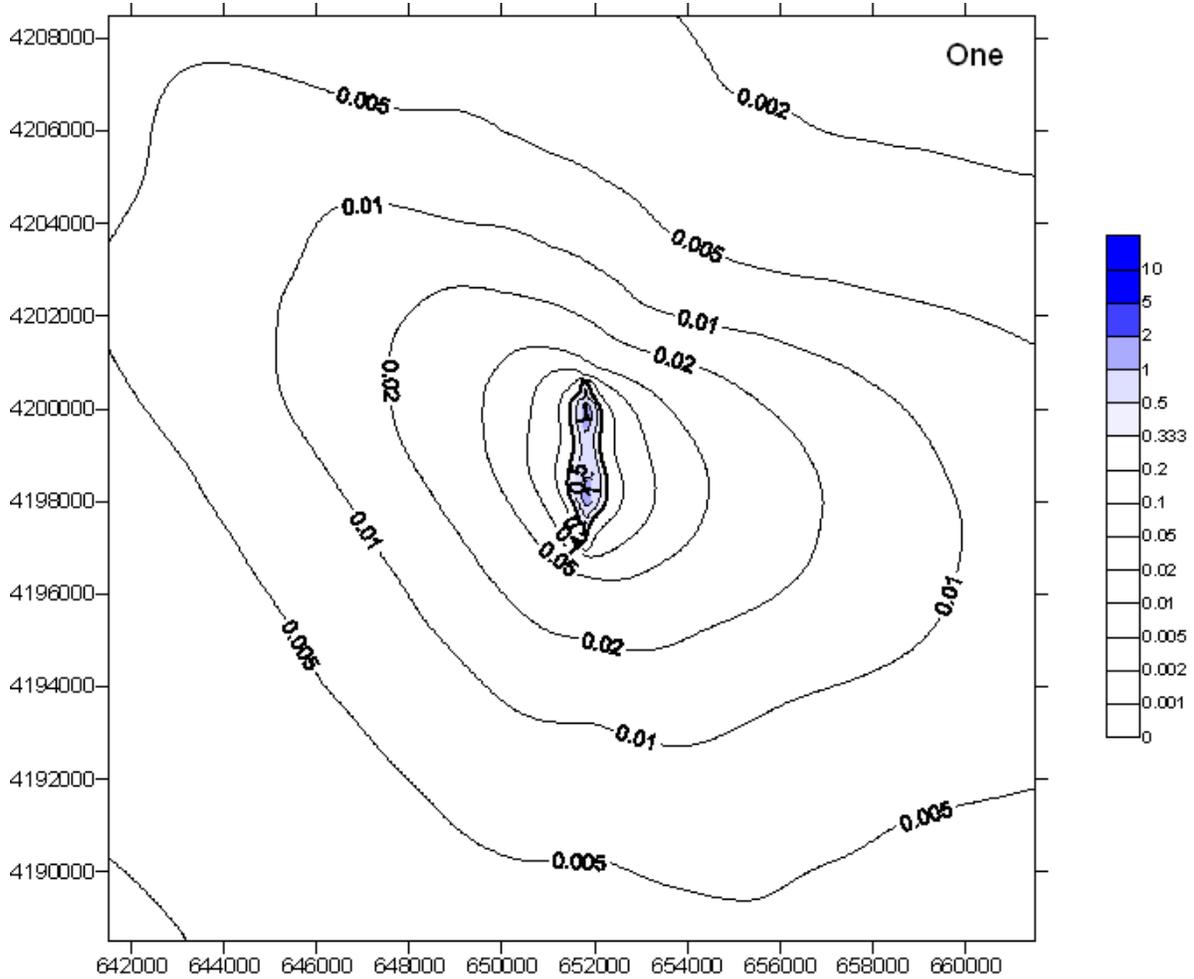

**Figure 9. AERMOD's Simulated Diesel PM Concentrations
(Due to On-site and Off-site Diesel PM Emissions)
Around UP Stockton Railyard Using Five-year Meteorological Data**

