



June 30, 2023

Cheryl Laskowski, Ph.D.
California Air Resources Board
1001 I Street
Sacramento, CA 95814

Re: Low Carbon Fuel Standard Workshops

Dear Dr. Laskowski,

ICF is a non-partisan, non-political company that delivers a broad and diverse range of independent, unbiased, objective analyses and related consulting services to help its clients meet their missions. ICF is supporting a coalition of interested parties representing a diverse mix of zero emission vehicle manufacturers, charging companies, low carbon fuel producers and others seeking to understand the potential carbon intensity (CI) reduction that could be achieved assuming the likely aggregate deployment of low carbon fuels and supporting technologies. Through a consideration of various factors, the project is seeking to quantify what CI target may be achievable in 2030. Furthermore, the project seeks to develop a clearer understanding of the potential interim CI reduction targets that could be achieved between 2030 and 2045. ICF's work should not be construed as ICF's endorsement of any policy or any regulatory, lobbying, legal, or other advocacy position, organization, or political party. Furthermore, any conclusions presented by ICF do not necessarily represent the policy or political views of ICF.

Attached is a Draft Final version of ICF's report on the *Accelerated Decarbonization, Central Case*. **In our modeling, ICF finds that a carbon intensity target of 41-44% for 2030 is achievable based on expected fuel volumes and carbon intensity reductions for a wide array of fuel pathways.** Additional research from ICF is forthcoming, particularly as it relates to the step-down mechanism, acceleration mechanism, and consideration of additional strategies that could be implemented to achieve greater CI reductions in our High Cases. We look forward to collaborating with Staff and interested parties to the extent that it is appropriate.

Sincerely,

Philip Sheehy, PhD
philip.sheehy@icf.com

Analyzing Future Low Carbon Fuel Targets in California



June 2023

*Initial Results for
Accelerated Decarbonization, Central Case*

ICF Resources, L.L.C.
1902 Reston Metro Plaza
Reston, VA 20190
703-934-3000

Contact: Philip Sheehy, PhD
Phone: 415-385-4160
E-Mail: Philip.Sheehy@icf.com

Contact: Fang Yan, PhD, PE
Phone: 916-210-5906
E-Mail: Fang.Yan@icf.com

ICF is a non-partisan, non-political company that delivers a broad and diverse range of independent, unbiased, objective analyses and related consulting services to help its clients meet their missions. This report may not be construed as ICF's endorsement of any policy or any regulatory, lobbying, legal, or other advocacy position, organization, or political party. Any conclusions presented herein do not necessarily represent the policy or political views of ICF. ICF's services do not constitute legal or tax advice.

Disclaimer

This report was prepared by ICF for the Client's use, based on certain limited information, methodologies, assumptions and under the circumstances applicable at the time the report was prepared. Different or additional information, methodologies, assumptions, or circumstances would lead to different results; therefore, actual future results may differ materially from those presented in this report. ICF does not make any representation with respect to the likelihood of any future outcome or the accuracy of any information herein or any conclusions based thereon. ICF is not responsible for typographical, pictorial, or other editorial errors.

Any use of this report other than as a whole and in conjunction with this notice is prohibited. This report may not be altered or copied in whole or in part without the prior express written consent of ICF.

This report is provided AS IS. NO WARRANTY, WHETHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IS GIVEN OR MADE BY ICF IN CONNECTION WITH THIS REPORT. You use this report at your own risk. ICF is not liable for any damages of any kind attributable to your use of this report.

Table of Contents

	Executive Summary.....	1
1	Introduction	4
	About ICF.....	4
	About the Project.....	4
2	ICF Methodology	5
	Stakeholder Outreach.....	6
3	Accelerated Decarbonization: Central Case Modeling Inputs.....	7
	Ethanol	7
	Feedstocks for Liquid Biofuels.....	12
	Biodiesel.....	13
	Renewable Diesel.....	15
	Renewable Jet Fuel.....	17
	Natural Gas Demand and NGV Deployment.....	19
	Biogas Renewable Natural Gas.....	19
	Battery Electric Vehicles & Fuel Cell Electric Vehicles.....	27
	Summary of Factors Not Considered in ICF Modeling.....	29
4	Summary of Results.....	30
	Options for Further Consideration.....	34

Executive Summary

The California Air Resources Board is considering setting more ambitious Low Carbon Fuel Standard targets, thereby achieving more significant greenhouse gas emission reductions in support of California’s pursuit of carbon neutrality—defined by the state as achieving net-zero GHG emissions as soon as possible, and no later than 2045, and achieving and maintaining net negative emissions thereafter.

ICF modeled carbon intensity reductions that could be achieved using the structure of the Low Carbon Fuel Standard program. The modeling is driven by the demand for transportation fuel in California, which is a function of many variables including but not limited to economic growth, vehicle miles traveled, vehicle fleet turnover, and the expected compliance with complementary policies that impact transportation fuel demand. ICF pairs the fleet turnover and fuel demand functions with supply-cost curves for low carbon fuels. ICF modeling incorporated expected compliance with several regulations that decrease fossil fuel demand, like the Advanced Clean Truck Rule, the Innovative Clean Transit Rule, Advanced Clean Cars II, and the Advanced Clean Fleets Regulation.

ICF is modeling multiple scenarios for this project and framing each as *Accelerating Decarbonization* in the transportation sector using a diverse array of low carbon fuel strategies that are viable in the timeframe contemplated. Within this framework, ICF is focused on a Central Case. In the *Accelerating Decarbonization, Central Case*, ICF limited our consideration of low carbon fuel strategies that require expanded deployment, reasonable technological advancement, and limited, if any, substantive policy changes.

ICF modeling shows that the lifecycle GHG emissions for the transportation sector (including gasoline, diesel, and intrastate jet fuel) can decrease by 42% by 2030 and 77% by 2040 from 2010 values (see table below).


Lifecycle GHG Emissions in California’s Transportation Sector

Lifecycle GHG emissions MMT CO ₂ e	2010	2030	2040
Transportation fuels	222	128	51
% Reduction	--	42%	77%


In our modeling, ICF finds that a carbon intensity target of 41–44% for 2030 is achievable in the Central Case based on expected fuel volumes and carbon intensity reductions for a wide array of fuel pathways.

This range excludes many crediting opportunities, including offroad electrification, infrastructure crediting, direct air capture of CO₂, carbon capture and storage at biogas or

hydrogen facilities, and others. Further, it does not include state goals for reducing vehicle miles traveled, which would lead to significant additional average carbon intensity reductions, assuming low carbon fuel volumes remain the same, otherwise.

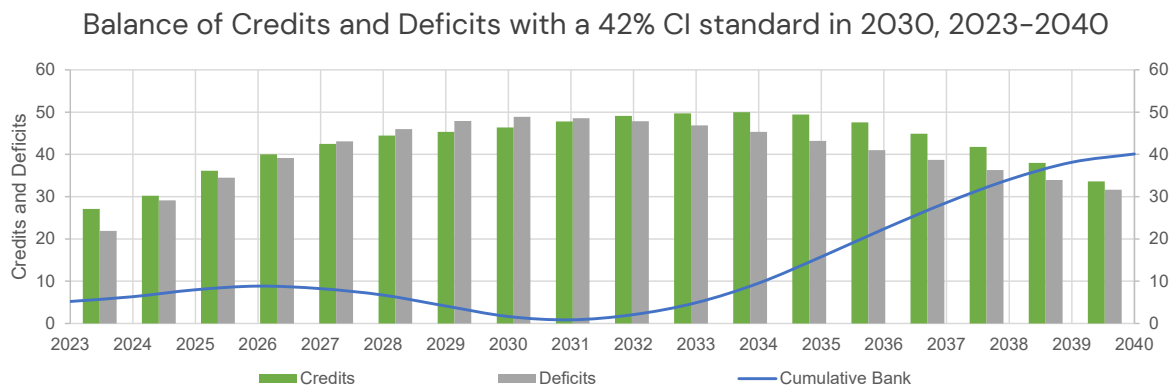

Overall, we believe this target represents a reasonable, yet potentially conservative, estimate of CI reduction potential under the LCFS in 2030. We present this as a range, because there is likely some desirable credit bank that the market would seek to maintain, rather than running the bank of credits and deficits to net zero.

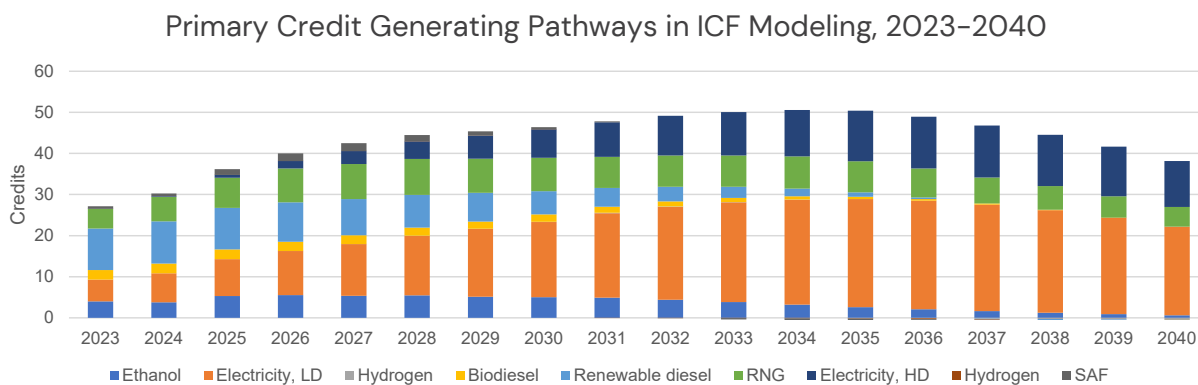

Based on ICF's analysis of the *Central Case*, we make the following observations:

- A trajectory with a 30% carbon intensity reduction requirement by 2030 is borderline untenable—ICF estimates this will yield a bank of more than 100 million excess credits.
- *Deficits are decreasing.* Gasoline and diesel demand are both at or near their peaks; there is only modest room for growth of fossil fuel consumption given California's regulations. This will limit deficit generation considerably in the next decade, especially for gasoline as transportation electrification accelerates.
- *Credit generating activity is poised to increase rapidly.* The diversity of options to achieve the range of carbon intensity reduction targets is significant. We consider higher liquid biofuels blending, lower carbon intensities across the board, electrification of the light-duty and heavy-duty sectors, renewable jet fuel

deployment, expanded role of biogas, and modest hydrogen deployment. These strategies align closely with the incentive structures of the Inflation Reduction Act, and other programs (e.g., the federal Renewable Fuel Standard).

- *A step-down mechanism is needed sooner than later.* The bank of credits will likely be in the range of 30 million credits by the end of 2024 absent intervention—this has the potential to alter the trajectory contemplated in our Central Case. The step-down mechanism is critical for 2024 implementation—another year of banked credits will shift the program trajectory and likely limit low carbon fuel deployment.
- *Diversity of credit-generating options is strength of modeling, not limitation.* Though we have under- and over-estimated credit generation for specific strategies previously, ICF analysis has consistently shown that we are in line with Low Carbon Fuel Standard market performance at the top level of credit-deficit balances. We generally attribute this to our consideration of a diverse set of compliance strategies, rather than narrowing our consideration from the outset.
- *Post-2030 considerations.* The carbon intensity trajectory of the program from 2030 to 2045 will need to be non-linear to prevent another build-up of credits. The full implementation of Advanced Clean Cars II and the Advanced Clean Fleets Regulation will achieve compliance without any other low carbon fuels by 2036 with a 62% carbon intensity standard.

There are several modeling considerations that ICF will address in further research. They include: 1) consideration of a step-down mechanism and an acceleration mechanism and 2) consideration of additional low carbon fuel strategies in a High Case or High Cases.

- *A step-down mechanism* would be designed to reduce significantly the current over-supply of credits. The *acceleration mechanism* is a concept introduced by the California Air Resources Board via workshop to outline an indicator or series of indicators that can be calculated and could be used to determine if the carbon intensity reduction requirements of the program need to be accelerated because of the over-performance in the market.
- ICF is also modeling Accelerated Decarbonization, High Cases. In these cases, ICF is considering additional strategies and/or policy changes that would lead to higher deployment of low carbon fuels and/or greater carbon intensity reductions over the course of the analysis. The assumptions in these cases reflect updated science and analysis, additional cost effective GHG reduction opportunities, and alignment with proposed federal policies.

1 Introduction

About ICF

ICF is a non-partisan, non-political company that delivers a broad and diverse range of independent, unbiased, objective analyses and related consulting services to help its clients meet their missions. ICF has conducted several impactful studies on low carbon fuels programs. Our team has conducted several feasibility and economic impact analyses on California's Low Carbon Fuel Standard (LCFS) since the program's inception, and as part of updates to the program. ICF has also supported the Oregon Department of Environmental Quality in the development and implementation of Oregon's Clean Fuels Program (CFP). We have also conducted similar analysis of low carbon fuel policies for the Puget Sound Clean Air Agency in Washington, the Colorado Energy Office, the Great Plains Institute, and the European Commission.

About the Project

The California Air Resources Board (CARB) is considering setting more ambitious Low Carbon Fuel Standard (LCFS) targets to increase the stringency of the carbon intensity (CI) requirements of the program, thereby achieving more significant greenhouse gas (GHG) emission reductions in support of California's pursuit of carbon neutrality – defined by the state as achieving net-zero GHG emissions as soon as possible, and no later than 2045, and achieving and maintaining net negative emissions thereafter. The current LCFS program includes a linear decrease from the current year (2023) target of 11.25% to 20% by 2030 (with the target being relative to 2010 average carbon intensity levels).

ICF is supporting a coalition of interested parties representing a diverse mix of zero emission vehicle manufacturers, charging companies, low carbon fuel producers and others seeking to understand the potential carbon intensity reduction that could be achieved assuming the likely aggregate deployment of low carbon fuels and supporting technologies. Through consideration of various factors, the project is seeking to quantify what CI target may be achievable in 2030. Furthermore, the project will develop a clearer understanding of the potential interim CI reduction targets that could be achieved between 2024 and 2045.

The objective of this ongoing analysis is to demonstrate the levels of CI reduction that could be achieved for the LCFS program under different market conditions and considerations and at what cost. The intent of scenario modeling is to help inform policy development, but it is neither meant to be deterministic with respect to the shape and/or design of any policy, nor is it meant to be prescriptive with regards to compliance. Furthermore, the results are not meant to be predictive forecasts. The scenarios considered will represent a bundle of multiple strategies that are designed to reduce the CI

of transportation fuels and that industry plans to bring to market given a presumably robust, ongoing LCFS market.

To be clear, the modeling described herein differs from the modeling conducted by others, including modeling by CARB staff using the California Transportation Supply (CATS) model. More specifically, CATS is described as a “transportation fuel supply optimization model” that “minimizes the cost of supplying fuel to meet demand in each year.” In other words, given certain modeling constraints, namely a specific CI reduction trajectory, associated policy constraints, and assumed costs and supply constraints, the CATS model optimizes compliance accordingly. The CATS model is designed to answer the question: *What is the least-cost compliance pathway associated with a CI target of X in year Y?* ICF’s modeling exercise, however, is seeking to answer a different question: *What is the CI target X that could be achieved in year Y given the supply-demand balance of low carbon transportation fuels into California?*

2 ICF Methodology

ICF is modeling the CI reductions that could be achieved using the structure of the LCFS program. The modeling is driven by the demand for transportation fuel in California, which is a function of many variables including but not limited to economic growth, vehicle miles traveled (VMT), vehicle fleet turnover, and the expected compliance with complementary policies that impact transportation fuel demand. ICF’s modeling is initiated using documentation associated with the Emissions FACTor model (EMFAC)¹ that is publicly available for download. The EMFAC model is “developed and used by CARB to assess emissions from on-road vehicles including cars, trucks, and buses in California.” The EMFAC model enables ICF to characterize top-level transportation fuel demand in California given baseline consideration of the aforementioned key factors, like VMT and fleet turnover. Although EMFAC2021 incorporates expected compliance with several regulations that decrease fossil fuel demand, like the Advanced Clean Truck (ACT) Rule and the Innovative Clean Transit (ICT) Rule, it does not include expected compliance with Advanced Clean Cars II (ACC2) or the Advanced Clean Fleets Regulation, which were adopted by the Board in 2022 and 2023, respectively. ICF has modified EMFAC2021 to ensure compliance with ACC2 and ACF. ICF then pairs the fleet turnover and fuel demand functions of EMFAC with supply-cost curves for low carbon fuels, including ethanol, biodiesel, renewable diesel, and renewable natural gas (RNG).

¹ ICF is using the most recent version of EMFAC, EMFAC2021 (v1.0.2) as a starting point for our modeling. The EMFAC model is available for download [online](#).

ICF is modeling multiple scenarios for this project and framing each as *Accelerating Decarbonization* in the transportation sector using a diverse array of low carbon fuel strategies that are viable in the timeframe contemplated. Within this framework, ICF is focused on a Central Case and High Case(s).

- *Accelerating Decarbonization, Central Case*: ICF's primary focus is this case, whereby we are limiting our consideration of low carbon fuel strategies that require expanded deployment, reasonable technological advancement, and limited, if any, substantive policy changes. This document reviews the key modeling inputs and results associated with the Central Case.
- *Accelerating Decarbonization, High Case(s)*: In these cases, ICF is considering additional strategies and/or policy changes that would lead to higher deployment of low carbon fuels and/or greater CI reductions over the course of the analysis. The assumptions in these cases reflect updated science and analysis, additional cost effective GHG reduction opportunities, and alignment with proposed federal policies. More specifically, these strategies may include but are not limited to reductions in LUC adders to CI scores, resumption of FFV manufacturing by OEMs, and relaxation of deliverability requirements for electricity used as a transportation fuel and as a processing fuel. Together, these represent a more expansive market and aggressive outlook for decarbonizing the transportation sector. This document limits our discussion of strategies to be incorporated into the High Cases.

Stakeholder Outreach

ICF retains exclusive decision-making with respect to the parameters that are included in (or excluded from) the modeling in this project. However, as part of the development of our modeling, we sought (and will continue to seek) input and feedback from stakeholders that are uniquely positioned to characterize trends, constraints, and opportunities across various low carbon fuels. ICF conducted interviews with stakeholders from various low carbon fuel providers. Through these conversations, ICF introduced the broader project objectives and ICF's modeling approach to help stakeholders understand the key drivers for our analysis. ICF then led a discussion guided by the following questions:

- **Deployment.** What are expected changes in the industry that will increase or decrease the deployment of a particular fuel or fuel/vehicle combination? These generally include supply and demand considerations and should account for opportunities and barriers to the extent feasible. What is the timeframe associated with any changes?
- **Carbon intensity.** What is the current and projected carbon intensity of the fuel under consideration? Are there any California-specific policy or regulatory changes that can be accommodated to help achieve these reductions? What is the rate at which these carbon intensity changes are likely to occur?

- **Demand from Other Markets.** Where are the developments likely to occur? Are there any specific advantages or disadvantages associated with delivering these solutions to California that ICF needs to consider? To what extent will other (existing or potential) low carbon fuel markets be advantaged or disadvantaged as it relates to these solutions as a function of their corresponding geography?

Lastly, it is important to note that ICF has developed the modeling framework used in this study based on publicly available tools and data—we have purposefully excluded any proprietary data or considerations at this time. ICF’s final report will include more detailed data and sourcing to ensure that we meet the transparency expectations of stakeholders.

3 Accelerated Decarbonization: Central Case Modeling Inputs

The following sections provide an overview of the key or prioritized inputs that have the most significant impact on the results in the *Central Case* modeled.

Ethanol

Increasing ethanol blended into gasoline: E15

California is a reformulated gasoline market, meaning that about 10% (by volume) of retail gasoline is ethanol to help mitigate air pollutants, and the other 90% of retail gasoline is referred to as California Reformulated Blendstock for Oxygenate Blending (CARBOB). In recent years, increased blends of ethanol in gasoline have gained traction, with the market focused on blending up to 15% (by volume) into gasoline. The EPA has said that any vehicle with model year 2001 or later can use E15 (in June 2011). In some regions, E15 blending at terminals is halted and E15 retail sales are subsequently halted on June 1. These constraints are imposed during the summer volatility season and relate to elevated Reid Vapor Pressure (RVP). In 2022, the Biden Administration granted a series of emergency waivers that allowed E15 to be blended in the summer months; and the Administration has initiated this again, having issued its third waiver for the 2023 summer volatility season in early June. These emergency waivers are designed to help protect consumers from fuel supply constraints under the authority of the Clean Air Act. In 2022, an estimated 1 billion gallons of E15 was sold domestically in 2022.

Despite growth domestically in E15, however, California has not advanced an E15 market because of issues related to a required multimedia evaluation for new additives blended with gasoline. This is changing, however, as the ethanol industry has collaborated with CARB to help advance the consideration of E15 blends in California. Most notably, the Tier 1 report

for the required multimedia evaluation was completed and published in June 2020.² A follow-on exhaust emissions study was published in June 2022, showing that "ozone forming potential showed a decreasing trend for E15 compared to E10, indicating that the introduction of E15 in the California gasoline market will likely not contribute to increases in ozone formation."³ ICF anticipates that California will advance towards E15 approval statewide after publication of the Tier 2 and Tier 3 reports associated with the multimedia evaluation, and that this will occur before the end of 2023.


ICF assumes a transition to E15 sales starting in 2024, representing 10% of the California gasoline market and increasing to 90% of the market by 2030. The rate of growth is supported by the potential downward pressure on gasoline pricing that will likely be observed between E15 and E10 blends. For instance, Minnesota reported price differences of up to 30 cents per gallon between E10 and E15 in Summer 2022. Nationally, the EPA estimates that E15 is about 25 cents per gallon cheaper than E10.

The figure below shows ethanol consumption as part of the transition to E15 in our modeling compared to a reference or business as usual case whereby ethanol is limited to E10 blending in gasoline. The black line shows the trajectory for gasoline consumption in California after accounting for ZEV adoption under ACC2 and improved vehicle fuel efficiency. The largest gap between ethanol consumption in our modeled case and the reference case using E10 occurs in 2032 and is about 400 million gallons. Despite the gap in ethanol consumption between the E10 and E15 case, ethanol consumption in California's gasoline market is more or less constant from current levels through 2030 before decreasing in line with gasoline consumption thereafter.

² California Multimedia Evaluation of E11-E15 Gasoline-Ethanol Blends Tier I Report, available online [here](#).

³ Comparison of Exhaust Emissions Between E10 CaRFG and Splash Blended E15, available online [here](#).

Figure 1. Ethanol consumption in gasoline

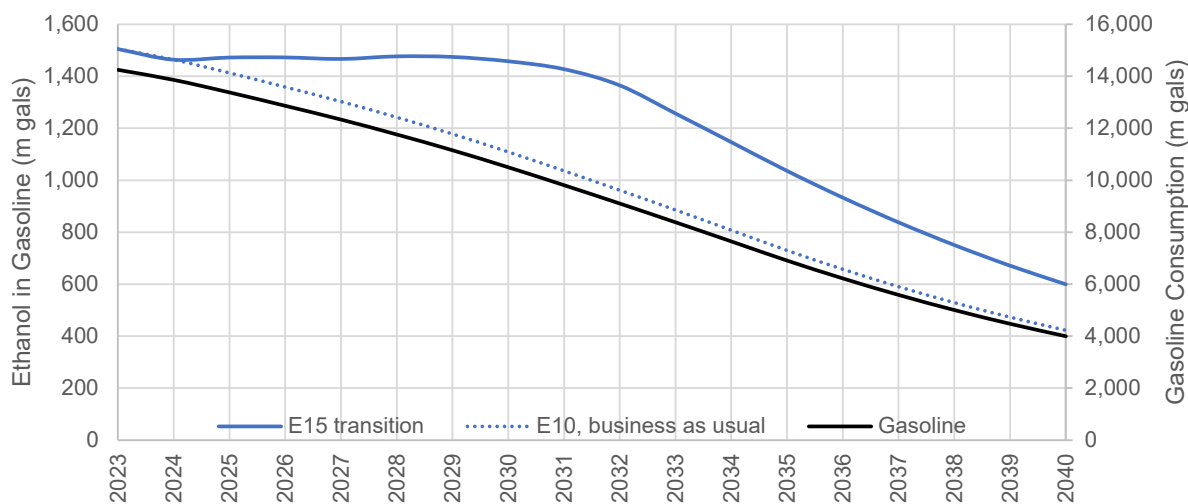

High level blends of ethanol: E85

Ethanol can also be blended at higher levels with gasoline to make what is referred to as E85, which is generally considered a blend of 85% (by volume) ethanol with 15% gasoline. E85 needs to be consumed in flex fuel vehicles or FFVs. California's population of FFVs has held steady since 2018, with slight increases, despite the reduced availability of new FFVs from automobile manufacturers (OEMs). By the end of 2021, California's FFV population topped about 1.2 million vehicles. Historically, California's FFVs have not consumed much E85; however, in the past several years, the E85 market has shown considerable growth. For instance, in 2022, CARB reports that E85 volumes have increased from around 34 million gallons consumed in 2018 to more than 103 million gallons consumed in 2022.

ICF projected E85 sales volumes as a function of several factors, including the flexible fuel vehicle (FFV) population and a weighted average share of E85 consumption per FFV. E85 volumes exceeded 100 million gallons in 2022, up from around 60 million gallons in 2021. Similarly, FFVs actually increased between 2021 and 2022 in California from about 1.14 million FFVs to 1.21 million FFVs based on data presented by the California Energy Commission (CEC).⁴ Based on ICF analysis of average annual fuel consumption of light-duty

⁴ Light-Duty Vehicle Population in California, available online [here](#).


vehicles in California, E85 consumption per vehicle has increased from about 6–8% of average fuel consumption to 16% of average fuel consumption.⁵

ICF increased the FFV fleet by 2.9% annually until 2025 (consistent with the rate of growth observed since OEMs started reducing FFV offerings in their lineups). Starting in 2025, ICF assumed that the FFV fleet would start to shrink as a result of fleet turnover. To forecast the amount of E85 consumed annually, ICF increased the rate of FFV fueling per vehicle to around 50% by 2028 and held it constant thereafter.

CI Reductions for Ethanol

The CI for ethanol has decreased steadily over the course of the LCFS program. It has decreased from around 73 g/MJ in 2016 to just below 60 g/MJ in 2022. These values include the land use change (LUC) adder of 19.8 g/MJ and 11.8 for ethanol from corn and sugarcane, respectively. About 90% of the ethanol in California comes from corn and fiber.

Figure 2. CI of Ethanol in California, 2016–2022

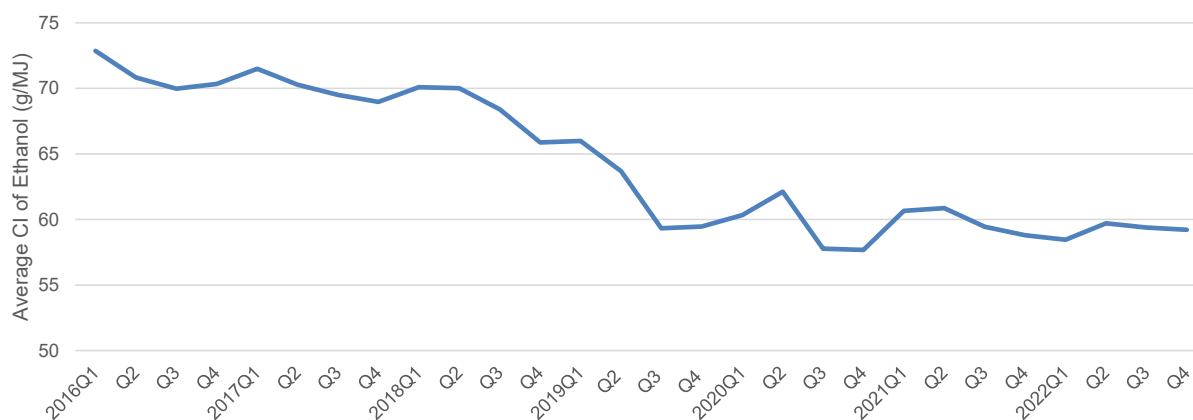

Despite the slower rate of CI improvements for ethanol since 2020, ICF modeled two major changes to the ethanol market with respect to CI: 1) climate smart agriculture and 2) carbon capture and storage (CCS).

Climate Smart Agriculture in this work refers to GHG emission reductions that can be achieved by implementing certain practices during the cultivation and harvesting of feedstocks that are used to produce low carbon transportation fuels. In the case of corn, ICF assumed CI reductions consistent with an analysis that ICF performed for the United

⁵ ICF uses this as a proxy, recognizing that each FFV driver will fuel the vehicle differently with gasoline or E85. The value is calculated as the annual gallons consumed per FFV on the road in the state divided by the average annual fuel consumption for light-duty vehicles in the state. A value of 0% implies that FFVs are fueling exclusively with gasoline, where as a value of 100% implies that all FFVs are consuming E85 all the time.

States Department of Agriculture (USDA)⁶ referred to as a high efficiency–high conservation (HEHC) projection of the CI profile of ethanol. That scenario includes CI reductions from the following:

- Domestic farm inputs and fertilizer N₂O: **yield increases** and conservation **technologies and practices**.
- Domestic land use change: **reduced tillage** decreases soil disturbance during field operations and leaves a large proportion of plant residues on the field.
- Fuel production: **process fuel switching** to biomass, **increased corn to ethanol yield**, and other process efficiencies in the ethanol plant.

More specifically, ICF incorporated the farm–level adoption of three conservation practice standards (CPSs) in the production of corn used to produce ethanol that USDA’s Natural Resources Conservation Service (NRSC) has recognized as having GHG benefits. These are:

- CPS 345—Residue and Tillage Management, Reduced Till;
- CPS 590—Nutrient Management: Improved Nitrogen Fertilizer Management; and
- CPS 340—Cover Crops.

ICF bundled the considerations for CI reductions by a) process efficiencies and b) agronomic practices. For the former, ICF assumed that a 1.2% per year decrease in the CI of ethanol is attributable to process efficiencies during ethanol fuel production. For the latter, ICF assumed that a maximum CI reduction of 21.6% from the baseline ethanol CI could be achieved. For reference, ICF reported that the maximum achievable CI reduction through the implementation of agronomic practices is about 31%.

Ethanol facilities have been targeted for CCS deployment because the purity of the CO₂ stream from the fermenters is so high (i.e., 99%). The implementation of CCS at ethanol facilities will reduce the CI of the fuel by around 28 g/MJ. The initial round of CCS investments will focus on ethanol production facilities that have accessibility to geological sequestration in close proximity. For instance, Red Trail Energy in North Dakota began CCS in July 2022, and submitted a design pathway to CARB in 2020. Moving forward, the industry will look to carbon dioxide pipelines for larger–scale CCS. There are several active investments in this space:

- Summit Carbon Solutions is pursuing a project to carry CO₂ from over 30 ethanol plants through a 2,000–mile pipeline network to a carbon storage site in North Dakota.

⁶ A Life–Cycle Analysis of the Greenhouse Gas Emissions from Corn–Based Ethanol, available online [here](#).

- Navigator CO2 Ventures (in partnership with Valero and BlackRock) is developing a similar project to transport CO2 from ethanol and fertilizer plants through a 1,300-mile pipeline network to sequestration sites in Illinois.
- Wolf Carbon Solutions has proposed a 350-mile CO2 pipeline project in Iowa.
- Battelle and Catahoula Resources announced in 2021 that they will jointly develop solutions for CCS produced at ethanol facilities in Nebraska.

These proposed facilities will face some challenges due to concerns about CO2 pipeline safety and the sequestration well integrity liability. However, changes to Section 45Q as part of the Inflation Reduction Act (IRA) will help to address these concerns, with changes summarized here:

- The new Section 45Q increased the tax credit value to \$85/ton for captured qualified carbon oxide (QCO) stored in geologic formations, \$60/metric ton for the use of captured carbon emissions, and \$60/metric ton for QCO stored in oil and gas fields if certain wage and apprenticeship requirements are met.
- The IRA expanded eligibility for CCS by extending the beginning of the construction deadline from before January 1, 2026 to before January 1, 2033.
- The IRA lowered the amount of QCO that projects must capture annually to qualify for Section 45Q credits. More specifically, the IRA modifies the definition of "Qualified Facility" under Section 45Q such that the CCS threshold for all eligible facilities is reduced significantly.
- Other changes to Section 45Q relate to the incentive payment and how it can be applied or transferred. The revised Section 45Q now allows for so-called direct pay through a tax refund, which may help project developers avoid the process of raising tax equity. Taxpayers may also elect to transfer Section 45Q credits to an unrelated taxpayer (for cash and are not included in the transferor's income, nor is it deductible by the transferee).

The combination of technological advances made recently and modifications made to the Section 45Q credits of the Internal Revenue Code, we anticipate that all of the ethanol delivered to California will have incorporated CCS by 2031.


To be clear, the implementation of Climate Smart Agricultural practices and CCS are not mutually exclusive. Considering that, we assessed the market share for ethanol as a transition from "average CI ethanol" in 2022 to a combination of average CI ethanol, climate smart agriculture ethanol, CCS ethanol, and a combination of climate smart agriculture and CCS ethanol over time.

Feedstocks for Liquid Biofuels

The liquid biofuels in subsequent sections--biodiesel, renewable diesel, and renewable jet fuel--depend on similar feedstocks, including soybean oil, canola oil, other vegetable oils,

choice white grease, used cooking oil (UCO) or yellow grease, inedible tallow, distiller's corn oil (DCO), and other fats/grease. ICF developed an outlook on the supply of each of these feedstocks in units of million pounds annually. We limited our consideration to domestic feedstocks for the *Accelerated Decarbonization, Central Case*.

Figure 3. Feedstock Availability for Biofuel Production, 2023–2040

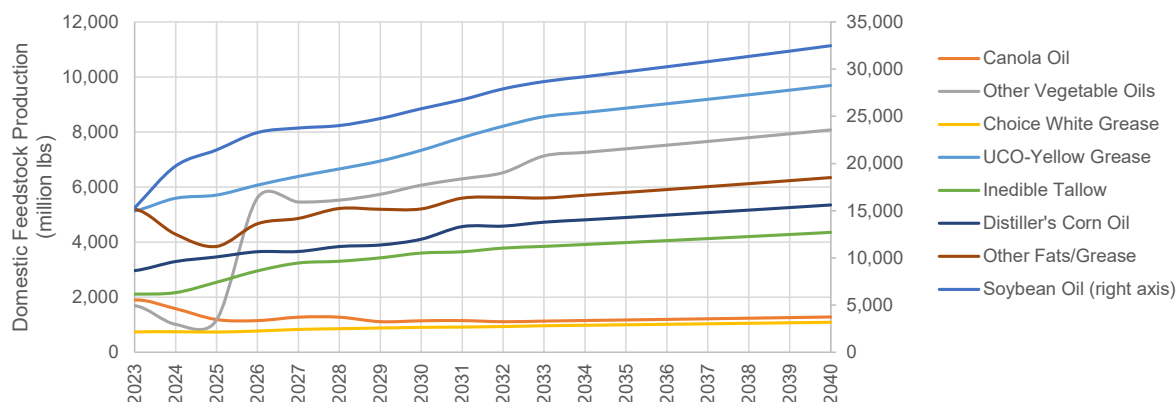

We are showing an increase in feedstock availability from a total of about 35 million pounds in 2023 to about 69 million pounds by 2040, a nearly two-fold increase over time.

Biodiesel

Biodiesel is produced via the processing of virgin oils (e.g., soy or canola), byproducts of other processes (e.g., corn oil extracted via corn ethanol production, and waste products like used cooking oil). Prior to the LCFS program being in place, California consumed very little biodiesel, typically less than 20 million gallons annually. Biodiesel consumption in the program has been aided in part by low CI scores for biodiesel sourced from corn oil, used cooking oil, and tallow. These fuels generally receive CI values less than 25 g/MJ. Other feedstocks include more traditional pathways from virgin oil feedstocks such as soy oil and canola oil. California blended about 290 million gallons of biodiesel in 2021, and 280 million gallons through 2022.


Biodiesel Blending

To date, California's market has hovered around 8% of the diesel pool with less than 15% of the feedstock coming from virgin oils like soybean oil and canola oil. Biodiesel has increased to this higher blend rate following the October 1, 2019 amendment to the California Water Resources Control Board amended California's Underground Storage Tank (UST) Regulations to reflect diesel containing up to 20% biodiesel, meeting the American Society for Testing and Materials (ASTM) International Standard B20, "shall be recognized as equivalent to diesel for the purpose of complying with existing approval requirements for

double-walled USTs, unless any material or component of the UST system has been determined to not be compatible with ASTM B20.”

ICF assumed an increase in the blend rate for biodiesel from around 8% in 2022 to as high as 17% by 2030. This blend rate generally aligns with most major engine manufacturers, who warranty their systems up to a 20% blend of biodiesel (by volume) with conventional diesel or B20. The figure below shows the trajectory of biodiesel consumption in California over the modeling period (to 2040) against total diesel consumption; note that diesel consumption is the sum of conventional diesel, renewable diesel, and biodiesel. Biodiesel reaches a peak of about 520 million gallons by 2030 and decreases thereafter as a result of pressure on overall diesel consumption based on regulations like ACT and ACF.

Figure 4. Biodiesel blending in California, 2023–2040

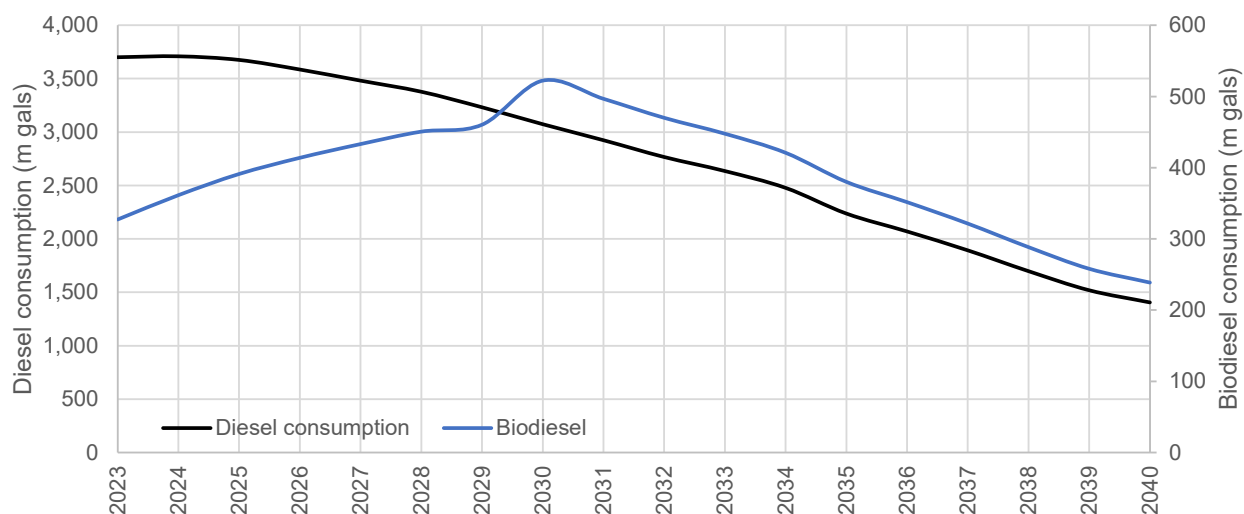

We assumed that the feedstock mix for biodiesel would be similar to what has been observed over the last several years in California, with virgin oil feedstocks representing about 10% of the total volume and waste-based feedstocks like corn oil, tallow, and UCO being the primary feedstocks.

CI Reductions for Biodiesel

We incorporated CI reductions associated with process efficiencies for biodiesel of 1.0–1.2% per year. There is not a detailed analysis available today specific to soybean farming regarding the CI reduction potential from climate smart agricultural practices. In work for the USDA, however, ICF has helped to prioritize areas for further study regarding potential CI reductions for soybean farming, which included reduced and no tillage, cover crops, and conservation crop rotations. Notably, soybean production has a low level of fertilizer application (~25% of acres) as well as a low fertilizer rate (~18 pounds/acre), meaning that improving N fertilization for soybeans will not result in as large of an N₂O reduction as that

seen from corn. ICF assumed that the potential reductions from climate smart agricultural practices would yield a reduction of up to 13.5%—we used the combined effects of no tillage and cover crops from ethanol as a proxy for what might be feasible for soybean farming.

Renewable Diesel

Most renewable diesel is produced via the catalytic hydrodeoxygenation of oils (e.g., virgin oils or waste oils) into alkanes and propane, commonly known as hydrotreating or hydrotreated fats and oils (HEFA) processes. This process removes oxygen from the oil, distinguishing it from the traditional trans-esterified fatty acid methyl-ester (FAME) biodiesel. Most producers use a catalytic isomerization technique to improve the stability of renewable diesel, specifically to adjust the cloud point to avoid any problems during operation in cold weather. Renewable diesel is functionally equivalent to conventional diesel, and as such requires no modification or special precautions for the engine.

California consumed approximately 385 million and 620 million gallons of renewable diesel in 2018 and 2019, respectively, representing a 60% increase year-over-year. We note growth in 2020 was expected to continue prior to the pandemic; however, 2020 ended up at 659 million gallons due to reduced demand associated with the lockdowns. 2021 was another strong year with 941 million gallons reported, and California consumed 1.39 billion gallons of renewable diesel in 2022.

Renewable diesel has garnered the most significant amount of investment from the refining industry over the past 24 months, as evidenced by the planned expansions and announced projects highlighted below, represent as much as 6.5 billion gallons of new renewable diesel supply coming online in the next 12–24 months.


Project	Location	Capacity MMGPY	Type	Announced Operation Date
Martinez Renewables	Martinez, CA	250	Conversion	2023
REG Geismar	Geismar, LA	50	Expansion	2023
Global Clean Energy	Bakersfield, CA	220	Conversion	2023
Vertex	Mobile, AL	180	Conversion	2023
BP Cherry Point Ex 1	Washington	100	Expansion	2023
Chevron	El Segundo, CA	125	Conversion	2023
Kern Oil and Refining	Bakersfield, CA	150	Conversion	2023
PBF Chalmette	Chalmette, LA	150	Conversion	2023
Tidewater	Prince George, BC	180	Conversion	2023
Calumet	Great Falls, MT	184	Conversion	2023
P66	Rodeo, CA	680	Conversion	2024
Martinez Renewables	Martinez, CA	450	Expansion	2024

Project	Location	Capacity MMGPY	Type	Announced Operation Date
Gron Fuels	Port Allen, LA	890	Green field	2024
Love's	Hastings, NE	80	Conversion	2024
Diamond Green	Norco, LA	400	Expansion	2024
World Energy, AltAir	Paramount, LA	290	Expansion	2025
World Energy	Houston, TX	125	Conversion	2025
Fulcrum Bioenergy	Gary, IN	31	Green field	2025
NEXT Renewable	Oregon	600	Green field	Unknown
PBF Chalmette	Chalmette, LA	150	Expansion	Unknown
ReadiFuels Iowa	Sioux Center, IA	35	NA	Unknown
Emerald Biofuels	Texas	110	Green field	Unknown
DG Fuels	St. James Parish, LA	151	DG Fuels	Unknown
CVR Energy	Coffeyville, KS	1450	Conversion	Unknown
Covenant Energy	Saskatchewan, CN	100	Green field	Unknown
Ceres Global Ag	Saskatchewan, CN	144	Green field	Unknown

The presence of commercial facilities operating Honeywell UOP's, Haldor Topsoe, and other commercially available renewable diesel technologies has helped bolster the likelihood of various commercial commitments and has bolstered market confidence in the engineering and production capabilities of these actors.

ICF forecasted renewable diesel production in North America, and considered demand from other low carbon fuel markets, including via Oregon, Washington, British Columbia, and Canada. Our renewable diesel outlook for California is a bottoms-up estimate based on announced facilities. For each facility, ICF assigns a probability of the facility coming online, the probability of delivering fuel to California, and the mix of feedstocks to be used at the facility. The supply for feedstocks is constrained separately (as noted previously).

Figure 5. Renewable diesel blending in California, 2023–2040

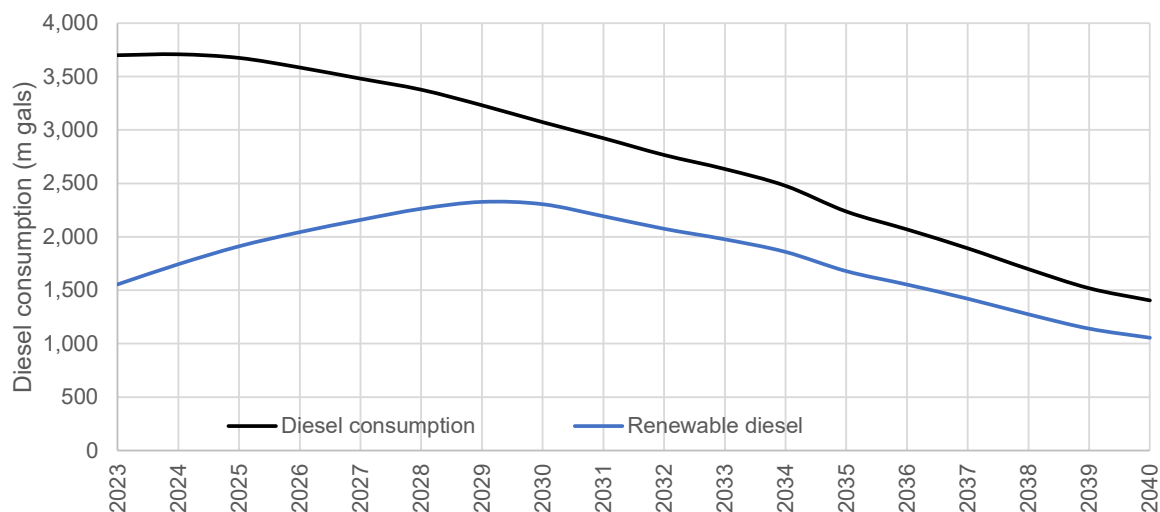

We did impose an arbitrary constraint on the renewable diesel distribution to California in the Central Case, with it not exceeding 75% of the diesel market. In other words, by around 2030, 75% of the diesel market is renewable diesel, 17% is biodiesel, and the balance is conventional diesel. Similar to biodiesel, renewable diesel consumption peaks in 2030 as diesel consumption faces downward pressure from regulations like ACT and ACF in California. Renewable diesel consumption in California in ICF modeling peaks at 2.3 billion gallons in 2030, which is a fraction of what is expected to come online over the next several years. Based on our review of project announcements and feedstock supply, and considerations of moving product into California, we assumed that virgin oils would comprise about 30–33% of the total renewable diesel market in California.

CI Reductions for Renewable Diesel


The CI reductions for renewable diesel are implemented in the same way as those that are reported for biodiesel. We incorporated CI reductions associated with process efficiencies for renewable diesel of 1.0–1.2% per year. ICF assumed that the potential reductions from climate smart agricultural practices for the subset of the renewable diesel product that is tied to virgin oils like soybean oil would yield a reduction of up to 13.5%—we used the combined effects of no tillage and cover crops from ethanol as a proxy for what might be feasible for soybean farming.

Renewable Jet Fuel

Renewable jet fuel (or alternative jet fuel or sustainable aviation fuel, SAF) became eligible to generate LCFS credits in 2019. In 2022, nearly 12 million gallons of renewable jet fuel were blended into California's jet fuel supply.

ICF forecasted intrastate jet fuel demand outlook for California assuming about 450 million gallons per year of consumption, growing at an annualized rate of about 1% before plateauing in 2030 at around 510 million gallons. This may be a conservative estimate considering that CARB may have the jurisdictional authority to subject all fossil jet fuel sold in California to the LCFS program. For the sake of simplicity, we assumed that CARB will regulate conventional jet fuel using the same CI reduction schedule as for gasoline and diesel moving forward.

ICF tracks renewable jet fuel announcements and differentiates them between two production pathways: via hydroprocessed esters and fatty acids (HEFA) or via alcohol-to-jet (ATJ) pathways. Both of these pathways are being pursued actively by producers today. The figure below shows our current outlook for North America production of renewable jet fuel or SAF from 2023 to 2040 for HEFA processing of fats, oils, and greases (FOG) and for AtJ pathways.

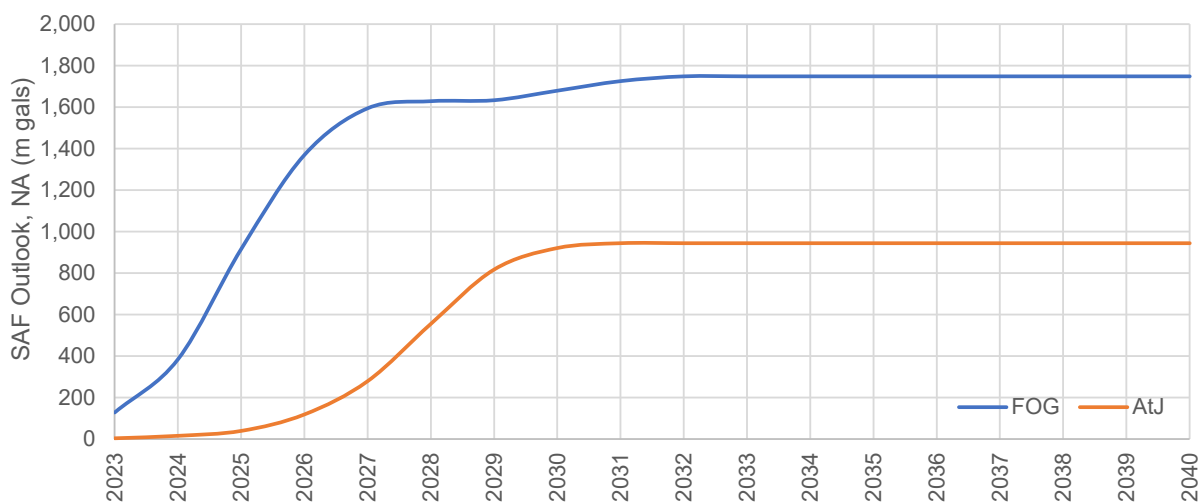

SAF investments are driven by a variety of factors, including incentives in the IRA and targets established via the federal government.

CI Reductions for Renewable Jet Fuel

The CI reductions for renewable jet fuel via HEFA pathways are implemented in the same way as those that are reported for biodiesel and renewable diesel. We incorporated CI reductions associated with process efficiencies for renewable jet fuel of 1.0–1.2% per year. ICF assumed that the potential reductions from climate smart agricultural practices for the subset of the renewable diesel product that is tied to virgin oils like soybean oil would yield a reduction of up to 13.5%—we used the combined effects of no tillage and cover crops from ethanol as a proxy for what might be feasible for soybean farming.


The CI reductions for renewable jet fuel via ATJ pathways are implemented in the same way as those that are reported for ethanol, with the assumption that the same ethanol that is used for blending into gasoline is also to be used for SAF.

Natural Gas Demand and NGV Deployment

Natural gas use as a transportation fuel reached about 200 million diesel gallons equivalent (mdge) in 2022, with 96.5% of the product being renewable natural gas (RNG) and just 3.5% of the total volume coming from fossil natural gas.

Forecasting natural gas vehicle (NGV) deployment requires modifications to EMFAC2021. For instance, EMFAC2021 reports about 160 mdge of natural gas consumed in the transportation sector for 2022, well below the 200 mdge actually consumed. ICF made no changes to the rate of decline in the consumption of natural gas as a transportation fuel used in transit buses, as this decrease is tied to ICT compliance. After accounting for ACF compliance, ICF assumed in the Central Case that for every heavy-duty truck that is not subject to ACF that there is a 15% chance to convert that vehicle to an NGV. By ICF's estimate, this will increase NGV deployment by about 1,800 and 3,000 in 2025 and 2027, respectively, compared to default ACF modeling.

Figure 6. Natural Gas Demand, 2023–2040

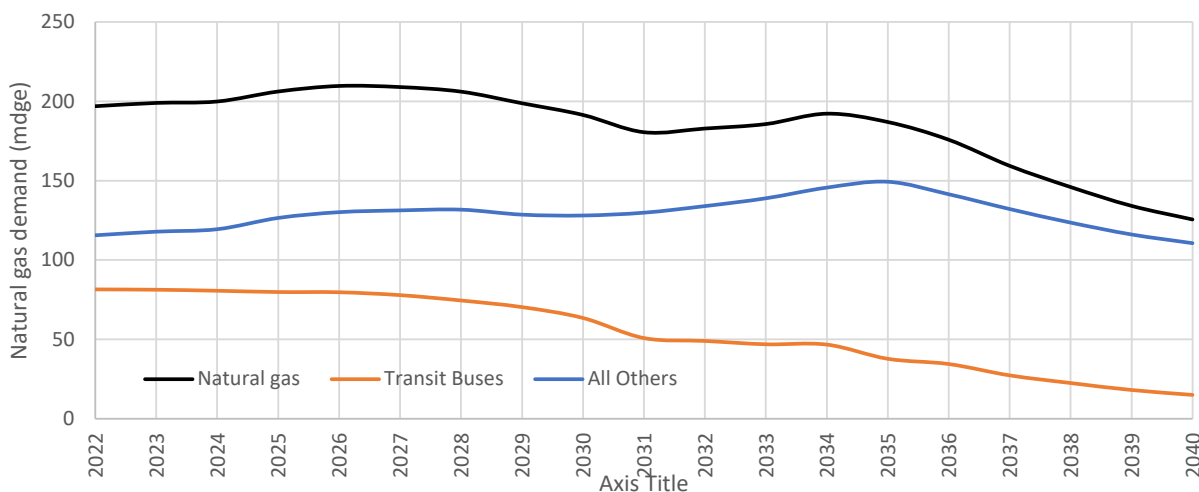

Biogas | Renewable Natural Gas

Most of the RNG that is currently produced is used as a transportation fuel. Furthermore, most of the RNG used in the transportation industry is derived from landfills. However, California's market is shifting towards lower carbon intensity RNG from feedstocks such as the anaerobic digestion of animal manure and from digesters deployed at waste water treatment plants or water resource recovery facilities (WRRFs). Over time, these lower carbon sources will likely displace substantial volumes of higher carbon intensity RNG from

landfills; however, these alternative sources of RNG tend to have smaller production profiles and will not be able to displace landfill gas entirely in the system.

By the end of 2022, for instance, 49% of RNG consumed in California was from lower CI sources, and most of that was from animal manure (making up 46% of the total). Moving forward, however, ICF modeled two key aspects for RNG: 1) The California market will be saturated with low CI RNG in the next 2–3 years, and 2) that because of incentives in the IRA, greater optionality for biogas in the transportation market will materialize.

With respect to the latter, ICF's modeling provides optionality with respect to the deployment of biogas as a resource to produce three fuels: renewable natural gas, electricity, or hydrogen. Furthermore, ICF modeling enables each of these fuels to be used as a transportation fuel (e.g., biogas to electricity used in an electric vehicle) or as a process fuel in the production of other low carbon fuels (e.g., renewable natural gas into a SMR unit to make green hydrogen that is used in renewable diesel production). Our modeling is neither deterministic nor optimized related to biogas use. The challenge with either of these approaches is that they both imply a certainty associated with the best use of the fuel based on some condition imposed by the model e.g., cost. The uncertainty of the value associated with the "best use" of biogas makes for a challenging modeling exercise, and requires consideration of federal tax incentives (e.g., via the Inflation Reduction Act, most of which lack guidance that would be needed to optimize around cost), as well as various physical and environmental commodity streams (e.g., RINs). ICF is working with stakeholders to develop a loading order for biogas--this our best attempt to highlight the flexibility of the resource, while also recognizing that certain uses will have higher value than others, and that different production pathways have different project economics.

ICF has provided a biogas supply estimate across two geographies--California and the rest of the United State-- and 8 feedstocks that we assume are used to generate fuel via either anaerobic digestion or thermal gasification (noting that the latter is also a pathway for woody biomass to liquid biofuels in our modeling). The feedstocks included landfill gas (LFG), animal manure, wastewater facilities, food waste, agricultural residues, forest products and forestry residues, energy crops, and municipal solid waste (MSW).

ICF developed three supply outlooks--a lower bound, upper bound, and maximum achievable. We used the same approach as part of work for the Michigan Public Service Commission (MPSC).⁷ We estimate the resource potential scenarios by considering constraints unique to each potential biogas feedstock, these constraints are based on

⁷ Michigan Renewable Natural Gas Study, September 2022. Available online [here](#).

factors such as feedstock accessibility. ICF's resource assessment is conducted using a combination of national-, state-, and regional-level information regarding the availability of different feedstocks.

ICF estimates approximately 870–1,210 trillion Btu (tBtu) of biogas can be captured annually for processing into useful energy by 2030 in the lower and upper bound scenarios, with about 100–137tBtu of this biogas sourced from California.

The biogas feedstocks and associated utilization assumed is highlighted in the following subsections.

Landfill Gas

To develop the biogas potential from LFG, ICF extracted data from the Landfill Methane Outreach Program (LMOP) administered by the U.S. EPA, which included more than 2,000 landfills included in the inventory. Due to the minimal and declining methane production of waste after 25 years in landfills, in building the scenarios ICF considered only landfills that are either open or were closed post-2005. This reduced the number of landfills included in our analysis.

ICF developed assumptions for the resource potentials for biogas production at landfills in the two scenarios, considering the potential at LFG facilities with collection systems in place, LFG facilities that do not have collection systems in place, and candidate landfills identified by the U.S. EPA.

- In the Lower Bound, ICF assumed that 75% of eligible LFG facilities would produce biogas.
- In the Upper Bound, ICF assumed that 95% of eligible LFG facilities would produce biogas.

Animal Manure

ICF considered animal manure from a variety of animal populations, including beef and dairy cows, broiler chickens, layer chickens, turkeys, and swine. Animal populations were derived from the United States Department of Agriculture's (USDA) National Agricultural Statistics Service. ICF used information provided from the most recent census year (2017) and extracted total animal populations on a county and state level.⁸ ICF developed the biogas potential using animal manure production and the energy content of dried manure taken from a California Energy Commission report prepared by the California Biomass

⁸ USDA, 2017. 2017 Census of Agriculture, <https://www.nass.usda.gov/AgCensus/index.php>

Collaborative.⁹ These inputs are summarized in Table 1 below, with the formula and an example calculation of a 10,000-head dairy farm included for reference:

$$\text{number of livestock} \times \text{volatile solids} \times \text{heating value} = \text{biogas production potential}$$

$$10,000 \text{ head} \times 3,020 \frac{\text{kg (dry)}}{\text{head}} \times 16,111 \frac{\text{Btu}}{\text{kg (dry)}} \times \frac{1}{1.0^6} = 486,491 \text{ MMBtu}$$

Table 1. Key Parameters for Animal Manure Resource Biogas Potential

Animal Type	Volatile Solids (kg/head/yr)	HHV (Btu/kg, dry basis)
Dairy	3,020	16,111
Beef:		
- Cattle	1,674	16,345
- Other	750	16,345
Swine	149	15,077
Poultry:		
- Layer Chickens	8.3	14,689
- Broiler Chickens	9.1	15,077
- Turkeys	25.0	14,830
Sheep & Goats	242	9,362

The animal manure inventory does not identify specific facilities or locations where biogas will likely be produced. However, concentrated animal feeding operations (CAFOs) provide an indication of where biogas from animal manure could be produced. The existing accumulation of animal manure at CAFOs located near pipeline infrastructure could conceivably increase the productive potential of animal manure as a biogas feedstock. ICF developed the following assumptions for the resource potentials for biogas production from animal manure in the two scenarios:

- In the Lower Bound, ICF assumed that 30% of the animal manure would be used to produce biogas.
- In the Upper Bound, ICF assumed that 60% of the animal manure would be used to produce biogas.

⁹ Williams, R. B., B. M. Jenkins and S. Kaffka (California Biomass Collaborative). 2015. An Assessment of Biomass Resources in California, 2013 – DRAFT. Contractor Report to the California Energy Commission. PIER Contract 500-11-020. Available online [here](#).

Wastewater Facilities

To determine biogas potential from wastewater facilities or water resource and recovery facilities (WRRFs), ICF used the Clean Watersheds Needs Survey (CWNS) conducted in 2012 by the U.S. EPA, an assessment of capital investment needed for wastewater collection and treatment facilities to meet the water quality goals of the Clean Water Act, and includes more than 14,500 WRRFs. ICF distinguishes between facilities based on location and facility size as a measure of average flow (in units of million gallons per day, MGD). ICF also reviewed more than 1,200 facilities that are reported to have anaerobic digesters in place, as reported by the Water Environment Federation.

To estimate the amount of biogas produced from wastewater at WRRFs, ICF used data reported by the U.S. EPA,¹⁰ a study of WRRFs in New York State,¹¹ and previous work published by AGF.¹² ICF used an average energy yield of 7.003 MMBtu/MG of wastewater.

ICF developed the following assumptions for the resource potentials for biogas production at WRRFs in the two scenarios:

- In the Lower Bound, ICF assumed that 80% of the WRRFs with a capacity greater than 7 MGD would produce biogas.
- In the Upper Bound, ICF assumed that 90% of the WRRFs with a capacity greater than 3.5 MGD would produce biogas.

Food Waste

Food waste is a major component of MSW—accounting for about 15% of MSW streams. More than 75% of food waste is landfilled. Food waste can be diverted from landfills to a composting or processing facility where it can be treated in an anaerobic digester. ICF limited our consideration to the potential for utilizing the food waste that is currently landfilled as a feedstock for biogas production via AD, thereby excluding the 25% of food waste that is recycled or directed to waste-to-energy facilities. In addition, food waste that is potentially diverted from landfills in the future is not included in the landfill gas analysis, thereby avoiding any issues around double counting of biomass from food waste.

¹⁰ US EPA, Opportunities for Combined Heat and Power at Wastewater Treatment Facilities, October 2011. Available online [here](#).

¹¹ Wightman, J and Woodbury, P., Current and Potential Methane Production for Electricity and Heat from New York State Wastewater Treatment Plants, New York State Water Resources Institute at Cornell University. Available online [here](#).

¹² AGF, The Potential for Renewable Gas: Biogas Derived from Biomass Feedstocks and Upgraded to Pipeline Quality, September 2011.

ICF extracted county-level information from the U.S. DOE's Bioenergy Knowledge Discovery Framework (KDF), which includes information collected as part of U.S. DOE's Billion Ton Report (updated in 2016). The Bioenergy KDF includes food waste at tipping fee price points ranging from \$70/ton to \$100/ton. ICF assumed a high heating value of 12.04 MMBtu/ton (dry). Note that the values from the Bioenergy KDF are reported in dry tons, so the moisture content of the food waste has already been accounted for in the DOE's resource assessment.

ICF developed the following assumptions for the biogas production potential from food waste in the two scenarios:

- In the Lower Bound scenario, ICF assumed that 80% of available food waste would be diverted to AD systems for biogas production.
- In the Upper Bound, ICF assumed that 95% of available food waste would be diverted to AD systems for biogas production.

Agricultural Residue

Agricultural residues include the material left in the field, orchard, vineyard, or other agricultural setting after a crop has been harvested. More specifically, this resource is inclusive of the unusable portion of crop, stalks, stems, leaves, branches, and seed pods. Agricultural residues (and sometimes crops) are often added to anaerobic digesters.

ICF extracted information from the U.S. DOE Bioenergy KDF, including corn stover, noncitrus residues, tree nut residues, and wheat straw. These estimates are based on modeling undertaken as part of the 2016 Billion Ton Study, and utilizes the Policy Analysis System (POLYSYS), a policy simulation model of the U.S. agricultural sector. The POLYSYS modeling framework simulates how commodity markets balance supply and demand via price adjustments based on known economic relationships and is intended to reflect how agricultural producers respond to new and different agricultural market opportunities, such as for biomass. Available biomass is constrained to not exceed the tolerable soil loss limit of the USDA Natural Resources Conservation Service and to not allow long-term reduction of soil organic carbon.

ICF developed the following assumptions for the biogas production potential from agricultural residues in the two scenarios.

- In the Lower Bound, ICF assumed that 20% of the agricultural residues available at \$40/dry ton would be diverted to biogas production.
- In the Upper Bound, ICF assumed 70% of the agricultural residues available at \$60/dry ton would be diverted to biogas production.

Forestry and Forest Product Residues

Forestry and forest product residues include biomass generated from logging, forest and fire management activities, and milling. Logging residues (e.g., bark, stems, leaves, branches), forest thinnings (e.g., removal of small trees to reduce fire danger), and mill residues (e.g., slabs, edgings, trimmings, sawdust) are also considered in the analysis. This includes materials from public forestlands (e.g., state, federal), but not specially designated forests (e.g., roadless areas, national parks, wilderness areas) and includes sustainable harvesting criteria as described in the U.S. DOE Billion Ton Update. The updated DOE Billion Ton study was altered to include additional sustainability criteria. Some of the changes included:¹³

- Alterations to the biomass retention levels by slope class (e.g., slopes with between 40% and 80% grade included 40% biomass left on-site, compared to the standard 30%).
- Removal of reserved (e.g., wild and scenic rivers, wilderness areas, USFS special interest areas, national parks) and roadless designated forestlands, forests on steep slopes and in wet land areas (e.g., stream management zones), and sites requiring cable systems.
- The assumptions only include thinnings for over-stocked stands and did not include removals greater than the anticipated forest growth in a state.
- No road building greater than 0.5 miles.

These additional sustainability criteria provide a more realistic assessment of available forestland than other studies.

ICF extracted information from the U.S. DOE Bioenergy KDF, including information on forest residues such as thinnings, mill residues, and different residues from woods (e.g., mixedwood, hardwood, and softwood). The Bioenergy KDF estimates are based on ForSEAM, a linear programming model constructed to estimate forestland production over time, developing both traditional forest products but also products that meet biomass feedstock demands. The model assumes that projected traditional timber demands will be met and estimates costs, land use, and competition between lands. The forestry and forest product residue estimates also reflect a cost minimization framework that minimizes the total costs (harvest costs and other costs) under a production target goal in addition to land, growth, and other constraints. The cost minimization framework incorporates the

¹³ DOE, 2011. *2011 Billion Ton Update – Assumptions and Implications Involving Forest Resources*, http://web.ornl.gov/sci/ees/cbes/workshops/Stokes_B.pdf

POLYSYS model as well as IMPLAN, an input-output model that estimates impacts to the economy.¹⁴

ICF extracted data from the Bioenergy KDF at price points, from \$30/ton to \$100/ton, although the price points did not show any variation in production potential for forest and forest product residue biomass from 2025 out to 2040. ICF developed the following assumptions for the biogas production potential from forest residues in the two scenarios:

- In the Lower Bound, ICF assumed that 20% of the forest and forestry product residues available at \$40/dry ton would be diverted to biogas production.
- In the Upper Bound, ICF assumed that 70% of the forest and forestry product residues available at \$60/dry ton would be diverted to biogas production.

Energy Crops

Energy crops are inclusive of perennial grasses, trees, and some annual crops that can be grown specifically to supply large volumes of uniform, consistent quality feedstocks for energy production. Energy crop estimates are based on the same modeling framework used to derive the agricultural residue estimates, outlined in the previous section. With respect to land use, rather than shifting existing agricultural production (e.g., corn and soy) to energy crop production, DOE's modeling also shows that energy crops are largely grown on idle or available pasture lands, particularly at lower farmgate prices. Similar to agricultural residues, in the simulations no land use change is assumed to occur, except within the agricultural sector (i.e., forested land is not converted to agricultural land for agricultural residue or energy crop purposes).

ICF extracted data from the Bioenergy KDF at \$10 price point increments, from \$30/ton to \$100/ton that showed variation in production potential for energy crops from 2025 out to 2040. ICF developed assumptions for the biogas production potential from energy crops for the two scenarios:

- In the Lower Bound, ICF assumed that 20% of the energy crops available outside of California at \$40/dry ton would be diverted to biogas production.
- In the Upper Bound, ICF assumed that 40% of the energy crops available outside of California at \$60/dry ton would be diverted to biogas production.

Municipal Solid Waste

MSW represents the trash and various items that household, commercial, and industrial consumers throw away—including materials such as glass, construction and demolition (C&D) debris, food waste, paper and paperboard, plastics, rubber and leather, textiles,

¹⁴ DOE, 2016. 2016 Billion Ton Report, <https://www.energy.gov/eere/bioenergy/2016-billion-ton-report>

wood, and yard trimmings. About 25% of MSW is currently recycled, 9% is composted, and 13% is combusted for energy recovery, with the remaining balance (about 50%) landfilled.

ICF limited consideration to biogenic MSW types not covered in other feedstock categories – paper and paperboard, and yard trimmings. We further limited MSW to only the potential for utilizing MSW that is currently landfilled as a feedstock for thermal gasification; this excludes MSW that is recycled or directed to waste-to-energy facilities.

ICF extracted information from the U.S. DOE’s Bioenergy KDF, which includes information collected as part of U.S. DOE’s Billion Ton Report (updated in 2016). The Bioenergy KDF includes the following waste residues: construction and demolition (C&D) debris, paper and paperboard, plastics, rubber and leather, textiles, wood, yard trimmings, and other. ICF extracted data from the Bioenergy KDF at price points between \$30/ton and \$60/ton. ICF developed assumptions for the biogas production potential from MSW for the two scenarios:

- In the Lower Bound, ICF assumed that 20% of the MSW available at \$40/dry ton would be diverted to biogas production.
- In the Upper Bound, ICF assumed that 70% of the MSW available at \$60/dry ton would be diverted to biogas production.

Battery Electric Vehicles & Fuel Cell Electric Vehicles

The publicly available version of EMFAC accounts for the ACT and ICT Rules, which together drive electrification (whether it be through electricity or hydrogen) in heavy-duty market segments. ICF modified the EMFAC model to account for compliance with the ACC2 Advanced Clean Fleets (ACF) rule.

Advanced Clean Cars 2.0 Modeling for Light-duty Market Segments

ICF modeling of ACC2 requirements relies on CARB’s rulemaking documents and up-to-date market data. EMFAC2021 is used as the basis to estimate new sales, vehicle population, and fuel and energy consumption. EMFAC2021 uses vehicle registration from the California Department of Motor Vehicles (DMV) through 2019 and projects ZEVs based on consumer choice modeling approach¹⁵. To forecast the impacts of ACC2 on EV new sales and EV population on road, the following assumptions are made:

- New vehicle sales by calendar year are estimated as 1.25x the population of vehicles with age equal to zero derived from EMFAC2021, as EMFAC uses an October cut of

¹⁵ California Air Resources Board (CARB) (2021). EMFAC2021 Technical Document. Available at: https://ww2.arb.ca.gov/sites/default/files/2021-08/emfac2021_technical_documentation_april2021.pdf

DMV data and may miss the new vehicle registrations in the last quarter of each year.

- EV fractional share (including BEVs, FCEVs, and PHEVs) of new sales in 2020 and 2021 is based on CARB's adjusted baseline in the Initial Statement of Reasons (ISOR)¹⁶, while the fractions from 2023 to 2025 are interpolation between CEC's report in 2022 and ACC2 requirements in 2026 and also align with 2021 Annual Alternative Fuel Survey Results published by CARB.
- To comply with ACC2, annual EV requirements start with 35% of new vehicles sales in 2026 and continues to ramp up quickly to nearly 70% by 2030, and reaches 100% in 2035.
- The splits among BEVs, PHEVs, and FCEVs relies on CARB's modeling of emission benefit analysis.

Advanced Clean Fleet Modeling for Heavy-duty Market Segments

ICF modeling of the ACF regulation mainly followed the same assumptions as stated in CARB's rule-making documents, including the total affected population, ZEV purchase and phase-in schedule, statutory useful life assumptions, etc.¹⁷ ICF considered all four components as required by the rule:

- State and local agencies: ICF modeled that 50 percent of vehicle purchases made by state and local government fleets are ZEVs beginning in 2024 and 100 percent of vehicle purchases are ZEVs by 2027.
- Drayage fleets: ICF assumed that any truck that is 15 years or older would be subject to the useful life requirement of ACF and be removed from the drayage inventory. Any new addition to the inventory will be ZEV starting in 2024.
- High priority and federal fleets: ICF assumed that all the regulated fleets would follow the ZEV Milestones Option and meet ZEV targets as a percentage of the total fleet starting with vehicle types that are most suitable for electrification.
- Manufacturer sales mandate: ICF modeled that all in-state sales of Class 2b-8 vehicles will be zero-emission starting in 2036.

¹⁶ California Air Resources Board (CARB) (2022). Public Hearing to Consider the Proposed Advanced Clean Cars II Regulations. Staff Report: Initial Statement of Reasons. Available at: <https://ww2.arb.ca.gov/sites/default/files/barcu/regact/2022/acii/isor.pdf>

¹⁷ California Air Resources Board (CARB), Advanced Clean Fleets Regulation: Appendix F. Emissions Inventory and Results, available at <https://ww2.arb.ca.gov/sites/default/files/barcu/regact/2022/acf22/appf.pdf>

In addition, ICF modeling also considered the new provision to leave more time for CNG trucks supporting waste diversion and biomethane production.¹⁸ The technology mix projections also stayed consistent with CARB's assumptions that 10 percent of day cab tractors would be FCEV until 2027 and 25 percent afterwards, and an even 50:50 split between BEVs and FCEVs for sleeper cabs. For all other vehicles, all ZEVs would be battery-electric until 2026, and purchases starting in 2027 onward would be 90 percent BEV and 10 percent FCEV.¹⁹ For modeling simplicity, ICF assumed that all in-state tractors are day cabs, while interstate and out-of-state Class 8 tractors²⁰ are sleeper cabs.

Carbon Intensity for Electricity

ICF developed CI trajectories for four types of electricity considered in our analysis, including grid average electricity, zero carbon intensity electricity using book-and-claim provisions, LFG-to-electricity, and dairy biogas-to-electricity. The CI values for the latter three are held constant over the course of the analysis but have increasing market shares over time. The grid average CI is decreased in line with the Renewable Portfolio Standard (RPS) requirements (e.g., 60% RPS by 2030) using a straight-line decrease from 2023 to 2030. ICF assumed that the grid would be decarbonized at the same rate post-2030, reaching 32 g/MJ by 2040.

Carbon Intensity for Hydrogen

ICF developed CI trajectories for four types of hydrogen considered in our analysis, including SMR from fossil gas, RNG from LFG, or RNG from animal manure, and via electrolysis using renewable electricity. These are each held constant over the course of the analysis but have varying shares of the market over time.

Summary of Factors Not Considered in ICF Modeling

ICF did not consider several factors that impact the supply-demand balance of credits and deficits because our modeling exercise is focused on the carbon intensity reductions that could be achieved, rather than optimizing some compliance outlook via scenario modeling. For instance, we did not consider:

¹⁸ One of the five new provisions introduced to the Board in the latest April 2023 hearing, more information available at <https://ww2.arb.ca.gov/sites/default/files/barcu/board/books/2023/042723/23-4-2pres.pdf>

¹⁹ California Air Resources Board (CARB), Advanced Clean Fleets Regulation Staff Report: Initial Statement of Reasons, available at <https://ww2.arb.ca.gov/sites/default/files/barcu/regact/2022/acf22/isor2.pdf>

²⁰ T7 CAIRP, T7 NOOS, and T7 NNOOS categories under EMFAC2021

- *Off-road electrification.* There are several technologies that generate credits in off-road applications, including fixed guideway systems, electric forklifts, cargo handling equipment, shore power for ocean going vessels, and truck refrigeration units. Together, these technologies generated about 2.2 million credits in 2022. Most of those credits (1.5 million credits) are tied to electricity used in forklifts, and CARB has proposed a variety of ways to modify reporting requirements for electric forklifts that will likely decrease credit generation substantially. Given the uncertainty around some of these markets, this initial Central Case modeling excludes consideration of these technologies for the sake of simplicity.
- *Infrastructure crediting.* Credits can be generated from DC fast charging and deploying hydrogen refueling infrastructure. CARB staff have also proposed modifying and expanding these credit generation pathways to medium- and heavy-duty vehicles. We did not consider these credits in our modeling.
- *Incremental deficits.* CARB calculates and posts annually the crude average carbon intensity of crude refined at California refineries or refineries that distribute fuel to California. The value is reported on a three-year average basis. If the three-year average is greater than California Baseline Crude Average CI of 11.85 g/MJ plus 0.1 g/MJ, then all gallons of gasoline and diesel sold in California are subject to incremental deficits. In 2022, about 1.6 million incremental deficits were reported for gasoline (CARBOB) and diesel. It is unclear to what extent this will impact deficit generation in the future, but given the three year rolling basis, we anticipate it will likely have an impact at least through 2025. However, ICF did not account for this in our modeling.

Generally, we believe that the eligible credit generating pathways and deficit generating aspects of the program that we did not consider in our analysis lean towards slightly *higher* credit generation than considered in our analysis.

4 Summary of Results

ICF modeling shows that the lifecycle GHG emissions for the transportation sector (including gasoline, diesel, and intrastate jet fuel) can decrease by 42% by 2030 and 77% by 2040 from 2010 values.

Table 2. Lifecycle GHG Emissions in California's Transportation Sector

Lifecycle GHG emissions MMT CO ₂ e	2010	2030	2040
Transportation fuels	222	128	51
% Reduction	--	42%	77%

ICF overlaid the results of our supply–demand analysis and CI trajectory analysis of conventional and low carbon fuels into California with a CI reduction trajectory from 2023 to 2040. From there, we calculated deficits and credits to determine achievable CI targets in various years. There are two key components that are not considered in this version of the Central Case: 1) a step–down mechanism and 2) an acceleration mechanism.

- The former, a step–down mechanism, is designed to reduce significantly the current over–supply of credits. At the end of 2022, CARB reported a surplus of 15 million credits. This is expected to grow significantly again in 2023. For our part, we do not consider the existing bank of 15 million credits, as we assume that these will be drawn down in some controlled fashion as part of the step–down mechanism.
- The acceleration mechanism is a concept introduced by CARB via workshop to outline an indicator or series of indicators that can be calculated and could be used to determine if the CI reduction requirements of the program need to be accelerated because of the over–performance in the market. Together, these two mechanisms should help the LCFS program find stronger footing with respect to the supply–demand balance of credits and deficits, especially in cases where innovation continues to occur more rapidly than otherwise forecast.

ICF will provide further commentary on these two policy mechanisms in other forthcoming publications.

In our modeling, ICF finds that a CI target of 41–44% for 2030 is achievable in the Central Case, as shown below, based on expected fuel volumes and carbon intensity reductions for a wide array of fuel pathways. This range excludes many crediting opportunities, including offroad electrification, infrastructure crediting, direct air capture of CO₂, CCS at biogas or hydrogen facilities, and others. Further, it does not include state goals for reducing vehicle miles travelled, which would lead to significant additional average carbon intensity reductions, assuming low carbon fuel volumes remain the same, otherwise. Overall, we believe this target represents a reasonable, yet conservative, estimate of CI reduction potential under the LCFS in 2030. We present this as a range, because there is likely some desirable credit bank that the market would seek to maintain, rather than running the bank of credits and deficits to net zero. Figure 7 shows the CI reduction trajectory used as an overlay against ICF modeling to develop Figure 8 and Figure 9 below, which show the balance of credits and deficits, and the primary credit generating pathways, respectively. The results presented are for a 42.8% CI reduction target by 2030, and a linear increase in the stringency of the program thereafter to achieve a 90% CI reduction by 2045.

Figure 7. CI Reduction Trajectory Modeled for LCFS Program

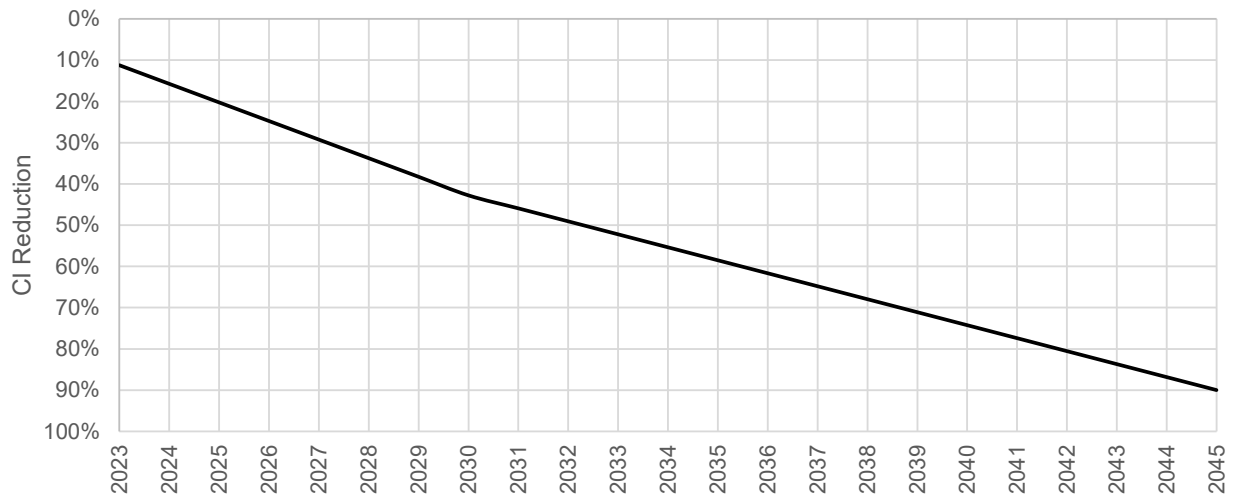


Figure 8. Balance of Credits and Deficits with a 42% CI standard in 2030, 2023–2040


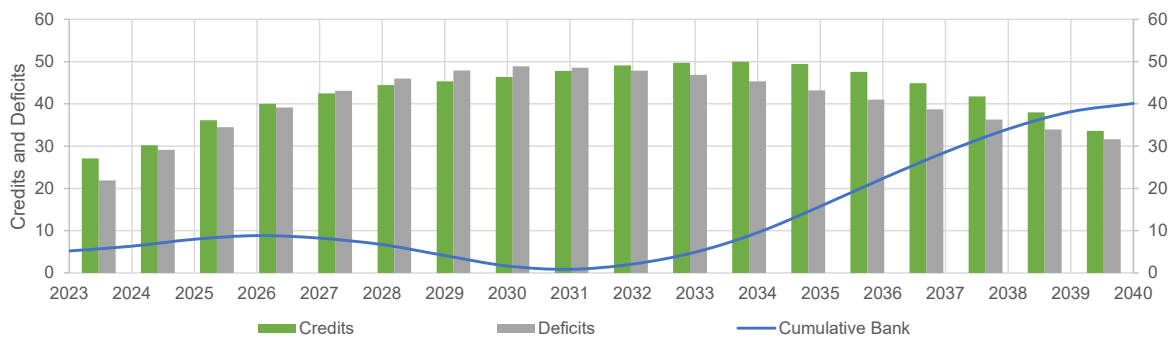


Figure 9. Primary Credit Generating Pathways in Modeling, 2023–2040

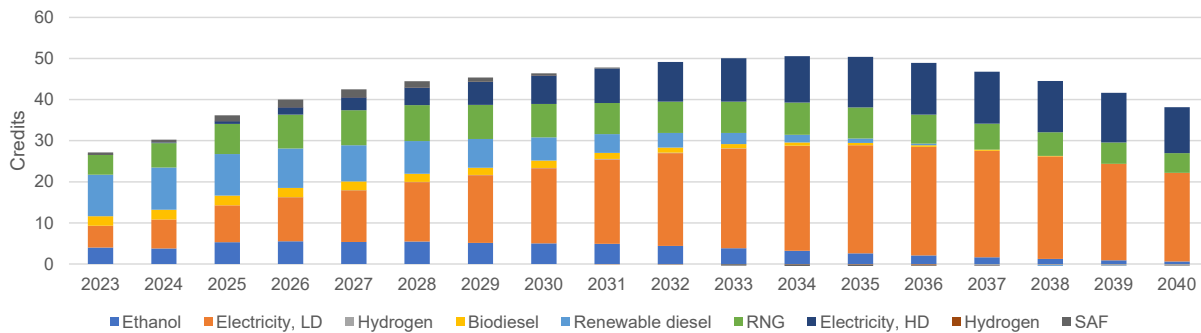

Based on this initial analysis of the Central Case, we make the following observations:

- A trajectory with a 30% CI by 2030 is borderline untenable—ICF estimates this will yield a bank in excess of 100 million credits.
- *Deficits are decreasing.* Gasoline and diesel demand are both at or near their peaks; there is only modest room for growth given California regulations. This will limit


deficit generation considerably in the next decade, especially for gasoline as transportation electrification accelerates.

- *Credit generating activity is poised to increase rapidly.* The diversity of options to achieve the range of CI target is significant. We consider higher liquid biofuels blending, lower CIs across the board, electrification of the light-duty and heavy-duty sectors, SAF deployment, expanded role of biogas, and modest hydrogen deployment. These strategies align closely with the incentive structures of the Inflation Reduction Act, and other programs (e.g., the Renewable Fuel Standard). The LCFS program will certainly help the economics of some of these projects, but many are being developed without expectations of significant price support from the LCFS program.
- *A step-down mechanism is needed sooner than later.* The bank of credits will likely be in the range of 30 million credits by the end of 2024 absent intervention—this has the potential to alter the trajectory contemplated in our Central Case. The step-down mechanism is critical for 2024 implementation—another year of banked credits will shift the program trajectory and likely limit low carbon fuel deployment.
- *Diversity of credit-generating options is strength of modeling, not limitation.* Though we have under- and over-estimated credit generation for specific strategies previously, ICF analysis has consistently shown that we are in line with LCFS market performance at the top level of credit-deficit balances.
- *Post-2030 considerations.* The CI trajectory of the program from 2030 to 2045 will need to be non-linear to prevent another build-up of credits. The full implementation of ACC2 and Advanced Clean Fleets will achieve compliance without any other low carbon fuels by 2036 with a 62% CI standard.

Options for Further Consideration

As noted previously, ICF is modeling both an Accelerated Decarbonization Central Case and High Cases. The High Cases that ICF will present separately will consider strategies such as those listed below. These strategies should be considered in draft form and are subject to change as ICF finalizes our work on this project, especially as it relates to the High Case modeling.

Low Carbon Fuel	Strategies for Consideration in High Case(s)
Ethanol	<ul style="list-style-type: none"> Optimized ILUC value for corn in line with current science Increased FFV penetration linked to renewal of FFV production, including for plug-in hybrid vehicles
Biodiesel	<ul style="list-style-type: none"> Optimized ILUC value for soybeans in line with current science Increased biodiesel blending Faster CI reductions for biodiesel
Renewable Diesel	<ul style="list-style-type: none"> Optimized ILUC value for soybeans in line with current science
Renewable Jet Fuel	<ul style="list-style-type: none"> Optimized ILUC value for soybeans in line with current science (HEFA pathways) Optimized ILUC value for corn in line with current science (ATJ pathways) Faster CI reductions for renewable jet fuel
Natural Gas Demand	<ul style="list-style-type: none"> Higher NGV deployment in some segments, due in part to more flexible view of ACF compliance e.g., via exemptions granted for select fleets
Biogas Deployment	<ul style="list-style-type: none"> More aggressive deployment of biogas into low carbon fuel production and processing CCS associated with anaerobic digestion pathways
Electric Vehicles & Fuel Cell Electric Vehicles	<ul style="list-style-type: none"> Higher interim adoption of light-duty ZEVs Faster CI reductions for electricity Faster CI reductions for hydrogen Infrastructure crediting CCS associated with RNG and SMR pathways Offroad electrification
Other	<ul style="list-style-type: none"> CCS at California petroleum refineries Direct Air Capture for LCFS crediting VMT reductions



icf.com



About ICF

ICF (NASDAQ:ICFI) is a global consulting and digital services company with over 7,000 full- and part-time employees, but we are not your typical consultants. At ICF, business analysts and policy specialists work together with digital strategists, data scientists and creatives. We combine unmatched industry expertise with cutting-edge engagement capabilities to help organizations solve their most complex challenges. Since 1969, public and private sector clients have worked with ICF to navigate change and shape the future. Learn more at [icf.com](https://www.icf.com).