

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER U-R-6-16  
Relating to Certification of New Off-Road Compression-Ignition Equipment Engines

ISUZU MOTORS LIMITED

Pursuant to the authority vested in the Air Resources Board (Board) by Sections 43013, 43018, 43101, 43102, 43104 and 43105 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following compression-ignition engine and exhaust emission control system produced by the manufacturer are certified as described below for use in off-road equipment:

Model Year: 2000

Typical Equipment Usage: Crane, Loader, Dozer, Compressor and Industrial Equipment

Fuel Type: Diesel

<u>Engine Family</u>	<u>Engine Displacement (liters)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
YSZXL07.8EXA	7.8	Direct Diesel Injection Turbocharger Charge Air Cooler

Engine models and codes are listed on attachments. Production engines shall be in all material respects the same as those for which certification is granted.

The exhaust emission certification standards and certification values for total hydrocarbons (THC), carbon monoxide (CO), oxides of nitrogen (NOx), and particulate matter (PM) (units are expressed in grams per kilowatt-hour (g/kw-hr)), and the opacity-of-smoke certification standards and certification values in percent (%) during acceleration (Accel), lugging (Lug), and the peak value from either mode (Peak) for this engine family are as follows (Title 13, California Code of Regulations, Section 2423, as amended by Board approval on January 28, 2000):

<u>Engine Power Rating (kw)</u>	<u>Emission Standard Category</u>	<u>Exhaust Emissions (g/kw-hr)</u>				<u>Smoke Opacity (%)</u>			
		<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>	
37≤KW<130	Tier 1	Standard	--	--	9.2	--	20	15	50
130≤KW	Tier 1	Standard	1.3	11.4	9.2	0.54	20	15	50
All Above		Certification	0.3	0.9	5.3	0.12	15	0	44

BE IT FURTHER RESOLVED: That, at the request of the manufacturer, the listed engine models are **conditionally certified** to, and shall be required to comply with, all amendments to Title 13, California Code of Regulations, Sections 2420 through 2427 adopted by the Board on January 28, 2000 at its hearing "TO CONSIDER AMENDMENTS TO OFF-ROAD COMPRESSION-IGNITION ENGINE REGULATIONS: 2000 AND LATER EMISSION STANDARDS, COMPLIANCE REQUIREMENTS AND TEST PROCEDURES." The listed engine models comply with all such amendments, including, but not limited to:

- the amended "Emission Control Labels—1996 and Later Off-Road Compression-Ignition Engines" (Title 13, California Code of Regulations, Section 2424) for the aforementioned model year;
- the Board's amended emission control system warranty provisions (Title 13, California Code of Regulations, Sections 2425 and 2426) for the listed engine models, as demonstrated by materials submitted by the manufacturer; and
- new California requirements for the Selective Enforcement Audit (SEA) for the listed engine models, as demonstrated by the manufacturer's submission of materials.

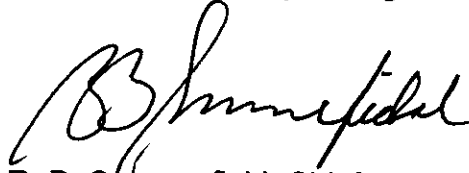
BE IT FURTHER RESOLVED: That the conditional certification described in the paragraph above is conditioned on the amendments being approved by the California Office of Administrative Law (OAL) pursuant to Government Code Section 11349.3, and where necessary, authorized by the Administrator of the U. S. Environmental Protection Agency (U.S. EPA) pursuant to Section 209(e)(2) of the Federal Clean Air Act.

- A. In the event that the OAL disapproves the amendments or the U.S. EPA decides not to authorize them, the ARB shall notify the manufacturer that the listed engine models must comply with the "California Exhaust Emission Standards and Test Procedures for 1996 and Later Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Sections 2420 through 2427) adopted on May 12, 1993, as applicable. Failure to demonstrate compliance within 45 days after notification by the Air Resources Board shall be cause for the Board to revoke the Executive Order and deem the listed engine models uncertified.
- B. In the event that the OAL disapproves the amendments or the U.S. EPA decides not to authorize them, the conditional certification herein of the listed engine models with rated power greater than or equal to 37 KW but less than 130 KW shall be deemed null and void.

The conditional certification described herein is not conditioned on further U.S. EPA action on amendments determined by the Board to be within the scope of an existing U.S. EPA authorization.

Engines certified under this Executive Order must conform to the above requirements under Title 13, California Code of Regulations, Chapter 9, Article 4, and all other applicable California emission laws and regulations.

Executed at El Monte, California this 15<sup>th</sup> day of August 2000.

A handwritten signature in black ink, appearing to read "R. B. Summerfield". The signature is written in a cursive, flowing style.

R. B. Summerfield, Chief  
Mobile Source Operations Division

# Engine Model Summary Form

ATTA MEMI

U-R-6-16

**Manufacturer:** Isuzu Motors Limited  
**Engine category:** Nonroad CI  
**EPA Engine Family:** YSZXL06.5EXA  
**Mfr Family Name:** NA  
**Process Code:** New Submission

1. Engine Code	2. Engine Model	3. BHP@RPM (SAE Gross)	4. Fuel Rate: mm/stroke @ peak HP (for diesel only)	5. Fuel Rate: (lbs/hr) @ peak HP (for diesels only)	6. Torque @ RPM (SEA Gross)	7. Fuel Rate: mm/stroke@peak torque	8. Fuel Rate: (lbs/hr)@peak torque	9. Emission Control Device Per SAE J1930
6BG1XABEA-01	CC-6BG1T	188.4@2200	92.3@2200	67.7@2200	498.7@1800	98.0@1800	58.8@1800	TC, CAC
6BG1XABEA-02	CC-6BG1T	185.1@2100	95.4@2100	66.8@2100	498.7@1800	98.0@1800	58.8@1800	TC, CAC
6BG1XABEA-03	CC-6BG1T	188.0@2150	94.0@2150	67.4@2150	498.7@1800	98.0@1800	58.8@1800	TC, CAC
6BG1XABEB-01	CC-6BG1T	188.4@2200	92.3@2200	67.7@2200	498.7@1800	98.0@1800	58.8@1800	TC, CAC
6BG1XABEC-01	CC-6BG1T	149.9@2200	72.5@2200	53.2@2200	359.7@1800	68.3@1800	41.0@1800	TC, CAC
6BG1XABEC-02	CC-6BG1T	147.2@2100	76.0@2100	53.2@2100	359.7@1800	68.3@1800	41.0@1800	TC, CAC
6BG1XABEC-03	CC-6BG1T	171.0@2100	88.0@2100	61.6@2100	461.9@1800	91.5@1800	54.9@1800	TC, CAC

