

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-10-834
Relating to Certification of New Motor Vehicles

FORD MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1999 model-year Ford Motor Company exhaust emission control systems are certified as described below for light-duty trucks:

Emission Standard Category: Ultra-Low-Emission Vehicle (ULEV)

Fuel Type: Gasoline

Engine Family: XFMXT03.82JC Displacement: 3.8 Liters (232 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

Dual Three Way Catalytic Converters
Dual Heated Oxygen Sensors (two)
Exhaust Gas Recirculation
Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The non-methane organic gas (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) ULEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Loaded Vehicle Weight (lbs.)</u>	<u>Miles</u>	<u>NMOG</u>	<u>CO</u>	<u>NOx</u>	<u>HCHO</u>	<u>CO (20°F)</u>
3751-5750	50,000	0.050	2.2	0.4	0.009	12.5
	100,000	0.070	2.8	0.5	0.013	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.94

The certification exhaust emission values set forth for NMOG reflect application of a 0.94 RAF for 1999 model-year ULEVs. The ULEV certification exhaust emission values for this engine family in grams per mile are:

<u>Loaded Vehicle Weight (lbs.)</u>	<u>Miles</u>	<u>NMOG</u>	<u>CO</u>	<u>NOx</u>	<u>HCHO</u>	<u>CO (20°F)</u>
3751-5750	50,000	0.030	1.1	0.1	0.001	2.3
	100,000	0.042	1.7	0.2	0.001	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

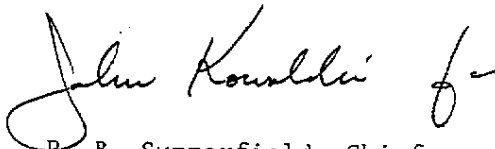
BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 16th day of July 1998.

A handwritten signature in cursive script, appearing to read "John Kowalski" followed by a flourish.

R. B. Summerfield, Chief
Mobile Source Operations Division

1999 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer FORD MOTOR COMPANY Exh. Eng. Fam.: XFMXT03.82JC Evap. Fam.: XFMXE0155BBE

Engine Code Types: CA XXX 49S 50S AB965 ORVR: Yes No XXX

Exhaust Std: CA Tier-1 TLEV LEV ULEV XXX SULEV U.S. EPA TIER-1

Vehicle Class(es): PC LDT1 LDT2 XXX MDV1 MDV2 MDV3 MDV4 MDV5

Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A,LDT1,MDV1,MDV2,MDV3,MDV4)

Fuel Type(s): Dedicated X Flex-Fuel Dual-Fuel Bi-Fuel Gasoline XXX Diesel
 CNG LNG LPG M85 Other (specify):

Exh Emiss Test Fuel(s): Indo CBG XXX CNG LPG M85 Other(specify):
 Diesel 13 CCR 2282 40 CFR 86.113-90 40 CFR 86.113-94

Evaporative Emission Test Procedure: California Federal XXX

Service Accum: Std AMA Mod AMA Mfr ADP X Other (specify)

NMOG Test Procedure: N/A Std XXX Equip R/L Test Procedure: SHED Pt.Source XXX

Engine Configuration V-6 Displacement: 3.8L Liters 232 Cubic Inches

Valves/Cyl: 2 Rated HP: 200 @ 4900 RPM

Engine: Front XXX Mid Rear Drive: Fwd XXX RWD 4WD-FT 4WD-PT

Exhaust ECS (e.g., MFI, EGR,TC,CAC): 2 TWC, 2HO2S, EGR, SFI
 (Use abbreviations per SAE J1930 JUN93)

EngineCode (California)	Vehicle Models	Trans.			Ignition Part No (PCM) -12A650-	EGR System Part No -9D475-	Catalyst Part No -5F250-
		A-Auto	M-Man	ETW			
9LMABDAA		A4			XF2F-HA	F65E-AA	XF22-F1 (F2 - Alt)
	Windstar Van Regular	A4	4000	*			
	Windstar Wagon 3 Door	A4	4500				
	Windstar Wagon 4 Door	A4	4500				

* See Section 20.09.17.03